

# GEAR COUPLINGS

270D



Since 1886





## MAINA GEAR COUPLINGS - INTRODUCTION

The full-flex gear couplings are employed to mechanically connect two rotating shafts which have to transmit a torque in a torsionally rigid way. The torque is transmitted from hub to sleeve and vice-versa by the working gear teeth, and between the connecting flanges of the two hubs by the set bolts.

The gear couplings are flexible to compensate the misalignment of the shafts to be connected. They compensate both the initial misalignment (support clearances, dimensional and geometrical tolerances of the equipment, alignment imperfections), and further alignment modifications (settling and support wear) and/or temperature (expansion).

The gear couplings are flexible because their working gear teeth must be able to float and slide, in order to compensate misalignments. Floating is performed by engaging outer spherical gear teeth with inner cylindrical ones, both having proper tangential clearance. The outer spherical gear teeth, olive shaped tangential section and "Semitopping" on the head, enable the gear hubs to float on their central axis, thus allowing their axial slide and the continuous lube flow, while avoiding any harmful stress concentration on the gear teeth.

The gear teeth center on their external diameters, with a proper radial clearance, so that the rotating masses do not generate any vibration when operating at low speed and transmitting torque. When the speed and/or the torque get higher, the gear teeth center on their working flanks, so distributing the load on all the teeth.

We recommend to perform a dynamic balancing of the rotating masses - grade and requirements to be specified (see AGMA 9000 C90) - in case of high rotation speed or when equipment having supports sensitive to mass imbalance are involved.

A single engagement of gear teeth (half-coupling) can compensate both angular and axial misalignments; two engagements of gear teeth (complete coupling) are required to compensate also the parallel misalignments.

Please remember that angular, parallel, axial and combined misalignments, maximum speed rotation and transmitted torques must be in accordance with the requirements of every kind of coupling, to avoid excessive or early wear. Maintenance and lubrication have to be careful and precise. Please strictly follow our INSTALLATION, USE & MAINTENANCE INSTRUCTIONS (see pages 54, 55, 56, 57, 58).

MAINA gear couplings are obtained from forged steel ingots, machined and heat treated. Gear couplings can be made of different types of steel, as AISI 1045, AISI 4140, Nitralloy N/135/135M which are hardened and tempered before being machined. To increase the load capacity, in some types of couplings, the gear teeth can be surface-hardened after machining by thermal or thermochemical treatments and, when required, they can be ground. Main treatments are induction tempering, nitroxidation and gas nitriding.

It is also possible to perform antioxidant and anticorrosive treatments in the end stage.

We can perform a nitroxidation (N.O.) treatment on our standard GO-A gear couplings made of AISI 1045, when required. Besides limiting surface corrosion, this treatment improves surface hardness and wear resistance, and increases working gear teeth lifetime even in presence of high misalignments and rotation speeds.

Unless otherwise required, our gear couplings are properly packaged, according to their dimensions, weight, required type of transport and storage. To prevent oxidation, the interface surfaces or the surfaces which have to be submitted to assembly operations are usually protected by a wax film of TECTYL 506 EH. The raw (semifinished) and wide surfaces of spacer tubes are painted, after sandblasting, by one primer acrylic coat and two final epoxy coats; this kind of painting can resist at temperatures up to 100-120°C.

Different types of coatings can be applied on demand.


The torque a gear coupling can transmit as well as its maximum operating speed change according to the total misalignment between the shafts to be connected (see diagrams of speed factor Kv and of load factor Ki, shown on pages 02, 03, 04 and 05).

The gear couplings must be selected according to the operational data (load and speed), the application, the nominal and max load capacities, the nominal speed, the static and dynamic misalignments and the max admitted bore.

This catalogue shows the main types and designs of flex gear couplings employed in the machinery manufacturing; it does not contain all the possible different designs.

For special solutions, not included in this catalogue, please contact MAINA.

### LIST OF COMPONENTS

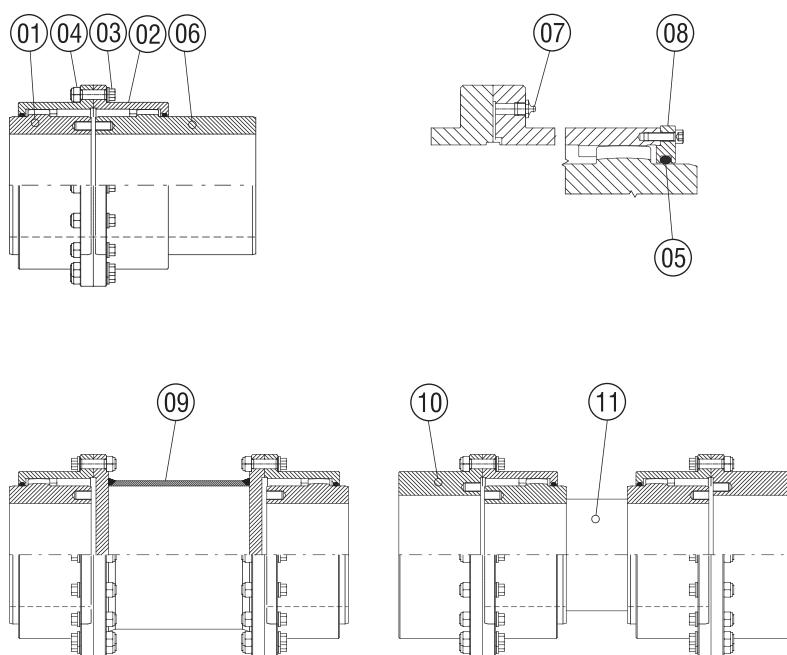

- |    |                            |
|----|----------------------------|
| 01 | Standard Hub               |
| 02 | Flanged Sleeve             |
| 03 | Set Screw                  |
| 04 | Hexagonal Self-locking Nut |
| 05 | Seal Gasket                |
| 06 | Longer Hub                 |
| 07 | Lube Fitting or Lube Plug  |
| 08 | Removable Side Flange      |
| 09 | Tubular Spacer             |
| 10 | Rigid Hub                  |
| 11 | Floating Shaft             |



## INDEX

---

pag. **01** GO-A, GO-B, GO-B.HT & G20 Couplings - Coupling Selection

pag. **02** GO-A, AO-A Couplings -  $k_i$  &  $K_v$  Factors

pag. **03** GO-B, AO-B, GO-B.HT & AO-B.HT Couplings -  $k_i$  &  $K_v$  Factors

pag. **04** G20-F G20-FS & G20-FR Couplings -  $k_i$  &  $K_v$  Factors

pag. **05** G35 & G60 Couplings -  $k_i$  &  $K_v$  Factors

pag. **06** GO-A, GO-AR & GO-ARR Couplings

pag. **07** GO-A.HT Couplings

pag. **08** GO-AMM, GO-AM & GO-AMR Couplings


pag. **09** GO-FA, GO-FAR & GO-FAM Couplings

pag. **10** AO-A, AO-ARR & AO-AMM Spacer Couplings


pag. **11** AO-FAC & AO-FARC Floating Shaft Couplings

pag. **12** GO-AV Couplings & AO-AV Spacer Couplings


pag. **13** GO-ASC & GO-ASC.D Couplings




pag. **14** GO-ACS Couplings




pag. **15** GO-ALGD & GO-ALGE Couplings

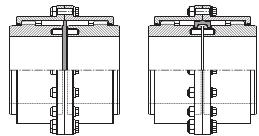

pag. **16** GO-A.FF Couplings



pag. **17** GO-A.DT & GO-A.DF Couplings

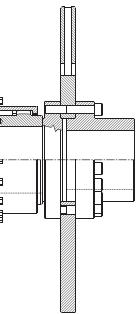


pag. **18,19** GO-A.DFV & GO-A.DFP Couplings




## INDEX


---

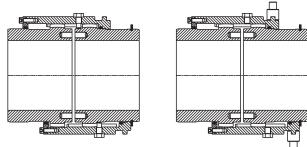


**pag. 20** GO-AH.MN & GO-AH.CL Couplings




**pag. 28** AGMA-N, AGMA-R & AGMA-RR Couplings



**pag. 21** GO-AH.RO Couplings




**pag. 29** SID-N, SID-R & SID-RR Couplings

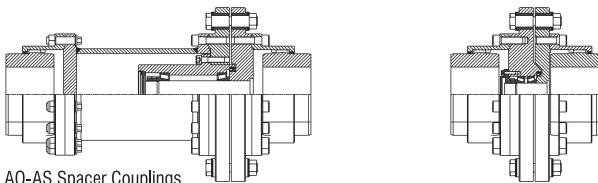


AO-AS Spacer Couplings

**pag. 30** AO-HLC & AO-HLR Spacer Couplings



**pag. 31** Mill Motor AISE 600-800 Series Couplings

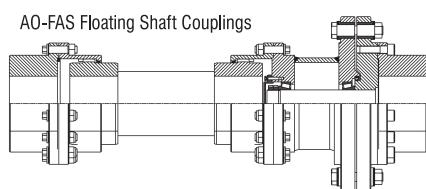


AO-FAS Floating Shaft Couplings

**pag. 32** GO-A.W Hubs Shrinkfitting Details


**pag. 33** GO-A Flange & Keyway Details

**pag. 22,23** GO-AS Couplings + AO-AS & AO-FAS Spacer and Floating Shaft Couplings

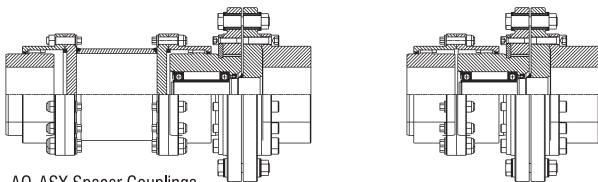


AO-ASX Spacer Couplings

**pag. 24,25** GO-ASX Couplings + AO-ASX Spacer Couplings




**pag. 34,35** GO-B & GO-B.HT Couplings




**pag. 36,37** AO-B & AO-B.HT Spacer Couplings

**pag. 26** GO-APR Couplings




**pag. 27** GO-MA Couplings



AO-FB.C & AO-FB.HT.C Floating Shaft Couplings



AO-FB.D & AO-FB.HT.D Floating Shaft Couplings




**pag. 38,39** GO-FB & GO-FB.HT + AO-FB Floating Shaft Couplings



## INDEX

---

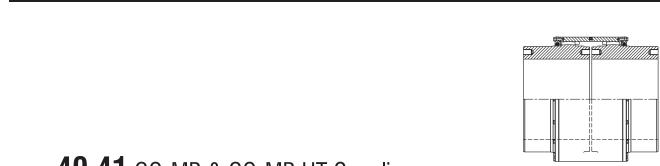


**pag. 40,41** GO-MB & GO-MB.HT Couplings


**pag. 42** GO-B.W Couplings - Hubs Shrinkfitting Details

**pag. 43** GO-B.HT.W Couplings - Hubs Shrinkfitting Details



**pag. 44** GO-B Flange & Keyway Details

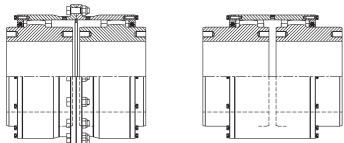

**pag. 45** Couplings G20-F & G20-M

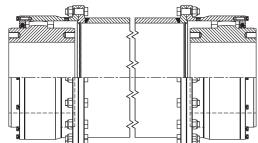



**pag. 46** G20-FS Spacer Couplings

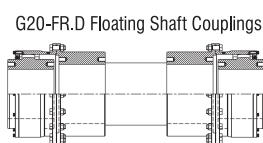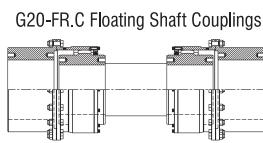

**pag. 47** G20-FR Couplings + G20-FR Floating Shaft Couplings



**pag. 48** G20-F.W Couplings - Hubs Shrinkfitting Details

**pag. 49** G20 Couplings - Flange & Keyway Details


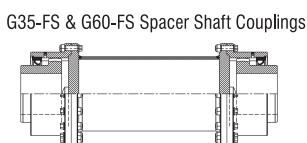


**pag. 50,51** G35/G60-F & G35/G60-FR Couplings + G35 & G60 Spacer and Floating Shaft Couplings



G35-M.FF & G60-M.FF Floating Shaft Couplings




G35-M.FS & G60-M.FS Floating Shaft Couplings



G35-M.SS & G60-M.SS Floating Shaft Couplings



**pag. 50,51** G35/G60 Couplings + G35/G60 Floating Shaft Couplings



**pag. 52,53** GTS Gear Couplings for Hoist Barrels

**pag. 54,55,56,57,58** Installation, Use & Maintenance Instructions

**pag. 59** Bore Designs

**pag. 60** Special Designs



## TECHNICAL DATA

## GO-A, GO-B, GO-B.HT & G20 COUPLINGS

### LOAD DATA:

<b>P</b>	= ABSORBED AND/OR INSTALLED POWER	[kW]
<b>n</b>	= OPERATING SPEED	[1/min]
<b>KS</b>	= OVERLOAD FACTOR	[ - ]
<b>FS</b>	= SERVICE FACTOR, TAB 00	[ - ]
<b>D,L</b>	= DIAMETER, LENGTH OF THE SHAFTS TO BE CONNECTED	[mm]
<b>LA</b>	= DISTANCE BETWEEN SHAFT ENDS	[mm]
<b>Tn</b>	= $\frac{P \times 30}{n \times \pi}$ = DRIVE NOMINAL TORQUE	[kNm]

### VERIFY THAT:

COUPLING NOMINAL TORQUE	<b>Tk</b> [kNm]	$\geq Tn \times FS/Ki$
COUPLING MAX TORQUE	<b>Tf</b> [kNm]	$\geq Tn \times KS/Ki$
COUPLING MAX SPEED	<b>nk</b> [1/min]	$\geq n/Kv$
COUPLING MAX BORE	<b>d</b> [mm]	$\geq D$
Ki = TORQUE REDUCTION FACTOR: pp. 02, 03, 04, 05		
Kv = SPEED REDUCTION FACTOR: pp. 02, 03, 04, 05		

## COUPLING SELECTION

For a correct Service Factor **FS** it is necessary to know the following preliminary data:

- Type of Driving Machine
- Type of Driven Machine
- Duration and Type of the Daily Service
- Reversible Service Under Load
- Presence of Shocks or Very High Load Peaks
- Possibility of Operating Unit Shutdown

>FOR HEAVY DUTY APPLICATIONS<  
>CONTACT OUR ENGINEERING STAFF<

**TAB. 01**

SIZE	GO-A NOMINAL TORQUE <b>Tk</b> [kNm]	MAX TORQUE <b>Tf</b> [kNm]	MAX SPEED <b>nk</b> [1/min]	MAX BORE <b>d</b> [mm]
<b>0</b>	1.80	4.32	6000	52
<b>1</b>	2.76	6.62	4620	62
<b>2</b>	5.55	13.30	4140	78
<b>3</b>	8.70	20.90	4000	98
<b>4</b>	14.10	33.80	3860	112
<b>5</b>	22.80	54.70	3720	132
<b>6</b>	34.80	83.50	3190	156
<b>7</b>	44.00	105.6	2900	174
<b>8</b>	69.80	167.5	2570	190
<b>9</b>	83.80	201.2	2330	210
<b>10</b>	152.0	364.8	2150	233
<b>11</b>	203.5	488.4	1800	280

Max Dynamic Angle "GO-A Standard" = 0°10'  
Max Dynamic Angle "GO-A with N.O." = 0°15'  
Max Static Angle = 1°00'

**TAB. 02**

SIZE	G20 NOMINAL TORQUE <b>Tk</b> [kNm]	MAX TORQUE <b>Tf</b> [kNm]	MAX SPEED <b>nk</b> [1/min]	MAX BORE <b>d</b> [mm]
<b>12</b>	14.2	21.3	6980	75
<b>14</b>	22.3	33.5	5650	90
<b>17</b>	33	49.5	4720	105
<b>19</b>	55	82.5	4030	120
<b>23</b>	84	126	3300	145
<b>26</b>	123	184.5	2790	170
<b>30</b>	197	295.5	2360	195
<b>35</b>	284	426	1990	230
<b>40</b>	408	612	1710	260
<b>46</b>	615	922	1460	300
<b>52</b>	850	1275	1260	340
<b>58</b>	1145	1718	1110	380

Max Dynamic Angle "G-20" = 0°30'  
Max Static Angle = 2°30'

**TAB. 00**

SERVICE TYPE	SERVICE FACTORS - FS	
UNIFORM	1.25	1.50
LIGHT	1.50	2.00
MEDIUM	2.00	2.50
HEAVY	2.50	3.00
VERY HEAVY	3.00	---

**TAB. 03**

GO-B GO-B.HT SIZE	MAX BORE <b>d</b> [mm]	GO-B			GO-B.HT		
		NOMINAL TORQUE <b>Tk</b> [kNm]	MAX TORQUE <b>Tf</b> [kNm]	MAX SPEED <b>nk</b> [1/min]	NOMINAL TORQUE <b>Tk</b> [kNm]	MAX TORQUE <b>Tf</b> [kNm]	MAX SPEED <b>nk</b> [1/min]
<b>4</b>	325	277	554	1140	417	834	1950
<b>5</b>	370	383	766	1010	563	1126	1730
<b>6</b>	400	493	986	920	745	1490	1570
<b>7</b>	430	660	1320	810	980	1960	1380
<b>8</b>	475	840	1680	720	1235	2470	1230
<b>9</b>	510	990	1195	670	1455	2910	1150
<b>10</b>	530	1195	2390	630	1785	3570	1080
<b>11</b>	580	1555	3110	560	2290	4580	960
<b>12</b>	610	1815	3630	530	2670	5340	900
<b>13</b>	680	2510	5020	470	3790	7580	800
<b>14</b>	780	3530	7060	400	5260	10520	690
<b>15</b>	860	4440	8880	360	6540	13080	620
<b>16</b>	950	5920	11840	320	8750	17500	550
<b>17</b>	1020	7180	14360	300	10580	21160	510
<b>18</b>	1090	8500	17000	270	12540	25080	470
<b>19</b>	1180	10600	21200	250	15630	31260	430

Max Dynamic Angle "GO-B & GO-B.HT" = 0°15'  
Max Static Angle = 1°00'



## GO-A, AO-A & GO-A.HT COUPLINGS


## TECHNICAL DATA

Max Dynamic Angle "GO-A Standard"	=0°10'
Max Dynamic Angle "GO-A with N.O."	=0°15'
Max Dynamic Angle "GO-A.HT"	=0°15'
Max Static Angle	=1°00'

n ≤ 450 [1/min]	Not Necessary
n ≤ 900 [1/min]	G 16 Floating Part
n ≤ 1800 [1/min]	G 6.3 Floating Part
n ≤ 3400 [1/min]	G 2.5 Floating Part & Hubs
n > 3400 [1/min]	Special


TAB. 04

Mat. AISI 1045

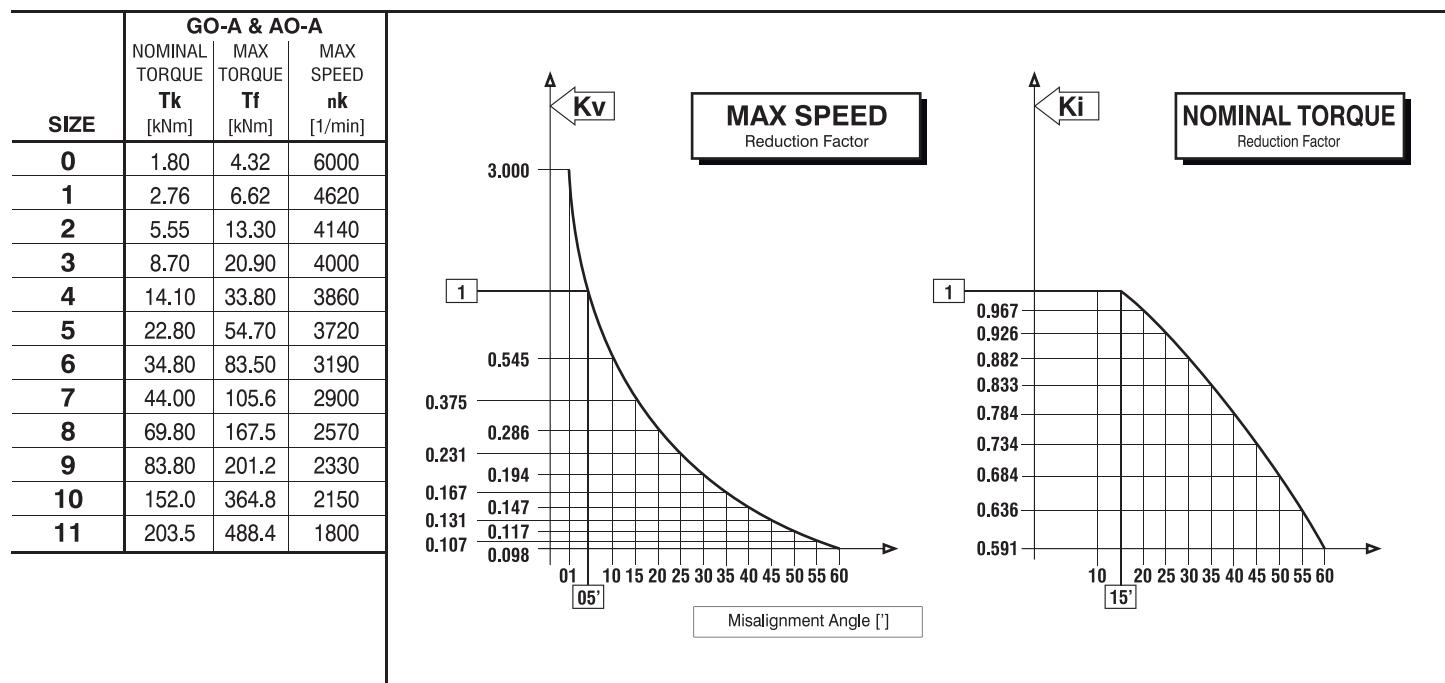

TAB. 05

Mat. AISI 4140 Gas Nitrided

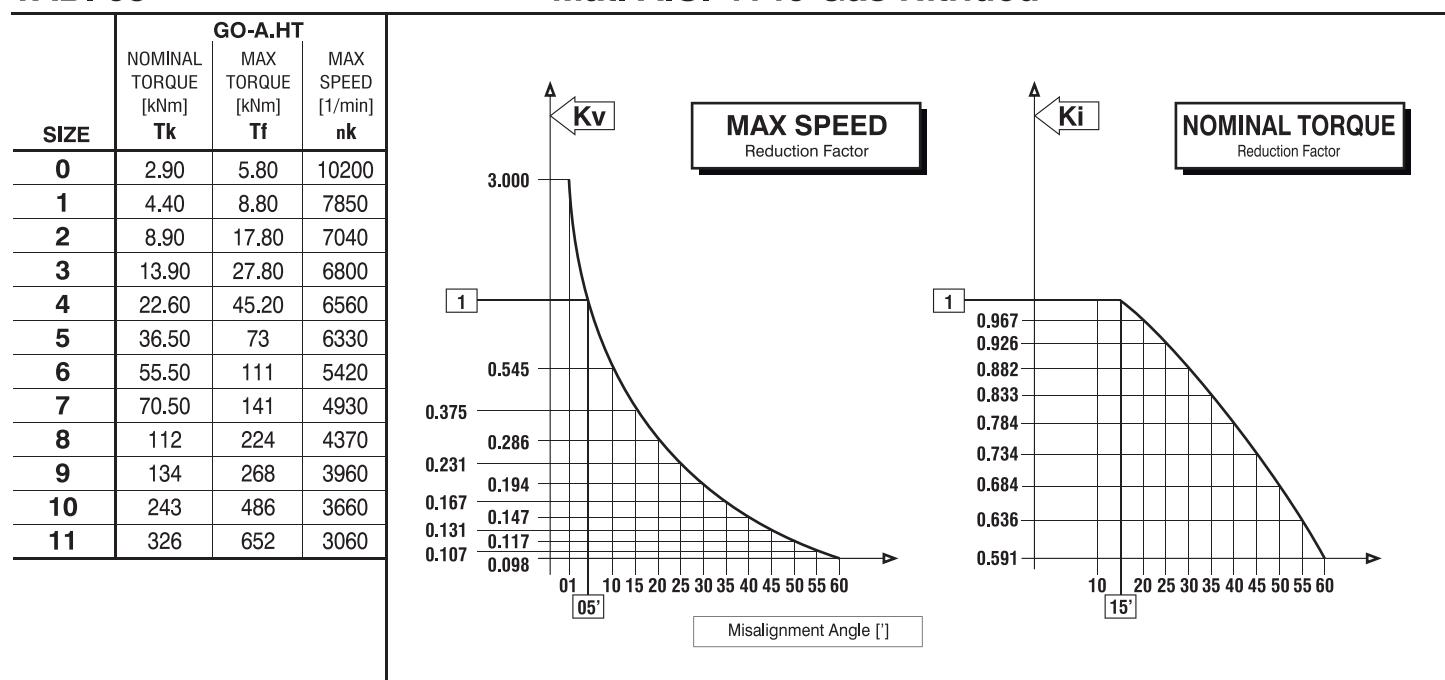



## TECHNICAL DATA

## GO-B, AO-B, GO-B.HT & AO-B.HT COUPLINGS

Max Dynamic Angle "GO-B & GO-B.HT" =  $0^\circ 15'$

Max Static Angle =  $1^\circ 00'$

Balancing grades as per PFB 1113


(References: ISO1940 - AGMA9000-C90)

$n \leq 450$ [1/min]	Not Necessary
$n \leq 900$ [1/min]	G 16 Floating Part
$n \leq 1800$ [1/min]	G 6.3 Floating Part
$n \leq 3400$ [1/min]	Not Applicable
$n > 3400$ [1/min]	Not Applicable

TAB. 06

Mat. AISI 1045


SIZE	GO-B & AO-B		
	NOMINAL TORQUE Tk [kNm]	MAX TORQUE Tf [kNm]	MAX SPEED nk [1/min]
<b>4</b>	277	554	1140
<b>5</b>	383	766	1010
<b>6</b>	493	986	920
<b>7</b>	660	1320	810
<b>8</b>	840	1680	720
<b>9</b>	990	1980	670
<b>10</b>	1195	2390	630
<b>11</b>	1555	3110	560
<b>12</b>	1815	3630	530
<b>13</b>	2510	5020	470
<b>14</b>	3530	7060	400
<b>15</b>	4440	8880	360
<b>16</b>	5920	11840	320
<b>17</b>	7180	14360	300
<b>18</b>	8500	17000	270
<b>19</b>	10600	21200	250

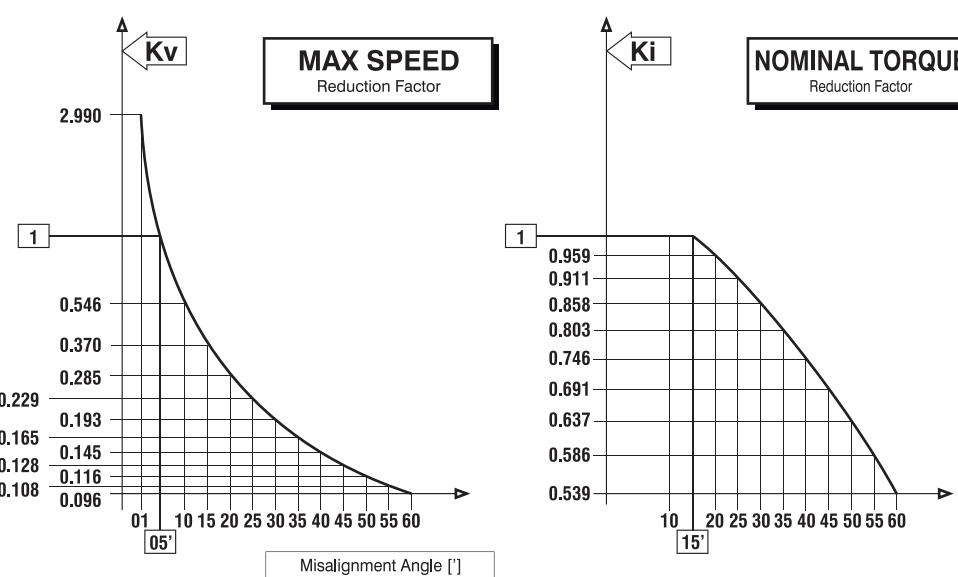


TAB. 07

Mat. AISI 4140

SIZE	GO-B.HT & AO-B.HT		
	NOMINAL TORQUE Tk [kNm]	MAX TORQUE Tf [kNm]	MAX SPEED nk [1/min]
<b>4</b>	417	834	1950
<b>5</b>	563	1126	1730
<b>6</b>	745	1490	1570
<b>7</b>	980	1960	1380
<b>8</b>	1235	2470	1230
<b>9</b>	1455	2910	1150
<b>10</b>	1785	3570	1080
<b>11</b>	2290	4580	960
<b>12</b>	2670	5340	900
<b>13</b>	3790	7580	800
<b>14</b>	5260	10520	690
<b>15</b>	6540	13080	620
<b>16</b>	8750	17500	550
<b>17</b>	10580	21160	510
<b>18</b>	12540	25080	470
<b>19</b>	15630	31260	430

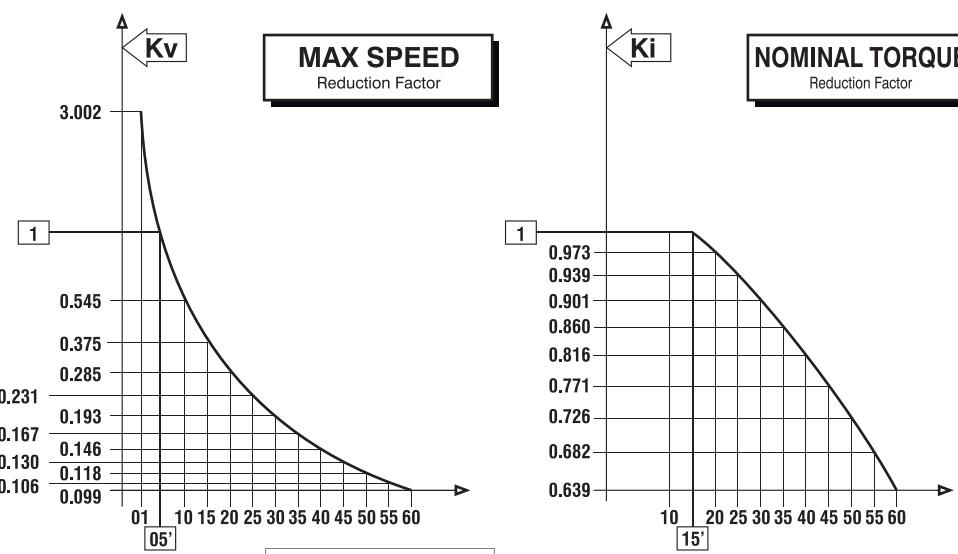

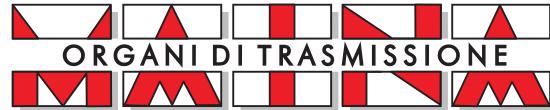

## G20-F, G20-FS & G20-FR COUPLINGS

## TECHNICAL DATA



Reference Angle	=0°30'
Max Dynamic Angle	=2°00'
Max Static Angle	=2°30'

n ≤ 450 [1/min]	Not Necessary
n ≤ 900 [1/min]	G 16 Floating Part
n ≤ 1800 [1/min]	G 6.3 Floating Part
n ≤ 3400 [1/min]	G 2.5 Floating Part & Hubs
n > 3400 [1/min]	Special

TAB. 08

Mat. AISI 4140 Gas Nitrided

SIZE	G20-F & G20-FS		
	NOMINAL TORQUE [kNm] Tk	MAX TORQUE [kNm] Tf	MAX SPEED [1/min] nk
12	14.2	21.3	6980
14	22.3	33.5	5650
17	33	49.5	4720
19	55	82.5	4030
23	84	126	3300
26	123	185	2790
30	197	296	2360
35	284	426	1990
40	408	612	1710
46	615	922	1460
52	850	1275	1260
58	1145	1718	1110

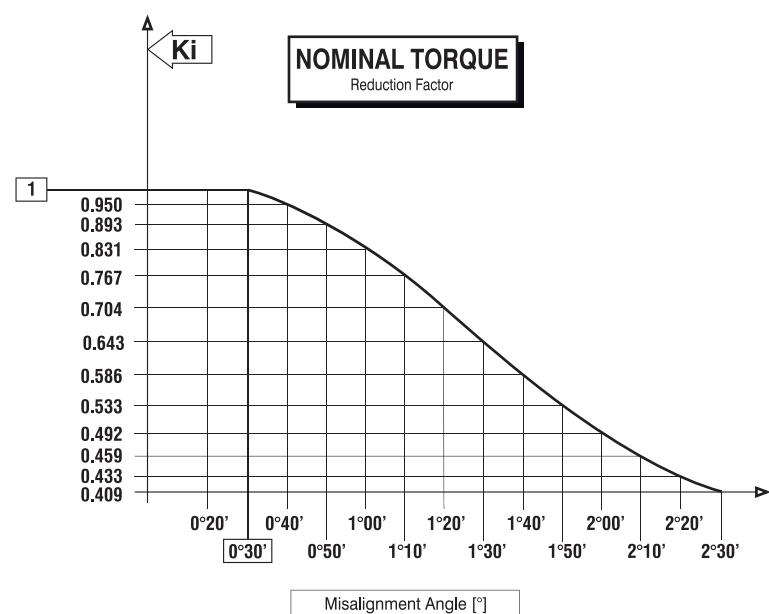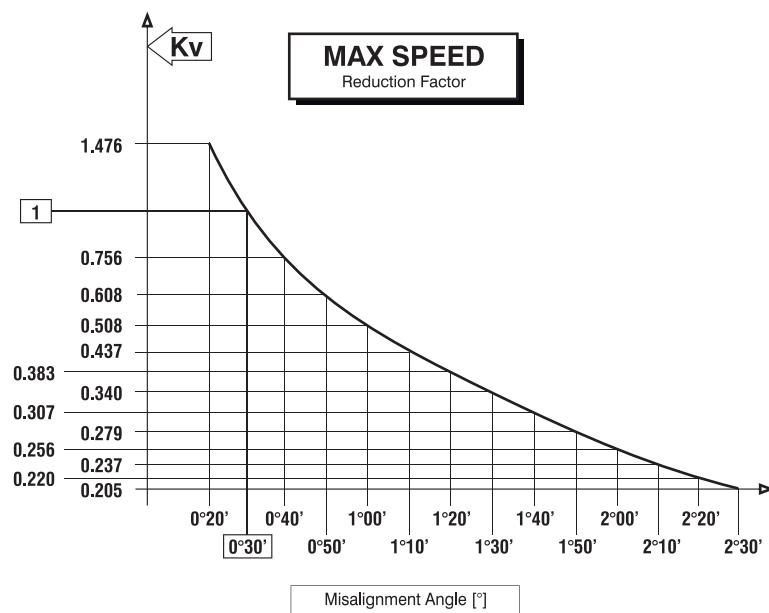



## TECHNICAL DATA

## G35 & G60 COUPLINGS

Balancing grades as per PFB 1113  
(References: ISO1940 - AGMA9000-C90)


$n \leq 450$	[1/min]	Not Necessary
$n \leq 900$	[1/min]	G 16 Floating Part
$n \leq 1800$	[1/min]	G 6.3 Floating Part
$n \leq 3400$	[1/min]	Not Applicable
$n > 3400$	[1/min]	Not Applicable

TAB. 09

Mat. AISI 4140 Gas Nitrided

Reference Angle =  $1^{\circ}30'$   
**G35** Max Dynamic Angle =  $3^{\circ}30'$   
Max Static Angle =  $3^{\circ}30'$

SIZE	<b>G35-F, FR &amp; M</b>		
	NOMINAL TORQUE [kNm] Tk	MAX TORQUE [kNm] Tf	MAX SPEED [1/min] nk
<b>10</b>	4.05	8.10	3250
<b>20</b>	10.3	20.6	2360
<b>30</b>	16.4	32.8	1810
<b>40</b>	29.5	59.0	1530
<b>50</b>	39.5	79.0	1290
<b>60</b>	72.0	144.0	1090
<b>70</b>	102.0	204.0	950
<b>80</b>	134.0	268.0	850
<b>90</b>	168.0	336.0	760
<b>100</b>	230.0	460.0	680
<b>110</b>	275.0	550.0	560

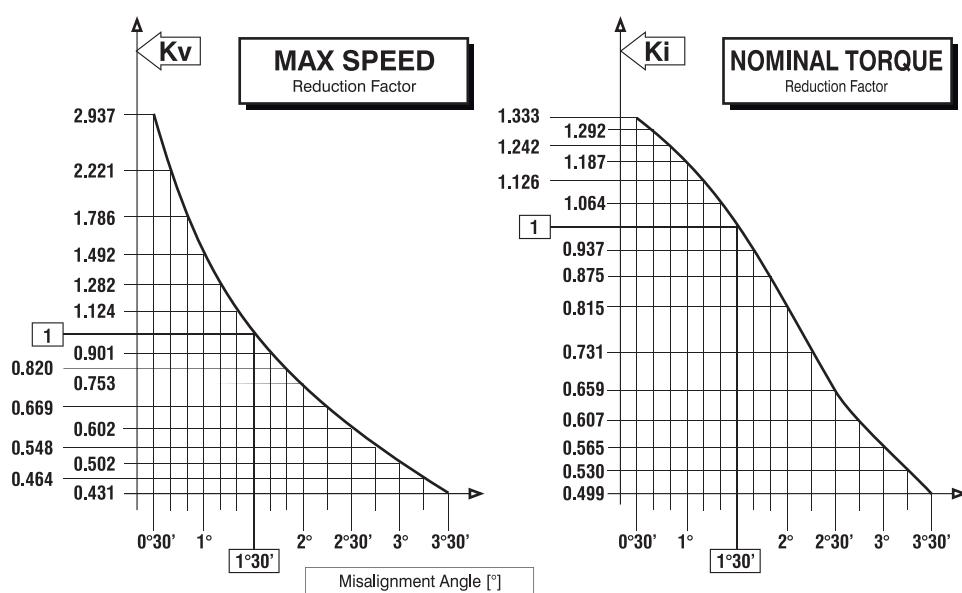


TAB. 10

Mat. AISI 4140 Gas Nitrided

Reference Angle =  $1^{\circ}30'$   
**G60** Max Dynamic Angle =  $6^{\circ}00'$   
Max Static Angle =  $6^{\circ}00'$

SIZE	<b>G60-F, FR &amp; M</b>		
	NOMINAL TORQUE [kNm] Tk	MAX TORQUE [kNm] Tf	MAX SPEED [1/min] nk
<b>10</b>	2.40	4.80	3250
<b>20</b>	5.95	11.9	2360
<b>30</b>	9.40	18.8	1810
<b>40</b>	17.0	34.0	1530
<b>50</b>	23.0	46.0	1290
<b>60</b>	43.0	86.0	1090
<b>70</b>	61.0	122.0	950
<b>80</b>	76.0	152.0	850
<b>90</b>	90.0	180.0	760
<b>100</b>	140.0	280.0	680
<b>110</b>	155.0	310.0	560

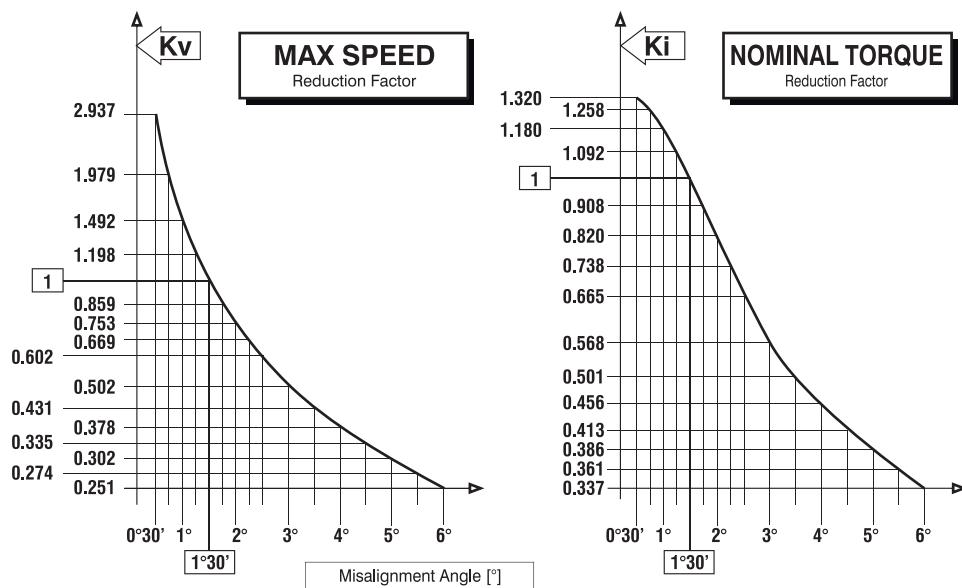



## GO-A, GO-AR & GO-ARR COUPLINGS

## TECHNICAL DATA

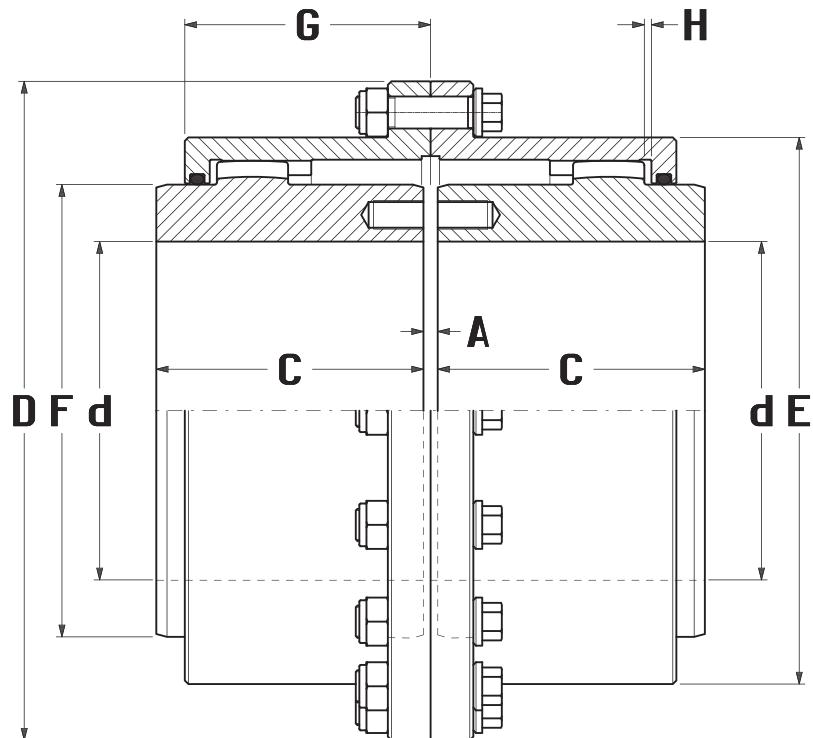


Fig. 01 - GO-A Coupling

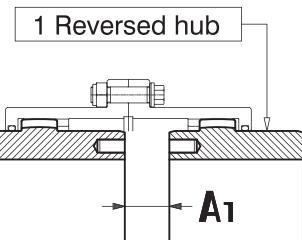


Fig. 02 - GO-AR Coupling

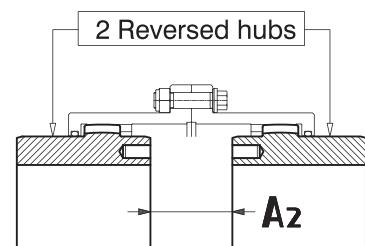


Fig. 03 - GO-ARR Coupling

DENOMINATION EXAMPLE:  
GO-A GEAR COUPLING SIZE 6

## GO-6A Coupling

TAB. 11


SIZE	NOMINAL TORQUE [kNm] <b>T<sub>k</sub></b>	MAX TORQUE [kNm] <b>T<sub>f</sub></b>	MAX SPEED [1/min] <b>n<sub>k</sub></b>	MIN MAX [mm] <b>d</b>	DIMENSIONS [mm]								MASS <b>M</b> [Kg]	MOMENT OF INERTIA <b>J</b> [Kgm <sup>2</sup> ]	GREASE QUANTITY [Kg]	TORSIONAL STIFFNESS <b>Kx10<sup>6</sup></b> [Nm/rad]	
					<b>D</b>	<b>C</b>	<b>A</b>	<b>A<sub>1</sub></b>	<b>A<sub>2</sub></b>	<b>E</b>	<b>F</b>	<b>G</b>					
<b>0</b>	1.80	4.32	6000	12-52	111	43	3	5	7	82.5	69	39	1.5	4.3	0.005	0.08	4.360
<b>1</b>	2.76	6.62	4620	18-62	142	50	3	8	13	104.5	85	45.5	1.5	7.5	0.012	0.09	7.310
<b>2</b>	5.55	13.30	4140	28-78	168	62	3	14	25	130.5	107	59	1.5	13.5	0.033	0.16	13.45
<b>3</b>	8.70	20.90	4000	40-98	200	76	5	12	19	158.5	133	68.5	2.5	25	0.085	0.27	24.58
<b>4</b>	14.10	33.80	3860	50-112	225	90	5	24	43	183.5	152	82.5	2.5	37	0.163	0.47	30.34
<b>5</b>	22.80	54.70	3720	60-132	265	105	6	27	48	211.5	178	93	3	60	0.376	0.68	47.68
<b>6</b>	34.80	83.50	3190	70-156	300	120	6	32	58	245.5	209	106	3	90	0.727	0.93	68.27
<b>7</b>	44.00	105.6	2900	85-174	330	135	8	37	66	275	234	118	4	124	1.226	1.54	97.85
<b>8</b>	69.80	167.5	2570	95-190	370	150	8	50	92	307	254	138	4	170	2.099	2.28	136.1
<b>9</b>	83.80	201.2	2330	110-210	406	175	8	53	98	335	279	154	4	233	3.390	3.10	159.9
<b>10</b>	152.0	364.8	2150	120-233	438	190	8	58	108	367	305	166	4	298	5.053	3.90	203.3
<b>11</b>	203.5	488.4	1800	130-280	505	220	10	72	134	423	355	193	5	457	10.33	6.20	283.0

NOTE 1 - Values are calculated for solid hubs



## TECHNICAL DATA

## GO-A.HT COUPLINGS

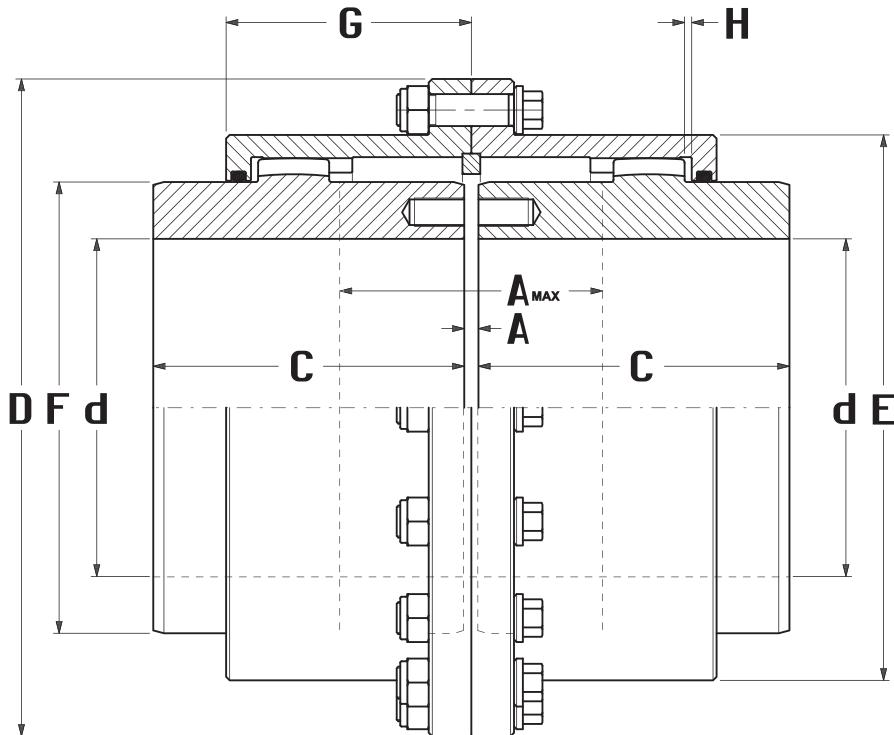

DENOMINATION EXAMPLE:  
GO-A.HT GEAR COUPLING SIZE 6

Fig. 04 - GO-A.HT Coupling

## GO-6A.HT Coupling

TAB. 12


SIZE	NOMINAL TORQUE [kNm] Tk	MAX TORQUE [kNm] Tf	MAX SPEED [1/min] nk	MIN MAX [mm] d	DIMENSIONS [mm]							MASS ① M [Kg]	MOMENT OF INERTIA ① J [Kgm <sup>2</sup> ]	GREASE QUANTITY [Kg]	TORSIONAL STIFFNESS ① Kx10 <sup>6</sup> [Nm/rad]	
					D	C	A	MAX A	E	F	G					
0	2.90	5.80	10200	12-52	111	50	3	25	82.5	69	39	1.5	4.30	0.005	0.08	4.360
1	4.40	8.80	7850	18-62	142	62	3	35	104.5	85	45.5	1.5	7.50	0.012	0.09	7.310
2	8.90	17.80	7040	28-78	168	76	3	45	130.5	107	59	1.5	13.50	0.033	0.16	13.45
3	13.90	27.80	6800	40-98	200	90	5	55	158.5	133	68.5	2.5	25	0.085	0.27	24.58
4	22.60	45.20	6560	50-112	225	105	5	80	183.5	152	82.5	2.5	37	0.163	0.47	30.34
5	36.50	73	6330	60-132	265	120	6	95	211.5	178	93	3	60	0.376	0.68	47.68
6	55.50	111	5420	70-156	300	135	6	105	245.5	209	106	3	90	0.727	0.93	68.27
7	70.50	141	4930	85-174	330	150	8	120	275	234	118	4	124	1.226	1.54	97.85
8	112	224	4370	95-190	370	175	8	145	307	254	138	4	170	2.099	2.28	136.1
9	134	268	3960	110-210	406	190	8	165	335	279	154	4	233	3.390	3.10	159.9
10	243	486	3660	120-233	438	220	8	180	367	305	166	4	298	5.053	3.90	203.3
11	326	652	3060	130-280	505	250	10	200	423	355	193	5	457	10.33	6.20	283.0

NOTE 1 - Values are calculated for solid hubs.



## GO-AMM, GO-AM & GO-AMR COUPLINGS

## TECHNICAL DATA

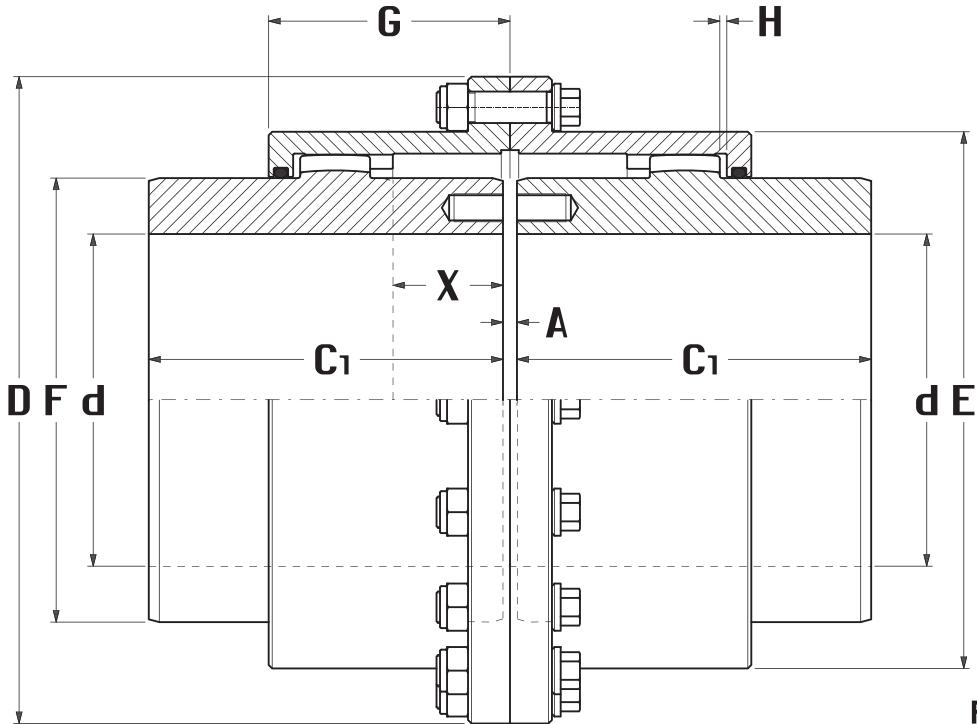

1 Standard hub

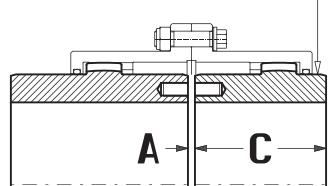


Fig. 06 - GO-AM Coupling

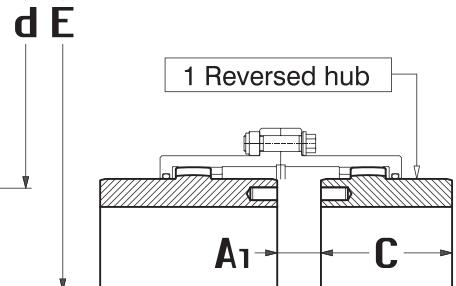


Fig. 07 - GO-AMR Coupling

DENOMINATION EXAMPLE:  
GO-AMM GEAR COUPLING SIZE 6

Fig. 05 - GO-AMM Coupling

## GO-6AMM Coupling

TAB. 13

SIZE	NOMINAL TORQUE [kNm] <b>T<sub>k</sub></b>	MAX TORQUE [kNm] <b>T<sub>f</sub></b>	MAX SPEED [1/min] <b>n<sub>k</sub></b>	MIN MAX [mm] <b>d</b>	DIMENSIONS [mm]									MASS <b>M</b> [Kg]	MOMENT OF INERTIA <b>J</b> [Kgm <sup>2</sup> ]	GREASE QUANTITY [Kg]	TORSIONAL STIFFNESS <b>Kx10<sup>6</sup></b> [Nm/rad]	
					<b>D</b>	<b>C</b>	<b>C<sub>1</sub></b>	<b>A</b>	<b>A<sub>1</sub></b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>H</b>					
<b>0</b>	1.80	4.32	6000	12-52	111	43	105	3	5	82.5	69	39	1.5	12	8	0.007	0.08	4.360
<b>1</b>	2.76	6.62	4620	18-62	142	50	115	3	8	104.5	85	45.5	1.5	16	13	0.018	0.09	7.310
<b>2</b>	5.55	13.30	4140	28-78	168	62	130	3	14	130.5	107	59	1.5	22	23	0.046	0.16	13.45
<b>3</b>	8.70	20.90	4000	40-98	200	76	150	5	12	158.5	133	68.5	2.5	26	41	0.120	0.27	24.58
<b>4</b>	14.10	33.80	3860	50-112	225	90	170	5	24	183.5	152	82.5	2.5	38	60	0.229	0.47	30.34
<b>5</b>	22.80	54.70	3720	60-132	265	105	185	6	27	211.5	178	93	3	45	91	0.501	0.68	47.68
<b>6</b>	34.80	83.50	3190	70-156	300	120	215	6	32	245.5	209	106	3	50	141	1.005	0.93	68.27
<b>7</b>	44.00	105.6	2900	85-174	330	135	245	8	37	275	234	118	4	58	199	1.734	1.54	97.85
<b>8</b>	69.80	167.5	2570	95-190	370	150	295	8	50	307	254	138	4	70	285	3.029	2.28	136.1
<b>9</b>	83.80	201.2	2330	110-210	406	175	300	8	53	335	279	154	4	80	352	4.556	3.10	159.9
<b>10</b>	152.0	364.8	2150	120-233	438	190	305	8	58	367	305	166	4	86	428	6.165	3.90	203.3
<b>11</b>	203.5	488.4	1800	130-280	505	220	310	10	72	423	355	193	5	96	596	12.55	6.20	283.0

NOTE 1 - Values are calculated for solid hubs



## TECHNICAL DATA

## GO-FA, GO-FAR & GO-FAM COUPLINGS

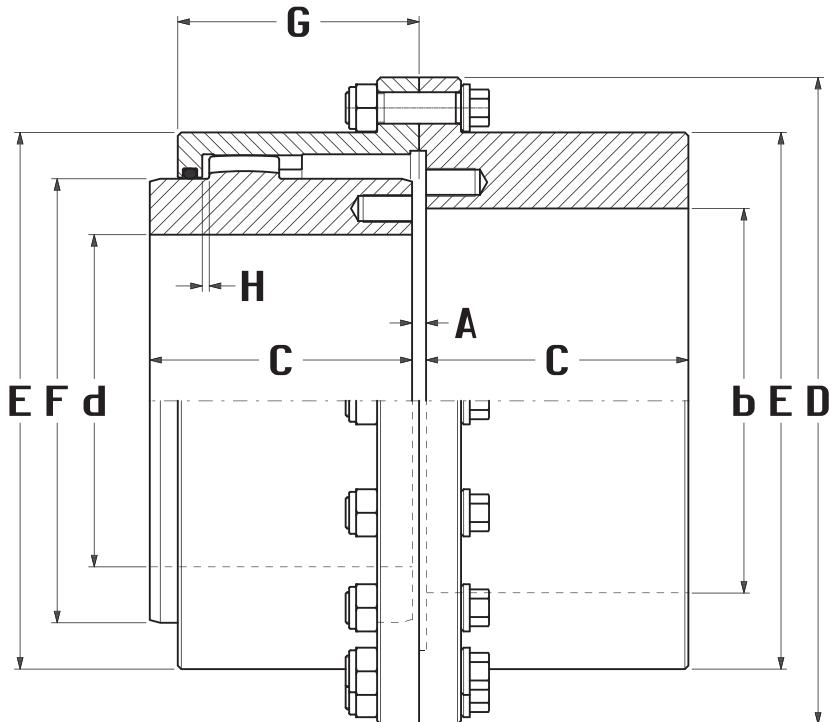


Fig. 08 - GO-FA Coupling

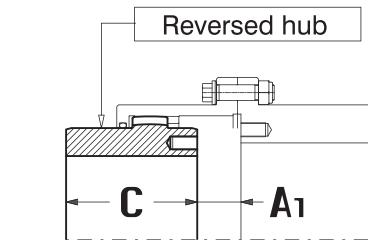


Fig. 09 - GO-FAR Coupling

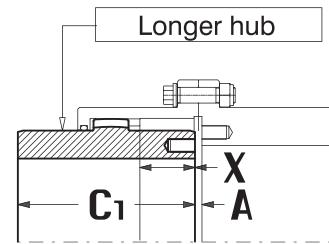


Fig. 10 - GO-FAM Coupling

DENOMINATION EXAMPLE:  
GO-FA GEAR COUPLING SIZE 6

## GO-6FA Coupling

TAB. 14

SIZE	NOMINAL TORQUE [kNm] Tk	MAX TORQUE [kNm] Tf	MAX SPEED [1/min] nk	MIN MAX [mm] d	MAX [mm] b	DIMENSIONS [mm]									MASS ① M [Kg]	MOMENT OF INERTIA ① J [Kgm <sup>2</sup> ]	GREASE QUANTITY [Kg]	TORSIONAL STIFFNESS ① Kx10 <sup>6</sup> [Nm/rad]	
						D	C	C <sub>1</sub>	A	A <sub>1</sub>	E	F	G	H					
0	1.80	4.32	6000	12-52	60	111	43	105	3	5	82.5	69	39	1.5	12	4.5	0.005	0.04	8.720
1	2.76	6.62	4620	18-62	75	142	50	115	3	8	104.5	85	45.5	1.5	16	8	0.013	0.05	14.62
2	5.55	13.30	4140	28-78	90	168	62	130	3	14	130.5	107	59	1.5	22	14	0.035	0.08	26.90
3	8.70	20.90	4000	40-98	110	200	76	150	5	12	158.5	133	68.5	2.5	26	26	0.091	0.14	49.16
4	14.10	33.80	3860	50-112	130	225	90	170	5	24	183.5	152	82.5	2.5	38	39	0.177	0.24	60.68
5	22.80	54.70	3720	60-132	150	265	105	185	6	27	211.5	178	93	3	45	63	0.407	0.34	95.36
6	34.80	83.50	3190	70-156	175	300	120	215	6	32	245.5	209	106	3	50	95	0.786	0.47	136.5
7	44.00	105.6	2900	85-174	192	330	135	245	8	37	275	234	118	4	58	131	1.331	0.77	195.7
8	69.80	167.5	2570	95-190	220	370	150	295	8	50	307	254	138	4	70	180	2.288	1.14	272.3
9	83.80	201.2	2330	110-210	240	406	175	300	8	53	335	279	154	4	80	248	3.729	1.55	319.9
10	152.0	364.8	2150	120-233	260	438	190	305	8	58	367	305	166	4	86	318	5.609	1.95	406.7
11	203.5	488.4	1800	130-280	300	505	220	310	10	72	423	355	193	5	96	488	10.44	3.10	566.0

NOTE 1 - Values are calculated for solid hubs



## AO-A, AO-ARR & AO-AMM SPACER COUPLINGS

## TECHNICAL DATA

Fig. 11 - AO-A Spacer Couplings

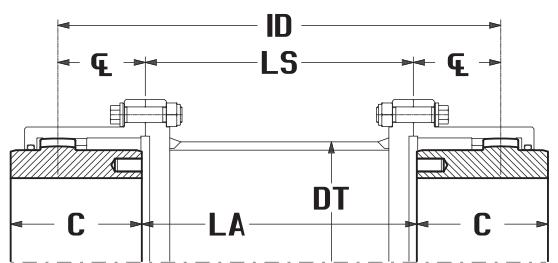


Fig. 12 - AO-ARR Spacer Couplings



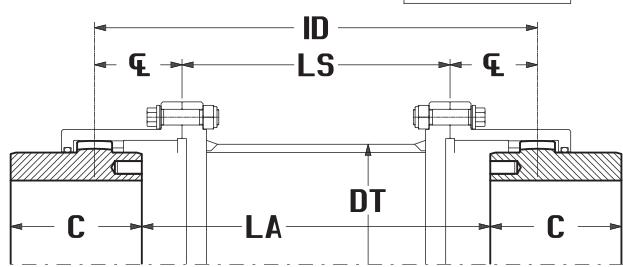


Fig. 13 - AO-AMM Spacer Couplings

$LS = LA - A$   
 $ID = LS + 2\Phi$

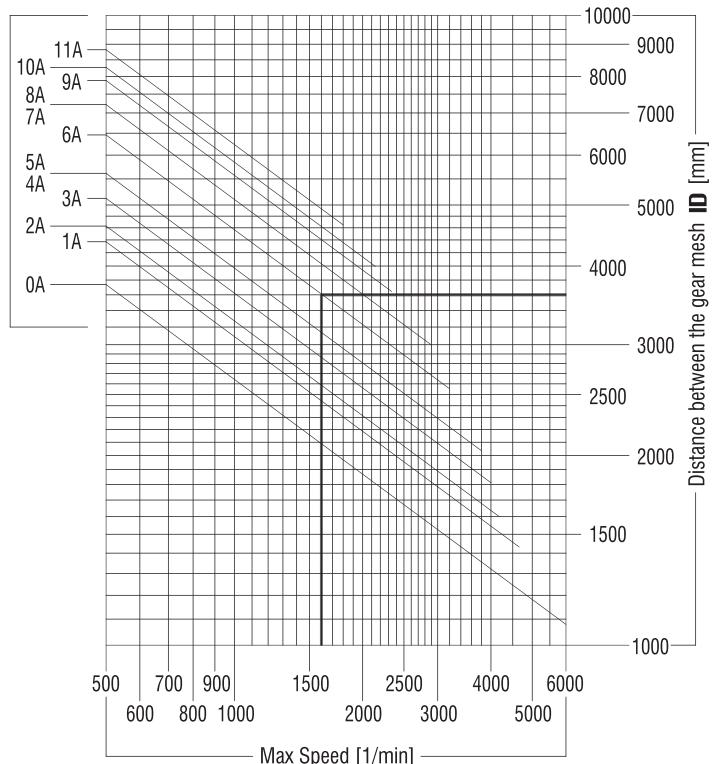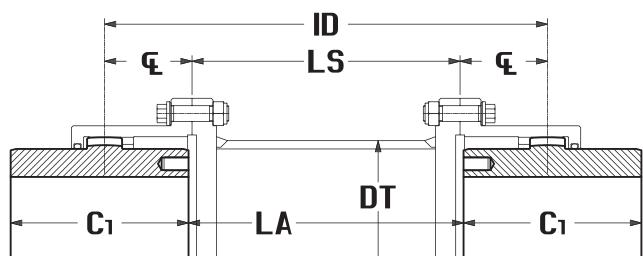

Verification Example:  
AO-6A Spacer Coupling with distance between the gear mesh ID=3600 [mm]  
In the graph (see bold lines) you can obtain a max working speed of 1600 [1/min]

DENOMINATION EXAMPLE:  
AO-A GEAR COUPLING SIZE 6

## AO-6A Spacer Couplings


TAB. 15

SIZE	DIMENSIONS [mm]								① MASS [Kg] M	① MOMENT OF INERTIA [Kgm <sup>2</sup> ] J	① TORSIONAL STIFFNESS K [Nm/rad] x 10 <sup>6</sup>	GREASE QUANTITY [Kg]							
	C	C <sub>1</sub>	A	A <sub>2</sub>	Φ	Standard LS	Min LS	DT											
0	43	105	3	7	24	107	124	175	80	22.8	26.5	1.73	0.219	2.282	0.08				
1	50	115	3	13	29	107	124	175	90	89	21.5	27	1.19	0.045	0.051	0.003	0.030	2.946	0.09
2	62	130	3	25	38	107	124	175	90	125	32.5	42	1.60	0.091	0.104	0.005	0.489	4.984	0.16
3	76	150	5	19	44	-	122	173	100	140	53.5	70	2.29	0.215	0.250	0.010	1.048	10.69	0.27
4	90	170	5	43	57	-	122	173	100	168	79.5	103	3.54	0.432	0.498	0.022	2.250	23.79	0.47
5	105	185	6	48	66	-	121	172	110	168	113	144	3.54	0.765	0.890	0.022	2.364	23.79	0.68
6	120	215	6	58	76	-	121	172	110	219	155	206	4.17	1.455	1.733	0.046	4.761	49.13	0.93
7	135	245	8	66	86	-	-	-	130	273	212	287	6.17	2.654	3.162	0.107	10.43	113.5	1.54
8	150	295	8	92	100	-	-	-	150	273	270	385	6.17	3.822	4.752	0.107	11.04	113.5	2.28
9	175	300	8	98	114	-	-	-	160	324	356	475	7.04	6.250	7.416	0.183	17.93	193.6	3.10
10	190	305	8	108	124	-	-	-	170	356	438	568	8.11	8.920	10.03	0.243	23.68	256.9	3.90
11	220	310	10	134	146	-	-	-	180	406	662	802	12.3	17.72	19.94	0.478	44.60	505.7	6.20



NOTE 1 - Values are calculated for solid hubs and spacer length LS = 1000 [mm]

**TECHNICAL DATA**
**AO-FAC & AO-FARC FLOATING SHAFT COUPLINGS**
**Fig. 14 - AO-FAC Floating Shaft Couplings**

$$LS = LA - A \\ ID = LS + 2\epsilon$$

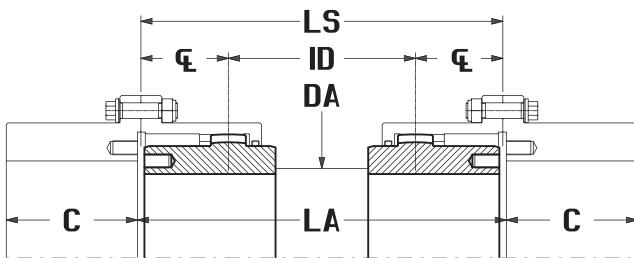
**Fig. 15 - AO-FARC Floating Shaft Couplings**

$$LS = LA - A \\ ID = LS + 2\epsilon$$

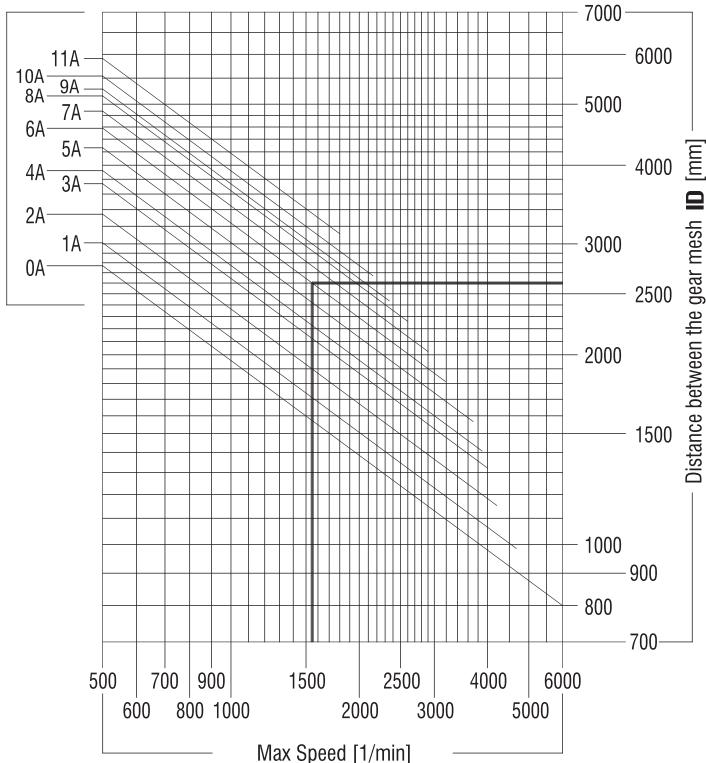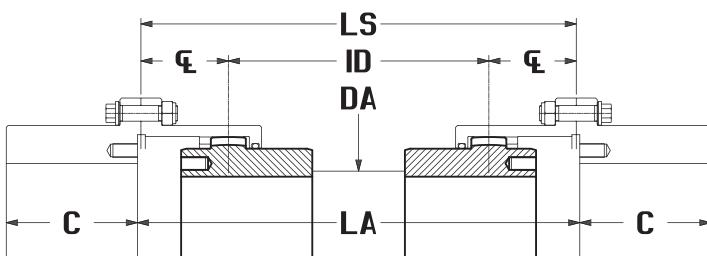

Verification Example:  
AO-6A Spacer Coupling with distance between the gear mesh ID=3600 [mm]  
In the graph (see bold lines) you can obtain a max working speed of 1600 [1/min]

**DENOMINATION EXAMPLE:**  
GO-FAC GEAR COUPLING SIZE 6

## **AO-6FAC Floating Shaft Couplings**

**TAB. 16**

SIZE	DIMENSIONS [mm]					(1) MASS [Kg] M			(1) MOMENT OF INERTIA [Kgm²] J			(1) TORSIONAL STIFFNESS K			GREASE QUANTITY
	C	A	$\epsilon$	Min LS	DA	AO-FAC	AO-FARC	SHAFT 100mm	AO-FAC	AO-FARC	SHAFT 100mm	[Nm/rad] x 10 <sup>6</sup>	AO-FA..	100mm	[Kg]
<b>0</b>	43	3	24	140	55	26.0	25.9	1.86	0.016	0.016	0.001	0.074	0.720		0.08
<b>1</b>	50	3	29	170	65	39.4	39.1	2.61	0.038	0.038	0.001	0.146	1.404		0.09
<b>2</b>	62	3	38	220	80	62.4	61.6	3.95	0.098	0.097	0.003	0.340	3.221		0.16
<b>3</b>	76	5	44	250	100	104.0	103.1	6.16	0.247	0.246	0.008	0.833	7.865		0.27
<b>4</b>	90	5	57	320	110	138.8	136.0	7.46	0.446	0.442	0.011	1.246	11.51		0.47
<b>5</b>	105	6	66	370	130	207.7	203.3	10.42	0.987	0.887	0.022	2.455	22.46		0.68
<b>6</b>	120	6	76	430	150	294.6	287.4	13.87	1.866	1.846	0.039	4.393	39.81		0.93
<b>7</b>	135	8	86	480	170	390.6	380.3	17.82	3.127	3.089	0.064	7.338	65.69		1.54
<b>8</b>	150	8	100	550	190	514	495	22.26	5.271	5.187	0.100	11.71	102.5		2.28
<b>9</b>	175	8	114	630	200	654	632	24.66	8.250	8.139	0.123	14.79	125.8		3.10
<b>10</b>	190	8	124	690	220	819	789	29.84	12.32	12.14	0.181	21.86	184.2		3.90
<b>11</b>	220	10	146	800	250	1188	1140	38.53	24.54	24.16	0.301	37.62	307.2		6.20

NOTE 1 - Values are calculated for solid hubs and floating shaft  
length LS = 1000 [mm]



## GO-AV COUPLINGS & AO-AV SPACER COUPLINGS

## TECHNICAL DATA

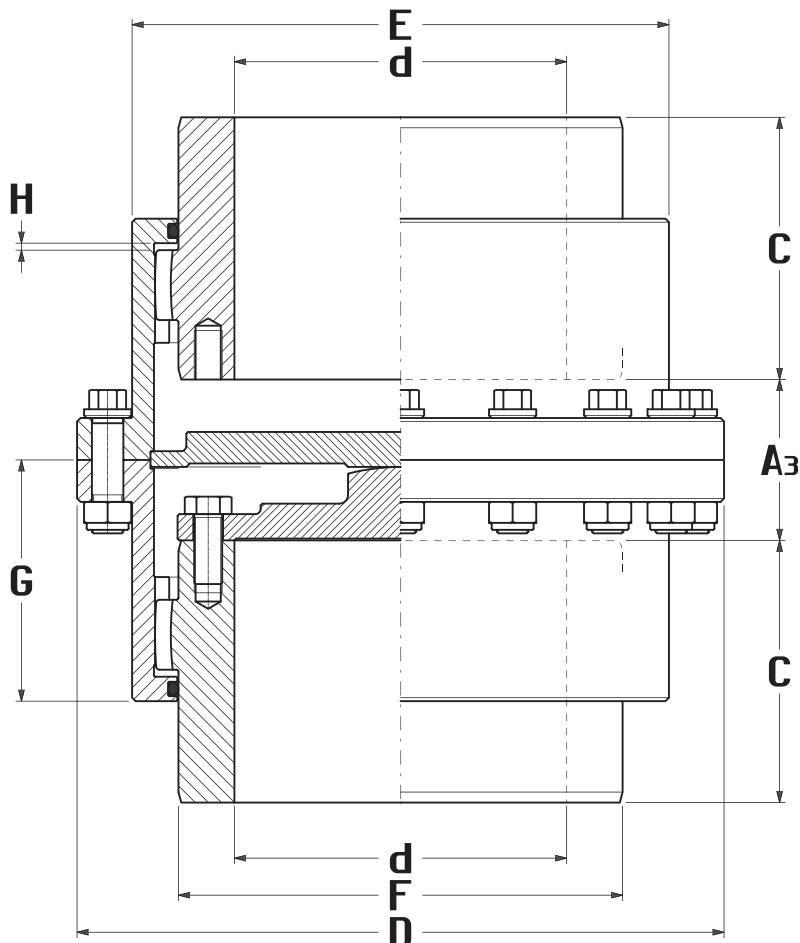


Fig. 16 - GO-AV Coupling

Shaft Diameter	M	N
from 24 to 30	M10	22
from 30 to 38	M12	28
from 38 to 50	M16	36
from 50 to 85	M20	42
from 85 to 130	M24	50
from 130 to 160	M30	60
from 160 to 200	M36	80
from 200 to 250	M48	100
from 250 to 300	M56	125


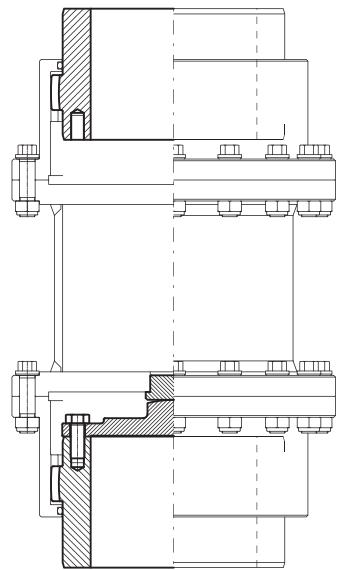


Fig. 17  
AO-AV Spacer Couplings

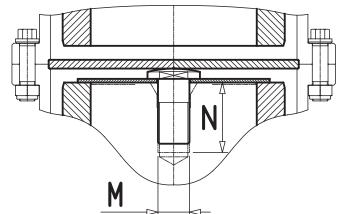

DENOMINATION EXAMPLE:  
GO-AV GEAR COUPLING SIZE 6  
**GO-6AV Coupling**

TAB. 17

SIZE	NOMINAL TORQUE [kNm] Tk	MAX TORQUE [kNm] Tf	MAX SPEED [1/min] nk	MIN MAX [mm] d	DIMENSIONS [mm]							MASS ① M [Kg]	MOMENT OF INERTIA ① J [Kgm <sup>2</sup> ]	GREASE QUANTITY [Kg]	TORSIONAL STIFFNESS ① Kx10 <sup>6</sup> [Nm/rad]
					D	C	A <sub>3</sub>	E	F	G	H				
<b>0</b>	1.80	4.32	6000	12-52	111	43	23	82.5	69	39	1.5	4.3	0.005	0.08	4.360
<b>1</b>	2.76	6.62	4620	18-62	142	50	23	104.5	85	45.5	1.5	7.5	0.012	0.09	7.310
<b>2</b>	5.55	13.30	4140	28-78	168	62	31	130.5	107	59	1.5	13.5	0.033	0.16	13.45
<b>3</b>	8.70	20.90	4000	40-98	200	76	31	158.5	133	68.5	2.5	25	0.085	0.27	24.58
<b>4</b>	14.10	33.80	3860	50-112	225	90	43	183.5	152	82.5	2.5	37	0.163	0.47	30.34
<b>5</b>	22.80	54.70	3720	60-132	265	105	48	211.5	178	93	3	60	0.376	0.68	47.68
<b>6</b>	34.80	83.50	3190	70-156	300	120	58	245.5	209	106	3	90	0.727	0.93	68.27
<b>7</b>	44.00	105.6	2900	85-174	330	135	66	275	234	118	4	124	1.226	1.54	97.85
<b>8</b>	69.80	167.5	2570	95-190	370	150	92	307	254	138	4	170	2.099	2.28	136.1
<b>9</b>	83.80	201.2	2330	110-210	406	175	98	335	279	154	4	233	3.390	3.10	159.9
<b>10</b>	152.0	364.8	2150	120-233	438	190	108	367	305	166	4	298	5.053	3.90	203.3
<b>11</b>	203.5	488.4	1800	130-280	505	220	134	423	355	193	5	457	10.33	6.20	283.0

NOTE 1 - Values are calculated for solid hubs  
and refer to GO-AV couplings only



## TECHNICAL DATA

## GO-ASC & GO-ASC.D COUPLINGS

Fig. 18 - GO-ASC Coupling

DENOMINATION EXAMPLE:  
GO-ASC GEAR COUPLING SIZE 6

### GO-6ASC Coupling

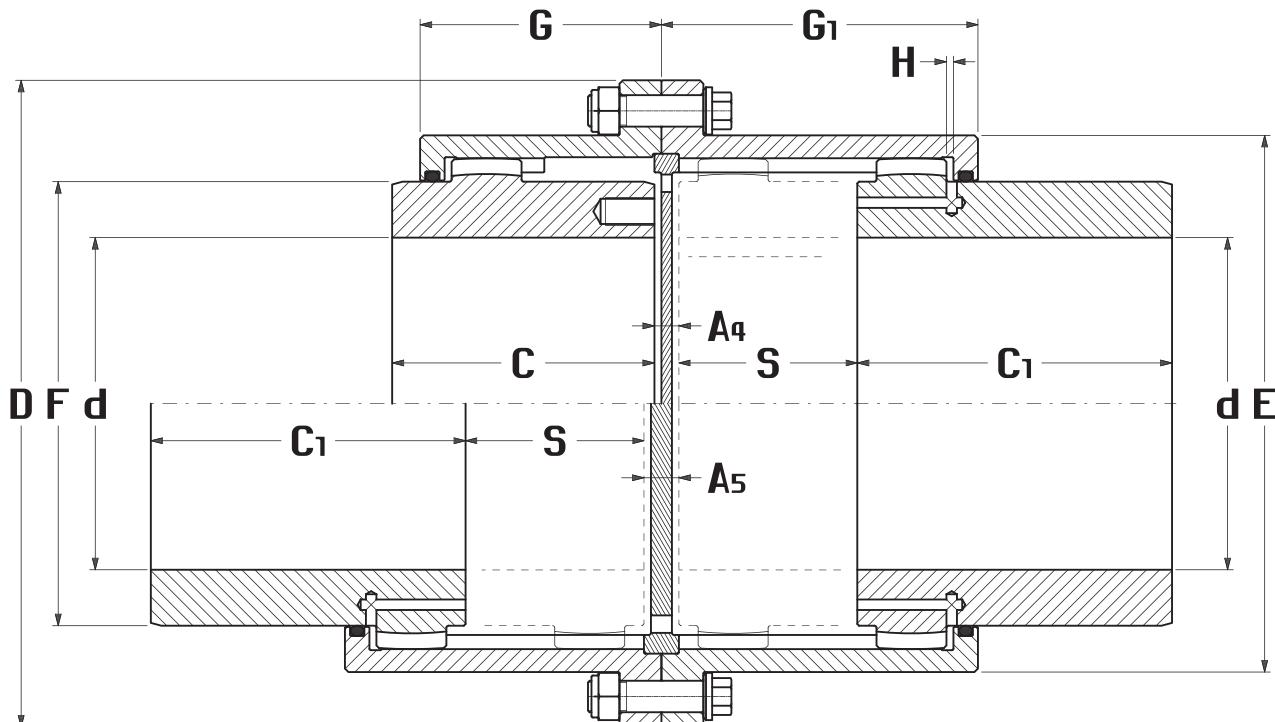


Fig. 19 - GO-ASC.D Coupling

DENOMINATION EXAMPLE:  
GO-ASC.D GEAR COUPLING SIZE 6

### GO-6ASC.D Coupling

## TAB. 18


SIZE	NOMINAL TORQUE [kNm]	MAX TORQUE [kNm]	MAX SPEED [1/min]	MIN MAX [mm] d	DIMENSIONS [mm]								GREASE QUANTITY [Kg]	GO-ASC		GO-ASC.D	
	T <sub>k</sub>	T <sub>f</sub>	n <sub>k</sub>		D	C	C <sub>1</sub>	E	F	G	G <sub>1</sub>	H		MIN MAX A <sub>4</sub>	MAX SLIDE S	MIN MAX A <sub>5</sub>	MAX SLIDE S+S
0	1.80	4.32	6000	12-52	111	43	100	82.5	69	39	100	1.5	0.08	7-69	62	11-135	124
1	2.76	6.62	4620	18-62	142	50	102	104.5	85	45.5	98.5	1.5	0.09	7-69	62	11-135	124
2	5.55	13.30	4140	28-78	168	62	110	130.5	107	59	106.5	1.5	0.16	7-71	64	11-139	128
3	8.70	20.90	4000	40-98	200	76	122	158.5	133	68.5	119.5	2.5	0.27	8-80	72	11-155	144
4	14.10	33.80	3860	50-112	225	90	130	183.5	152	82.5	122.5	2.5	0.47	8-80	72	11-155	144
5	22.80	54.70	3720	60-132	265	105	144	211.5	178	93	137	3	0.68	10-90	80	14-174	160
6	34.80	83.50	3190	70-156	300	120	156	245.5	209	106	151	3	0.93	10-98	88	14-190	176
7	44.00	105.6	2900	85-174	330	135	162	275	234	118	158	4	1.54	14-102	88	20-196	176
8	69.80	167.5	2570	95-190	370	150	180	307	254	138	181	4	2.28	14-116	102	20-224	204
9	83.80	201.2	2330	110-210	406	175	220	335	279	154	213	4	3.10	14-144	130	20-280	260
10	152.0	364.8	2150	120-233	438	190	220	367	305	166	217	4	3.90	14-144	130	20-280	260
11	203.5	488.4	1800	130-280	505	220	210	423	355	193	209	5	6.20	16-126	110	22-242	220

NOTE 1 - Values are calculated for solid hubs



## GO-ACS COUPLINGS

## TECHNICAL DATA

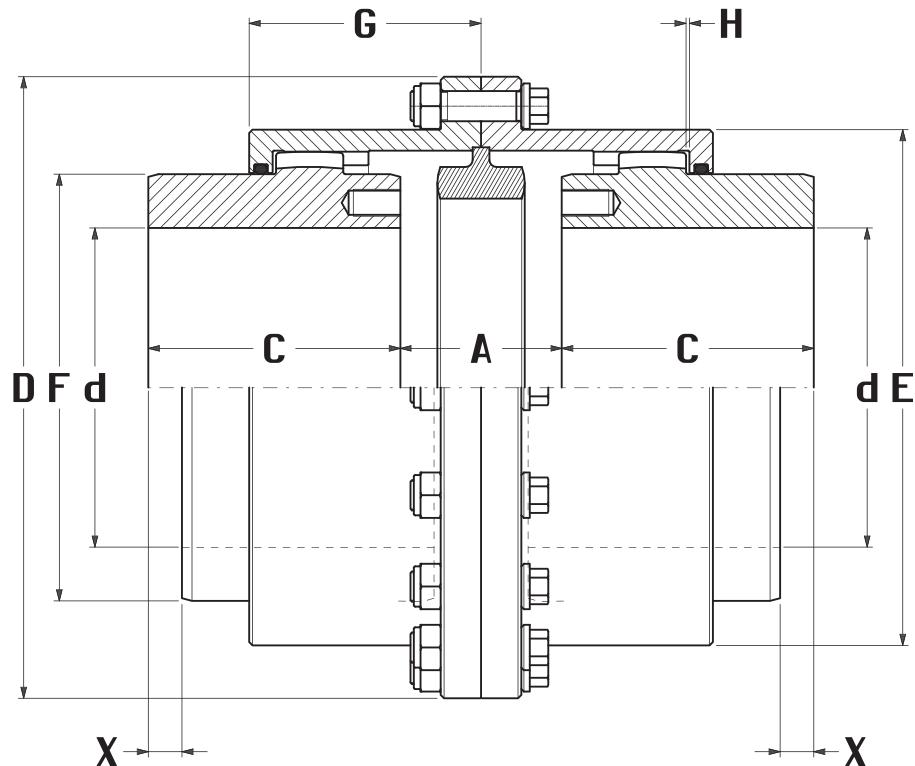

DENOMINATION EXAMPLE:  
GO-ACS GEAR COUPLING SIZE 6

Fig. 20 - GO-ACS Coupling

## GO-6ACS Coupling

TAB. 19

SIZE	NOMINAL TORQUE [kNm] <b>T<sub>k</sub></b>	MAX TORQUE [kNm] <b>T<sub>f</sub></b>	MAX SPEED [1/min] <b>n<sub>k</sub></b>	MIN MAX [mm] <b>d</b>	DIMENSIONS [mm]								MASS <b>M</b> [Kg]	MOMENT OF INERTIA <b>J</b> [Kgm <sup>2</sup> ]	GREASE QUANTITY [Kg]	TORSIONAL STIFFNESS <b>Kx10<sup>6</sup></b> [Nm/rad]	
					D	C	Min	Max	E	F	G	Min	H				
<b>0</b>	1.80	4.32	6000	12-52	111	43	8	24	82.5	69	39	1	16=8+8	4.3	0.005	0.08	4.360
<b>1</b>	2.76	6.62	4620	18-62	142	50	8	24	104.5	85	45.5	1	16=8+8	7.5	0.012	0.09	7.310
<b>2</b>	5.55	13.30	4140	28-78	168	62	8	26	130.5	107	59	1	18=9+9	13.5	0.033	0.16	13.45
<b>3</b>	8.70	20.90	4000	40-98	200	76	8	30	158.5	133	68.5	1	22=11+11	25	0.085	0.27	24.58
<b>4</b>	14.10	33.80	3860	50-112	225	90	22	46	183.5	152	82.5	1	24=12+12	37	0.163	0.47	30.34
<b>5</b>	22.80	54.70	3720	60-132	265	105	20	52	211.5	178	93	1	32=16+16	60	0.376	0.68	47.68
<b>6</b>	34.80	83.50	3190	70-156	300	120	26	62	245.5	209	106	1	36=18+18	90	0.727	0.93	68.27
<b>7</b>	44.00	105.6	2900	85-174	330	135	38	70	275	234	118	2	32=16+16	124	1.226	1.54	97.85
<b>8</b>	69.80	167.5	2570	95-190	370	150	56	96	307	254	138	2	40=20+20	170	2.099	2.28	136.1
<b>9</b>	83.80	201.2	2330	110-210	406	175	60	102	335	279	154	2	42=21+21	233	3.390	3.10	159.9
<b>10</b>	152.0	364.8	2150	120-233	438	190	64	112	367	305	166	2	48=24+24	298	5.053	3.90	203.3
<b>11</b>	203.5	488.4	1800	130-280	505	220	80	140	423	355	193	2	60=30+30	457	10.33	6.20	283.0

NOTE 1 - Values are calculated for solid hubs



## TECHNICAL DATA

## GO-ALGD & GO-ALGE COUPLINGS

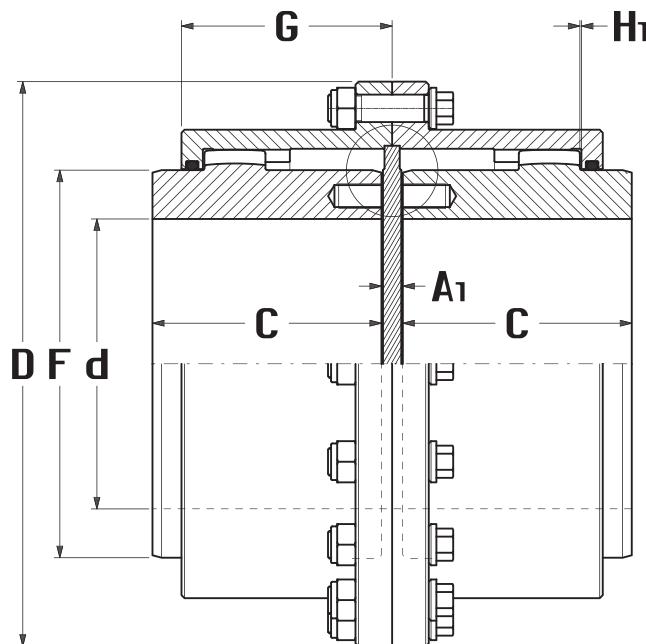


Fig. 21 - GO-ALGD Coupling



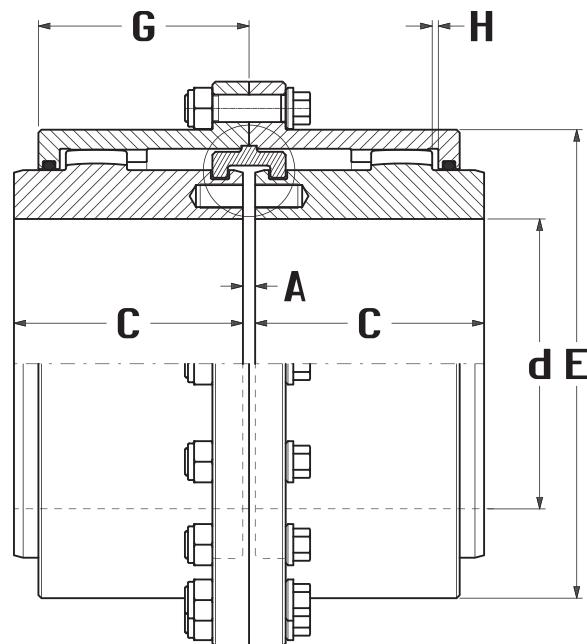


Fig. 22 - GO-ALGE Coupling

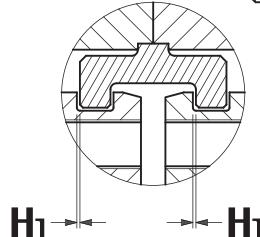

DENOMINATION EXAMPLE:  
GO-ALGD GEAR COUPLING SIZE 6

## GO-6ALGD Coupling

DENOMINATION EXAMPLE:  
GO-ALGE GEAR COUPLING SIZE 6

## GO-6ALGE Coupling

### TAB. 20


SIZE	NOMINAL TORQUE [kNm] Tk	MAX TORQUE [kNm] Tf	MAX SPEED [1/min] nK	MIN MAX [mm] d	DIMENSIONS [mm]								MASS ① M [Kg]	MOMENT OF INERTIA ① J [Kgm <sup>2</sup> ]	GREASE QUANTITY [Kg]	TORSIONAL STIFFNESS ① Kx10 <sup>6</sup> [Nm/rad]	
					D	C	A	A <sub>1</sub>	E	F	G	H					
0	1.80	4.32	6000	12-52	111	43	3	5	82.5	69	39	1.5	0.5	4.3	0.005	0.08	4.360
1	2.76	6.62	4620	18-62	142	50	3	5	104.5	85	45.5	1.5	0.5	7.5	0.012	0.09	7.310
2	5.55	13.30	4140	28-78	168	62	3	5	130.5	107	59	1.5	0.5	13.5	0.033	0.16	13.45
3	8.70	20.90	4000	40-98	200	76	5	8	158.5	133	68.5	2.5	1	25	0.085	0.27	24.58
4	14.10	33.80	3860	50-112	225	90	5	8	183.5	152	82.5	2.5	1	37	0.163	0.47	30.34
5	22.80	54.70	3720	60-132	265	105	6	10	211.5	178	93	3	1	60	0.376	0.68	47.68
6	34.80	83.50	3190	70-156	300	120	6	10	245.5	209	106	3	1	90	0.727	0.93	68.27
7	44.00	105.6	2900	85-174	330	135	8	14	275	234	118	4	1	124	1.226	1.54	97.85
8	69.80	167.5	2570	95-190	370	150	8	14	307	254	138	4	1	170	2.099	2.28	136.1
9	83.80	201.2	2330	110-210	406	175	8	14	335	279	154	4	1	233	3.390	3.10	159.9
10	152.0	364.8	2150	120-233	438	190	8	14	367	305	166	4	1	298	5.053	3.90	203.3
11	203.5	488.4	1800	130-280	505	220	10	18	423	355	193	5	1	457	10.33	6.20	283.0

NOTE 1 - Values are calculated for solid hubs



## GO-A.FF COUPLINGS

## TECHNICAL DATA

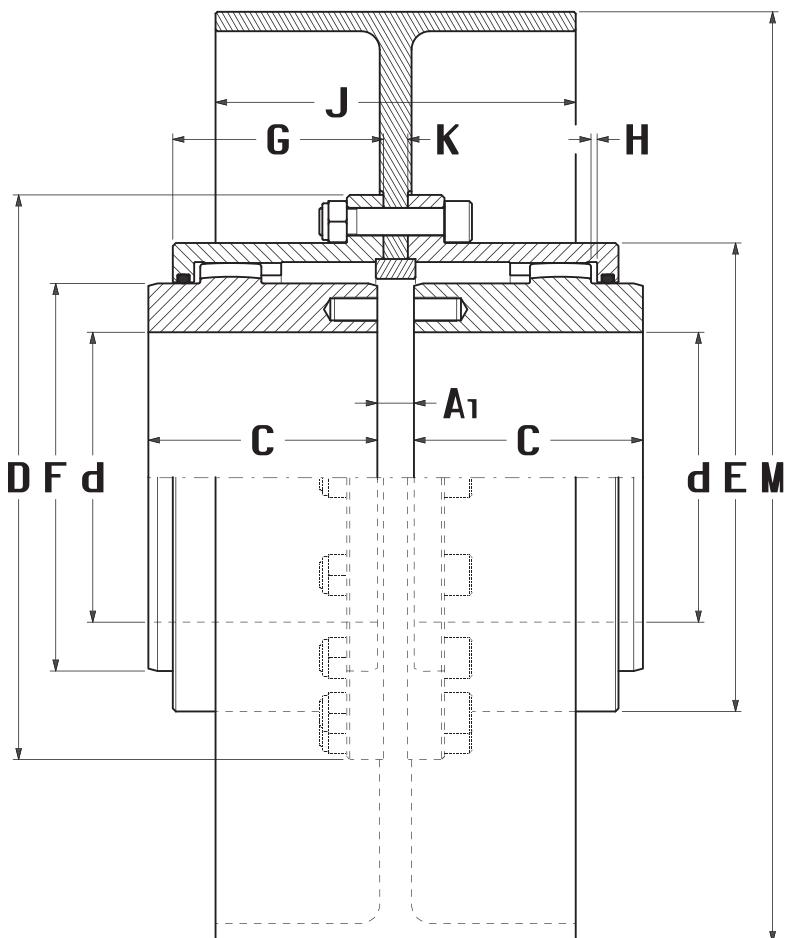

GO-A COUPLING SIZE	MAIN BRAKE PULLEY ASSEMBLIES										
	0	1	2	3	4	5	6	7	8	9	10
M	200	250	315	400	500	630	710				
J	75	95	118	150	190	236	265				
K	8	10	12	14	18	22	22				
SIZE Dimensions [mm]											
M	200	250	315	400	500	630	710				
J	75	95	118	150	190	236	265				
K	8	10	12	14	18	22	22				

DENOMINATION EXAMPLE:  
GO-A.FF COUPLING SIZE 6 + BRAKE PULLEY SIZE 630  
**GO-6A.FF.630 Coupling**

TAB. 21

SIZE	NOMINAL TORQUE [kNm] Tk	MAX TORQUE [kNm] Tf	MAX SPEED [1/min] n <sub>k</sub>	MIN MAX [mm] d	DIMENSIONS [mm]							MASS ① M [Kg]	MOMENT OF INERTIA ① J [Kgm <sup>2</sup> ]	GREASE QUANTITY [Kg]	TORSIONAL STIFFNESS ① Kx10 <sup>6</sup> [Nm/rad]	
					D	C	A	A <sub>1</sub>	E	F	G					
0	1.80	4.32	6000	12-52	111	43	3	3+K	82.5	69	39	1.5	4.3	0.005	0.08	4.360
1	2.76	6.62	4620	18-62	142	50	3	3+K	104.5	85	45.5	1.5	7.5	0.012	0.09	7.310
2	5.55	13.30	4140	28-78	168	62	3	3+K	130.5	107	59	1.5	13.5	0.033	0.16	13.45
3	8.70	20.90	4000	40-98	200	76	5	5+K	158.5	133	68.5	2.5	25	0.085	0.27	24.58
4	14.10	33.80	3860	50-112	225	90	5	5+K	183.5	152	82.5	2.5	37	0.163	0.47	30.34
5	22.80	54.70	3720	60-132	265	105	6	6+K	211.5	178	93	3	60	0.376	0.68	47.68
6	34.80	83.50	3190	70-156	300	120	6	6+K	245.5	209	106	3	90	0.727	0.93	68.27
7	44.00	105.6	2900	85-174	330	135	8	8+K	275	234	118	4	124	1.226	1.54	97.85
8	69.80	167.5	2570	95-190	370	150	8	8+K	307	254	138	4	170	2.099	2.28	136.1
9	83.80	201.2	2330	110-210	406	175	8	8+K	335	279	154	4	233	3.390	3.10	159.9
10	152.0	364.8	2150	120-233	438	190	8	8+K	367	305	166	4	298	5.053	3.90	203.3
11	203.5	488.4	1800	130-280	505	220	10	10+K	423	355	193	5	457	10.33	6.20	283.0


NOTE 1 - Values are calculated for solid hubs  
and without brake pulley



## TECHNICAL DATA

## GO-A.DT & GO-A.DF COUPLINGS

Fig. 24 - GO-A.DT Coupling

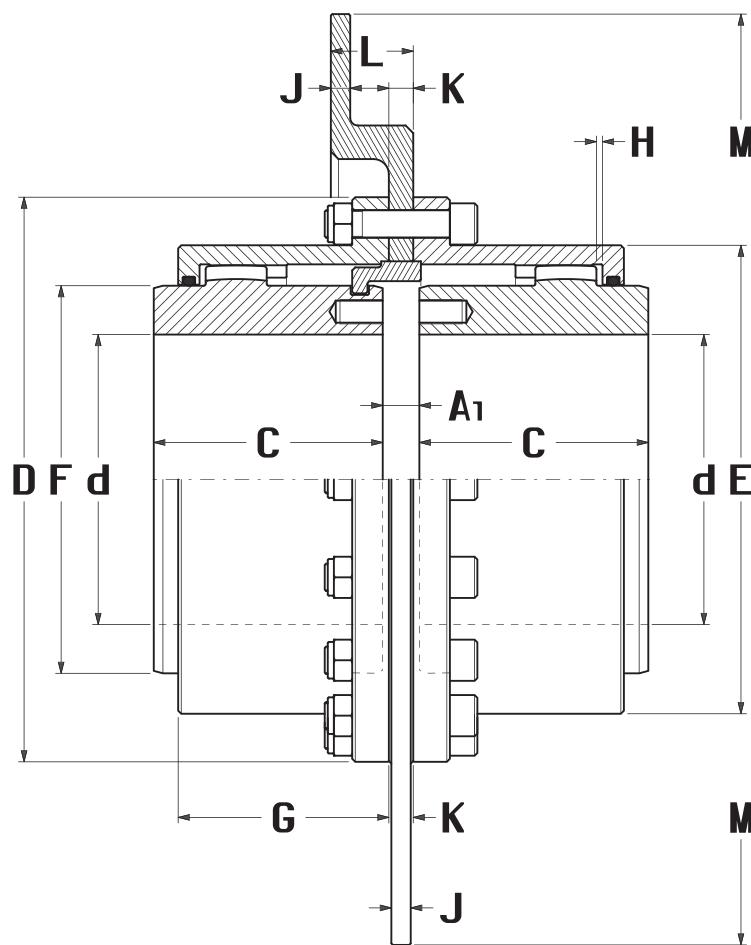

DENOMINATION EXAMPLE:  
GO-A.DT COUPLING SIZE 6 + BRAKE DISC SIZE 610  
**GO-6A.DT.610 Coupling**

GO-A COUPLING SIZE	TWIFLEX BRAKE DISC ASSEMBLIES										
	0	1	2	3	4	5	6	7	8	9	10
0											
1											
2											
3											
4											
5											
6											
7											
8											
9											
10											
11											

BRAKE DISK	SIZE Dimensions [mm]										
	M	250	300	350	400	460	515	610	710	810	915
M	250	300	356	406	457	514	610	711	812	915	12.7
J											
K	6	13	16	13	16	16	16	16	19	25	25
L	36	41							54		


Fig. 25 - GO-A.DF Coupling

DENOMINATION EXAMPLE:  
GO-A.DF COUPLING SIZE 6 + BRAKE DISC SIZE 610  
**GO-6A.DF.610 Coupling**

## TAB. 22

SIZE	NOMINAL TORQUE [kNm] Tk	MAX TORQUE [kNm] Tf	MAX SPEED [1/min] nk	MIN MAX [mm] d	DIMENSIONS [mm]							MASS ① M [Kg]	MOMENT OF INERTIA ① J [Kgm <sup>2</sup> ]	GREASE QUANTITY [Kg]	TORSIONAL STIFFNESS ① Kx10 <sup>6</sup> [Nm/rad]	
					D	C	A	A <sub>1</sub>	E	F	G					
0	1.80	4.32	6000	12-52	111	43	3	3+K	82.5	69	39	1.5	4.3	0.005	0.08	4.360
1	2.76	6.62	4620	18-62	142	50	3	3+K	104.5	85	45.5	1.5	7.5	0.012	0.09	7.310
2	5.55	13.30	4140	28-78	168	62	3	3+K	130.5	107	59	1.5	13.5	0.033	0.16	13.45
3	8.70	20.90	4000	40-98	200	76	5	5+K	158.5	133	68.5	2.5	25	0.085	0.27	24.58
4	14.10	33.80	3860	50-112	225	90	5	5+K	183.5	152	82.5	2.5	37	0.163	0.47	30.34
5	22.80	54.70	3720	60-132	265	105	6	6+K	211.5	178	93	3	60	0.376	0.68	47.68
6	34.80	83.50	3190	70-156	300	120	6	6+K	245.5	209	106	3	90	0.727	0.93	68.27
7	44.00	105.6	2900	85-174	330	135	8	8+K	275	234	118	4	124	1.226	1.54	97.85
8	69.80	167.5	2570	95-190	370	150	8	8+K	307	254	138	4	170	2.099	2.28	136.1
9	83.80	201.2	2330	110-210	406	175	8	8+K	335	279	154	4	233	3.390	3.10	159.9
10	152.0	364.8	2150	120-233	438	190	8	8+K	367	305	166	4	298	5.053	3.90	203.3
11	203.5	488.4	1800	130-280	505	220	10	10+K	423	355	193	5	457	10.33	6.20	283.0

NOTE 1 - Values are calculated for solid hubs  
and without brake disk

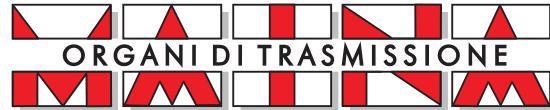

## GO-A.DFV & GO-A.DFP COUPLINGS

## TECHNICAL DATA

Fig. 26 - GO-A.DFV Coupling

DENOMINATION EXAMPLE:  
GO-A.DFV COUPLING SIZE 6 + BRAKE DISC SIZE 630V30

## GO-6A.DFV.630 V30 Coupling

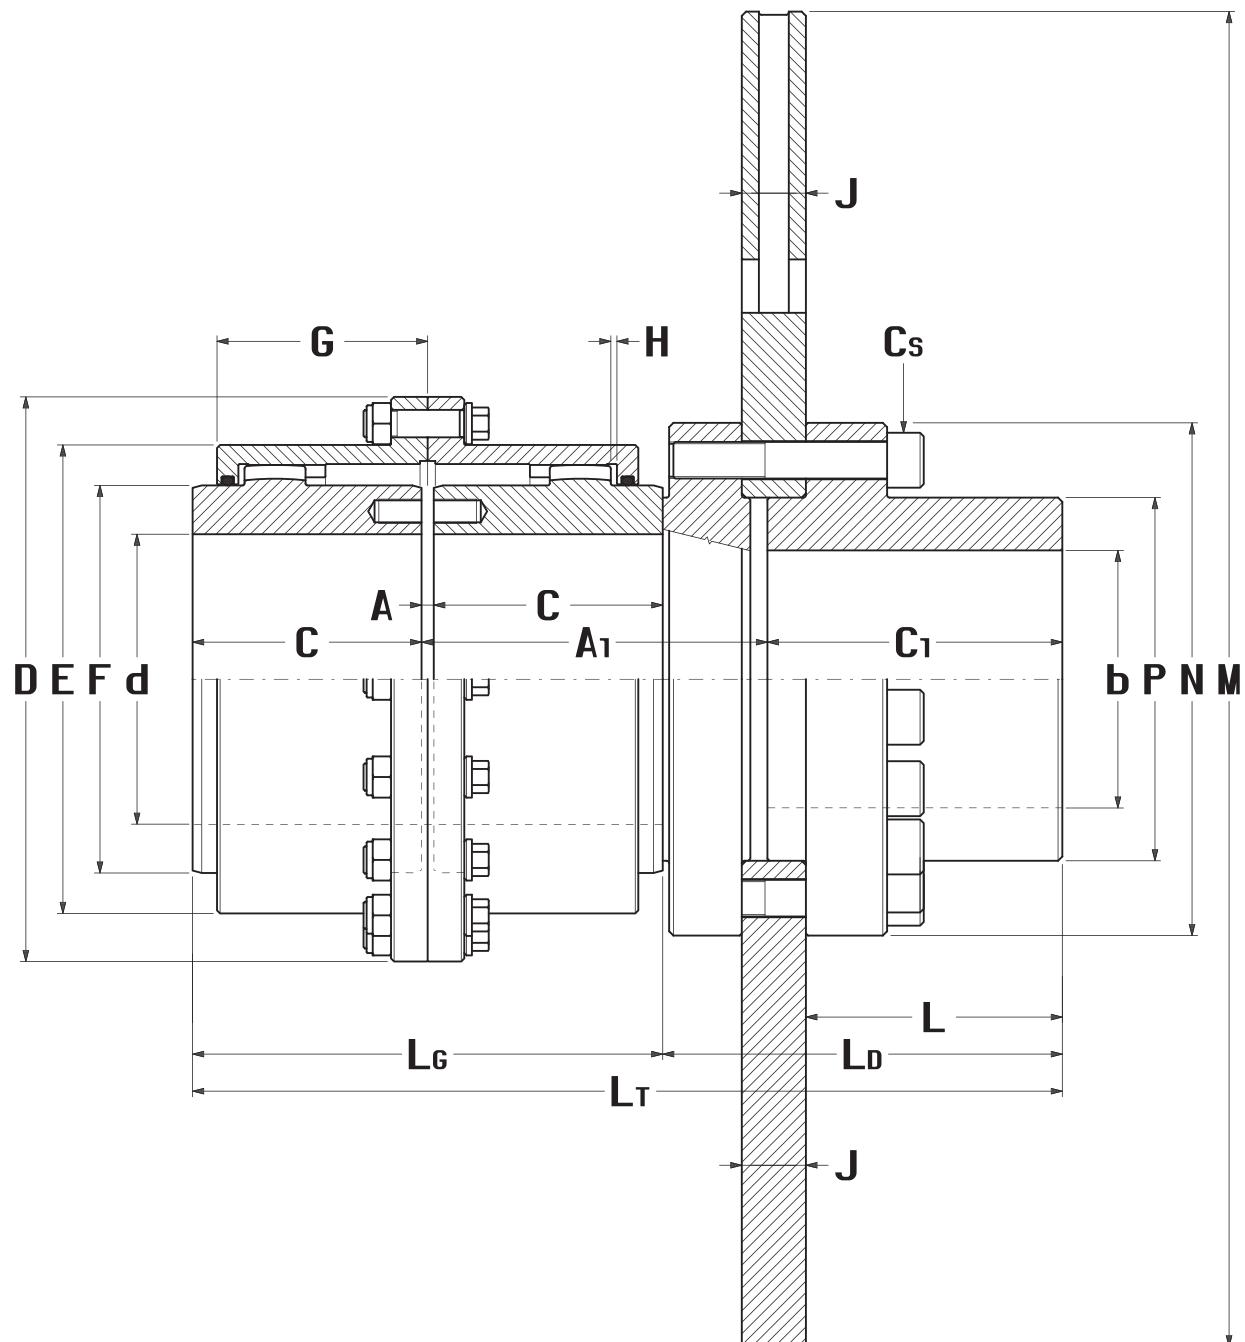


Fig. 27 - GO-A.DFP Coupling

DENOMINATION EXAMPLE:  
GO-A.DFP COUPLING SIZE 6 + BRAKE DISC SIZE 630P30

## GO-6A.DFP.630 P30 Coupling



## TECHNICAL DATA

## GO-A.DFV & GO-A.DFP COUPLINGS

**TAB. 23**

### GO-A COUPLINGS

SIZE	NOMINAL TORQUE [kNm] Tk	MAX TORQUE [kNm] Tf	MIN MAX [mm] d	DIMENSIONS [mm]								MASS ① M [Kg]	MOMENT OF INERTIA ① J [Kgm²]	GREASE QUANTITY [Kg]	TORSIONAL STIFFNESS ① Kx10⁶ [Nm/rad]
				D	C	A	Lg	E	F	G	H				
1	2.76	6.62	18-62	142	50	3	103	104.5	85	45.5	1.5	7.5	0.012	0.09	7.310
2	5.55	13.30	28-78	168	62	3	127	130.5	107	59	1.5	13.5	0.033	0.16	13.45
3	8.70	20.90	40-98	200	76	5	157	158.5	133	68.5	2.5	25	0.085	0.27	24.58
4	14.10	33.80	50-112	225	90	5	185	183.5	152	82.5	2.5	37	0.163	0.47	30.34
5	22.80	54.70	60-132	265	105	6	216	211.5	178	93	3	60	0.376	0.68	47.68
6	34.80	83.50	70-156	300	120	6	246	245.5	209	106	3	90	0.727	0.93	68.27
7	44.00	105.6	85-174	330	135	8	278	275	234	118	4	124	1.226	1.54	97.85
8	69.80	167.5	95-190	370	150	8	308	307	254	138	4	170	2.099	2.28	136.1

NOTE 1 - Values are calculated for solid hubs and without brake disc

DENOMINATION EXAMPLE:  
GO-A GEAR COUPLING SIZE 6

**GO-6A Coupling**

**TAB. 24**

### DFV & DFP BRAKE DISC

SIZE	TIGHTENING TORQUE [Nm] Cs	MAX SPEED [1/min] nK	MAX [mm] b	DIMENSIONS [mm]								
				M	J	C <sub>1</sub>	L	P	N	L <sub>D</sub>		
315-30	49	3000	60	315	30	107	87	88	130	145		
355-30	86	2700	72	355	30	107	87	106	150	145		
400-30	135	2400	80	395	30	107	87	118	170	145		
450-30	210	2100	80	445	30	140	120	118	180	190		
500-30	290	1900	110	495	30	140	120	160	225	190		
550-30	290	1800	110	550	30	140	120	160	225	190		
630-30	410	1500	120	625	30	140	120	170	240	190		
710-30	550	1300	130	705	30	140	120	190	270	195		
800-30	710	1200	150	795	30	140	120	220	310	195		
630-42	710	1500	150	625	42	140	120	220	310	210		
800-42	1450	1300	190	795	42	180	160	280	390	250		
1000-42	1450	1200	190	995	42	180	160	280	390	250		

BRAKE DISC ASSEMBLIES									
1A	2A	3A	4A	5A	6A	7A	8A		
L <sub>T</sub>	A <sub>1</sub>	L <sub>T</sub>	A <sub>1</sub>	L <sub>T</sub>	A <sub>1</sub>	L <sub>T</sub>	A <sub>1</sub>	L <sub>T</sub>	A <sub>1</sub>
248	91	272	103						
248	91	272	103						
248	91	272	103	302	119				
293	103	317	115	347	131	375	145		
		317	115	347	131	375	145	406	161
		317	115	347	131	375	145	406	161
			347	131	375	145	406	161	436
				380	150	411	166	441	181
				380	150	411	166	441	181
					426	181	456	196	488
						496	196	528	213
						496	196	528	213
							558	228	
								518	228

x = 65 x = 68 x = 74 x = 80 x = 80 x = 95 x = 110 x = 145

DENOMINATION EXAMPLE:  
SIZE 630 VENTILATED BRAKE DISC THICKNESS 30  
**630V30 Brake Disc**


If assembled with GO-AMM coupling      L<sub>T</sub> = L<sub>T</sub> + 2X  
dimensions L<sub>T</sub> & A<sub>1</sub> will be:      A<sub>1</sub> = A<sub>1</sub> + X

DENOMINATION EXAMPLE:  
SIZE 630 SOLID BRAKE DISC THICKNESS 30  
**630P30 Brake Disc**



## GO-AH.MN, GO-AH.PM & GO-AH.CL COUPLINGS

## TECHNICAL DATA

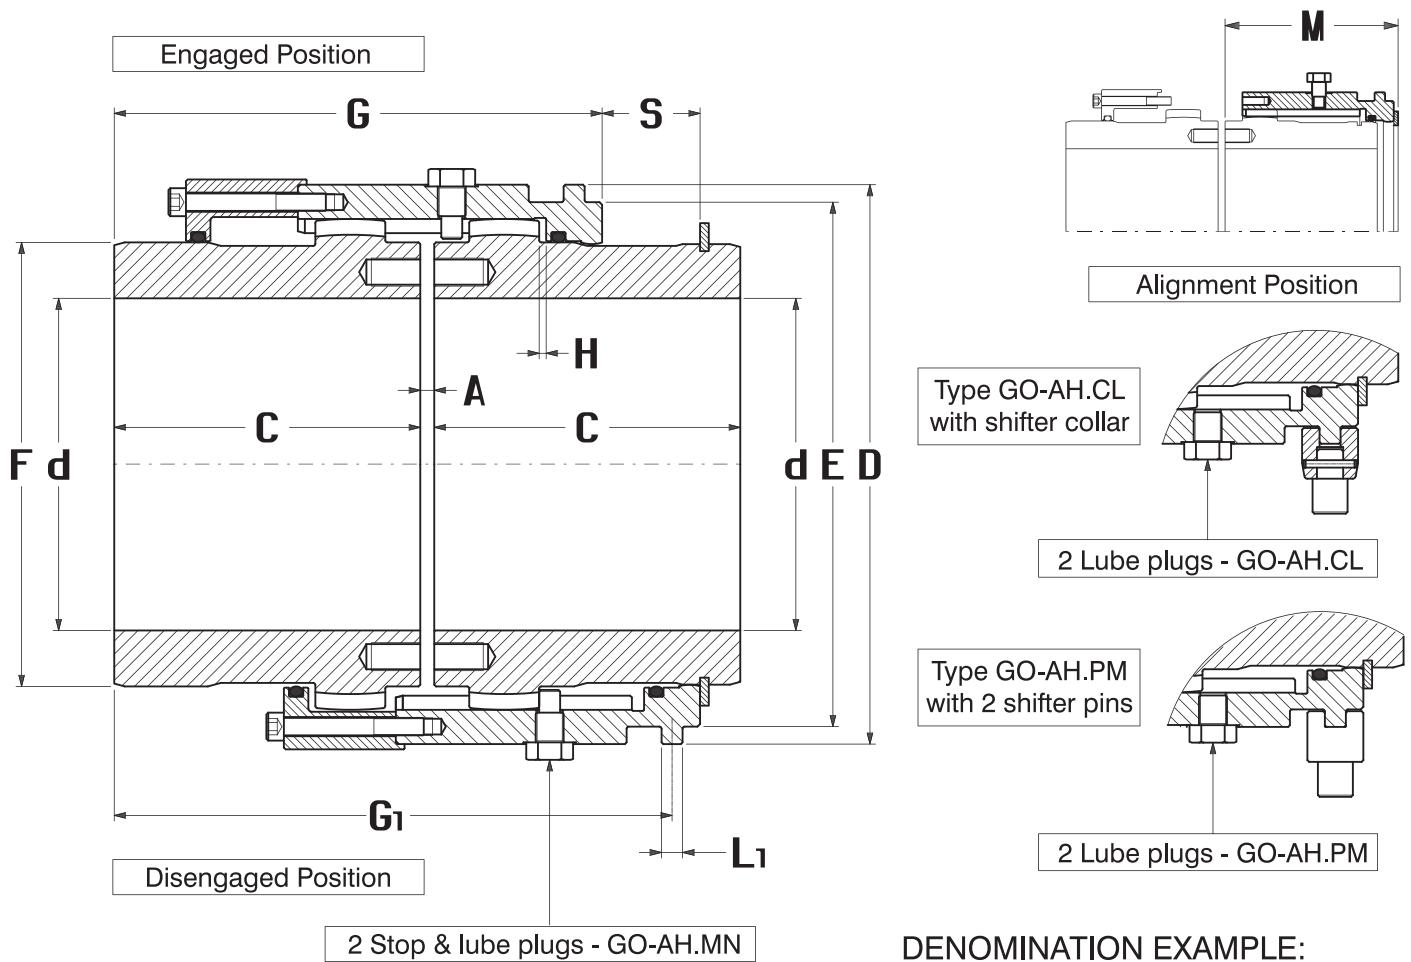

DENOMINATION EXAMPLE:  
GO-AH.MN GEAR COUPLING SIZE 6

## GO-6AH.MN Coupling

TAB. 25

SIZE	NOMINAL TORQUE [kNm] Tk	MAX TORQUE [kNm] Tf	MAX SPEED [1/min] nk	MIN MAX [mm] d	DIMENSIONS [mm]											GREASE QUANTITY [Kg]
					D	C	A	E	F	G	G <sub>1</sub>	L <sub>1</sub>	H	S	M	
0	1.80	4.32	3000	12-52	100	60	3	90	69	98	112	6	1.5	17	70	0.08
1	2.76	6.62	2500	18-62	120	70	3	110	85	111	124	6	1.5	22	80	0.09
2	5.55	13.30	2000	28-78	152	85	3	138	107	135.5	152.5	8	1.5	29	95	0.16
3	8.70	20.90	1800	40-98	175	95	5	161	133	155.5	176	8	2.5	32	110	0.27
4	14.10	33.80	1500	50-112	200	105	5	186	152	170.5	192.5	8	2.5	34	120	0.47
5	22.80	54.70	1350	60-132	230	120	6	215	178	195	220	12	3	39	135	0.68
6	34.80	83.50	1200	70-156	260	130	6	248	209	206	235	12	3	45	145	0.93
7	44.00	105.6	1100	85-174	290	150	8	273	234	238	272	12	4	50	160	1.54
8	69.80	167.5	950	95-190	320	175	8	300	254	279	319	12	4	56	200	2.28
9	83.80	201.2	900	110-210	350	190	8	329	279	303	348	12	4	62	220	3.10
10	152.0	364.8	800	120-233	395	220	8	374	305	356	407	12	4	70	265	3.90
11	203.5	488.4	700	130-280	450	250	10	420	355	404	461	16	5	77	295	6.20

NOTE - The max speed values (nk) are applicable to GO-AH.MN & GO-AH.CL couplings and must be reduced 20% for GO-AH.PM type



## TECHNICAL DATA

## GO-AH.RO COUPLINGS

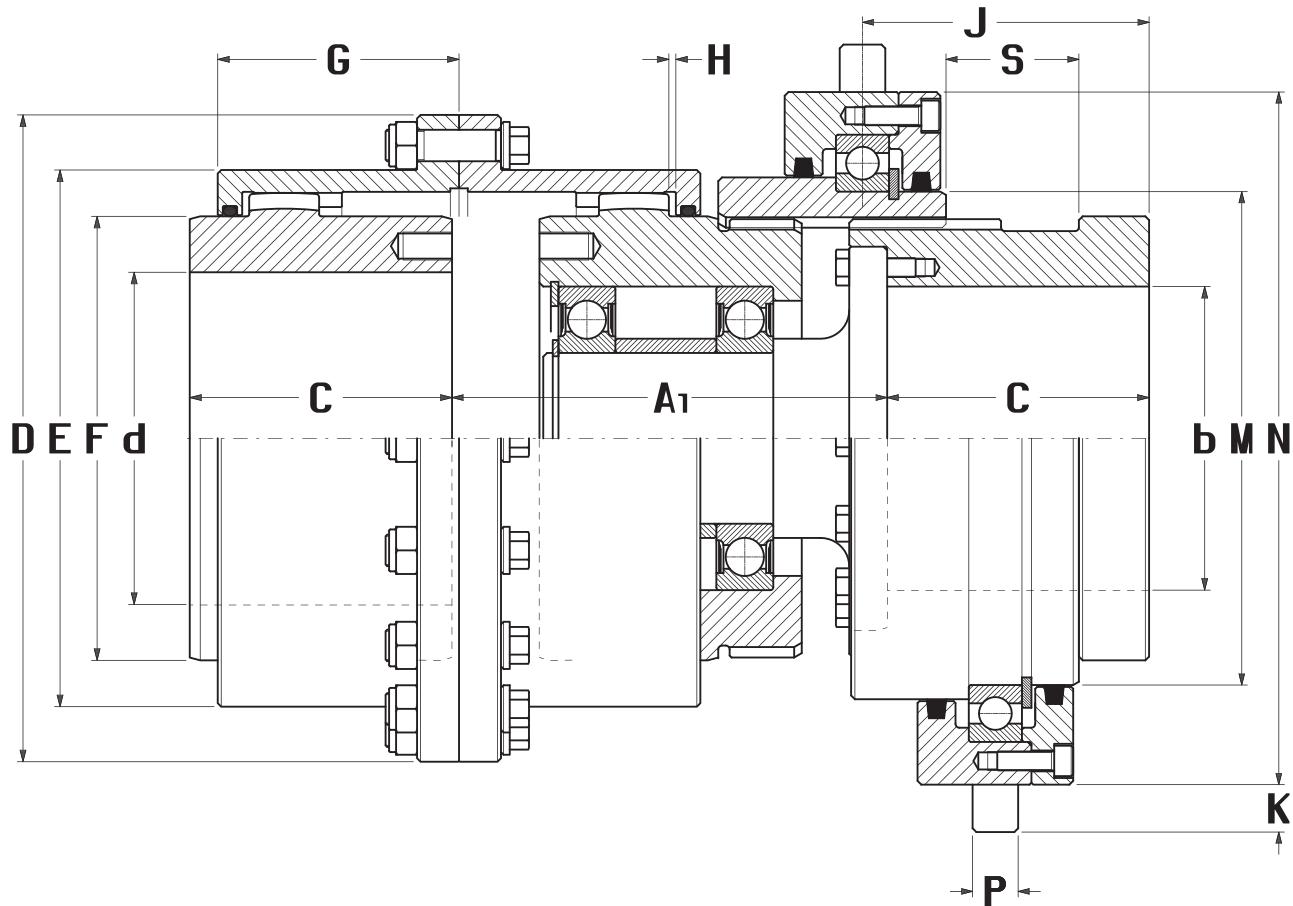


Fig. 29 - GO-AH.RO Coupling

DENOMINATION EXAMPLE:  
GO-AH.RO GEAR COUPLING SIZE 6

**GO-6AH.RO Coupling**

TAB. 26

SIZE	NOMINAL TORQUE [kNm] <b>T<sub>k</sub></b>	MAX TORQUE [kNm] <b>T<sub>f</sub></b>	MAX SPEED [1/min] <b>n<sub>k</sub></b>	MIN MAX [mm] <b>d</b>	MAX [mm] <b>b</b>	DIMENSIONS [mm]												GREASE QUANTITY [Kg]	
						<b>D</b>	<b>C</b>	<b>A<sub>1</sub></b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>H</b>	<b>M</b>	<b>N</b>	<b>J</b>	<b>K</b>	<b>P</b>	<b>S</b>	
<b>0</b>	1.80	4.32	6000	12-52	38	111	43	80	82.5	69	39	1.5	80	120	56	12	12	28	0.08
<b>1</b>	2.76	6.62	4620	18-62	50	142	50	95	104.5	85	45.5	1.5	100	150	66	12	12	35	0.09
<b>2</b>	5.55	13.30	4140	28-78	68	168	62	115	130.5	107	59	1.5	120	175	78	16	16	40	0.16
<b>3</b>	8.70	20.90	4000	40-98	86	200	76	130	158.5	133	68.5	2.5	150	220	89	16	16	45	0.27
<b>4</b>	14.10	33.80	3860	50-112	94	225	90	155	183.5	152	82.5	2.5	170	260	107	16	16	50	0.47
<b>5</b>	22.80	54.70	3720	60-132	120	265	105	165	211.5	178	93	3	200	300	122	20	20	50	0.68
<b>6</b>	34.80	83.50	3190	70-156	135	300	120	190	245.5	209	106	3	240	350	135	20	20	60	0.93
<b>7</b>	44.00	105.6	2900	85-174	160	330	135	220	275	234	118	4	260	370	151	20	20	70	1.54
<b>8</b>	69.80	167.5	2570	95-190	170	370	150	250	307	254	138	4	280	400	158	20	20	80	2.28
<b>9</b>	83.80	201.2	2330	110-210	185	406	175	275	355	279	154	4	320	450	175	24	24	90	3.10
<b>10</b>	152.0	364.8	2150	120-233	200	438	190	300	367	305	166	4	340	470	181	24	24	100	3.90
<b>11</b>	203.5	488.4	1800	130-280	250	505	220	350	423	355	193	5	400	550	193	27	27	115	6.20



## GO-AS, AO-AS & AO-FAS COUPLINGS

## TECHNICAL DATA

TAB. 27

SIZE	NOMINAL TORQUE [kNm]	MAX TORQUE [kNm]	MAX SPEED [1/min] nk	MIN MAX [mm]	MAX [mm]	DIMENSIONS [mm]			
	Tk	Tf				D	C	E	F
<b>0</b>	1.80	4.32	6000	12-52	60	111	43	82.5	69
<b>1</b>	2.76	6.62	4620	18-62	75	142	50	104.5	85
<b>2</b>	5.55	13.30	4140	28-78	90	168	62	130.5	107
<b>3</b>	8.70	20.90	4000	40-98	110	200	76	158.5	133
<b>4</b>	14.10	33.80	3860	50-112	130	225	90	183.5	152
<b>5</b>	22.80	54.70	3720	60-132	150	265	105	211.5	178
<b>6</b>	34.80	83.50	3190	70-156	175	300	120	245.5	209
<b>7</b>	44.00	105.6	2900	85-174	195	330	135	275	234
<b>8</b>	69.80	167.5	2570	95-190	220	370	150	307	254
<b>9</b>	83.80	201.2	2330	110-210	240	406	175	335	279
<b>10</b>	152.0	364.8	2150	120-233	260	438	190	367	305
<b>11</b>	203.5	488.4	1800	130-280	300	505	220	423	355

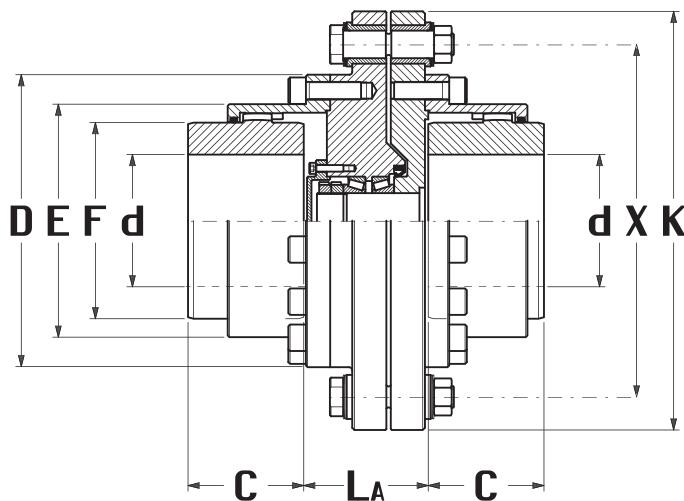


Fig. 30 - GO-AS Coupling

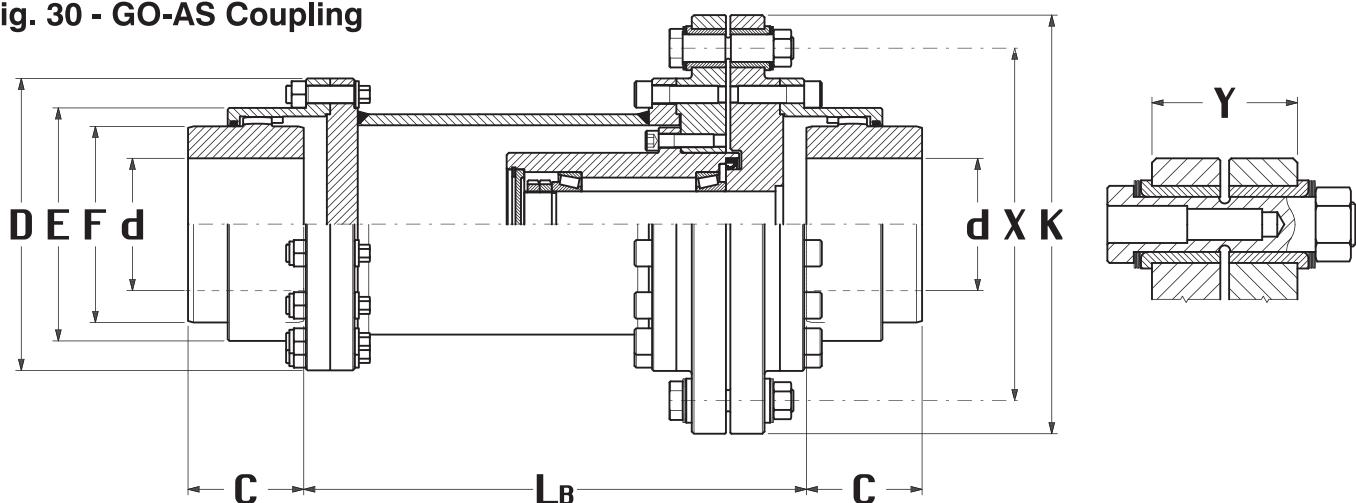


Fig. 31 - AO-AS Spacer Couplings

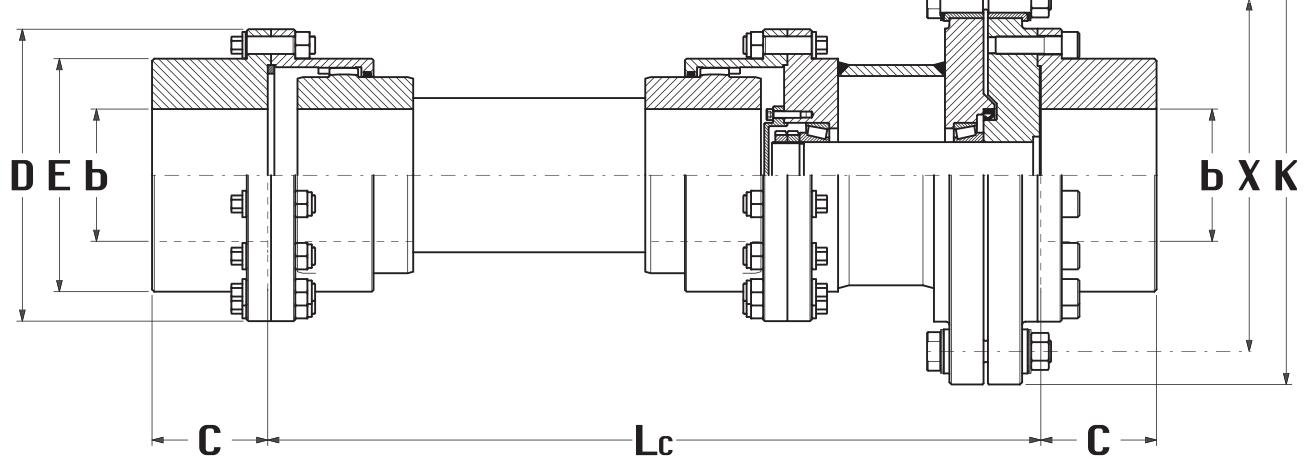


Fig. 32 - AO-FAS Floating Shaft Couplings



## TECHNICAL DATA

## GO-AS, AO-AS & AO-FAS COUPLINGS

**TAB. 28**

SIZE	DIMENSIONS [mm]						SHEAR PIN DEVICE TYPE	SHEAR PIN TYPE L			SHEAR PIN TYPE H		
	min LA	min LB	min LC	K	X	Y		TYPE	SETTING [kNm] MIN	MAX	TYPE	SETTING [kNm] MIN	MAX
0	85	160	300	150	130	28	08.2.13	08L	0.20	0.37	08H	0.33	0.63
				165	140	34	10.2.14	10L	0.31	0.63	10H	0.52	1.04
				170	140		12.2.14	12L	0.48	0.85	12H	0.80	1.42
1	85	170	300	195	170	34	10.2.17	10L	0.38	0.76	10H	0.64	1.27
				200	170		12.2.17	12L	0.58	1.04	12H	0.97	1.72
				215	180	50	14.2.18	14L	0.82	1.60	14H	1.37	2.66
2	100	200	400	230	200	34	12.2.20	12L	0.69	1.22	12H	1.15	2.03
				235	200	50	14.2.20	14L	0.91	1.78	14H	1.52	2.96
				250	210		17.2.21	17L	1.51	2.72	17H	2.51	4.52
3	100	200	400	265	230	50	14.2.23	14L	1.05	2.05	14H	1.75	3.40
				270	230		17.2.23	17L	1.66	2.98	17H	2.75	4.95
				300	250	66	22.2.25	22L	2.86	5.46	22H	4.75	9.07
4	110	240	500	310	270	50	17.2.27	17L	1.95	3.50	17H	3.23	5.82
				320	270	66	22.2.27	22L	3.09	5.90	22H	5.13	9.80
				340	280		25.2.28	25L	4.22	7.84	25H	6.41	11.90
5	110	280	500	360	310	66	22.2.31	22L	3.54	6.77	22H	5.89	11.25
				380	320		25.2.32	25L	4.83	8.96	25H	7.33	13.60
				390	320		30.2.32	30L	6.73	12.76	30H	10.21	19.36
6	140	290	600	400	350	66	22.2.35	22L	4.00	7.64	22H	6.65	12.70
				410	350		25.2.35	25L	5.28	9.80	25H	8.02	14.87
				430	360		30.2.36	30L	7.57	14.36	30H	11.49	21.78
				450	370	84	35.2.37	35L	10.76	20.33	35H	16.33	30.85
7	150	310	650	440	380	66	25.2.38	25L	5.73	10.64	25H	8.70	16.15
				460	390		30.2.39	30L	8.20	15.55	30H	12.45	23.60
				480	400	84	35.2.40	35L	11.64	21.98	35H	17.66	33.35
				500	410		40.2.41	40L	15.66	29.07	40H	23.76	44.11
8	150	330	700	480	420	66	25.2.42	25L	6.34	11.76	25H	9.62	17.85
				500	430		30.2.43	30L	9.04	17.15	30H	13.72	26.02
				530	450	84	35.2.45	35L	13.09	24.73	35H	19.86	37.52
				540	450		40.2.45	40L	17.18	31.91	40H	26.07	48.41
				560	460	105	45.2.46	45L	21.78	41.54	45H	33.04	63.03
9	170	380	800	520	460	66	25.2.46	25L	6.94	12.88	25H	10.54	19.55
				530	460		30.2.46	30L	9.68	18.34	30H	14.68	27.84
				560	480	84	35.2.48	35L	13.96	26.38	35H	21.19	40.03
				570	480		40.2.48	40L	18.33	34.03	40H	27.81	51.64
				600	500	105	45.2.50	45L	23.67	45.16	45H	35.92	68.52
				610	500		50.2.50	50L	28.73	56.03	50H	43.60	85.01
10	170	390	900	580	510	66	30.2.51	30L	10.73	20.34	30H	16.28	30.86
				590	510	84	35.2.51	35L	14.84	28.03	35H	22.51	42.53
				610	520		40.2.52	40L	19.86	36.87	40H	30.13	55.95
				620	520	105	45.2.52	45L	24.62	46.96	45H	37.35	71.26
				640	530		50.2.53	50L	30.46	59.39	50H	46.21	90.12
				640	530		55.2.53	55L	37.29	71.61	55H	56.58	108.66
11	170	420	1000	660	580	84	35.2.58	35L	16.87	31.88	35H	25.60	48.37
				680	590		40.2.59	40L	22.53	41.84	40H	34.19	63.48
				690	590	105	45.2.59	45L	27.93	53.29	45H	42.38	80.85
				710	600		50.2.60	50L	34.48	67.24	50H	52.32	102.02
				710	600		55.2.60	55L	42.22	81.07	55H	64.05	123.01
				730	610	137	60.2.61	60L	51.46	98.49	60H	78.08	149.44

NOTE - Setting torques shown in the table are for 2 shear pins; for 3 shear pins multiply the values by 1.5

DENOMINATION EXAMPLE:  
GO-AS COUPLING SIZE 6 + DEVICE 30H.2.36

**GO-6AS.30H.2.36 Coupling**



## GO-ASX & AO-ASX COUPLINGS

## TECHNICAL DATA

**TAB. 29**

SIZE	NOMINAL TORQUE [kNm]	MAX TORQUE [kNm]	MAX SPEED [1/min]	MIN MAX [mm]	MAX [mm]	DIMENSIONS [mm]			
	T <sub>k</sub>					D	C	E	F
<b>0</b>	1.80	4.32	6000	12-52	60	111	43	82.5	69
<b>1</b>	2.76	6.62	4620	18-62	75	142	50	104.5	85
<b>2</b>	5.55	13.30	4140	28-78	90	168	62	130.5	107
<b>3</b>	8.70	20.90	4000	40-98	110	200	76	158.5	133
<b>4</b>	14.10	33.80	3860	50-112	130	225	90	183.5	152
<b>5</b>	22.80	54.70	3720	60-132	150	265	105	211.5	178
<b>6</b>	34.80	83.50	3190	70-156	175	300	120	245.5	209
<b>7</b>	44.00	105.6	2900	85-174	195	330	135	275	234
<b>8</b>	69.80	167.5	2570	95-190	220	370	150	307	254
<b>9</b>	83.80	201.2	2330	110-210	240	406	175	335	279
<b>10</b>	152.0	364.8	2150	120-233	260	438	190	367	305
<b>11</b>	203.5	488.4	1800	130-280	300	505	220	423	355

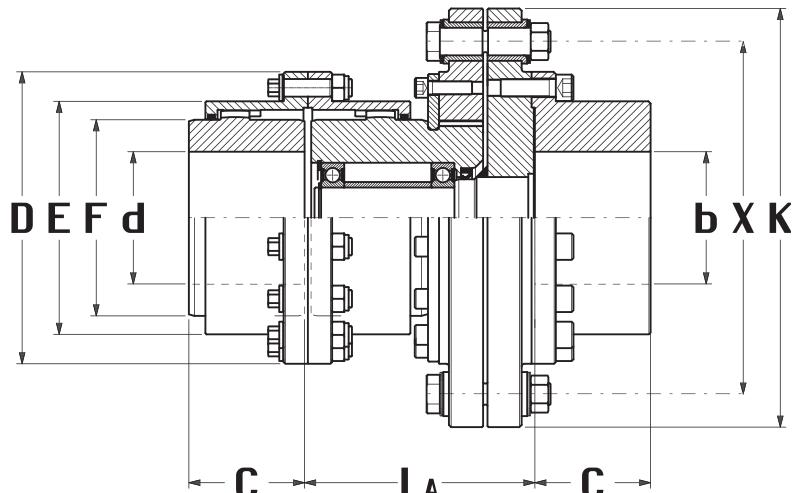
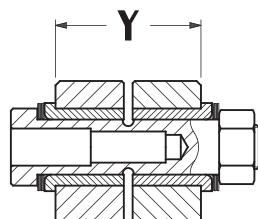


Fig. 33 - GO-ASX Coupling

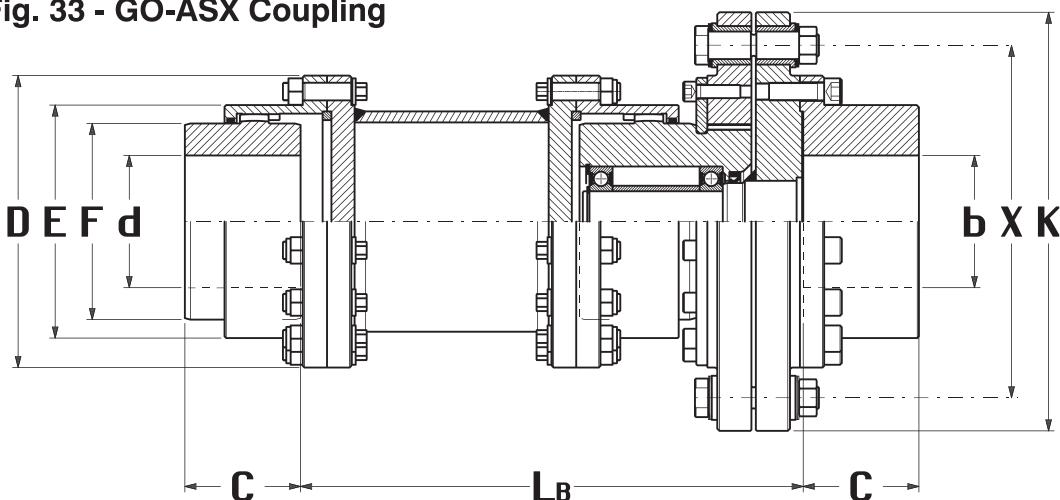


Fig. 34 - AO-ASX Spacer Coupling



## TECHNICAL DATA

## GO-ASX & AO-ASX COUPLINGS

**TAB. 30**

SIZE	DIMENSIONS [mm]					SHEAR PIN DEVICE TYPE	SHEAR PIN TYPE L			SHEAR PIN TYPE H		
	min LA	min LB	K	X	Y		TYPE	SETTING [kNm] MIN	MAX	TYPE	SETTING [kNm] MIN	MAX
0	85	170	150	130	28	08.2.13	08L	0.20	0.37	08H	0.33	0.63
			165	140	34	10.2.14	10L	0.31	0.3	10H	0.52	1.04
			170	140		12.2.14	12L	0.48	0.85	12H	0.80	1.42
1	110	210	195	170	34	10.2.17	10L	0.38	0.76	10H	0.64	1.27
			200	170		12.2.17	12L	0.58	1.04	12H	0.97	1.72
			215	180	50	14.2.18	14L	0.82	1.60	14H	1.37	2.66
2	125	230	230	200	34	12.2.20	12L	0.69	1.22	12H	1.15	2.03
			235	200	50	14.2.20	14L	0.91	1.78	14H	1.52	2.96
			250	210		17.2.21	17L	1.51	2.72	17H	2.51	4.52
3	155	270	265	230	50	14.2.23	14L	1.05	2.05	14H	1.75	3.40
			270	230		17.2.23	17L	1.66	2.98	17H	2.75	4.95
			300	250	66	22.2.25	22L	2.86	5.46	22H	4.75	9.07
4	170	300	310	270	50	17.2.27	17L	1.95	3.50	17H	3.23	5.82
			320	270	66	22.2.27	22L	3.09	5.90	22H	5.13	9.80
			340	280		25.2.28	25L	4.22	7.84	25H	6.41	11.90
5	200	340	360	310	66	22.2.31	22L	3.54	6.77	22H	5.89	11.25
			380	320		25.2.32	25L	4.83	8.96	25H	7.33	13.60
			390	320	30.2.32	30L	6.73	12.76	30H	10.21	19.36	
6	215	360	400	350	66	22.2.35	22L	4.00	7.64	22H	6.65	12.70
			410	350		25.2.35	25L	5.28	9.80	25H	8.02	14.87
			430	360	30.2.36	30L	7.57	14.36	30H	11.49	21.78	
7	235	400	450	370	84	35.2.37	35L	10.76	20.33	35H	16.33	30.85
			440	380	66	25.2.38	25L	5.73	10.64	25H	8.70	16.15
			460	390		30.2.39	30L	8.20	15.55	30H	12.45	23.60
8	275	480	480	420	66	35.2.40	35L	11.64	21.98	35H	17.66	33.35
			500	430		40.2.41	40L	15.66	29.07	40H	23.76	44.11
			530	450	84	35.2.45	35L	13.09	24.73	35H	19.86	37.52
9	290	500	540	450		40.2.45	40L	17.18	31.91	40H	26.07	48.41
			560	460	105	45.2.46	45L	21.78	41.54	45H	33.04	63.03
			520	460	66	25.2.46	25L	6.94	12.88	25H	10.54	19.55
10	310	540	530	460		30.2.46	30L	9.68	18.34	30H	14.68	27.84
			560	480	84	35.2.48	35L	13.96	26.38	35H	21.19	40.03
			570	480		40.2.48	40L	18.33	34.03	40H	27.81	51.64
11	370	620	600	500	105	45.2.50	45L	23.67	45.16	45H	35.92	68.52
			610	500		50.2.50	50L	28.73	56.03	50H	43.60	85.01
			580	510	66	30.2.51	30L	10.73	20.34	30H	16.28	30.86
10	310	540	590	510	84	35.2.51	35L	14.84	28.03	35H	22.51	42.53
			610	520		40.2.52	40L	19.86	36.87	40H	30.13	55.95
			620	520	105	45.2.52	45L	24.62	46.96	45H	37.35	71.26
11	370	620	640	530		50.2.53	50L	30.46	59.39	50H	46.21	90.12
			640	530	84	55.2.53	55L	37.29	71.61	55H	56.58	108.66
			660	580		35.2.58	35L	16.87	31.88	35H	25.60	48.37
11	370	620	680	590	105	40.2.59	40L	22.53	41.84	40H	34.19	63.48
			690	590		45.2.59	45L	27.93	53.29	45H	42.38	80.85
			710	600	137	50.2.60	50L	34.48	67.24	50H	52.32	102.02
11	370	620	710	600	137	55.2.60	55L	42.22	81.07	55H	64.05	123.01
			730	610		60.2.61	60L	51.46	98.49	60H	78.08	149.44

NOTE - Setting torques shown in the table are for 2 shear pins; for 3 shear pins multiply the values by 1.5


DENOMINATION EXAMPLE:  
GO-ASX COUPLING SIZE 6 + DEVICE 30H.2.36

**GO-6ASX.30H.2.36 Coupling**



## GO-APR COUPLINGS

## TECHNICAL DATA

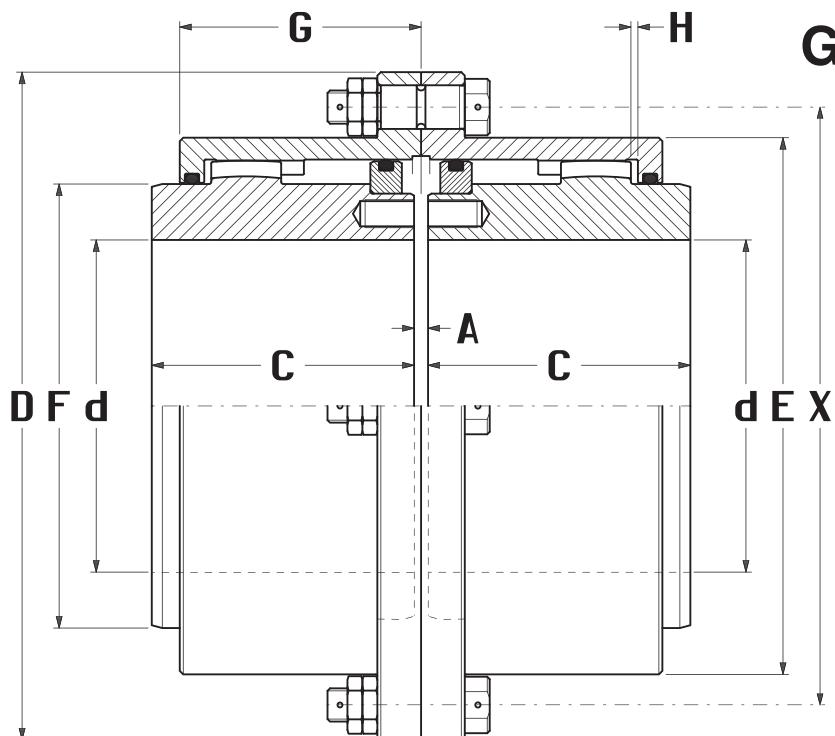

**Fig. 35 - GO-APR Coupling**

DENOMINATION EXAMPLE:  
GO-APR COUPLING SIZE 6 WITH 22H.3 SHEAR PIN

**GO-6APR.22H.3 Coupling**

**TAB. 32**

TYPE COUPLING	SHEAR PIN TYPE L			SHEAR PIN TYPE H		
	TYPE	SETTING [kNm] MIN	MAX	TYPE	SETTING [kNm] MIN	MAX
<b>0</b>	08L.2	0.14	0.74	08H.2	0.24	1.23
	08L.3	0.22	1.11	08H.3	0.36	1.85
	08L.4	0.29	1.49	08H.4	0.48	2.47
<b>1</b>	10L.2	0.27	1.46	10H.2	0.45	2.42
	10L.3	0.41	2.19	10H.3	0.68	3.63
	10L.4	0.54	2.92	10H.4	0.90	4.85
<b>2</b>	12L.2	0.52	2.59	12H.2	0.86	4.30
	12L.3	0.78	3.88	12H.3	1.29	6.45
	12L.4	1.04	5.18	12H.4	1.72	8.60
<b>3</b>	17L.2	1.30	6.46	17H.2	2.15	10.73
	17L.3	1.95	9.69	17H.3	3.23	16.09
	17L.4	2.60	12.92	17H.4	4.31	21.46
<b>4</b>	17L.2	1.48	7.35	17H.2	2.45	12.22
	17L.3	2.22	11.03	17H.3	3.23	18.33
	17L.4	2.96	14.71	17H.4	4.91	24.44
<b>5</b>	22L.2	2.74	14.19	22H.2	4.56	23.57
	22L.3	4.12	21.29	22H.3	6.84	35.36
	22L.4	5.49	28.39	22H.4	9.12	47.15
<b>6</b>	22L.2	3.16	16.32	22H.2	5.24	27.11
	22L.3	4.74	24.48	22H.3	7.87	40.67
	22L.4	6.32	32.65	22H.4	10.49	54.23
<b>7</b>	22L.2	3.46	17.92	22H.2	5.76	29.76
	22L.3	5.20	26.88	22H.3	8.64	44.65
	22L.4	6.93	35.84	22H.4	11.52	59.53
<b>8</b>	25L.2	5.16	25.56	25H.2	7.83	38.79
	25L.3	7.74	38.35	25H.3	11.75	58.19
	25L.4	10.33	51.13	25H.4	15.67	77.58
<b>9</b>	25L.2	5.58	27.66	25H.2	8.47	41.96
	25L.3	8.38	41.49	25H.3	12.71	62.95
	25L.4	11.17	55.32	25H.4	16.95	83.93
<b>10</b>	25L.2	6.07	30.05	25H.2	9.21	45.59
	25L.3	9.10	45.08	25H.3	13.81	68.39
	25L.4	12.14	60.10	25H.4	18.42	91.19
<b>11</b>	28L.2	8.47	44.72	28H.2	12.63	66.70
	28L.3	12.71	67.08	28H.3	18.95	100.06
	28L.4	16.94	89.44	28H.4	25.27	133.41



## TECHNICAL DATA

## GO-MA COUPLINGS

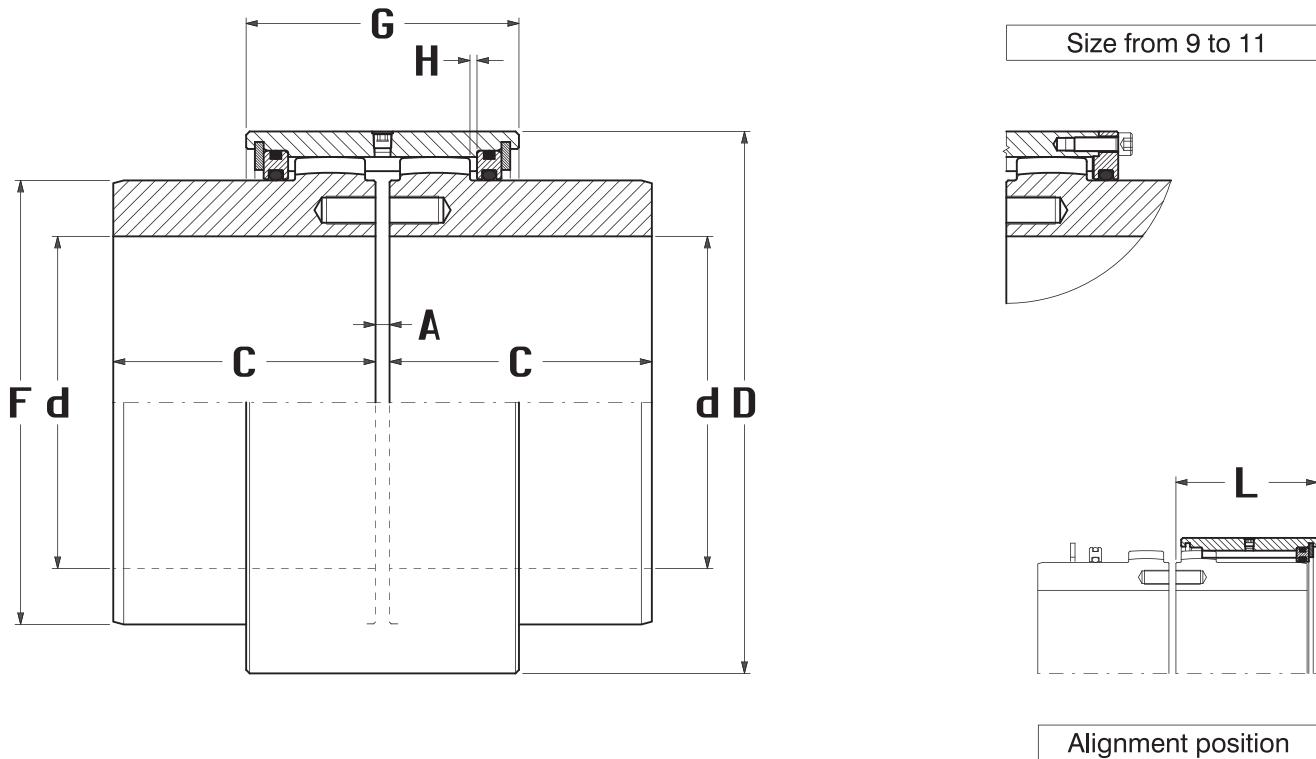


Fig. 36 - GO-MA Coupling

DENOMINATION EXAMPLE:  
GO-MA GEAR COUPLING SIZE 6  
**GO-6MA Coupling**

**TAB. 33**

SIZE	NOMINAL TORQUE [kNm] Tk	MAX TORQUE [kNm] Tf	MAX SPEED [1/min] nk	MIN MAX [mm] d	DIMENSIONS [mm]							MASS ① M [Kg]	MOMENT OF INERTIA ① J [Kgm <sup>2</sup> ]	GREASE QUANTITY [Kg]	TORSIONAL STIFFNESS ① Kx10 <sup>6</sup> [Nm/rad]	
					D	C	A	F	G	H	L					
0	1.80	4.32	6000	12-52	96	43	3	69	63	1.5	67	4	0.004	0.08	21.63	
1	2.76	6.62	4620	18-62	115	50	3	85	74	1.5	78	7	0.010	0.09	32.63	
2	5.55	13.30	4140	28-78	140	62	3	107	89	1.5	94	13	0.028	0.16	56.58	
3	8.70	20.90	4000	40-98	175	76	5	133	102	2.5	107	24	0.080	0.27	121.9	
4	14.10	33.80	3860	50-112	195	90	5	152	108	2.5	114	34	0.140	0.47	148.8	
5	22.80	54.70	3720	60-132	225	105	6	178	118	3	124	53	0.292	0.68	238.3	
6	34.80	83.50	3190	70-156	255	120	6	209	130	3	136	80	0.553	0.93	303.8	
7	44.00	105.6	2900	85-174	290	135	8	234	138	4	144	113	1.037	1.54	523.6	
8	69.80	167.5	2570	95-190	310	150	8	254	156	4	162	146	1.521	2.28	532.5	
9	83.80	201.2	2330	110-210	340	175	8	279	152	4	151	SIZES from 9 to 11 are provided on demand				
10	152.0	364.8	2150	120-233	370	190	8	305	160	4	159					
11	203.5	488.4	1800	130-280	425	220	10	355	180	5	179	SIZES from 9 to 11 are provided on demand				

NOTE 1 - Values are calculated for solid hubs



## AGMA-N, AGMA-R & AGMA-RR COUPLINGS

## TECHNICAL DATA

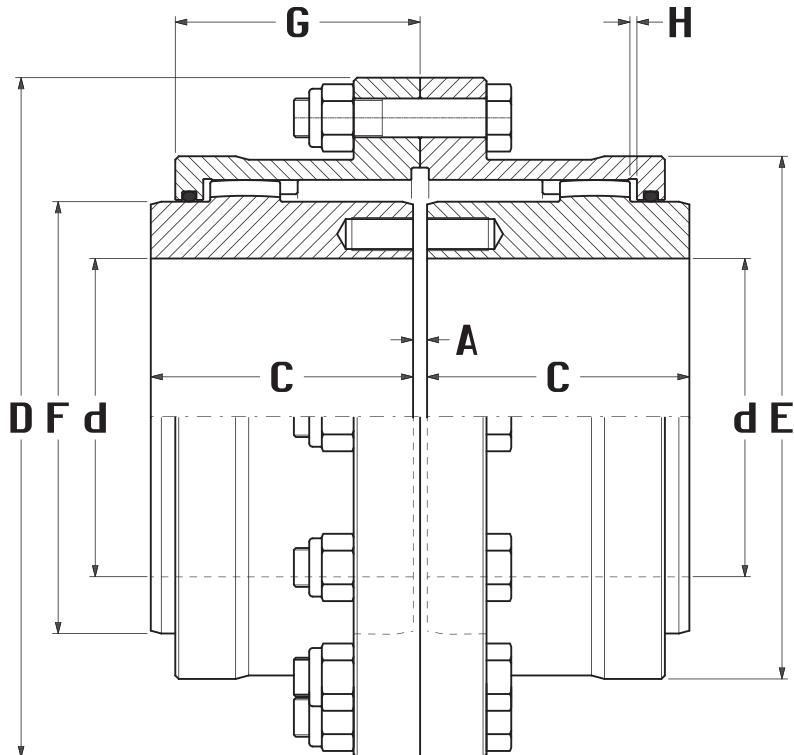


Fig. 37 - AGMA-N Coupling

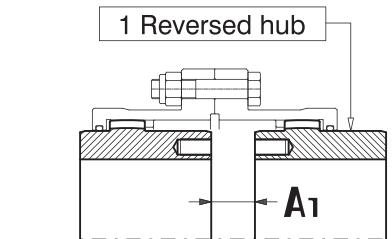


Fig. 38 - AGMA-R Coupling

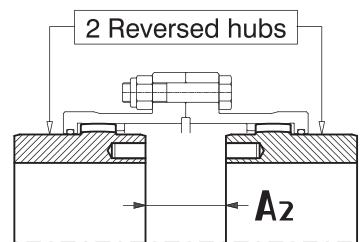


Fig. 39 - AGMA-RR Coupling

DENOMINATION EXAMPLE:  
AGMA GEAR COUPLING SIZE 4.5




**AGMA-4.5N Coupling**

**TAB. 34**

SIZE	NOMINAL TORQUE [kNm] <b>T<sub>k</sub></b>	MAX TORQUE [kNm] <b>T<sub>f</sub></b>	MAX SPEED [1/min] <b>n<sub>k</sub></b>	MIN MAX [mm] <b>d</b>	DIMENSIONS [mm]								MASS <b>① M</b> [Kg]	MOMENT OF INERTIA <b>① J</b> [Kgm <sup>2</sup> ]	GREASE QUANTITY [Kg]	TORSIONAL STIFFNESS <b>① Kx10<sup>6</sup></b> [Nm/rad]	
					<b>D</b>	<b>C</b>	<b>A</b>	<b>A<sub>1</sub></b>	<b>A<sub>2</sub></b>	<b>E</b>	<b>F</b>	<b>G</b>					
<b>1.0</b>	1.10	2.20	6000	20-44	116	43	3	5	7	84	60	39	1.5	4	0.005	0.08	3.020
<b>1.5</b>	2.45	4.90	4620	25-61	152	50	3	8	13	104	79	48.5	1.5	9.5	0.020	0.09	6.050
<b>2.0</b>	4.60	9.20	4140	35-75	178	62	3	14	25	127	101	60	1.5	15.5	0.044	0.16	9.250
<b>2.5</b>	7.85	15.70	4000	40-95	213	76	5	12	19	156	123.5	69.5	2.5	27	0.112	0.27	17.30
<b>3.0</b>	12.00	24.00	3860	50-110	240	90	5	24	43	179	145.5	85.5	2.5	39	0.203	0.47	20.30
<b>3.5</b>	17.00	34.00	3720	55-127	280	105	6	27	48	206	167	98	3	65	0.460	0.68	33.60
<b>4.0</b>	26.75	53.50	3190	65-150	318	120	6	32	58	240	196	111	3	94	0.844	0.93	53.00
<b>4.5</b>	36.65	73.30	2900	72-171	346	135	8	37	66	269	216	123	4	125	1.325	1.54	78.90
<b>5.0</b>	52.65	105.3	2570	80-182	389	150	8	50	92	299	247	140	4	183	2.531	2.28	93.10
<b>5.5</b>	80.00	160.0	2330	90-200	425	175	8	53	98	329	273	158	4	242	3.725	3.10	103.1
<b>6.0</b>	90.50	181.0	2150	95-225	457	190	8	58	108	358	292	169	4	298	5.291	3.90	148.4
<b>7.0</b>	137.0	274.0	1800	115-270	527	220	10	72	134	416	342	195	5	453	10.48	6.20	184.0
<b>8.0</b>	149.6	299.2	1700	125-290	590	250	10	74	138	460	368	198	5	617	17.72	7.40	345.1
<b>9.0</b>	206.6	413.2	1600	140-330	660	275	12	81	150	512	420	200	6	868	31.35	9.20	469.2

NOTE 1 - Values are calculated for solid hubs

## TECHNICAL DATA

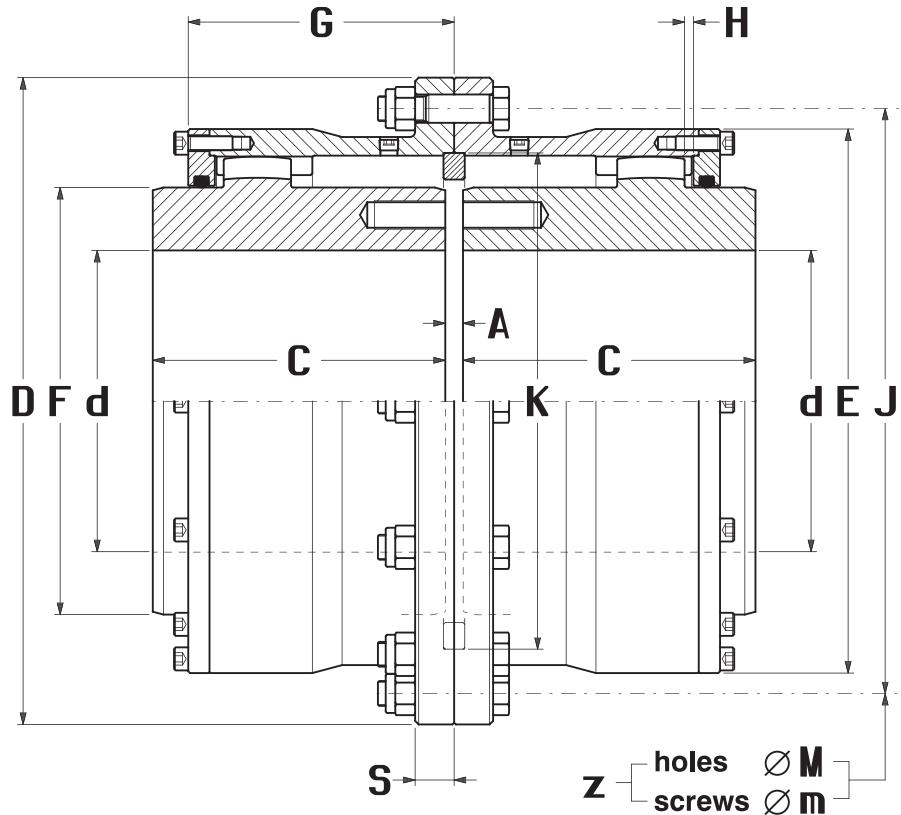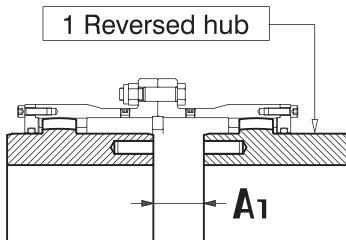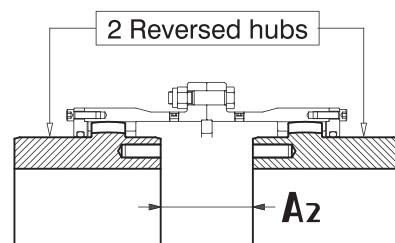**SID-N, SID-R & SID-RR COUPLINGS**

**Fig. 40 - SID-N Coupling**

**Fig. 41 - SID-R Coupling**

**Fig. 42 - SID-RR Coupling**

DENOMINATION EXAMPLE:  
SID GEAR COUPLING SIZE 110

**SID-110N Coupling**


**TAB. 35**

SIZE	NOMINAL TORQUE [kNm] <b>T<sub>k</sub></b>	MAX TORQUE [kNm] <b>T<sub>f</sub></b>	MAX SPEED [1/min] <b>n<sub>k</sub></b>	MIN MAX [mm] <b>d</b>	DIMENSIONS [mm]														
					<b>D</b>	<b>C</b>	<b>A</b>	<b>A<sub>1</sub></b>	<b>A<sub>2</sub></b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>H</b>	<b>J</b>	<b>z</b>	<b>M</b>	<b>m</b>	<b>K</b>	<b>S</b>
<b>30</b>	3.00	6.00	6530	60	145	60	3	14	25	114	85	58	2	125	6	8	7.9	105	10
<b>40</b>	4.80	9.60	5220	70	170	68	4	24	44	136	104	68	2	150	8	10	9.8	125	12
<b>50</b>	7.60	15.20	4450	85	200	80	5	26	47	157	121	78	3	175	8	12	11.8	145	14
<b>60</b>	11.30	22.60	3660	100	225	90	6	34	62	182	143	88	3	200	10	12	11.8	170	16
<b>70</b>	17.50	35.00	3220	110	245	105	7	39	71	202	160	104	4	220	10	12	11.8	190	16
<b>80</b>	24.50	49.00	2870	125	275	120	8	46	84	225	175	116	4	245	12	14	13.8	210	18
<b>90</b>	29.80	59.60	2620	135	295	135	9	49	59	245	190	127	5	265	12	14	13.8	230	18
<b>100</b>	40.60	81.20	2310	150	330	150	10	56	102	272	215	140	5	295	12	16	15.8	255	20
<b>110</b>	66.00	132.0	1980	170	365	165	10	57	104	307	241	150	5	330	12	16	15.8	280	22
<b>125</b>	82.50	165.0	1790	185	390	185	12	71	130	330	260	170	6	355	12	18	17.7	310	25
<b>140</b>	101.5	203.0	1630	200	430	210	14	70	126	362	285	185	7	390	12	20	19.7	340	28
<b>160</b>	158.0	316.0	1420	225	480	240	16	82	148	409	317	210	8	440	12	22	21.7	385	32
<b>180</b>	216.0	432.0	1220	260	535	270	18	94	170	457	368	235	9	490	12	24	23.6	430	36
<b>200</b>	289.0	578.0	1070	295	595	300	20	106	192	508	418	260	10	545	12	27	26.6	480	40



## AO-HLC & AO-HLR SPACER COUPLINGS

## TECHNICAL DATA

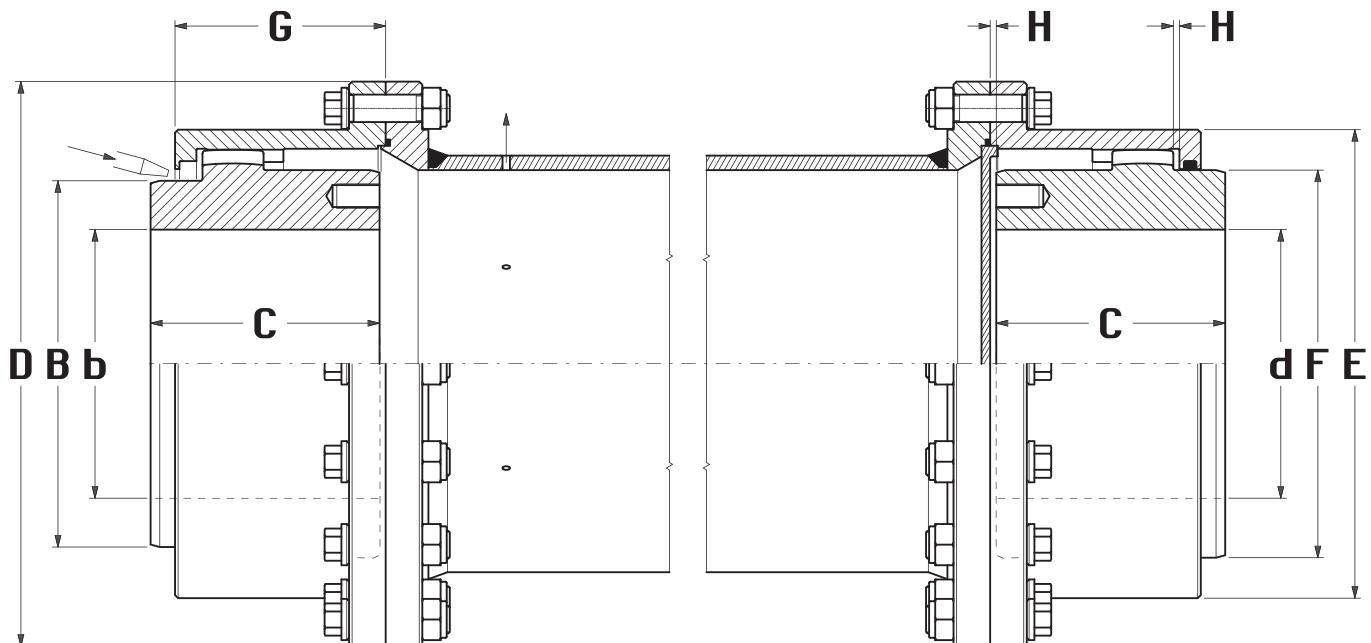

**Fig. 43 - AO-HLC Spacer Coupling**

**Fig. 44 - AO-HLR Spacer Coupling**

**CONTINUOUS OIL LUBRICATION**

**PACKED GREASE LUBRICATION**

DENOMINATION EXAMPLE:  
AO-HLC SPACER COUPLING SIZE 6

DENOMINATION EXAMPLE:  
AO-HLR SPACER COUPLING SIZE 6

**AO-6HLC Spacer Coupling**

**AO-6HLR Spacer Coupling**


**TAB. 36**

SIZE	NOMINAL TORQUE [kNm] <b>T<sub>k</sub></b>	MAX TORQUE [kNm] <b>T<sub>f</sub></b>	MAX SPEED [1/min] <b>n<sub>k</sub></b>	MAX [mm] <b>b</b>	MAX [mm] <b>d</b>	DIMENSIONS [mm]						
						<b>D</b>	<b>C</b>	<b>E</b>	<b>B</b>	<b>F</b>	<b>G</b>	<b>H</b>
<b>1</b>	2.76	6.62	6930	58	62	142	50	104.5	80	85	45.5	1.5
<b>2</b>	5.55	13.30	6210	72	78	168	62	130.5	100	107	59	1.5
<b>3</b>	8.70	20.90	6000	90	98	200	76	158.5	123	133	68.5	2.5
<b>4</b>	14.10	33.80	5790	104	112	225	90	183.5	142	152	82.5	2.5
<b>5</b>	22.80	54.70	5580	124	132	265	105	211.5	168	178	93	3
<b>6</b>	34.80	83.50	4780	146	156	300	120	245.5	197	209	106	3
<b>7</b>	44.00	105.6	4350	165	174	330	135	275	222	234	118	4
<b>8</b>	69.80	167.5	3850	180	190	370	150	307	240	254	138	4
<b>9</b>	83.80	201.2	3490	200	210	406	175	335	265	279	154	4
<b>10</b>	152.0	364.8	3220	220	233	438	190	367	290	305	166	4
<b>11</b>	203.5	488.4	2700	265	280	505	220	423	340	355	193	5




## TECHNICAL DATA

## MILL MOTORS AISE 600-800 SERIES COUPLINGS

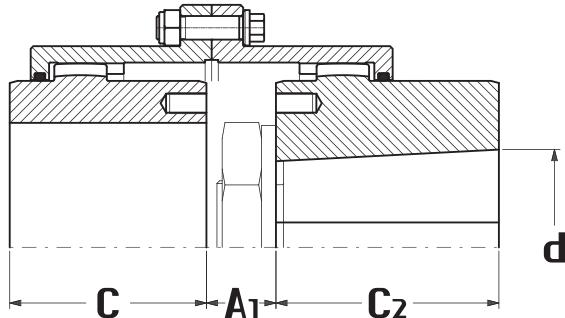


E.g. GO-AM Coupling size 6 for 614 motor

**Fig. 45 - GO-6AM.614 Coupling**

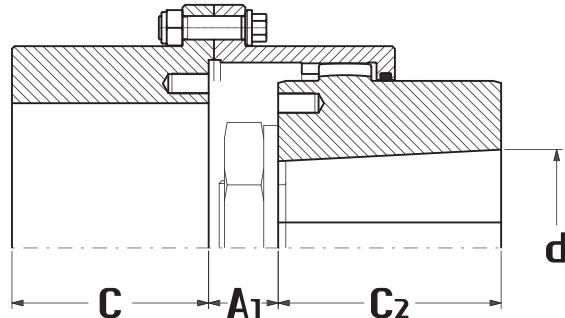

E.g. GO-FAM Coupling size 6 for 614 motor


**Fig. 46 - GO-6AM.614 Coupling**

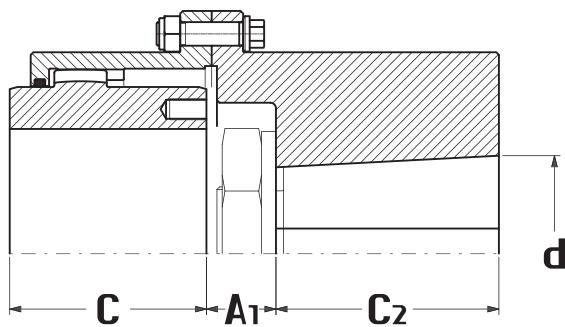

E.g. GO-FM Coupling size 6 for 614 motor

**Fig. 47 - GO-6FM.614 Coupling**

Taper ratio 1:9.6 (1.25":12")  
Tapered keyway

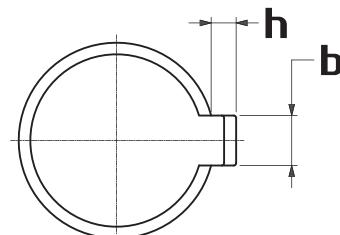

**TAB. 37**

MILL MOTOR AISE 600-800 SERIES <b>SIZE</b>	DIMENSIONS [mm]					<b>A<sub>1</sub> [mm]</b>										
	[in]	<b>d</b> [mm]	<b>b</b>	<b>h</b>	<b>C<sub>2</sub></b>	0A	1A	2A	3A	4A	5A	6A	7A	8A	9A	10A
<b>602-802</b>	1.750"	44.450	12.70	6.35	75	28	28	28								
<b>603-803</b>	2.000"	50.800	12.70	6.35	88		30	30	32							
<b>604-804</b>																
<b>606-806</b>	2.500"	63.500	12.70	6.35	100			33	35	35						
<b>608-808</b>	3.000"	76.200	19.05	6.35	113				38	38	39					
<b>610-810</b>	3.250"	82.550	19.05	6.35	113					41	42	42				
<b>612-812</b>	3.750"	92.075	19.05	6.35	125					45	46	46	48			
<b>614-814</b>	4.250"	107.950	25.40	9.52	125						49	49	51	51		
<b>616-816</b>	4.625"	117.475	31.75	9.52	138						52	52	54	54		
<b>618-818</b>	5.000"	127.000	31.75	12.70	150							41	43	43	43	43
<b>620-820</b>	5.875"	149.225	38.10	19.05	170								53	53	53	53
<b>622-822</b>	6.250"	158.750	38.10	19.05	183									70	70	70
<b>624-824</b>	7.000"	177.800	38.10	19.05	233										70	70



## GO-A.W COUPLINGS

## TECHNICAL DATA

### TAB. 38 - Hubs Shrinkfitting - MAX TORQUES

SHAFT	COUPLING SIZE	0	1	2	3	4	5	6	7	8	9	10	11	
		Hub Length C	43	50	62	76	90	105	120	135	150	175	190	
<b>Ø 30</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]	0.622 44/70												
<b>Ø 35</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]	0.742 48/80												
<b>Ø 40</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]	0.938 57/89	1.306 58/90											
<b>Ø 45</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]	1.088 66/98	1.613 67/99											
<b>Ø 50</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]	1.142 76/106	1.914 77/109	2.667 73/105										
<b>Ø 55</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]		1.955 80/118	2.894 76/114										
<b>Ø 60</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]		2.051 88/126	3.387 86/124	4.887 87/125									
<b>Ø 65</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]			3.732 94/132	5.650 96/134									
<b>Ø 70</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]			4.034 103/141	6.385 105/143	8.327 106/144								
<b>Ø 75</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]			4.175 111/149	7.064 114/152	9.369 115/153								
<b>Ø 80</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]				7.661 123/161	10.37 124/162	13.47 125/163							
<b>Ø 85</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]				7.679 125/169	10.75 127/171	14.21 128/172							
<b>Ø 90</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]				8.034 134/178	11.58 136/180	15.73 138/182	19.68 138/182						
<b>Ø 100</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]					12.76 153/197	18.33 156/200	23.77 157/201	28.54 158/202					
<b>Ø 110</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]					13.10 169/213	20.33 173/217	27.52 175/219	33.56 176/220					
<b>Ø 120</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]						21.62 190/234	30.87 193/237	38.39 194/238	45.20 195/239				
<b>Ø 130</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]						21.15 200/250	32.59 205/255	41.77 207/257	49.79 208/258				
<b>Ø 140</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]							34.15 221/271	45.38 224/274	55.18 226/276	65.66 215/265			
<b>Ø 150</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]							34.62 237/287	48.15 241/291	59.91 244/294	72.39 232/282			
<b>Ø 160</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]								49.84 258/308	63.49 261/311	78.48 249/299	92.40 250/300		
<b>Ø 170</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]								49.99 274/324	65.68 277/327	83.67 266/316	100.4 268/318		
<b>Ø 180</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]									66.46 293/343	87.40 282/332	107.1 285/335		
<b>Ø 190</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]									63.83 301/359	87.23 290/348	109.2 293/351		
<b>Ø 200</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]										87.70 305/363	113.2 309/367	159.5 314/372	
<b>Ø 210</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]										86.10 319/377	115.1 324/382	168.5 331/389	
<b>Ø 220</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]											115.6 340/398	175.5 347/405	
<b>Ø 230</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]											113.3 354/412	181.1 363/421	
<b>Ø 240</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]												184.3 378/436	
<b>Ø 250</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]												186.0 394/452	
<b>Ø 260</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]												182.1 403/467	
<b>Ø 270</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]												178.1 417/481	
<b>Ø 280</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]												171.2 431/495	

DENOMINATION EXAMPLE:  
GO-A COUPLING SIZE 6 FOR  
SHRINKFITTING AND OIL PRESSURE REMOVAL

**GO-6A.W Coupling**





NOTE: The max torques are calculated with a friction coefficient  $\mu=0.12$ , with the min and max interferences (in Micron) and a max hub stress equal to the 80% of the material yielding.

The max torque values vary linearly with the increasing of the hub length C and with the friction coefficient  $\mu$ , which can be 0.15, 0.18 or 0.20 max.



## TECHNICAL DATA

## GO-A COUPLINGS

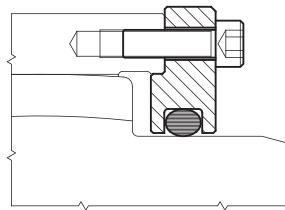




2 G1/8" grease nipples at 180°  
on each sleeve

Removable side flanges design,  
available on demand for sizes from 4 to 11  
denomination example GO-6A.C

**TAB. 40**


SIZE	Hub Diam. <b>F</b>		Max bore with 1 keyway				Max bore with 2 keyways				Extraction holes		
			max <b>d</b>	Key <b>b x h</b>	max <b>k</b>		max <b>d</b>	Key <b>b x h</b>	max <b>k</b>		2 holes at 180° <b>G</b>	<b>M</b>	
<b>0</b>	69		48	14x9	51.8		52	16x10	60.6		61	M5x15	On demand
<b>1</b>	85		62	16x10	66.4		62	18x11	70.8		73	M6x20	
<b>2</b>	107		72	20x12	76.9		78	22x14	88.8		91	M8x20	
<b>3</b>	133		90	25x14	95.4		98	28x16	110.8		115	M10x20	
<b>4</b>	152		105	28x16	111.4		112	32x18	126.8		132	M12x20	
<b>5</b>	178		122	32x18	129.4		132	36x20	148.8		154	M12x20	
<b>6</b>	209		144	36x20	152.4		156	40x22	174.8		180	M16x25	
<b>7</b>	234		160	40x22	169.4		174	45x25	194.8		204	M16x25	
<b>8</b>	254		175	45x25	185.4		190	45x25	210.8		220	M20x35	
<b>9</b>	279		192	45x25	202.4		210	50x28	232.8		240	M20x35	
<b>10</b>	305		210	50x28	221.4		233	56x32	257.8		268	M24x45	
<b>11</b>	355		245	56x32	257.4		280	63x32	304.8		316	M24x45	

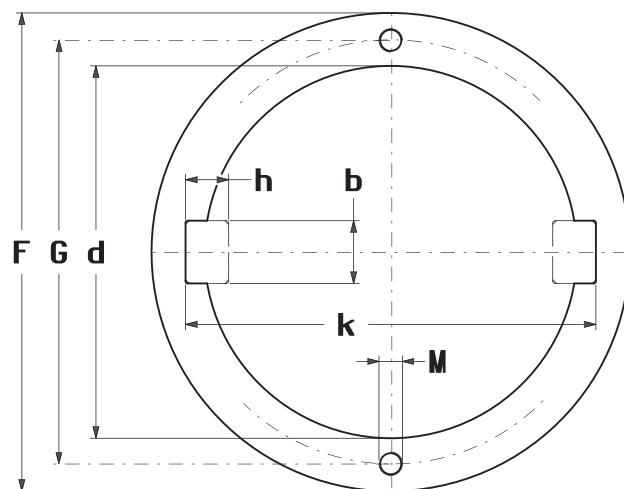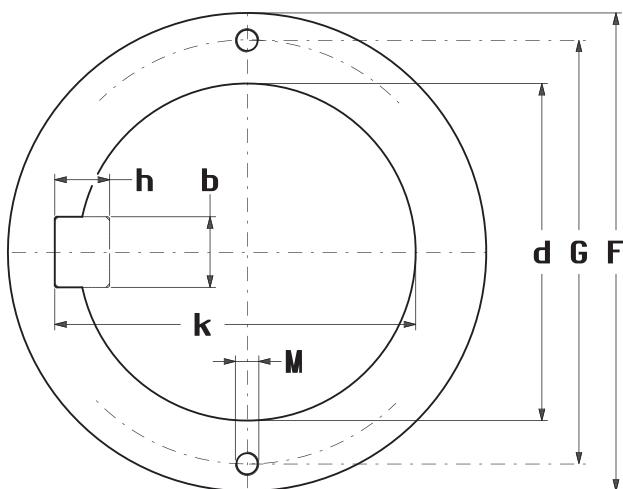

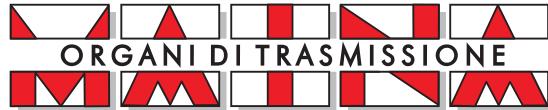

## GO-B COUPLINGS

## TECHNICAL DATA

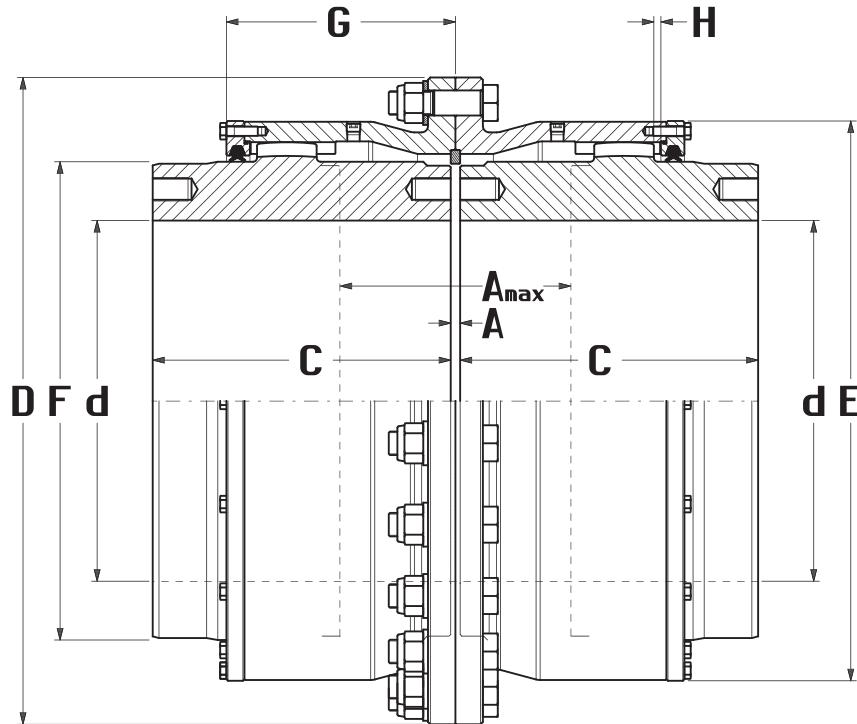

DENOMINATION EXAMPLE:  
GO-B GEAR COUPLING SIZE 10

**GO-10B Coupling**

Fig. 48 - GO-B Coupling


TAB. 41

SIZE	NOMINAL TORQUE [kNm] <b>T<sub>k</sub></b>	MAX TORQUE [kNm] <b>T<sub>f</sub></b>	MAX SPEED [1/min] <b>n<sub>k</sub></b>	MAX [mm] <b>d</b>	DIMENSIONS [mm]								MASS <b>M</b> [Kg] <b>①</b>	MOMENT OF INERTIA <b>J</b> [Kgm <sup>2</sup> ] <b>①</b>	GREASE QUANTITY [Kg]	TORSIONAL STIFFNESS <b>Kx10<sup>6</sup></b> [Nm/rad] <b>①</b>
					<b>D</b>	<b>C</b>	<b>A</b>	<b>A<sup>max</sup></b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>H</b>				
<b>4</b>	277	554	1140	325	580	250	12	196	493	400	221	9	688	20.753	5	565.1
<b>5</b>	383	766	1010	370	630	275	12	228	543	450	245	9	926	33.678	6	691.4
<b>6</b>	493	986	920	400	700	305	12	254	587	490	262	9	1231	53.496	8	838.3
<b>7</b>	660	1320	810	430	760	330	12	278	647	550	280	9	1613	84.161	10	1042.5
<b>8</b>	840	1680	720	475	825	355	12	294	712	610	292	9	2089	129.95	12	1444.2
<b>9</b>	990	1980	670	510	885	380	20	320	753	650	315	15	2517	178.43	18	1642.4
<b>10</b>	1195	2390	630	530	935	410	20	336	803	680	327	15	3011	237.68	21	2168.0
<b>11</b>	1555	3110	560	580	1010	430	20	358	878	750	346	15	3787	355.39	25	2787.5
<b>12</b>	1815	3630	530	610	1085	460	30	384	928	790	385	22	4550	482.71	38	3256.2
<b>13</b>	2510	5020	470	680	1185	510	30	426	1028	870	414	22	6080	777.01	48	4493.0
<b>14</b>	3530	7060	400	780	1340	560	30	494	1163	1000	460	22	8720	1444.6	60	6243.1
<b>15</b>	4440	8880	360	860	1440	610	40	556	1263	1100	507	30	11262	2193.5	85	7462.5
<b>16</b>	5920	11840	320	950	1575	660	40	624	1398	1220	568	30	14864	3520.8	105	9721.0
<b>17</b>	7180	14360	300	1020	1705	710	40	676	1498	1310	602	30	18347	4990.2	120	11349
<b>18</b>	8500	17000	270	1090	1805	760	40	730	1598	1400	635	30	22210	6824.4	135	13377
<b>19</b>	10600	21200	250	1180	1935	810	40	800	1728	1520	680	30	27637	9884.0	160	15846

NOTE 1 - Values are calculated for solid hubs

## TECHNICAL DATA

## GO-B.HT COUPLINGS

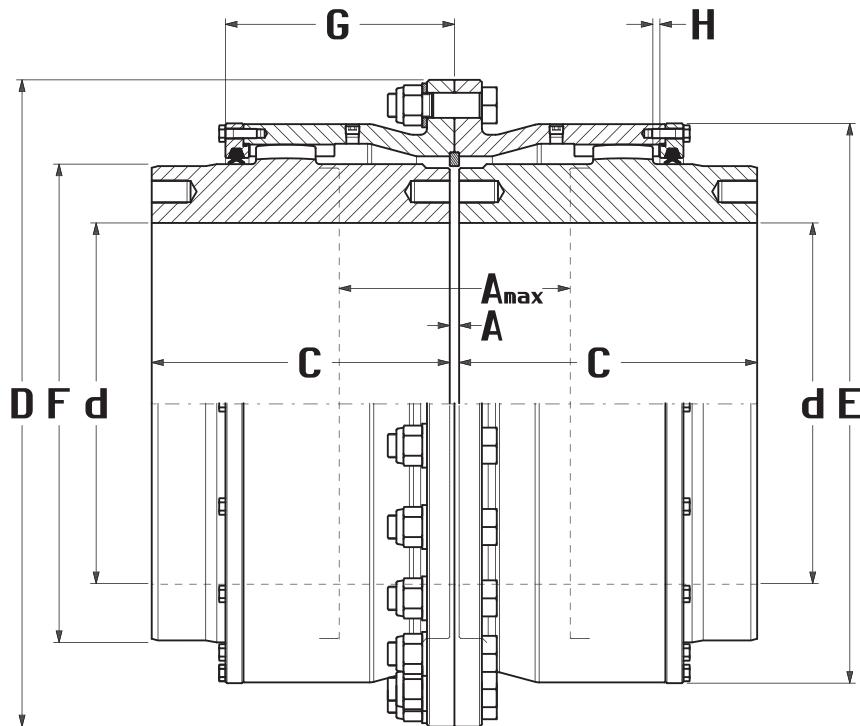

DENOMINATION EXAMPLE:  
GO-B.HT GEAR COUPLING SIZE 10

Fig. 49 - GO-B.HT Coupling

**GO-10B.HT Coupling**

**TAB. 42**


SIZE	NOMINAL TORQUE [kNm] <b>T<sub>k</sub></b>	MAX TORQUE [kNm] <b>T<sub>f</sub></b>	MAX SPEED [1/min] <b>n<sub>k</sub></b>	MAX [mm] <b>d</b>	DIMENSIONS [mm]								MASS <b>① M [Kg]</b>	MOMENT OF INERTIA <b>① J [Kgm<sup>2</sup>]</b>	GREASE QUANTITY [Kg]	TORSIONAL STIFFNESS <b>① Kx10<sup>6</sup> [Nm/rad]</b>
					<b>D</b>	<b>C</b>	<b>A</b>	<b>max A</b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>H</b>				
<b>4</b>	417	834	1950	325	580	250	12	196	493	400	221	9	688	20.753	5	565.1
<b>5</b>	563	1126	1730	370	630	275	12	228	543	450	245	9	926	33.678	6	691.4
<b>6</b>	745	1490	1570	400	700	305	12	254	587	490	262	9	1231	53.496	8	838.3
<b>7</b>	980	1960	1380	430	760	330	12	278	647	550	280	9	1613	84.161	10	1042.5
<b>8</b>	1235	2470	1230	475	825	355	12	294	712	610	292	9	2089	129.95	12	1444.2
<b>9</b>	1455	2910	1150	510	885	380	20	320	753	650	315	15	2517	178.43	18	1642.4
<b>10</b>	1785	3570	1080	530	935	410	20	336	803	680	327	15	3011	237.68	21	2168.0
<b>11</b>	2290	4580	960	580	1010	430	20	358	878	750	346	15	3787	355.39	25	2787.5
<b>12</b>	2670	5340	900	610	1085	460	30	384	928	790	385	22	4550	482.71	38	3256.2
<b>13</b>	3790	7580	800	680	1185	510	30	426	1028	870	414	22	6080	777.01	48	4493.0
<b>14</b>	5260	10520	690	780	1340	560	30	494	1163	1000	460	22	8720	1444.6	60	6243.1
<b>15</b>	6540	13080	620	860	1440	610	40	556	1263	1100	507	30	11262	2193.5	85	7462.5
<b>16</b>	8750	17500	550	950	1575	660	40	624	1398	1220	568	30	14864	3520.8	105	9721.0
<b>17</b>	10580	21160	510	1020	1705	710	40	676	1498	1310	602	30	18347	4990.2	120	11349
<b>18</b>	12540	25080	470	1090	1805	760	40	730	1598	1400	635	30	22210	6824.4	135	13377
<b>19</b>	15630	31260	430	1180	1935	810	40	800	1728	1520	680	30	27637	9884.0	160	15846

NOTE 1 - Values are calculated for solid hubs



## AO-B SPACER COUPLINGS

## TECHNICAL DATA

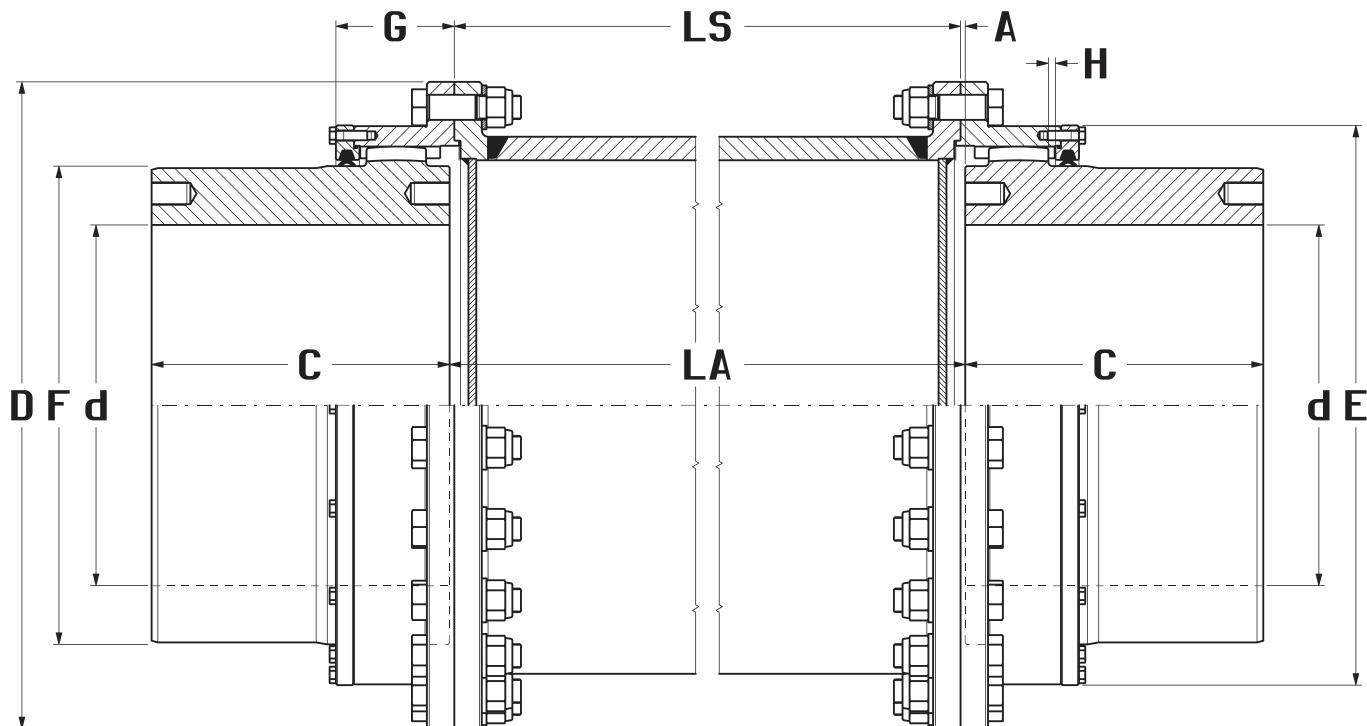

DENOMINATION EXAMPLE:  
AO-B SPACER COUPLING SIZE 10

Fig. 50 - AO-B Spacer Coupling

## AO-10B Spacer Coupling

TAB. 43


SIZE	NOMINAL TORQUE [kNm] <b>T<sub>k</sub></b>	MAX TORQUE [kNm] <b>T<sub>f</sub></b>	MAX SPEED [1/min] <b>n<sub>k</sub></b>	MAX [mm] <b>d</b>	DIMENSIONS [mm]								MASS <b>M</b> [Kg] ①	MOMENT OF INERTIA <b>J</b> [Kgm <sup>2</sup> ] ①	GREASE QUANTITY [Kg]	TORSIONAL STIFFNESS <b>K<sub>x</sub></b> [Nm/rad] ①
					<b>D</b>	<b>C</b>	<b>A</b>	<b>max LA</b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>H</b>				
4	277	554	1140	325	580	250	6	310	493	400	129	9	907	31.391	5	104.46
5	383	766	1010	370	630	275	6	330	543	450	137	9	1157	47.756	6	144.00
6	493	986	920	400	700	305	6	350	587	490	141	9	1575	79.562	8	233.86
7	660	1320	810	430	760	330	6	380	647	550	147	9	1942	113.95	10	275.35
8	840	1680	720	475	825	355	6	400	712	610	151	9	2446	168.00	12	357.23
9	990	1980	670	510	885	380	10	420	753	650	165	15	2935	231.45	18	466.72
10	1195	2390	630	530	935	410	10	440	803	680	169	15	3421	297.16	21	630.77
11	1555	3110	560	580	1010	430	10	460	878	750	177	15	4278	438.38	25	838.33
12	1815	3630	530	610	1085	460	15	480	928	790	208	22	5105	592.01	38	1011.2
13	2510	5020	470	680	1185	510	15	530	1028	870	216	22	6763	935.77	48	1638.5
14	3530	7060	400	780	1340	560	15	600	1163	1000	228	22	9535	1694.3	60	2400.2
15	4440	8880	360	860	1440	610	20	660	1263	1100	249	30	12212	2527.1	85	3526.9
16	5920	11840	320	950	1575	660	20	730	1398	1220	276	30	15788	3900.2	105	4742.9
17	7180	14360	300	1020	1705	710	20	780	1498	1310	284	30	19434	5499.1	120	6442.5
18	8500	17000	270	1090	1805	760	20	830	1598	1400	290	30	23412	7470.7	135	7950.1
19	10600	21200	250	1180	1935	810	20	900	1728	1520	300	30	28830	10609	160	9737.2

NOTE 1 - Values are calculated for solid hubs and spacer length LS=1000 [mm].



## TECHNICAL DATA

## AO-B.HT SPACER COUPLINGS

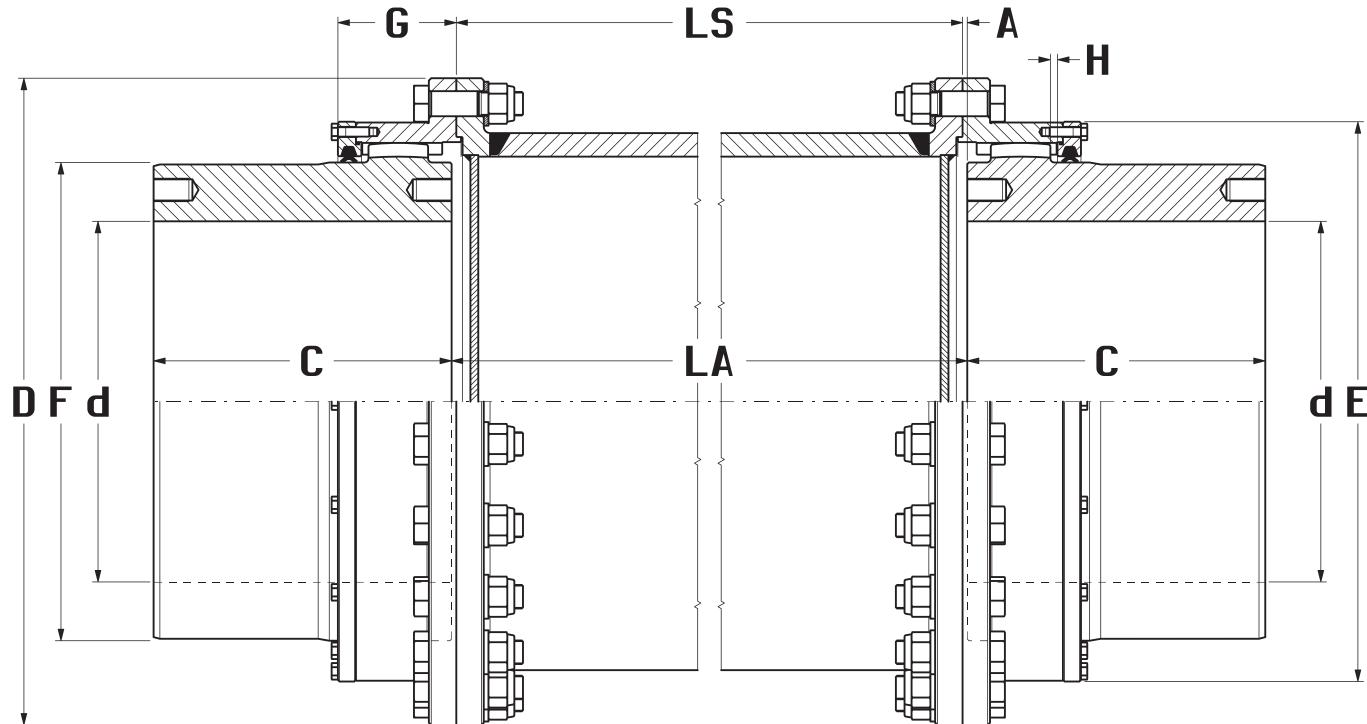

DENOMINATION EXAMPLE:  
AO-B.HT SPACER COUPLING SIZE 10

Fig. 51 - AO-B.HT Spacer Coupling

## AO-10B.HT Spacer Coupling

TAB. 44


SIZE	NOMINAL TORQUE [kNm] <b>T<sub>k</sub></b>	MAX TORQUE [kNm] <b>T<sub>f</sub></b>	MAX SPEED [1/min] <b>n<sub>k</sub></b>	MAX [mm] <b>d</b>	DIMENSIONS [mm]								MASS ① M [Kg]	MOMENT OF INERTIA ① J [Kgm <sup>2</sup> ]	GREASE QUANTITY [Kg]	TORSIONAL STIFFNESS ① Kx10 <sup>6</sup> [Nm/rad]
					<b>D</b>	<b>C</b>	<b>A</b>	<b>max LA</b>	<b>E</b>	<b>F</b>	<b>G</b>	<b>H</b>				
<b>4</b>	417	834	1950	325	580	250	6	310	493	400	129	9	953	33.402	5	123.95
<b>5</b>	563	1126	1730	370	630	275	6	330	543	450	137	9	1263	53.267	6	184.39
<b>6</b>	745	1490	1570	400	700	305	6	350	587	490	141	9	1627	83.042	8	278.96
<b>7</b>	980	1960	1380	430	760	330	6	380	647	550	147	9	2108	126.50	10	411.93
<b>8</b>	1235	2470	1230	475	825	355	6	400	712	610	151	9	2622	184.28	12	535.13
<b>9</b>	1455	2910	1150	510	885	380	10	420	753	650	165	15	3128	251.85	18	672.17
<b>10</b>	1785	3570	1080	530	935	410	10	440	803	680	169	15	3634	322.83	21	835.26
<b>11</b>	2290	4580	960	580	1010	430	10	460	878	750	177	15	4538	476.84	25	1215.8
<b>12</b>	2670	5340	900	610	1085	460	15	480	928	790	208	22	5380	638.08	38	1467.8
<b>13</b>	3790	7580	800	680	1185	510	15	530	1028	870	216	22	7072	997.96	48	2246.9
<b>14</b>	5260	10520	690	780	1340	560	15	600	1163	1000	228	22	9990	1808.6	60	3579.5
<b>15</b>	6540	13080	620	860	1440	610	20	660	1263	1100	249	30	12588	2641.8	85	4641.4
<b>16</b>	8750	17500	550	950	1575	660	20	730	1398	1220	276	30	16339	4107.2	105	6718.0
<b>17</b>	10580	21160	510	1020	1705	710	20	780	1498	1310	284	30	20151	5824.8	120	8767.6
<b>18</b>	12540	25080	470	1090	1805	760	20	830	1598	1400	290	30	24030	7773.3	135	10837
<b>19</b>	15630	31260	430	1180	1935	810	20	900	1728	1520	300	30	29828	11137	160	14868

NOTE 1 - Values are calculated for solid hubs and spacer length LS=1000 [mm].




## GO-FB COUPLINGS

## TECHNICAL DATA

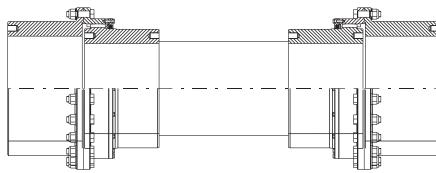

**Fig. 53 - AO-FB.C**  
Floating Shaft Coupling

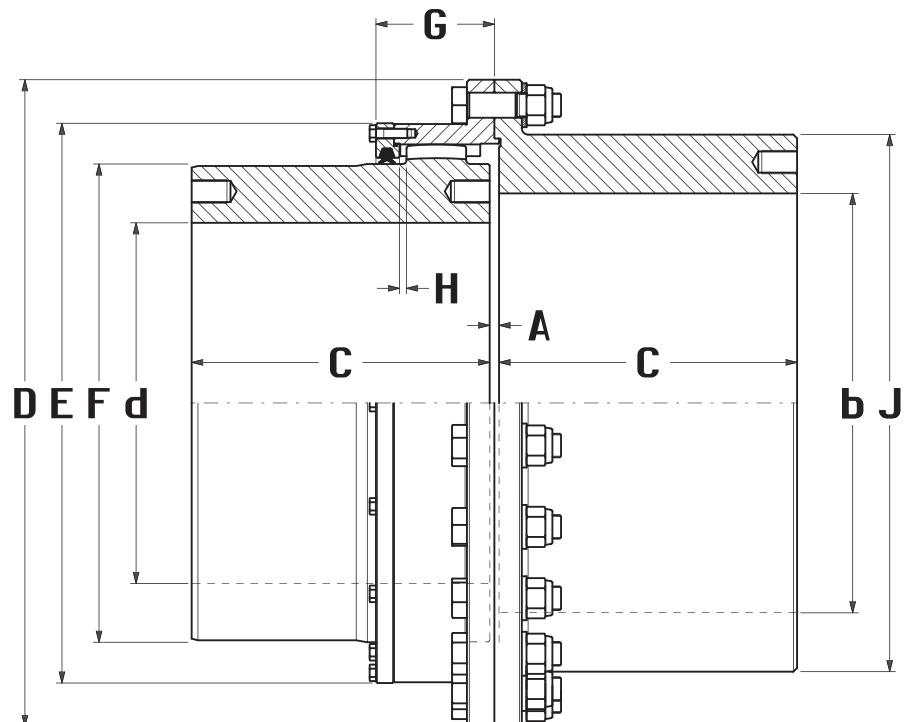

**Fig. 54 - AO-FB.D**  
Floating Shaft Coupling

DENOMINATION EXAMPLE:  
FB GEAR COUPLING SIZE 10

**Fig. 52 - GO-FB Coupling**

**GO-10FB Coupling**

**TAB. 45**


SIZE	NOMINAL TORQUE [kNm] <b>T<sub>k</sub></b>	MAX TORQUE [kNm] <b>T<sub>f</sub></b>	MAX SPEED [1/min] <b>n<sub>k</sub></b>	MAX [mm] <b>d</b>	MAX [mm] <b>b</b>	DIMENSIONS [mm]							MASS <b>M</b> [Kg] ①	MOMENT OF INERTIA <b>J</b> [Kgm <sup>2</sup> ] ①	GREASE QUANTITY [Kg]	TORSIONAL STIFFNESS <b>Kx10<sup>6</sup></b> [Nm/rad]	
						<b>D</b>	<b>C</b>	<b>A</b>	<b>E</b>	<b>F</b>	<b>J</b>	<b>G</b>	<b>H</b>				
4	277	554	1140	325	365	580	250	12	493	400	475	129	9	718	21.146	5	1579.5
5	383	766	1010	370	400	630	275	12	543	450	525	137	9	946	34.040	6	2014.5
6	493	986	920	400	430	700	305	12	587	490	560	141	9	1231	52.567	8	2376.8
7	660	1320	810	430	475	760	330	12	647	550	620	147	9	1718	87.832	10	2788.9
8	840	1680	720	475	525	825	355	12	712	610	685	151	9	2140	132.08	12	4427.2
9	990	1980	670	510	560	885	380	20	753	650	725	165	15	2690	188.07	18	6459.5
10	1195	2390	630	530	600	935	410	20	803	680	775	169	15	3090	244.05	21	7182.8
11	1555	3110	560	580	650	1010	430	20	878	750	850	177	15	3880	364.85	25	10328
12	1815	3630	530	610	690	1085	460	30	928	790	900	208	22	4685	498.50	38	12053
13	2510	5020	470	680	770	1185	510	30	1028	870	1000	216	22	6330	817.15	48	16167
14	3530	7060	400	780	870	1340	560	30	1163	1000	1130	228	22	8950	1487.4	60	24079
15	4440	8880	360	860	950	1440	610	40	1263	1100	1230	249	30	11500	2245.3	85	29315
16	5920	11840	320	950	1050	1575	660	40	1398	1220	1365	276	30	15220	3620.5	105	40272
17	7180	14360	300	1020	1120	1705	710	40	1498	1310	1455	284	30	18710	5097.2	120	49803
18	8500	17000	270	1090	1200	1805	760	40	1598	1400	1555	290	30	22750	7027.1	135	60398
19	10600	21200	250	1180	1300	1935	810	40	1728	1520	1685	300	30	28360	10219	160	76531

NOTE 1 - Values are calculated for solid hubs and refer to GO-FB gear couplings only




## TECHNICAL DATA

## GO-FB.HT COUPLINGS

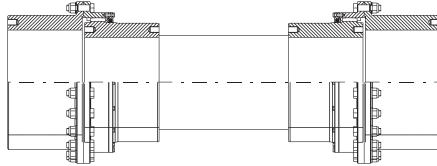

**Fig. 56 - AO-FB.HT.C  
Floating Shaft Coupling**

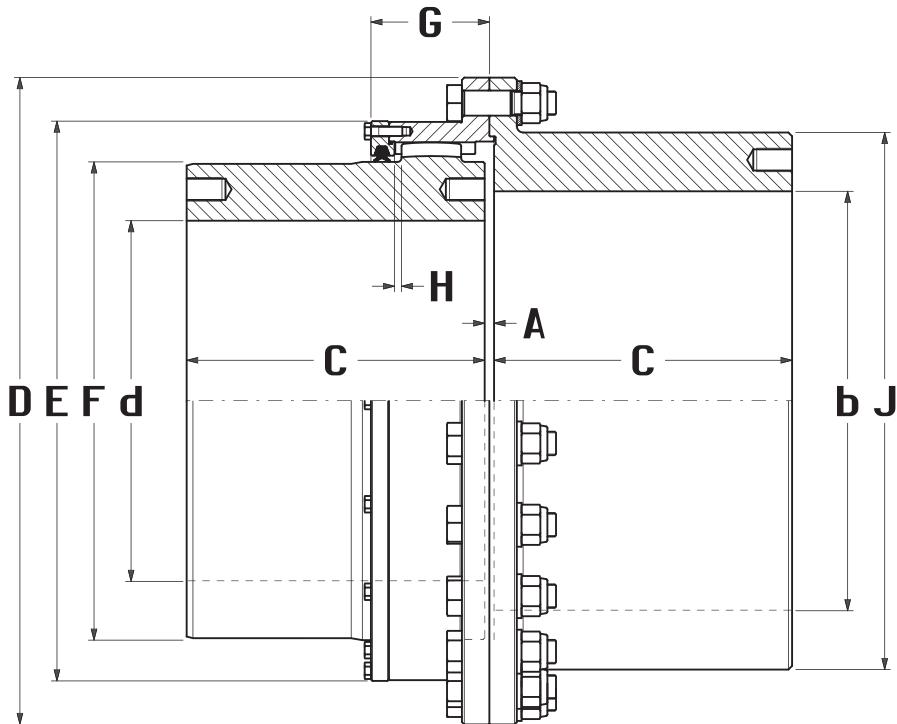

**Fig. 57 - AO-FB.HT.D  
Floating Shaft Coupling**

DENOMINATION EXAMPLE:  
GO-FB.HT GEAR COUPLING SIZE 10

**Fig. 55 - GO-FB.HT Coupling**

## GO-10FB.HT Coupling

### TAB. 46


SIZE	NOMINAL TORQUE [kNm] <b>T<sub>k</sub></b>	MAX TORQUE [kNm] <b>T<sub>f</sub></b>	MAX SPEED [1/min] <b>n<sub>k</sub></b>	MAX [mm] <b>d</b>	MAX [mm] <b>b</b>	DIMENSIONS [mm]							MASS <b>M</b> ① [Kg]	MOMENT OF INERTIA <b>J</b> ① [Kgm <sup>2</sup> ]	GREASE QUANTITY [Kg]	TORSIONAL STIFFNESS <b>K<sub>x10<sup>6</sup></sub></b> ① [Nm/rad]	
						D	C	A	E	F	J	G	H				
4	417	834	1950	325	365	580	250	12	493	400	475	129	9	718	21.146	5	1579.5
5	563	1126	1730	370	400	630	275	12	543	450	525	137	9	946	34.040	6	2014.5
6	745	1490	1570	400	430	700	305	12	587	490	560	141	9	1231	52.567	8	2376.8
7	980	1960	1380	430	475	760	330	12	647	550	620	147	9	1718	87.832	10	2788.9
8	1235	2470	1230	475	525	825	355	12	712	610	685	151	9	2140	132.08	12	4427.2
9	1455	2910	1150	510	560	885	380	20	753	650	725	165	15	2690	188.07	18	6459.5
10	1785	3570	1080	530	600	935	410	20	803	680	775	169	15	3090	244.05	21	7182.8
11	2290	4580	960	580	650	1010	430	20	878	750	850	177	15	3880	364.85	25	10328
12	2670	5340	900	610	690	1085	460	30	928	790	900	208	22	4685	498.50	38	12053
13	3790	7580	800	680	770	1185	510	30	1028	870	1000	216	22	6330	817.15	48	16167
14	5260	10520	690	780	870	1340	560	30	1163	1000	1130	228	22	8950	1487.4	60	24079
15	6540	13080	620	860	950	1440	610	40	1263	1100	1230	249	30	11500	2245.3	85	29315
16	8750	17500	550	950	1050	1575	660	40	1398	1220	1365	276	30	15220	3620.5	105	40272
17	10580	21160	510	1020	1120	1705	710	40	1498	1310	1455	284	30	18710	5097.2	120	49803
18	12540	25080	470	1090	1200	1805	760	40	1598	1400	1555	290	30	22750	7027.1	135	60398
19	15630	31260	430	1180	1300	1935	810	40	1728	1520	1685	300	30	28360	10219	160	76531

NOTE 1 - Values are calculated for solid hubs and refer to GO-FB.HT gear couplings only



## GO-MB COUPLINGS

## TECHNICAL DATA

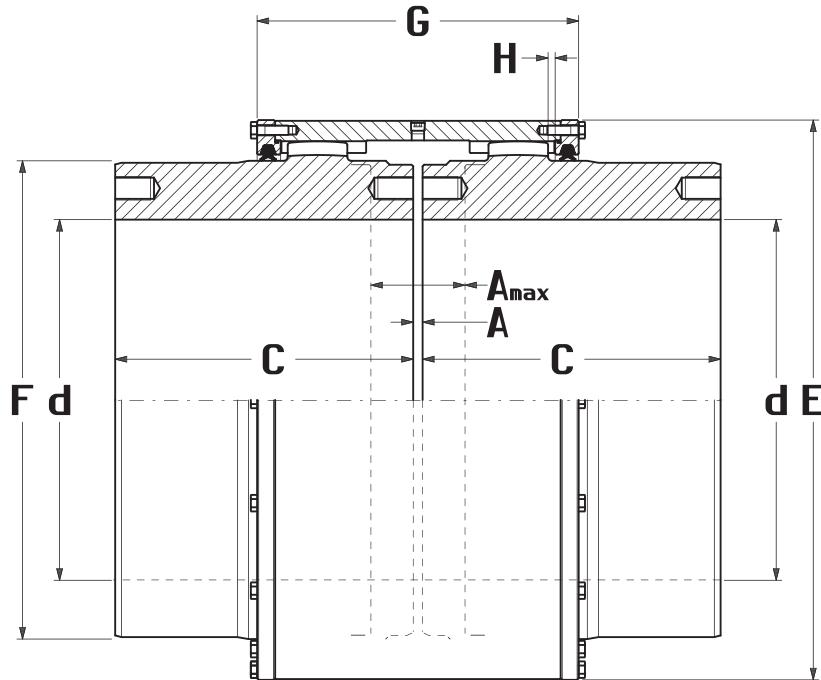

DENOMINATION EXAMPLE:  
GO-MB GEAR COUPLING SIZE 10

Fig. 58 - GO-MB Coupling

**GO-10MB Coupling**


**TAB. 47**

SIZE	NOMINAL TORQUE [kNm] <b>T<sub>k</sub></b>	MAX TORQUE [kNm] <b>T<sub>f</sub></b>	MAX SPEED [1/min] <b>n<sub>k</sub></b>	MAX [mm] <b>d</b>	DIMENSIONS [mm]							MASS  ① M [Kg]	MOMENT OF INERTIA  ① J [Kgm <sup>2</sup> ]	GREASE QUANTITY [Kg]	TORSIONAL STIFFNESS  ① Kx10 <sup>6</sup> [Nm/rad]
					E	C	A	<sup>max</sup> A	F	G	H				
<b>4</b>	277	554	1140	325	493	250	12	72	400	318	9	612	16.225	5	920.4
<b>5</b>	383	766	1010	370	543	275	12	88	450	350	9	832	26.829	6	1042.2
<b>6</b>	493	986	920	400	587	305	12	102	490	372	9	1078	40.279	8	1277.4
<b>7</b>	660	1320	810	430	647	330	12	114	550	396	9	1437	65.727	10	1597.3
<b>8</b>	840	1680	720	475	712	355	12	122	610	412	9	1885	104.55	12	2234.0
<b>9</b>	990	1980	670	510	753	380	20	136	650	446	15	2276	142.17	18	2527.5
<b>10</b>	1195	2390	630	530	803	410	20	144	680	462	15	2721	189.82	21	3284.2
<b>11</b>	1555	3110	560	580	878	430	20	154	750	488	15	3451	290.10	25	4271.8
<b>12</b>	1815	3630	530	610	928	460	30	160	790	546	22	4114	385.88	38	5033.9
<b>13</b>	2510	5020	470	680	1028	510	30	166	870	568	22	5140	628.05	48	7191.8
<b>14</b>	3530	7060	400	780	1163	560	30	192	1000	618	22	7900	1163.3	60	10258
<b>15</b>	4440	8880	360	860	1263	610	40	216	1100	674	30	10300	1806.9	85	12697
<b>16</b>	5920	11840	320	950	1398	660	40	238	1220	750	30	13690	2950.1	105	17230
<b>17</b>	7180	14360	300	1020	1498	710	40	254	1310	782	30	16890	4167.4	120	21016
<b>18</b>	8500	17000	270	1090	1598	760	40	270	1400	810	30	20545	5759.7	135	25456
<b>19</b>	10600	21200	250	1180	1728	810	40	290	1520	850	30	25710	8450.7	160	30996

NOTE 1 - Values are calculated for solid hubs

## TECHNICAL DATA

## GO-MB.HT COUPLINGS

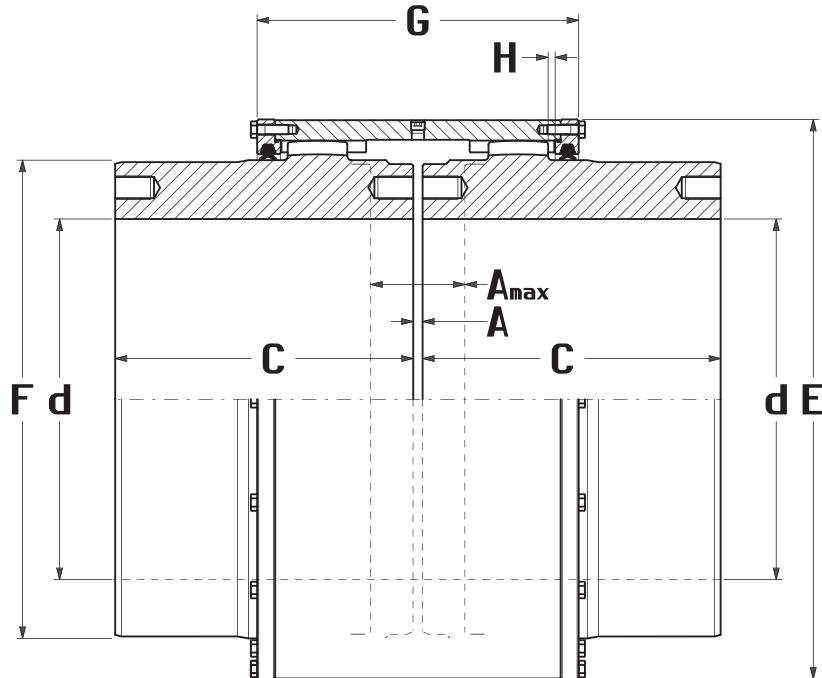

DENOMINATION EXAMPLE:  
GO-MB.HT GEAR COUPLING SIZE 10

Fig. 59 - GO-MB.HT Coupling

## GO-10MB.HT Coupling

TAB. 48

SIZE	NOMINAL TORQUE [kNm] <b>T<sub>k</sub></b>	MAX TORQUE [kNm] <b>T<sub>f</sub></b>	MAX SPEED [1/min] <b>n<sub>k</sub></b>	MAX [mm] <b>d</b>	DIMENSIONS [mm]							MASS ① M [Kg]	MOMENT OF INERTIA ① J [Kgm <sup>2</sup> ]	GREASE QUANTITY [Kg]	TORSIONAL STIFFNESS ① Kx10 <sup>6</sup> [Nm/rad]
					E	C	A	<sup>max</sup> A	F	G	H				
<b>4</b>	417	834	1950	325	493	250	12	72	400	318	9	612	16.225	5	920.4
<b>5</b>	563	1126	1730	370	543	275	12	88	450	350	9	832	26.829	6	1042.2
<b>6</b>	745	1490	1570	400	587	305	12	102	490	372	9	1078	40.279	8	1277.4
<b>7</b>	980	1960	1380	430	647	330	12	114	550	396	9	1437	65.727	10	1597.3
<b>8</b>	1235	2470	1230	475	712	355	12	122	610	412	9	1885	104.55	12	2234.0
<b>9</b>	1455	2910	1150	510	753	380	20	136	650	446	15	2276	142.17	18	2527.5
<b>10</b>	1785	3570	1080	530	803	410	20	144	680	462	15	2721	189.82	21	3284.2
<b>11</b>	2290	4580	960	580	878	430	20	154	750	488	15	3451	290.10	25	4271.8
<b>12</b>	2670	5340	900	610	928	460	30	160	790	546	22	4114	385.88	38	5033.9
<b>13</b>	3790	7580	800	680	1028	510	30	166	870	568	22	5140	628.05	48	7191.8
<b>14</b>	5260	10520	690	780	1163	560	30	192	1000	618	22	7900	1163.3	60	10258
<b>15</b>	6540	13080	620	860	1263	610	40	216	1100	674	30	10300	1806.9	85	12697
<b>16</b>	8750	17500	550	950	1398	660	40	238	1220	750	30	13690	2950.1	105	17230
<b>17</b>	10580	21160	510	1020	1498	710	40	254	1310	782	30	16890	4167.4	120	21016
<b>18</b>	12540	25080	470	1090	1598	760	40	270	1400	810	30	20545	5759.7	135	25456
<b>19</b>	15630	31260	430	1180	1728	810	40	290	1520	850	30	25710	8450.7	160	30996

NOTE 1 - Values are calculated for solid hubs




## GO-B.W & AO-B.W COUPLINGS

## TECHNICAL DATA

**TAB. 49 - Hubs Shrinkfitting - MAX TORQUES**

SHAFT	COUPLING SIZE	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
		Hub Length C	250	275	305	330	355	380	410	430	460	510	560	610	660	710	760
<b>Ø 200</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]	233.9 367/425															
<b>Ø 225</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]	273.4 417/475															
<b>Ø 250</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]	304.1 467/525	383.7 472/530														
<b>Ø 275</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]	330.0 531/595	414.7 511/557	507.9 516/580													
<b>Ø 300</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]	321.6 571/635	437.2 556/620	555.6 566/360	681.6 571/635												
<b>Ø 325</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]	286.0 603/675	457.9 623/695	575.1 603/675	729.2 608/680	870.4 613/685											
<b>Ø 350</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]		433.8 663/735	582.7 648/720	778.0 658/730	950.8 663/735	1077 663/735										
<b>Ø 375</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]		381.5 703/775	586.1 718/790	801.7 703/775	1010 708/780	1167 713/785	1314 713/785									
<b>Ø 400</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]			531.8 758/830	796.2 743/815	1058 758/830	1242 763/835	1411 763/835									
<b>Ø 425</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]				789.6 810/890	1064 795/875	1276 800/880	1474 805/885	1734 810/890								
<b>Ø 450</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]					1049 835/915	1299 845/925	1521 850/930	1839 860/940	2076 860/940							
<b>Ø 475</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]					1003 875/955	1285 885/965	1541 895/975	1912 905/985	2193 910/990							
<b>Ø 500</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]					1233 920/1000	1497 920/1000	1961 950/1030	2275 955/1035	2848 965/1045							
<b>Ø 525</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]						1445 962/1050	1964 987/1075	2324 997/1085	2964 1007/1095							
<b>Ø 550</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]							1941 1027/1115	2338 1037/1125	3064 1052/1140							
<b>Ø 575</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]							1881 1067/1155	2328 1082/1170	3135 1097/1185	3960 1062/1150						
<b>Ø 600</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]								2258 1117/1205	3158 1137/1225	4119 1107/1195						
<b>Ø 625</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]								3157 1182/1270	4253 1152/1240							
<b>Ø 650</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]								3068 1210/1310	4312 1185/1285	5316 1190/1290						
<b>Ø 675</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]								2966 1250/1350	4365 1225/1325	5512 1240/1340						
<b>Ø 700</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]									4380 1265/1365	5655 1285/1385	6925 1290/1390					
<b>Ø 725</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]									4370 1310/1410	5764 1330/1430	7159 1335/1435					
<b>Ø 750</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]									4298 1350/1450	5812 1370/1470	7391 1385/1485	8654 1395/1495				
<b>Ø 775</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]									4144 1380/1480	5797 1405/1505	7562 1430/1530	8927 1440/1540				
<b>Ø 800</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]										5757 1445/1545	7695 1475/1575	9169 1485/1585	10541 1485/1585			
<b>Ø 850</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]										5497 1518/1630	7722 1543/1655	9469 1563/1675	11053 1563/1675	12989 1583/1695		
<b>Ø 900</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]											7619 1623/1735	9613 1643/1755	11504 1653/1765	13736 1673/1785		
<b>Ø 950</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]											7289 1703/1815	9583 1728/1840	11776 1743/1855	14339 1763/1875		
<b>Ø 1000</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]												9264 1803/1915	11835 1833/1945	14767 1853/1965		
<b>Ø 1050</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]													11433 1888/2020	14794 1918/2050		
<b>Ø 1100</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]													10919 1968/2100	14708 1998/2130		
<b>Ø 1150</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]														14287 2068/2200		

**DENOMINATION EXAMPLE:**  
**GO-B COUPLING SIZE 10 FOR**  
**SHRINKFITTING AND OIL PRESSURE REMOVAL**  
**GO-10B.W Coupling**



**NOTE:** The max torques are calculated with a friction coefficient  $\mu=0.12$ , with the min and max interferences (in Micron) and a max hub stress equal to the 80% of the material yielding.

The max torque values vary linearly with the increasing of the hub length C and with the friction coefficient  $\mu$ , which can be 0.15, 0.18 or 0.20 max.




## TECHNICAL DATA

## GO-B.HT.W & AO-B.HT.W COUPLINGS

### TAB. 50 - Hubs Shrinkfitting - MAX TORQUES

SHAFT	COUPLING SIZE	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
		Hub Length C	250	275	305	330	355	380	410	430	460	510	560	610	660	710	760
<b>Ø 200</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]	351.8 547/605															
<b>Ø 225</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]	407.8 617/675															
<b>Ø 250</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]	450.5 687/745	566.4 692/750														
<b>Ø 275</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]	494.7 791/855	613.4 751/815	753.9 761/825													
<b>Ø 300</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]	485.0 856/920	649.4 821/885	815.5 826/890	1004 836/900												
<b>Ø 325</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]	433.2 908/980	644.7 873/945	846.8 883/955	1083 898/970	1289 903/975											
<b>Ø 350</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]		609.8 928/1000	856.8 948/1020	1144 963/1035	1402 973/1045	1597 978/1050										
<b>Ø 375</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]		535.6 983/1055	826.2 1008/1080	1178 1028/1100	1487 1038/1110	1724 1048/1120	1940 1048/1120									
<b>Ø 400</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]			748.7 1063/1135	1171 1088/1160	1553 1108/1180	1820 1113/1185	2076 1118/1190									
<b>Ø 425</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]				1115 1140/1220	1560 1160/1240	1874 1170/1250	2161 1175/1255	2547 1185/1265								
<b>Ø 450</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]					1539 1220/1300	1905 1235/1315	2237 1245/1325	2693 1255/1335	3053 1260/1340							
<b>Ø 475</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]					1473 1280/1360	1888 1295/1375	2256 1305/1385	2799 1320/1400	3217 1330/1410							
<b>Ø 500</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]						1822 1355/1435	2229 1365/1445	2869 1385/1465	3335 1395/1475	4176 1410/1490						
<b>Ø 525</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]							2129 1412/1500	2880 1442/1530	3396 1452/1540	4333 1467/1555						
<b>Ø 550</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]								2849 1502/1590	3432 1517/1605	4477 1532/1620						
<b>Ø 575</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]								2754 1557/1645	3404 1577/1665	4592 1602/1690	5297 1417/1505					
<b>Ø 600</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]								3309 1632/1720	4630 1662/1750	5509 1477/1565						
<b>Ø 625</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]									4612 1722/1810	5688 1537/1625						
<b>Ø 650</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]									4502 1770/1870	5763 1580/1680	7143 1595/1695					
<b>Ø 675</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]									4355 1830/1930	5857 1640/1740	7374 1655/1755					
<b>Ø 700</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]										5882 1695/1795	7564 1715/1815	9308 1730/1830				
<b>Ø 725</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]										5834 1745/1845	7687 1770/1870	9620 1790/1890				
<b>Ø 750</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]										5743 1800/1900	7779 1830/1930	9892 1850/1950	11562 1860/1960			
<b>Ø 775</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]										5568 1850/1950	7794 1885/1985	10120 1910/2010	11927 1920/2020			
<b>Ø 800</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]											7725 1935/2035	10272 1965/2065	12249 1980/2080	14154 1990/2090		
<b>Ø 850</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]											7358 2028/2140	10345 2063/2175	12644 2083/2195	14866 17330		
<b>Ø 900</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]												10221 2173/2285	12884 2198/2310	15431 2213/2325	18327 2228/2340	
<b>Ø 950</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]												9747 2273/2385	12796 2303/2415	15758 2328/2440	19133 2348/2460	
<b>Ø 1000</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]													12396 2408/2520	15770 2438/2550	19664 2463/2575	
<b>Ø 1050</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]														15276 2518/2650	17272 2553/2685	
<b>Ø 1100</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]														14553 2618/2750	19639 2663/2795	
<b>Ø 1150</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]															19124 2763/2895	



DENOMINATION EXAMPLE:  
GO-B.HT COUPLING SIZE 10 FOR  
SHRINKFITTING AND OIL PRESSURE REMOVAL

**GO-10B.HT.W Coupling**


NOTE: The max torques are calculated with a friction coefficient  $\mu=0.12$ , with the min and max interferences (in Micron) and a max hub stress equal to the 80% of the material yielding.

The max torque values vary linearly with the increasing of the hub length C and with the friction coefficient  $\mu$ , which can be 0.15, 0.18 or 0.20 max.




## GO-B, AO-B, GO-B.HT & AO-B.HT COUPLINGS

## TECHNICAL DATA

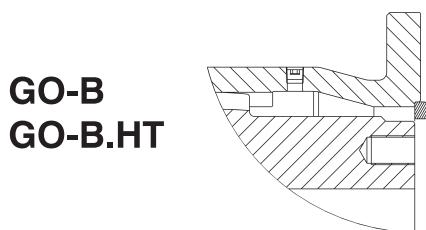

**GO-B  
GO-B.HT**

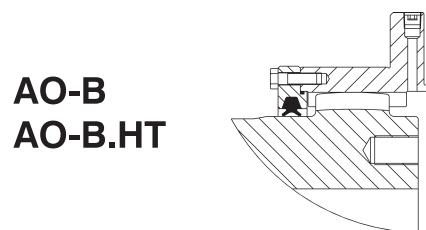


**AO-B  
AO-B.HT**

2 grease nipples at 180° on each sleeve

2 grease nipples at 180° on each sleeve

**TAB. 52**

SIZE	Hub Diam. <b>F</b>		Max bore with 1 keyway				Max bore with 2 keyways				Extraction holes		
			max <b>d</b>	Key <b>b x h</b>	max <b>k</b>		max <b>d</b>	Key <b>b x h</b>	max <b>k</b>		2 holes at 180° <b>G</b>	<b>M</b>	
4	400		310	70x45	328.5		325	56x36	356		350	M24x35	Standard
5	450		340	80x55	363		370	63x40	404		400	M24x35	
6	490		380	80x55	403.5		400	70x45	439		430	M30x45	
7	550		400	90x70	430		430	70x45	469		490	M30x45	
8	610		430	90x70	460.5		475	80x55	523		550	M30x45	
9	650		450	100x75	482		510	80x55	558		580	M36x55	
10	680		-	-	-		530	90x70	592		600	M36x55	
11	750		-	-	-		580	90x70	643		670	M36x55	
12	790		-	-	-		610	100x75	676		710	M42x65	
13	870		-	-	-		680	110x80	751		790	M42x65	
14	1000		-	-	-		780	120x90	860		900	M48x75	
15	1100		-	-	-		860	130x90	940		1000	M48x75	
16	1220		-	-	-		950	140x100	1040		1120	M48x75	
17	1310		-	-	-		1020	150x110	1120		1190	M56x85	
18	1400		-	-	-		1090	150x110	1190		1280	M56x85	
19	1520		-	-	-		1180	150x110	1280		1400	M56x85	

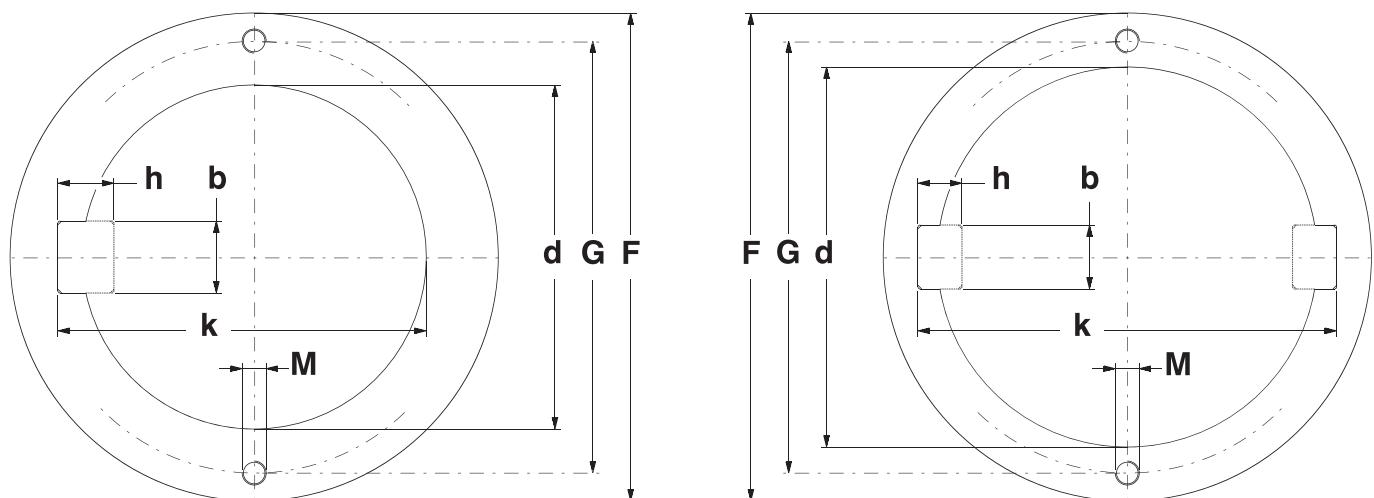



## TECHNICAL DATA

## G20-F & G20-M COUPLINGS

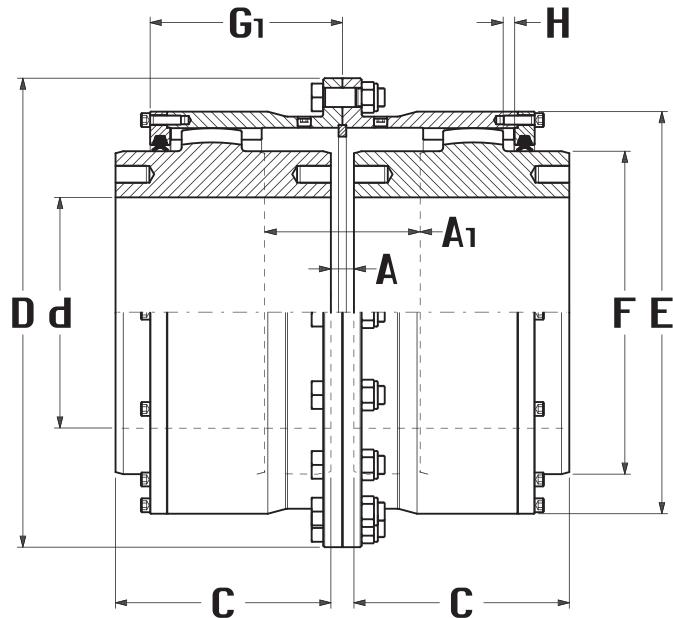


Fig. 60 - G20-F Coupling

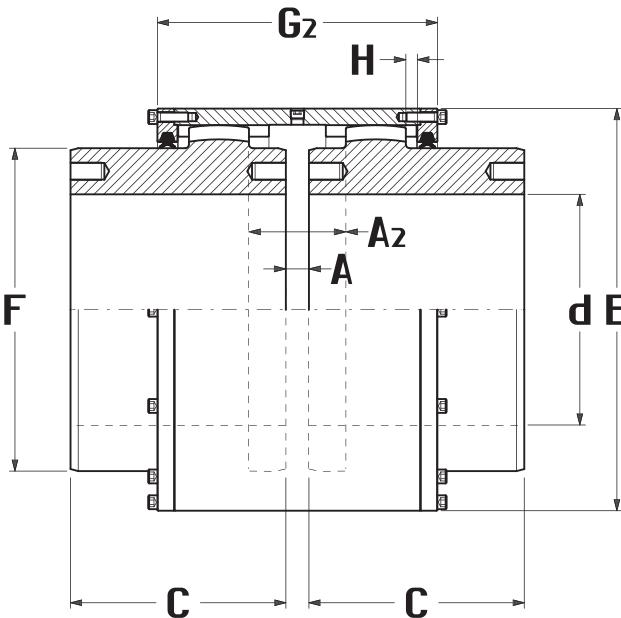


Fig. 61 - G20-M Coupling

**G20 SERIES** For angular misalignment up to **2°00'**

DENOMINATION EXAMPLE:  
G20-F GEAR COUPLING SIZE 30

**G20-30F Coupling**

DENOMINATION EXAMPLE:  
G20-M GEAR COUPLING SIZE 30

**G20-30M Coupling**

**TAB. 53**


SIZE	NOMINAL TORQUE [kNm] <b>T<sub>k</sub></b>	MAX TORQUE [kNm] <b>T<sub>f</sub></b>	MAX SPEED [1/min] <b>n<sub>k</sub></b>	MAX [mm] <b>d</b>	DIMENSIONS [mm]									MASS <b>(1) M</b> [Kg]	MOMENT OF INERTIA <b>(1) J</b> [Kgm <sup>2</sup> ]	GREASE QUANTITY [Kg]	TORSIONAL STIFFNESS <b>(1) Kx10<sup>6</sup></b> [Nm/rad]	
					<b>D</b>	<b>C</b>	<b>A</b>	<b>A<sub>1</sub></b>	<b>A<sub>2</sub></b>	<b>E</b>	<b>F</b>	<b>G<sub>1</sub></b>	<b>G<sub>2</sub></b>					
<b>12</b>	14.2	21.3	6980	75	192	90	10	64	40	152	105	88	132	6	24.5	0.0754	0.4	35.229
<b>14</b>	22.3	33.5	5650	90	216	105	10	82	50	176	128	101	150	6	35.5	0.1319	0.7	45.757
<b>17</b>	33	49.5	4720	105	240	120	10	98	58	200	152	113	166	6	52.5	0.2673	0.9	58.975
<b>19</b>	55	82.5	4030	120	274	135	10	110	64	230	170	126	186	9	76.0	0.4932	1.6	88.475
<b>23</b>	84	126	3300	145	312	155	10	130	72	268	206	142	206	9	111	1.0028	2.2	134.42
<b>26</b>	123	184.5	2790	170	364	180	10	148	82	307	242	157	228	9	189	2.1107	2.9	204.24
<b>30</b>	197	295.5	2360	195	410	200	20	150	92	353	274	187	276	12	270	3.9339	5.0	296.27
<b>35</b>	284	426	1990	230	460	230	20	172	102	403	322	206	302	12	403	7.6788	6.5	452.51
<b>40</b>	408	612	1710	260	544	250	20	194	112	453	370	225	328	12	583	14.816	8.2	638.89
<b>46</b>	615	922	1460	300	610	280	30	202	126	523	420	250	364	15	843	27.534	14	937.91
<b>52</b>	850	1275	1260	340	672	310	30	228	138	585	480	271	392	15	1171	47.437	17	1320.4
<b>58</b>	1145	1718	1110	380	734	340	30	252	150	647	540	291	420	15	1754	77.596	21	1758.1

NOTE 1 - Values are calculated for solid hubs and refer to G20-F gear couplings only



## G20-FS SPACER COUPLINGS

## TECHNICAL DATA

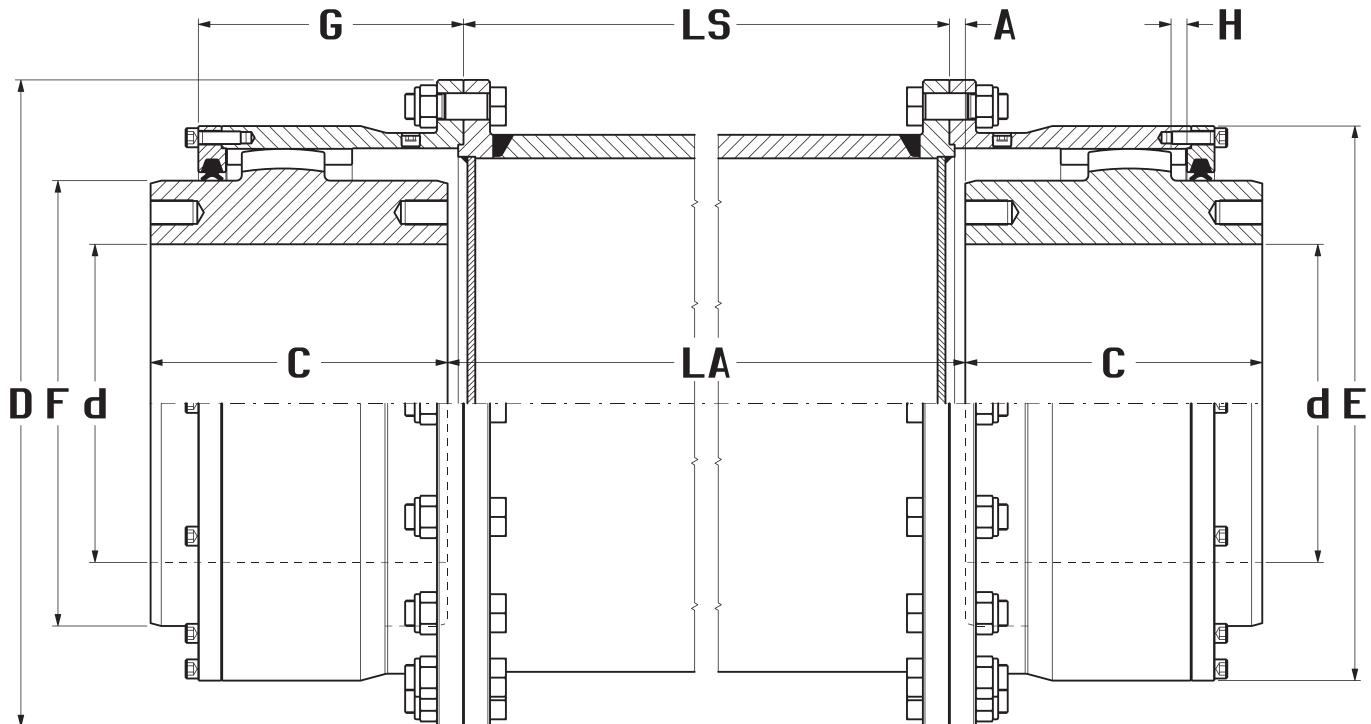

**G20 SERIES** For angular misalignment up to **2°00'**

DENOMINATION EXAMPLE:  
G20-FS GEAR COUPLING SIZE 30

**G20-30FS Coupling**

Fig. 62 - G20-FS Spacer Coupling

**TAB. 54**


SIZE	NOMINAL TORQUE [kNm] Tk	MAX TORQUE [kNm] Tf	MAX SPEED [1/min] nk	MAX [mm] d	DIMENSIONS [mm]								MASS ① M [Kg]	MOMENT OF INERTIA ① J [Kgm <sup>2</sup> ]	GREASE QUANTITY [Kg]	TORSIONAL STIFFNESS ① Kx10 <sup>6</sup> [Nm/rad]
					D	C	A	min LA	E	F	G	H				
12	14.2	21.3	6980	75	192	90	5	100	152	105	88	6	31	0.1102	0.4	14.510
14	22.3	33.5	5650	90	216	105	5	110	176	128	101	6	43	0.1890	0.7	19.660
17	33	49.5	4720	105	240	120	5	120	200	152	113	6	63	0.3637	0.9	28.273
19	55	82.5	4030	120	274	135	5	140	230	170	126	9	92	0.6816	1.6	40.310
23	84	126	3300	145	312	155	5	160	268	206	142	9	131	1.3498	2.2	62.265
26	123	184.5	2790	170	364	180	5	180	307	242	157	9	223	2.8525	2.9	95.225
30	197	295.5	2360	195	410	200	10	200	353	274	187	12	312	5.1391	5.0	139.05
35	284	426	1990	230	460	230	10	230	403	322	206	12	465	9.9772	6.5	214.59
40	408	612	1710	260	544	250	10	250	453	370	225	12	688	19.892	8.2	306.00
46	615	922	1460	300	610	280	15	280	523	420	250	15	970	35.799	14	454.22
52	850	1275	1260	340	672	310	15	310	585	480	271	15	1333	60.193	17	605.93
58	1145	1718	1110	380	734	340	15	340	647	540	291	15	1948	96.823	21	801.72

NOTE 1 - Values are calculated for solid hubs and spacer with min LA




## TECHNICAL DATA

## G20-FR COUPLINGS

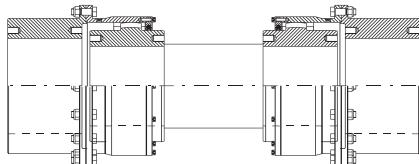

**Fig. 64 - G20-FR.C**  
Floating Shaft Coupling

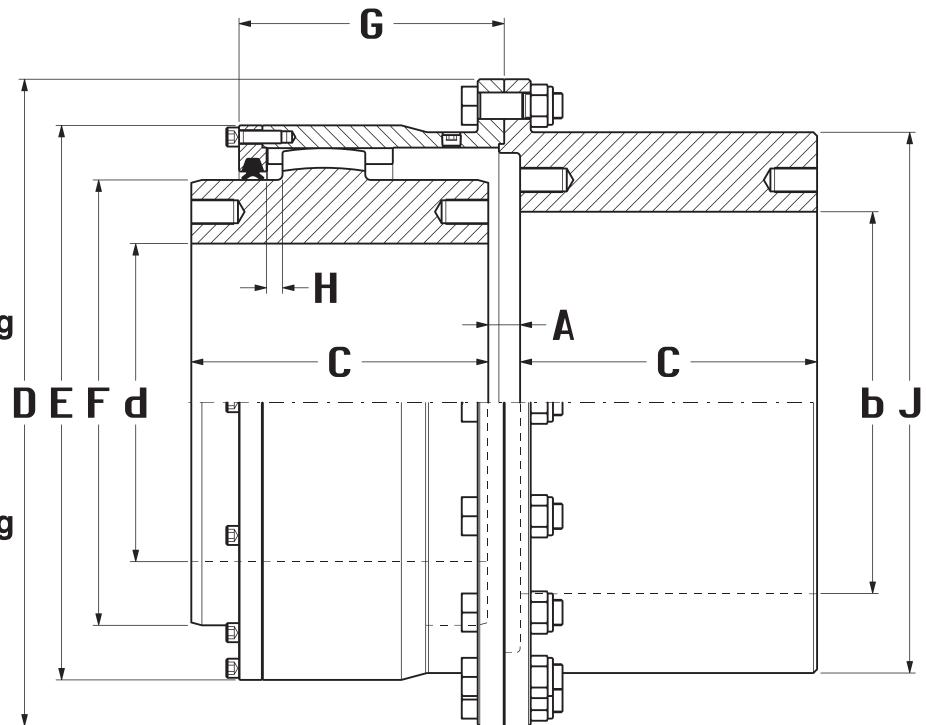

**Fig. 65 - G20-FR.D**  
Floating Shaft Coupling


**G20 SERIES** For angular misalignment up to **2°00'**

DENOMINATION EXAMPLE:  
G20-FR GEAR COUPLING SIZE 30  
**G20-30FR Coupling**

**TAB. 55**

SIZE	NOMINAL TORQUE [kNm] Tk	MAX TORQUE [kNm] Tf	MAX SPEED [1/min] nk	MAX [mm] d	MAX [mm] b	DIMENSIONS [mm]							MASS ① M [Kg]	MOMENT OF INERTIA ① J [Kgm <sup>2</sup> ]	GREASE QUANTITY [Kg]	TORSIONAL STIFFNESS ① Kx10 <sup>6</sup> [Nm/rad]	
						D	C	A	min E	F	J	G					
<b>12</b>	14.2	21.3	6980	75	100	192	90	10	152	105	145	88	6	25.5	0.0779	0.2	32.580
<b>14</b>	22.3	33.5	5650	90	120	216	105	10	176	128	168	101	6	38	0.1453	0.4	46.375
<b>17</b>	33	49.5	4720	105	135	240	120	10	200	152	192	113	6	55.5	0.2808	0.5	63.911
<b>19</b>	55	82.5	4030	120	155	274	135	10	230	170	222	126	9	81.5	0.5408	0.8	97.053
<b>23</b>	84	126	3300	145	185	312	155	10	268	206	260	142	9	123	1.1130	1.1	151.71
<b>26</b>	123	184.5	2790	170	210	364	180	10	307	242	298	157	9	198	2.3016	1.5	228.50
<b>30</b>	197	295.5	2360	195	240	410	200	20	353	274	344	187	12	288	4.3767	2.5	343.30
<b>35</b>	284	426	1990	230	280	460	230	20	403	322	394	206	12	430	8.4861	3.3	518.99
<b>40</b>	408	612	1710	260	320	544	250	20	453	370	444	225	12	615	16.107	4.1	743.38
<b>46</b>	615	922	1460	300	360	610	280	30	523	420	510	250	15	895	30.246	7	1111.4
<b>52</b>	850	1275	1260	340	410	672	310	30	585	480	572	271	15	1239	51.954	8.5	1569.0
<b>58</b>	1145	1718	1110	380	450	734	340	30	647	540	634	291	15	1751	84.762	10.5	2111.3

NOTE 1 - Values are calculated for solid hubs and refer to G20-FR Couplings only

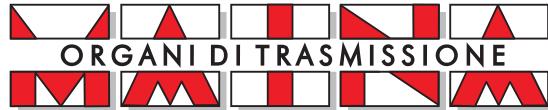

## G20-F.W, G20-FS.W & G20-FR.W COUPLINGS

## TECHNICAL DATA

### TAB. 56 - Hubs Shrinkfitting - MAX TORQUES

SHAFT	COUPLING SIZE	12	14	17	19	23	26	30	35	40	46	52	58
		Hub Length C	90	105	120	135	155	180	200	230	250	280	310
<b>Ø40</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]	5.055 104/136											
<b>Ø50</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]	7.600 135/167	9.795 136/168										
<b>Ø60</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]	9.468 159/197	12.97 161/199										
<b>Ø70</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]	10.88 188/226	16.29 191/229	21.16 193/231									
<b>Ø80</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]	10.71 213/251	18.78 220/258	25.83 223/261	31.44 224/262								
<b>Ø90</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]		19.29 241/285	29.05 247/291	36.52 249/293								
<b>Ø100</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]		18.30 266/310	31.40 274/318	41.34 278/322	52.37 263/307							
<b>Ø110</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]			31.97 301/345	44.65 306/350	60.06 292/336							
<b>Ø120</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]				29.86 325/369	45.87 333/377	66.56 320/364						
<b>Ø130</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]				43.55 352/402	69.92 340/390	97.45 345/395						
<b>Ø140</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]					72.64 366/416	106.0 372/422						
<b>Ø150</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]					72.52 390/440	113.3 400/450	144.6 404/454					
<b>Ø160</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]					69.46 414/464	117.5 425/475	155.1 431/481					
<b>Ø170</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]						119.1 450/500	163.7 458/508					
<b>Ø180</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]						117.6 475/525	169.8 485/535	239.7 492/542				
<b>Ø190</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]						110.0 490/548	169.6 502/560	249.4 511/569				
<b>Ø200</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]							168.5 526/584	260.7 538/596				
<b>Ø210</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]							163.2 549/607	268.7 564/622				
<b>Ø220</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]								272.9 589/647	366.5 600/658			
<b>Ø230</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]								273.4 614/672	379.7 626/684			
<b>Ø240</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]								269.2 638/696	389.9 652/710	514.0 660/718		
<b>Ø250</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]								259.8 661/719	395.9 677/735	534.7 687/745		
<b>Ø260</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]									394.4 696/760	547.6 708/772	611.0 624/688	
<b>Ø270</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]									392.0 721/785	561.1 734/798	637.8 648/712	
<b>Ø280</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]									384.1 745/809	570.8 760/824	662.4 672/736	812.4 678/742
<b>Ø290</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]									369.8 767/831	576.1 786/850	684.2 696/760	849.6 703/767
<b>Ø300</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]										575.8 811/875	703.1 720/784	883.5 727/791
<b>Ø320</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]										550.3 848/920	720.3 758/830	935.0 768/840
<b>Ø340</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]											726.7 802/874	981.4 815/887
<b>Ø360</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]											711.5 844/916	1010 860/932
<b>Ø380</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]												1019 904/976
<b>Ø400</b>	Max Torque [kNm] Min/Max Interference [ $\mu\text{m}$ ]												1004 946/1018

DENOMINATION EXAMPLE:  
G20-F COUPLING SIZE 30 FOR  
SHRINKFITTING AND OIL PRESSURE REMOVAL

**G20-30F.W Coupling**


NOTE: The max torques are calculated with a friction coefficient  $\mu=0.12$ , with the min and max interferences (in Micron) and a max hub stress equal to the 80% of the material yielding.

The max torque values vary linearly with the increasing of the hub length C and with the friction coefficient  $\mu$ , which can be 0.15, 0.18 or 0.20 max.



## TECHNICAL DATA

## G20-F, G20-FS, G20-FR & G20-M COUPLINGS

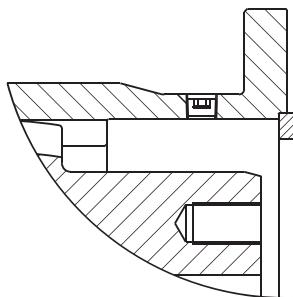


2 Grease nipples at 180° on each sleeve

**TAB. 58**

SIZE	Hub Diam. <b>F</b>	Max bore with 1 keyway			Max bore with 2 keyways			Extraction holes	
		max <b>d</b>	Key <b>b x h</b>	max <b>k</b>	max <b>d</b>	Key <b>b x h</b>	max <b>k</b>		
		<b>G</b>	<b>M</b>						
<b>12</b>	105		75	20x12	79.9		85	18x11	93.8
<b>14</b>	128		90	25x14	95.4		100	22x14	110.8
<b>17</b>	152		105	28x16	111.4		120	25x14	130.8
<b>19</b>	170		120	32x18	127.4		135	28x16	147.8
<b>23</b>	206		145	36x20	153.4		160	32x18	174.8
<b>26</b>	242		170	40x22	179.4		190	36x20	206.8
<b>30</b>	274		195	45x25	205.4		215	40x22	233.8
<b>35</b>	322		230	50x28	241.4		250	45x25	270.8
<b>40</b>	370		260	56x32	272.4		290	50x28	312.8
<b>46</b>	420		300	70x36	314.4		330	56x32	354.8
<b>52</b>	480		340	80x40	355.4		375	63x32	399.8
<b>58</b>	540		380	80x40	395.4		420	70x36	448.8

Standard

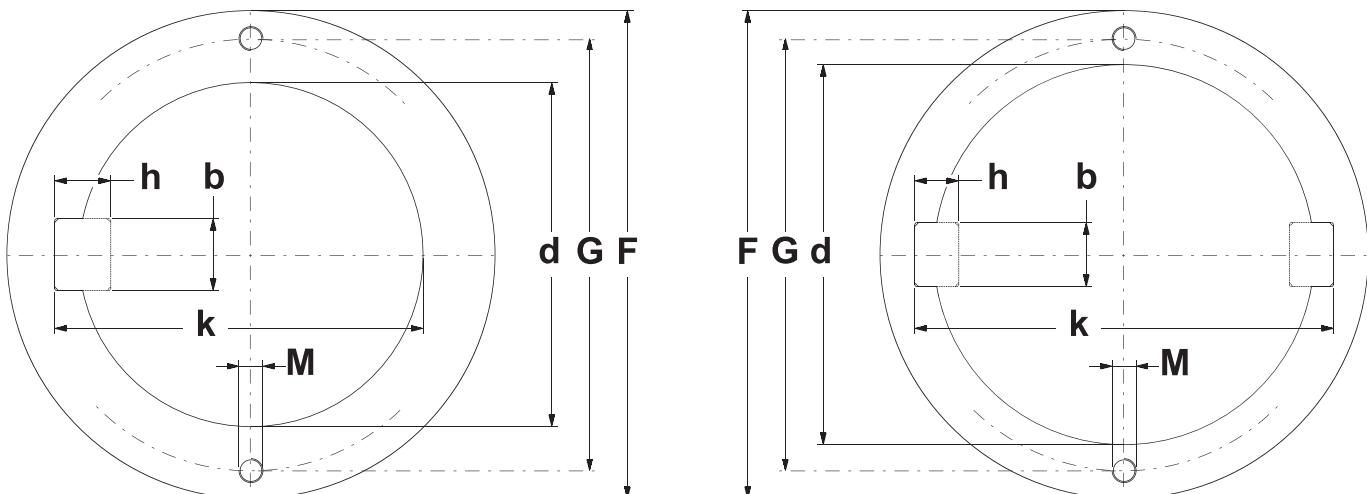



## G35 & G60 COUPLINGS

## TECHNICAL DATA

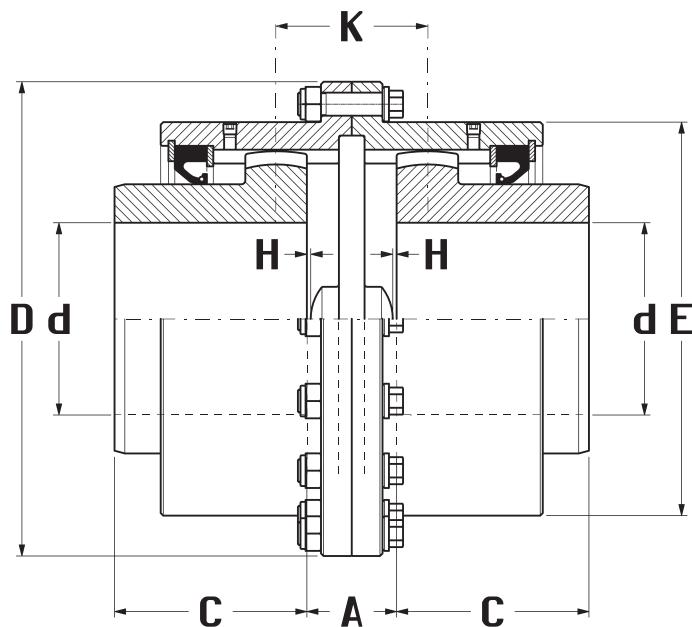


Fig. 66 - G35-F & G60-F Couplings

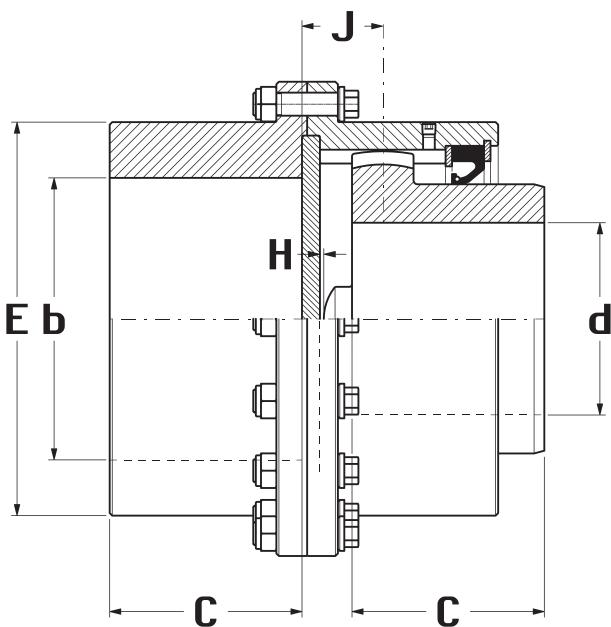


Fig. 67 - G35-FR & G60-FR Couplings

**G35 SERIES** For angular misalignment up to **3°30'**

**G60 SERIES** For angular misalignment up to **6°00'**

DENOMINATION EXAMPLE:  
G35-F GEAR COUPLING SIZE 60


**G35-F60 Coupling**

DENOMINATION EXAMPLE:  
G60-FR GEAR COUPLING SIZE 60


**G60-FR60 Coupling**

### TAB. 59

SIZE	G35 SERIES		G60 SERIES		MAX SPEED [1/min] nk	MAX [mm] d	MAX [mm] b	MAX [mm] f	DIMENSIONS [mm]							
	NOMINAL TORQUE [kNm] Tk	MAX TORQUE [kNm] Tf	NOMINAL TORQUE [kNm] Tk	MAX TORQUE [kNm] Tf					D	C	A	E	H	J	K	M
<b>10</b>	4.05	8.10	2.40	4.80	3250	44	75	50	142	55	45	104	1	32	61	105
<b>20</b>	10.3	20.6	5.95	11.9	2360	55	90	60	168	70	49	130	1	37	71	130
<b>30</b>	16.4	32.8	9.40	18.8	1810	70	110	75	200	80	55	158	2	41	77	160
<b>40</b>	29.5	59.0	17.0	34.0	1530	90	130	110	225	90	59	183	2	47	89	185
<b>50</b>	39.5	79.0	23.0	46.0	1290	100	150	130	265	105	68	211	3	52	98	215
<b>60</b>	72.0	144.0	43.0	86.0	1090	125	175	150	300	120	74	245	3	61	116	245
<b>70</b>	102.0	204.0	61.0	122.0	950	135	195	170	330	135	80	275	3	67	126	275
<b>80</b>	134.0	268.0	76.0	152.0	850	150	220	190	370	150	84	307	3	70	132	310
<b>90</b>	168.0	336.0	90.0	180.0	760	170	240	210	406	175	104	335	3	81	154	335
<b>100</b>	230.0	460.0	140.0	280.0	680	190	260	230	439	190	104	367	4	86	164	370
<b>110</b>	275.0	550.0	155.0	310.0	560	230	300	275	505	220	106	423	4	89	168	425

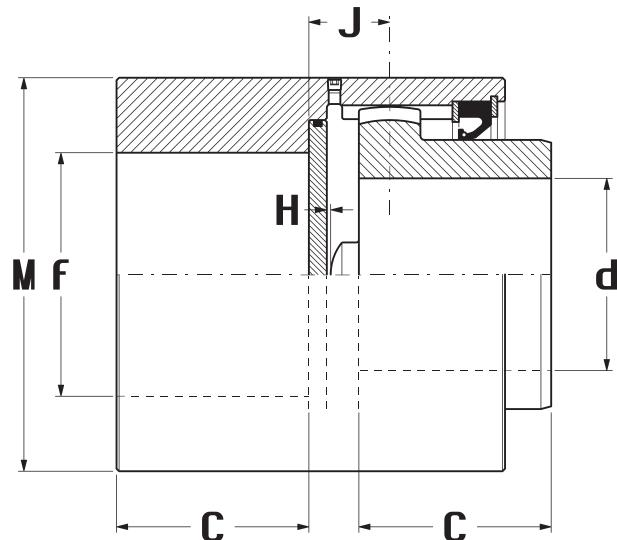

**Fig. 68 - G35-M.F & G60-M.F Couplings**

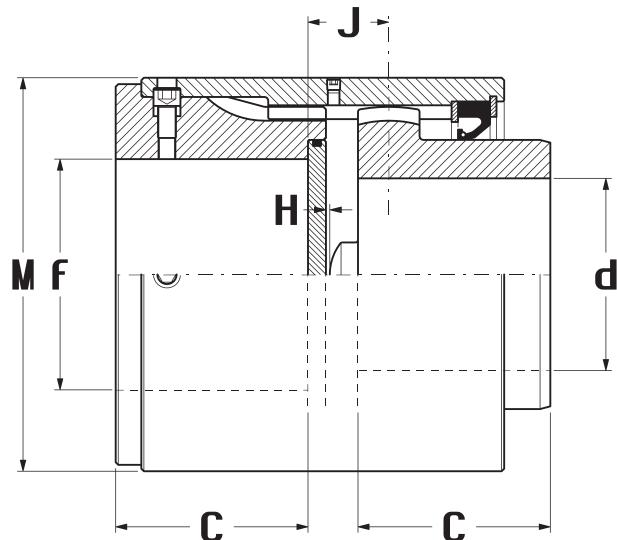


**Fig. 69 - G35-M.S & G60-M.S Couplings**




E.g. G35-FS SPACER COUPLING SIZE 60

**Fig. 70 - G35-FS60  
Spacer Coupling**

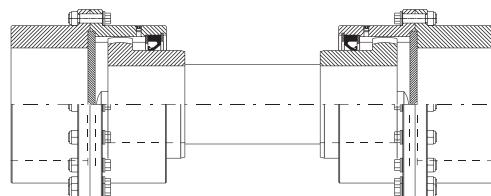


E.g. G35-FR FLOATING SHAFT COUPLING SIZE 60

**Fig. 71 - G35-FR60  
Floating Shaft Coupling**

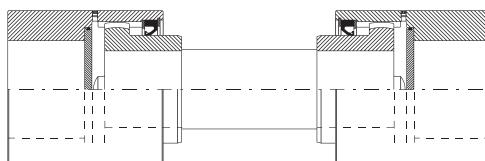


E.g. G35-M.FF FLOATING SHAFT COUPLING SIZE 60

**Fig. 72 - G35-M60.FF  
Floating Shaft Coupling**

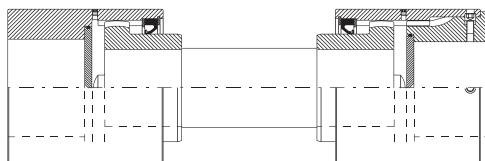

E.g. G35-M.SF FLOATING SHAFT COUPLING SIZE 60

**Fig. 73 - G35-M60.SF  
Floating Shaft Coupling**

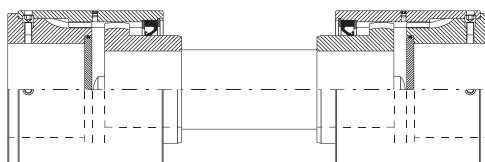


E.g. G35-M.SS FLOATING SHAFT COUPLING SIZE 60

**Fig. 74 - G35-M60.SS  
Floating Shaft Coupling**



## GTS COUPLINGS

## TECHNICAL DATA

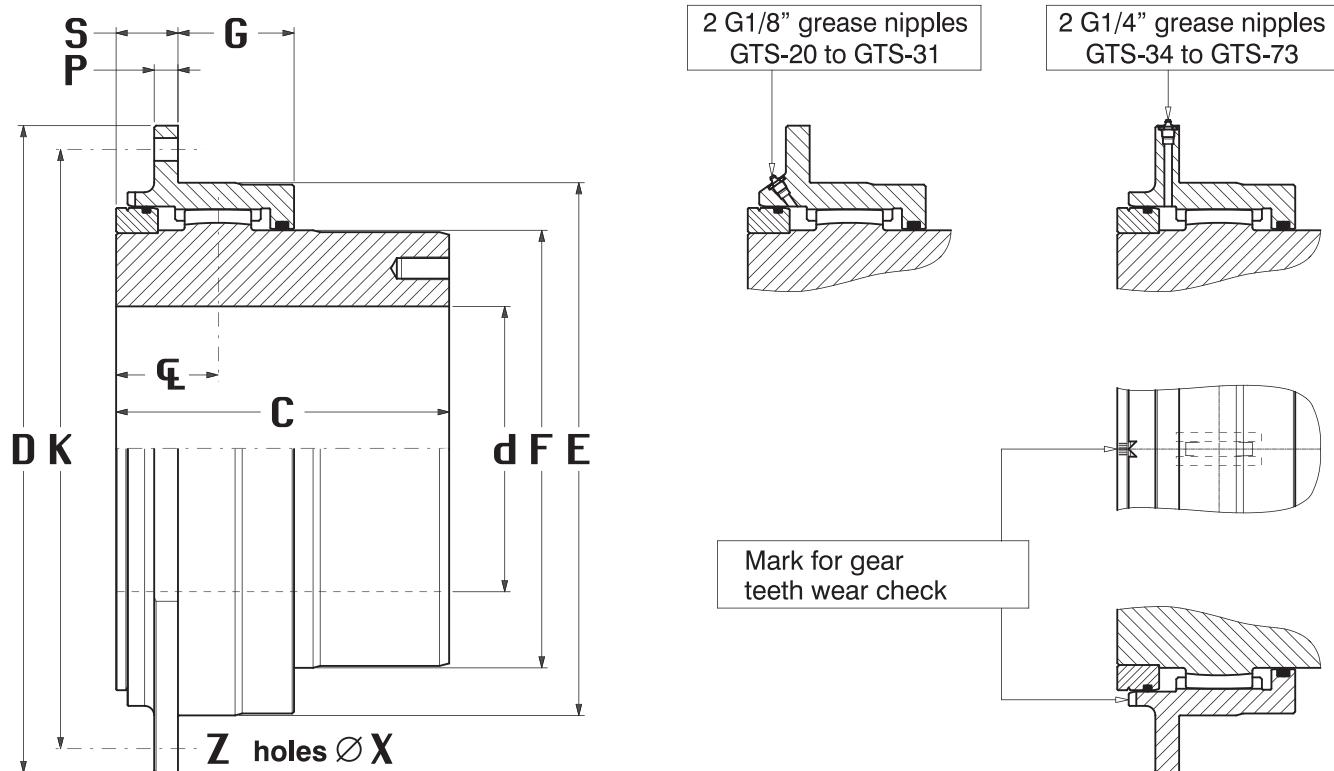

DENOMINATION EXAMPLE:  
GTS GEAR COUPLING SIZE 42

## GTS-42 Coupling

Fig. 75 - GTS Coupling

TAB. 60

SIZE	NOMINAL TORQUE [kNm] <b>T<sub>k</sub></b>	MAX TORQUE [kNm] <b>T<sub>f</sub></b>	MAX LOAD [kg] <b>Q<sub>k</sub></b>	MAX [mm] <b>d</b>	DIMENSIONS [mm]														MASS ① M [Kg]	GREASE QUANTITY [Kg]	
					D	K	Z	X	Y	S	P	G	¶	C	F	f8-H7 E	h9-F8 H	min M	min N		
<b>20</b>	21.5	32.3	3600	100	320	280	6	18	M16	45	15	47	53	110	149	200	280	10	25	28	0.15
<b>22</b>	26.7	40.1	4500	110	340	300	6	18	M16	45	15	54	55	125	165	220	300	10	25	36	0.17
<b>24</b>	32.5	48.8	5000	120	360	320	6	18	M16	45	15	54	55	130	184	240	320	10	25	44	0.18
<b>26</b>	44.5	66.8	6250	130	380	340	6	18	M16	45	15	58	57	145	196	260	340	10	25	53	0.20
<b>28</b>	58.5	87.8	7250	150	400	360	6	18	M16	45	15	65	62	170	222	280	360	10	25	73	0.26
<b>31</b>	79.0	119	10500	165	420	380	6	18	M16	45	15	67	62	175	253	310	380	10	25	96	0.28
<b>34</b>	93.0	140	13500	175	450	400	6	23	M20	60	20	73	77	185	266	340	400	10	25	120	0.32
<b>40</b>	139	209	16000	210	510	460	6	23	M20	60	20	75	77	220	317	400	460	10	25	158	0.48
<b>42</b>	168	252	21000	220	550	500	6	23	M20	60	20	82	82	240	330	420	500	10	25	223	0.58
<b>45</b>	245	367	23000	245	580	530	8	23	M20	60	20	92	87	260	368	450	530	20	40	284	0.70
<b>53</b>	370	555	29500	290	650	600	8	23	M20	65	25	107	97	315	435	530	580	25	50	466	1.10
<b>54</b>	480	720	38000	300	665	615	24	23	M20	65	25	115	102	330	450	545	590	25	50	522	1.25
<b>56</b>	560	840	44500	305	680	630	24	23	M20	65	25	122	107	350	460	560	600	25	50	574	1.40
<b>60</b>	660	990	52500	330	710	670	24	28	M24	81	35	125	123	380	500	600	640	35	60	718	1.80
<b>67</b>	840	1260	57500	375	780	730	24	28	M24	81	35	127	123	410	560	670	700	35	60	956	2.20
<b>73</b>	1200	1800	67500	410	850	800	24	28	M24	81	35	130	123	450	610	730	760	35	60	1230	2.60

NOTE 1 - Values are calculated for solid hubs



## TECHNICAL DATA

## GTS COUPLINGS

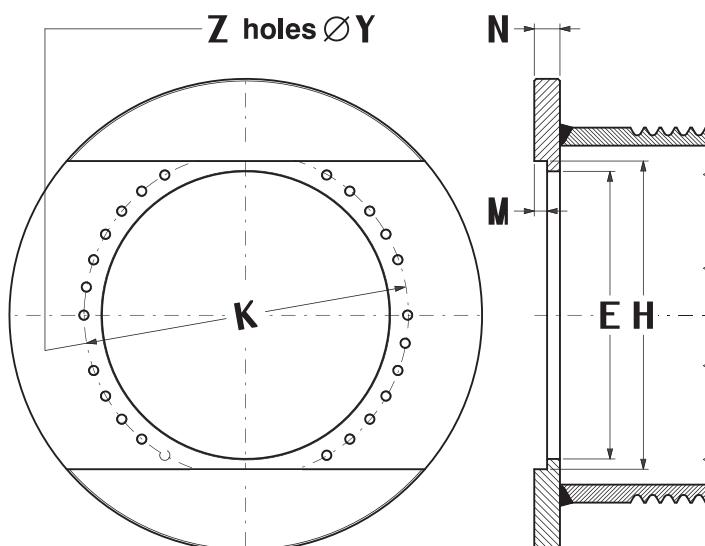
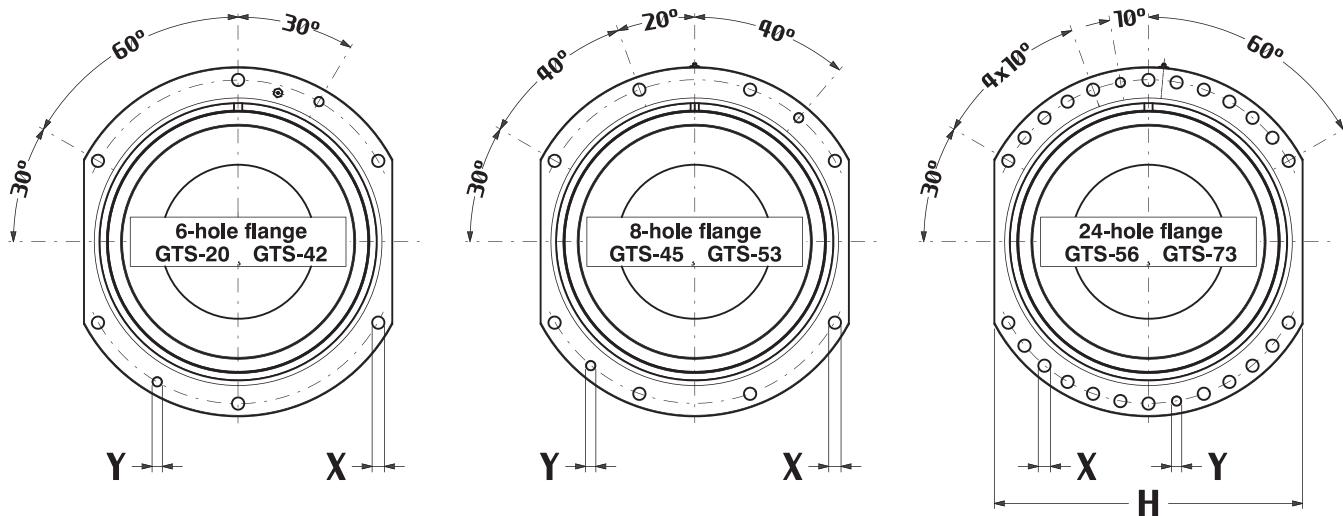


Fig. 76 - Drum Flange

## TAB. 61

Max Theoretic Total Working Life [h]	400	800	1600	3200	6300	12500	25000	50000
SAFETY CLASS (UNI 7670)	1 mC	1 mB	1 mA	2 m	3 m	4 m	5 m	5 m
SERVICE FACTOR FS	1.00	1.12	1.25	1.40	1.60	1.80	2.00	2.50


## GEAR COUPLING SELECTION

LOAD DATA:	$T_n$ = MAX TORQUE ON THE DRUM	[kNm]
$Q$	= MAX RADIAL LOAD ON THE GEAR COUPLING	[kg]
$D$	= SHAFT DIAMETER	[mm]
FS	= SERVICE FACTOR (TAB. 61)	[ $\cdot$ ]
VERIFY THAT:	GEAR COUPLING NOMINAL TORQUE	$T_k$ [kNm] $\geq T_n \times FS$
	MAX GEAR COUPLING RADIAL TORQUE	$Q_k$ [kg] $\geq Q$
	MAX GEAR COUPLING BORE	$d$ [mm] $\geq D$



## INSTALLATION, USE & MAINTENANCE

### LIST OF COMPONENTS

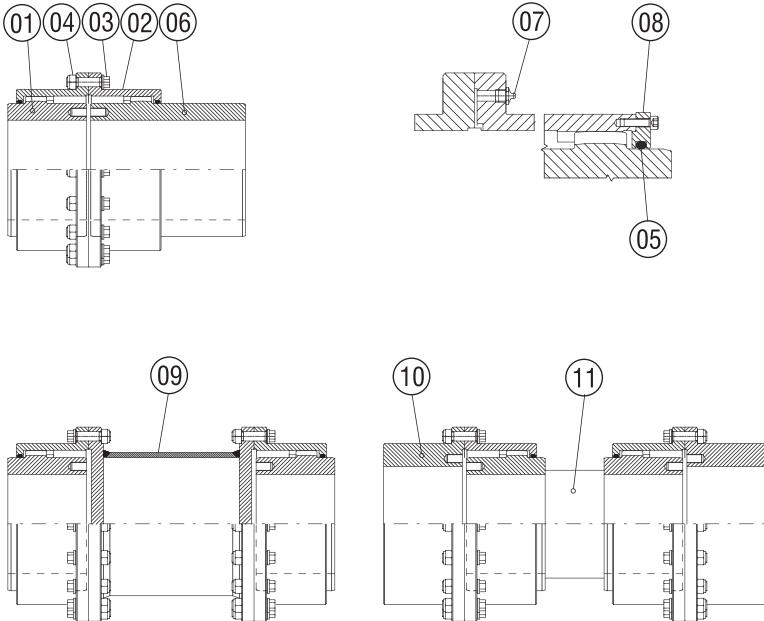

- |    |                            |
|----|----------------------------|
| 01 | Standard Hub               |
| 02 | Flanged Sleeve             |
| 03 | Set Screw                  |
| 04 | Hexagonal Self-locking Nut |
| 05 | Seal Gasket                |
| 06 | Longer Hub                 |
| 07 | Lube Fitting or Lube Plug  |
| 08 | Removable Side Flange      |
| 09 | Tubular Spacer             |
| 10 | Rigid Hub                  |
| 11 | Floating Shaft             |

### THESE INSTRUCTIONS ARE NECESSARY TO ENSURE A LONG LIFETIME OF OUR GEAR COUPLINGS

These general instructions are applicable to all our gear couplings. More specific and detailed instructions are provided with the goods. To perform all the required operations, use the necessary time and carefully check the work done. Please remember that all the mechanical machinings, like bore and keyway finishing, and the operations of lifting, handling, assembly, hub shrinkfitting, installation, alignment, lubrication and maintenance, must be performed by qualified, well trained and expert personnel only.

### INSTALLATION

- 1 - Keep the gear couplings in a proper non-corrosive environment, protected from dust, humidity and bad weather. Every 6 months, repeat the anticorrosive protection treatment on the machined surfaces.
- 2 - Before use, remove the gear coupling from the package and check its condition.
- 3 - Before installation, disassemble the gear coupling in its main components, remove the anticorrosive coat from the machined surfaces and clean the bore surfaces carefully. If toxic chemicals are used for the cleaning operations, follow prescribed safety measures. NEVER USE CORROSIVE PRODUCTS.
- 4 - If the finish bore operations are to be performed, verify that they conform to the dimensional and geometrical tolerances, defined in the specifications and in the drawings (see also AGMA 9002-A26).
- 5 - When working next to a rotating device, always follow safety procedures: verify that the unit is off and that it cannot restart until the work is finished. Carefully check the safety conditions. The personnel must wear proper clothing, which cannot get caught on the mechanical components.
- 6 - In order to facilitate the handling and lifting of the gear couplings

and their components, screw the eyebolts in their bores, employing the required tools and operating in the max safety conditions. Before handling and lifting, verify the weights of the units and the position of their barycenter, checking with the catalogue and/or the drawings. During the handling operations, avoid any impact which may damage the machined components. Use procedures and handling and lifting devices which do not damage the gear couplings and their components.

- 7 - The gear couplings, when operating under load, offer a resistance to the axial slide (translation). An axial force proportional to the transmitted torque contrasts this movement, and its entity is directly related to the primitive diameter of the gear teeth and to the value of the dynamic friction coefficient.

The reaction force is obtained as follows:

Where:  $-Fa = \text{Axial force [kN]}$   
 $-Tn = \text{Drive Nominal Torque [kNm]}$   
 $-Dp = \text{Primitive Diameter of the gear teeth [m]}$   
 $-\mu = \text{Friction Coefficient (from 0.01 to 0.15), depending on the lubrication condition. In particular emergency conditions the value } \mu = 0.30 \text{ can be taken.}$



## INSTALLATION, USE & MAINTENANCE

- 8 - A slight interference of approx. the 0.5/1000 of the diameter is recommended for the hub key shrinkfitting operations. The following tolerances are suggested: H7 for the hole and m6-r6 for the shaft. Furthermore, after shrinkfitting, the keys must remain fixed in position on their flanks, using the tolerance P9 for the keyways. For standard keys in standard hubs, with the nominal load condition and heavy, unidirectional duty, it is preferable not to exceed a specific pressure on the flanks of 160 [N/mm<sup>2</sup>].
- 9 - For keyless shrinkfittings, interferences from the 1/1000 to the 2.5/1000 of the diameter are employed, using a tolerance of H7 for the hole and s6-x6 for the shaft, or special fits. In this case always contact MAINA engineering staff who, in accordance with the type of shrinkfitting and the technical agreements, will evaluate the torque transmittable at the slipping as well as the stress generated in the hub, according to AGMA 9003-A91. In case of shrinkfittings with high interference on the flex hubs with working gear teeth, the external diameter of the gear teeth must always be reduced by a suitable dimension. The threaded holes, for fitting the oil pressure removal devices, and the shape of filling holes and grooves are usually executed in accordance with SKF prescriptions. Shrinkfittings can be cylindrical, cylindrical with double diameter, conical, conical with interposed bush. Conical shrinkfittings are suitable for hydraulic assembly.
- 10 - Uniformly heat the hubs, placing them either in an air furnace or in an oil bath, both with thermostatic control. It is also possible to heat the hubs by open flame, taking care not to generate overheatings and frequently checking the temperature with suitable and precise devices. Employing the flame, heat the outer side of the hubs, carefully avoiding to direct it on the gear teeth; work in max safety condition, far from flammable materials or substances.
- 11 - The heating temperatures must be evaluated considering an expansion which generates a clearance between hole and shaft of the 1÷1.5/1000 of the diameter. The heating temperatures, depending on the shrinkfitting interference, are 110-130°C for key shrinkfittings and 180-250°C for keyless shrinkfittings. Never exceed 320°C.
- 12 - After the hub heating, wearing suitable thermal insulated clothing, clear the hole seat of the carbon residual, using a proper cleaning paper instead of common rags. After cleaning, measure the entity of the expansions. Afterwards, lubricate holes and hub surfaces with pure mineral oil without additives. In case of shrinkfittings with a friction coefficient  $\mu \geq 0.15$ , follow our specifications (PFB 1202).
- 13 - Before shrinkfitting the hub, check that the flanged sleeves or the removable side flanges are correctly positioned on the shafts. Verify the seal integrity of these components and check that the seals are correctly inserted in their seats.
- 14 - During the shrinkfitting operations, avoid any contact between the hot hub surfaces and the rubber seals. Position the gear sleeves or the side flanges on the hubs only when the hub temperature goes below 60°C.
- 15 - Position the machines to be connected so that the axial distance between the hubs (or between the heads of the shafts) complies and is in tolerance with the dimension A shown in the catalogue or on the drawings. Obviously, this dimension has to be in

accordance with any possible expansion or axial movements/strokes of the connected shafts or to the axial clearance limiting devices. Moreover, to allow the half coupling additional alignment operations, the gear hubs must have the capability to move back so as to show a part of the hub; the minimum necessary movement is referred to as "cA" in TAB I. To make both the assembly and alignment operations and the additional gear teeth checks easier, it should be possible to move the gear sleeves back as far as they withdraw from the gear teeth. If there is not enough space, we recommend requesting gear couplings equipped with removable side flanges. To remove the gear couplings without moving the connected units, request couplings equipped with intermediate spacer.

- 16 - Perform the angular and parallel alignment of the half couplings and of the connected machines. To assure long coupling gear teeth lifetime it is better to assure that, after the machines alignment operation and in dynamic working conditions, the initial residual misalignment between the two half couplings is very close to the 1/1000 of the coupling gear teeth distance  $C$ . The max admissible limit is defined for every kind of gear couplings as the max dynamic angle value. This must always be lower than the allowed angle depending on the max working speed (see Kv diagrams). Secure the machines to their foundations and frames, tightening all the locking bolts and nuts. After this operation, check the half coupling alignment again.
- 17 - Assemble the gear sleeves and the side flanges on the hubs, carefully avoiding any seal damage, then fill the half coupling with grease by a spatula.
- 18 - Close the gear couplings, assembling all their components and devices. To assure a perfect fitting, apply a light coat of mastic on the flanges before closing them. During the assembly operations, respect the mutual position of the components; follow the assembly marks showing the right alignment and orientation of the hubs.
- 19 - Screw the main flange connection bolts, carefully tightening them at the torques shown in TAB IV. Carefully screw and tighten all the remaining bolts.
- 20 - For high-speed gear couplings dynamically balanced, in order to maintain the balancing condition with a reduced residual imbalance, besides observing the assembly marks used during the balancing operations, it is also recommended to respect the position of the bolts which, in this case, must not be replaced or mixed.
- 21 - Complete the lubrication through the grease nipples or the conical plugs. Do not exceed 15÷20 bar of pressure. Verify that the floating part of the gear coupling (gear hubs and spacers) is able to move axially of the dimension H (see TAB 1).
- 22 - Check the tightening of all bolts and screws, grease nipples and/or plugs.
- 23 - Before starting the machines, place proper safety protections around the gear coupling.
- 24 - After the start-up, the foundation settling and a suitable period of working at the max torques, speed and different temperatures (for a period of about 6 months), check the wear, verify and revise, if necessary, the alignment condition.

**GEAR COUPLINGS ARE POTENTIALLY DANGEROUS DEVICES, WHEN ROTATING, AND MAY CAUSE INJURY OR DAMAGE, THEREFORE THEY MUST BE PROPERLY SHIELDED. SAFETY REGULATIONS PROVIDE THAT THE ROTATING PARTS OF THE MACHINES ARE PROTECTED BY FIXED SHIELDS. AVOID ANY UNINTENTIONAL CONTACT AND PROTECT FROM THE OBJECTS OR LUBRICANT SPATTERING. SHIELDS MUST BE MANUFACTURED BY THE USER ACCORDING TO APPLICABLE GOVERNMENT REGULATIONS.**



## INSTALLATION, USE & MAINTENANCE

### CORRECT ALIGNMENT IS ESSENTIAL TO ENSURE A LONG OPERATING LIFETIME

The initial static no-load alignment condition (machines off) must consider what will happen under load (dynamic condition). This means that it should be also able to compensate the misalignments generated by load and temperatures (see point 16 of INSTALLATION INSTRUCTIONS).

Check the alignment condition of the half couplings, using for this purpose a modern laser equipment. In this case, to perform the alignment operations, the instructions for the use of the equipment have to be followed. Should you not have this equipment, use a thickness gauge or an inside micrometer with extension and a centesimal test indicator (with proper support elements). In this case, depending on the gear coupling type, proceed as indicated below.

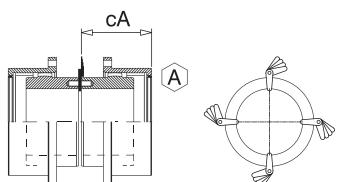


Fig. 01

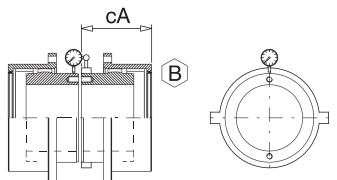


Fig. 02

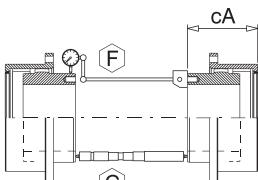


Fig. 03

① - Determine the angular misalignment value processing, in accordance with the tables, the measurements of the head parallelism between the reference frontal surfaces of the two hubs. For this purpose, by inserting the thickness gauge between the heads of the two hubs, perform a first 360° test to identify the position and the min and max entity of the distance between the hubs. After defining the extreme positions, perform a precise measurement of 4 points at 90°, like **A** in FIG.01. The max difference between two values at 180° is  $\Delta A$

Determine the parallel misalignment value processing, according to the tables, the mutual eccentricity between the reference diameter of the two hubs. For this purpose, rigidly fasten the test indicator on a band in two halves to the reference diameter of a hub, like **B** in FIG.02.

Verify that the whole unit, during a 360° rotation, does not have any clearance, afterwards measure the min and max eccentricity. The max difference is  $\Delta P$

② - For gear couplings with tubular spacer or with floating shaft, check the head parallelism between the hubs reference surfaces, using an inside micrometer positioned like **C** in FIG.03 or a comparator positioned like **D** in FIG.04 or **E** in FIG.05. The max difference between two values at 180° is  $\Delta A$ . The hub eccentricity is measured by a comparator, positioned like **F** in FIG.03, **G** in FIG.04 or **H** in FIG.05. The max difference is  $\Delta P$ . Gear couplings with spacer, having a long distance between the gear teeth, require an alignment accuracy lower than the normal gear couplings do.

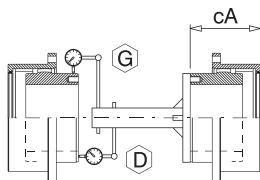


Fig. 04






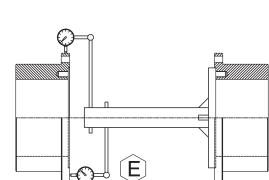


Fig. 05

According to the parallelism and coaxiality values  $\Delta A$  and  $\Delta P$  verify the alignment as follows.

See TAB. I for the values of: distance between the gear mesh **c**, hub diameter **F**, alignment length **cA** and hub axial slide **H**

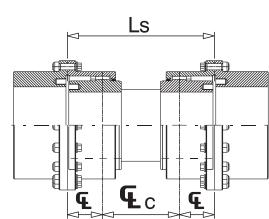

$$\begin{aligned} \mathbf{c}_a &= 2\mathbf{c} \\ \alpha P^\circ &= \text{arc tg} \left( \frac{\Delta P}{\mathbf{c}_a} \right) \\ \alpha A^\circ &= \text{arc tg} \left( \frac{\Delta A}{F} \right) \end{aligned}$$

$$\begin{aligned} \mathbf{c}_b &= L_s + 2\mathbf{c} \\ \alpha P^\circ &= \text{arc tg} \left( \frac{\Delta P}{\mathbf{c}_b} \right) \\ \alpha A^\circ &= \text{arc tg} \left( \frac{\Delta A}{F} \right) \end{aligned}$$

$$\begin{aligned} \mathbf{c}_c &= L_s - 2\mathbf{c} \\ \alpha P^\circ &= \text{arc tg} \left( \frac{\Delta P}{\mathbf{c}_c} \right) \\ \alpha A^\circ &= \text{arc tg} \left( \frac{\Delta A}{F} \right) \end{aligned}$$

$$\Delta A = a_2 - a_1$$

$$\alpha T^\circ = \text{arc tg} \sqrt{(\text{tg } \alpha A)^\circ + (\text{tg } \alpha P)^\circ}$$

$$\alpha T^\circ \leq \alpha D^\circ \text{ (Max Dynamic Angle)}$$

$$\alpha D^\circ = 0^\circ 10' \text{ - Standard GO-A Couplings}$$

$$\alpha D^\circ = 0^\circ 15' \text{ - GO-A Couplings with N.O. & GO-A.HT}$$

$$\alpha D^\circ = 0^\circ 15' \text{ - GO-B & GO-B.HT Couplings}$$

$$\alpha D^\circ = 0^\circ 30' \text{ - G20 Couplings}$$



## INSTALLATION, USE & MAINTENANCE

**TAB. I**

GO-A SIZE	C	F	cA	H
0	24	69	55	1.5±0.5
1	29	85	62	1.5±0.5
2	30	107	74	1.5±0.5
3	44	133	86	2.5±0.5
4	57	152	100	2.5±0.5
5	66	178	115	3±0.5
6	76	209	130	3±0.5
7	86	234	145	4±0.5
8	100	254	160	4±0.5
9	114	279	175	4±0.5
10	124	305	190	4±0.5
11	146	355	220	5±0.5

GO-B SIZE	GO-B C	F	cA	H	AO-B C
4	155	400	251	9±1	63
5	175	450	275	9±1	67
6	190	490	292	9±1	69
7	205	550	310	9±1	72
8	215	610	322	9±1	74
9	230	650	345	15±1.5	80
10	240	680	357	15±1.5	82
11	255	750	376	15±1.5	86
12	270	790	415	22±2	93
13	295	870	444	22±2	97
14	335	1000	490	22±2	103
15	370	1100	537	30±3	112
16	410	1220	598	30±3	118
17	440	1310	632	30±3	122
18	470	1400	665	30±3	125
19	510	1520	710	30±3	130

**ALIGNMENT DIMENSIONS**

G20 SIZE	C	F	cA	H
12	54	105	108	6±1
14	65	128	121	6±1
17	75	152	133	6±1
19	83	170	146	9±1
23	96	206	162	9±1
26	108	242	177	9±1
30	122	274	207	12±1
35	137	322	226	12±1
40	152	370	255	12±1
46	170	420	280	15±1.5
52	187	480	301	15±1.5
58	203	540	321	15±1.5

### PROPER LUBRICATION IS ESSENTIAL TO ENSURE A LONG OPERATING LIFETIME

- After the hub shrinkfitting and the positioning of the gear sleeves and side flanges, fill with grease all the spaces between hubs and sleeves using a spatula. After closing the gear coupling, apply a light coat of mastic on the flange connection surfaces.
- Tighten all the screws at the required torques (see TAB IV) then complete lubrication using all the grease nipples and/or plugs (2 for each half coupling).
- When lubricating through the grease nipples, verify that the grease is really filling the gear coupling; should the grease enter the coupling with difficulty, open a breather by removing a plug or a grease nipple.
- At the end of the lubrication, check that the gear coupling is completely filled with grease, then insert the plugs and/or the grease nipples checking their tightening.
- Regularly, every 3-4 months, relubricate the gear couplings. We suggest this initial time interval in case of integral seals, industrial applications, non corrosive environment, medium and heavy duty, room temperatures from 0 to 70°C. After the first working and observation year and after checking the results, time intervals can be extended up to 6 months. For different conditions, the time intervals between lubrications can still be extended, but they must never be longer than 12 months.
- When lubricating, totally replace grease. To let all the old grease out, remove a plug or a grease nipple at 180° from the new grease filling point and pump the new grease until this comes out from the breather. At the end of this operation, insert the plugs and/or grease nipples, checking that they are properly tightened.
- Always check that the floating part is axially free. If no movement is possible, open the gear coupling and check the gear teeth.
- Every 8000 working hours or maximum every two years, completely replace the grease. When doing this operation, you must open the gear coupling, clean the flange surfaces, remove the old grease, clean the interstices, check the gear teeth condition and then perform the operations shown in steps 1 to 4. Never use contaminated grease, or grease which is not suitable for the working conditions.

To separate the two flanges of the gear hubs never use tools which may damage the integrity of the seal surfaces.

To lubricate the gear couplings and their gear teeth, use lithium soap greases, with EP additives, centrifugation resistant, non hygroscopic and antioxidant, with minimum features comparable to what is shown in TAB II. Further details are contained in AGMA 9001-A86 instructions.

For all the conditions below, select the proper grease directly contacting the lubricant manufacturer and submit the chosen grease features to MAINA Technical Department for acceptance.

- Extreme duty condition
- Very heavy and/or reversible duty
- Extreme rotation speed
- Extreme working temperature
- High humidity environment
- "LONG-LIFE" lubrication

For information only, TAB III shows some brands and names of grease suitable to lubricate gear couplings operating in condition of medium speeds, loads and duties, and temperatures from -20 to +70°C.

**TAB. II**

LUBRICANT FEATURES		
Working Temperature	ASTM Penetration Index	NLGI Grade
≥ -20°C ≤ 30°C	350 , 380	0
≥ 30°C ≤ 70°C	300 , 350	1
≤ -20°C	Please contact	
≥ 70°C	our technical department	

**TAB. III**

RECOMMENDED LUBRICANTS			
AGIP	GR-MU EP	IP	ATHESIA EP
CHEVRON	DURA-LIGHT EP	MOBIL	MOBILTEMP 78
MONTESHELL	ALVANIA EP	ESSO	BEACON EP

NEVER MIX DIFFERENT KINDS AND/OR DIFFERENT BRANDS OF GREASE. THEY MAY BE INCOMPATIBLE AND MAY VOID THE LUBRICATION FEATURES OTHERWISE STATED, NEVER USE OIL TO LUBRICATE GEAR COUPLINGS.



## INSTALLATION, USE & MAINTENANCE


**TAB. IV**

GO-A SIZE	Seals OR. TN414	Tightening Torque (Nm)
0	OR 68	18
1	OR 85	36
2	OR 107	36
3	OR 133	65
4	OR 152	65
5	OR 177	150
6	OR 209	150
7	OR 234	150
8	OR 253	220
9	OR 279	400
10	OR 304	400
11	OR 355	520


GO-A SIZE	Seals TN559	Tightening Torque (Nm)
3	12.136	38
4	12.160	38
5	12.200	38
6	12.220	65
7	12.254	65
8	12.278	155
9	20.314	155
10	20.346	155
11	20.378	520

**SEAL GASKETS & TIGHTENING TORQUES**


GO-B SIZE	Seals GDL. TN559	Tightening Torque (Nm)
4	20.440	670
5	20.490	670
6	20.530	1250
7	20.590	1250
8	20.650	1250
9	20.690	2170
10	20.720	2170
11	20.790	2170
12	30.850	3480
13	30.930	3480
14	30.1060	5230
15	30.1160	5230
16	40.1300	5230
17	40.1390	8300
18	40.1480	8300
19	40.1600	8300

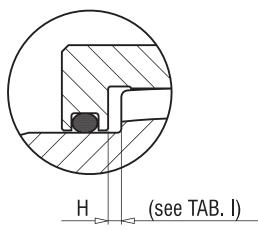

OR seal  
type TN414

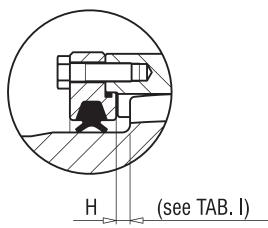


Extraction holes  
2 at 180°  
for half coupling




Double-lip seal  
type TN559

Grease nipples  
2 at 180°  
for half coupling




**GO-A**

Conical plugs  
2 at 180°  
for half coupling




**GO-A.HT**

Conical plugs  
2 at 180°  
for half coupling




**GO-B**

Conical plugs  
2 at 180°  
for half coupling



**A0-B**

Conical plugs  
2 at 180°  
for half coupling




















**G20**

**TAB. V**

**EXTRACTION HOLES, 2 AT 180° FOR HALF COUPLING**


GO-A SIZE	Holes M	Dia. Cf	GO-A SIZE with seals TN559	Holes M	Dia. Cf	GO-B SIZE	Holes M	Dia. Cf	G20 SIZE	Holes M	Dia. Cf
* 0	M5	61	3	M10	98	4	M24	350	12	M10	90
* 1	M6	73	4	M10	118	5	M24	400	14	M10	110
* 2	M8	91	5	M10	154	6	M30	430	17	M10	130
* 3	M10	115	6	M12	170	7	M30	490	19	M12	145
* 4	M12	132	7	M12	200	8	M30	550	23	M12	175
* 5	M12	154	8	M16	220	9	M36	580	26	M16	205
6	M16	180	9	M16	237	10	M36	600	30	M16	235
7	M16	204	10	M16	266	11	M36	670	35	M16	280
8	M20	220	11	M24	294	12	M42	710	40	M24	320
9	M20	240				13	M42	790	46	M24	360
10	M24	268				14	M48	900	52	M24	410
11	M24	316				15	M48	1000	58	M24	460
* Only on demand											
						16	M48	1120			
						17	M56	1190			
						18	M56	1280			
						19	M56	1400			

## BORE DESIGNS

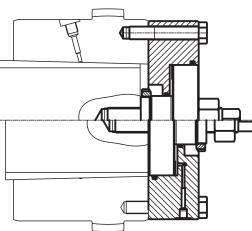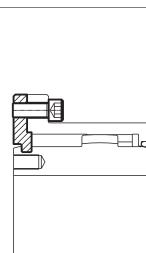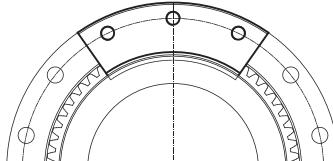
		<b>F01</b> Cylindrical Bore, 1 Keyway			<b>F11</b> Tapered bore for keyless fitting and oil pressure removal
		<b>F02</b> Cylindrical Bore, 2 Keyways at 90°			<b>F12</b> Tapered bore for keyless fitting and oil pressure removal
		<b>F03</b> Cylindrical Bore, 2 Keyways at 180°			<b>F13</b> Tapered bore with tapered bush for keyless fitting and oil pressure removal
		<b>F04</b> Cylindrical Bore, 2 Keyways at 120°			<b>F14</b> Hydraulic device for fitting and oil pressure removal
		<b>F05</b> Tapered Bore, 1 tapered Keyway			<b>F15</b> DIN 5480 splined bore without centerings
		<b>F06</b> Tapered Bore, 2 tapered Keyways at 180°			<b>F16</b> DIN 5480 splined bore with centerings diameters
		<b>F07</b> Tapered Bore, 1 straight Keyway			<b>F17</b> Rotating hub centering device with disconnected machines
		<b>F08</b> Tapered Bore, 2 Straight Keyways at 180°			<b>F09</b> Cylindrical Bore for keyless fitting and oil pressure removal
		<b>F10</b> Cylindrical Bore with 2 diameters, for keyless fitting and oil pressure removal			<b>F17</b> Rotating hub centering device with disconnected machines




## SPECIAL DESIGNS

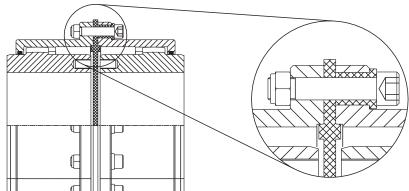


**GO-A.IE Couplings**  
insulated couplings

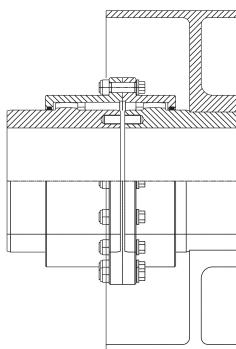


**GO-A.FFX Couplings**  
with brake pulley or brake disc

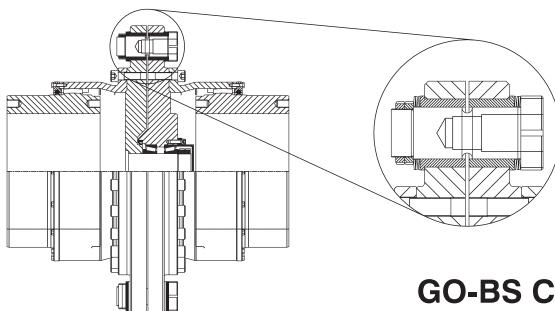


**GO-BS Couplings**  
with shear pin safety device

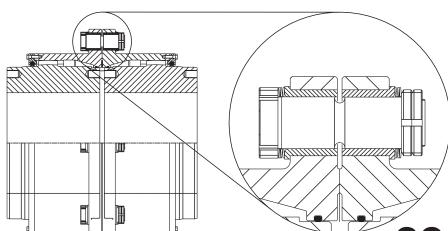


**GO-BPR Couplings**  
with breaking pins

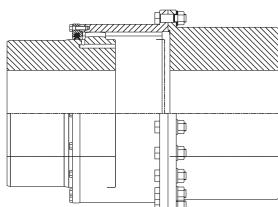


**GO-BSC Couplings**  
for axial slide

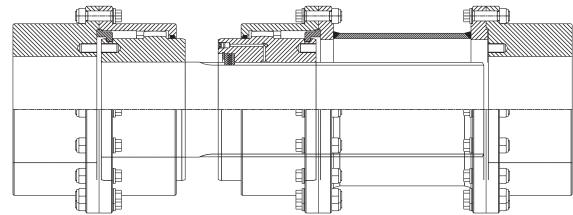


**AO-FASC.X Spacer Couplings**  
telescopic for high axial slide

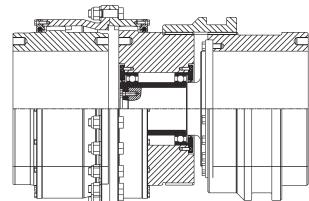

**GO-BH.RO Couplings**  
disengageable with idle part running on bearings

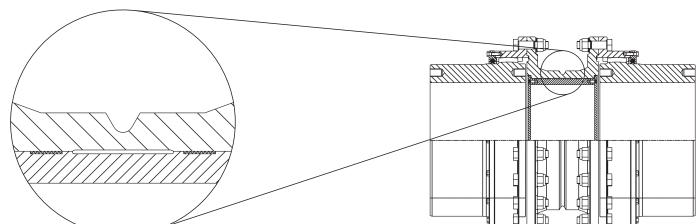

**GO-B.BS Couplings**  
with breaking spacer

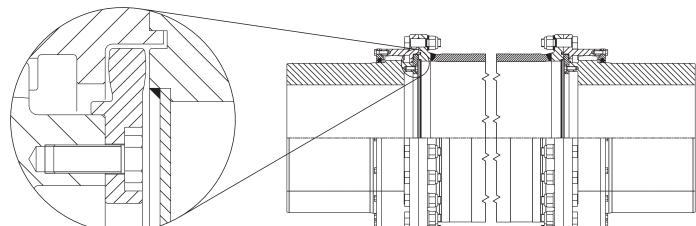

**GO-B.LG Couplings**  
with spacer and limited end float

MAINA Organi di Trasmissione S.p.A. reserves the right to change, without prior notice the technical information contained in this catalogue.  
Any unauthorized reproduction thereof, even partial, violating the copyright, will be legally prosecuted.





MAINÀ ORGANI DI TRASMISSIONE S.P.A. Corso Alessandria, 160 Asti (AT), 14100 Italy  
P: +39.0141.492811 F: +39.0141.492873 info@maina.it www.maina.it