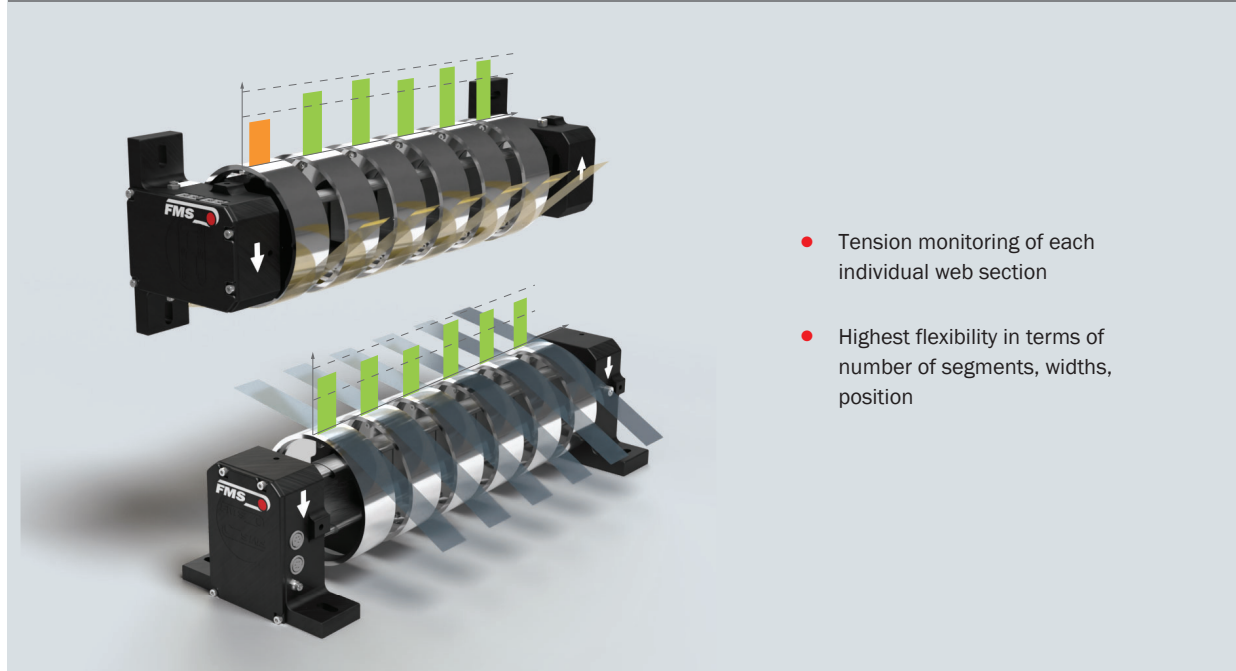


## **FMS-segFORCE® Compact measuring roller with multiple, independent force sensors**


- 
- FMS-segFORCE Analysis Tool**
- Connective Master  
Roller
- Single Segment view      Grouped Segment view
- |                          | Pos. 1 | Pos. 2 | Pos. 3 | Pos. 4 | Pos. 5 | Pos. 6 | Pos. 7 | Pos. 8 | Pos. 9 | Pos. 10 | Pos. 11 | Pos. 12 | Pos. 13 | Pos. 14 |
|--------------------------|--------|--------|--------|--------|--------|--------|--------|--------|--------|---------|---------|---------|---------|---------|
| Force [N]                | 13.2   | 27.3   | 28.1   | 22.8   | 30.2   | 18.3   | 10.2   | 18.9   | 22.2   | 30.2    | 18.1    | 22.3    | 8.3     | 28.8    |
| Speed [mm/s]             | 3.5    | 3.5    | 3.5    | 3.5    | 3.5    | 3.5    | 3.5    | 3.5    | 3.5    | 3.5     | 3.5     | 3.5     | 3.5     | 3.5     |
| Speed pulse Status 1/2/3 | 0/0/0  | 0/0/0  | 0/0/0  | 0/0/0  | 0/0/0  | 0/0/0  | 0/0/0  | 0/0/0  | 0/0/0  | 0/0/0   | 0/0/0   | 0/0/0   | 0/0/0   | 0/0/0   |
| Group No.                | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0      | 0       | 0       | 0       | 0       | 0       |
- Start recording
- Record file name
- MB
- Pressure 452 495 kPa
- Total Force [N] 522.8
- Alarm Temperature -1 °C
- Force [N]
- Speed [mm/s]
- Speed pulse Status 1/2/3
- Group No.

The force measuring roller of the FMS-segFORCE system consists of a rigid axis that holds the individual segments. The segments are slidable along the axis. The total number of segments, their width and their lateral position can be selected according to the individual requirements of the machine or the process. The secure locking of the segments on the axis is realized by means of pneumatics via a connector on one of either pillow block type brackets. Power supply and sensor signals are routed wirelessly over the axis. Automatic contacts allow for easy and quick re-adjustment of the lateral position of each segment for the required application. Universal installation of the measuring roller is provided by the two pillow block type brackets. The central electronics as well as the connectors for power supply and pressure air is also located in one of these two brackets. A RJ45 socket is available for the data transfer. Measuring signals can be directly transferred to the PLC or display on any computer with a dedicated software.

**FMS-segFORCE** : Slitter / rewinder

- Tension monitoring of each individual web section
- Highest flexibility in terms of number of segments, widths, position

Schematic of two measuring rollers in the slitter / rewinder. The offset of the individual segments from the lower to the upper measuring roller can be seen clearly. Smallest differences in tension between the individual web sections quickly become visible. The sophisticated design allows all types of wrap angles to be covered. Flexible segment widths and freely adjustable distances between the segments make it possible to configure the measuring rollers for a wide variety of slitting widths.

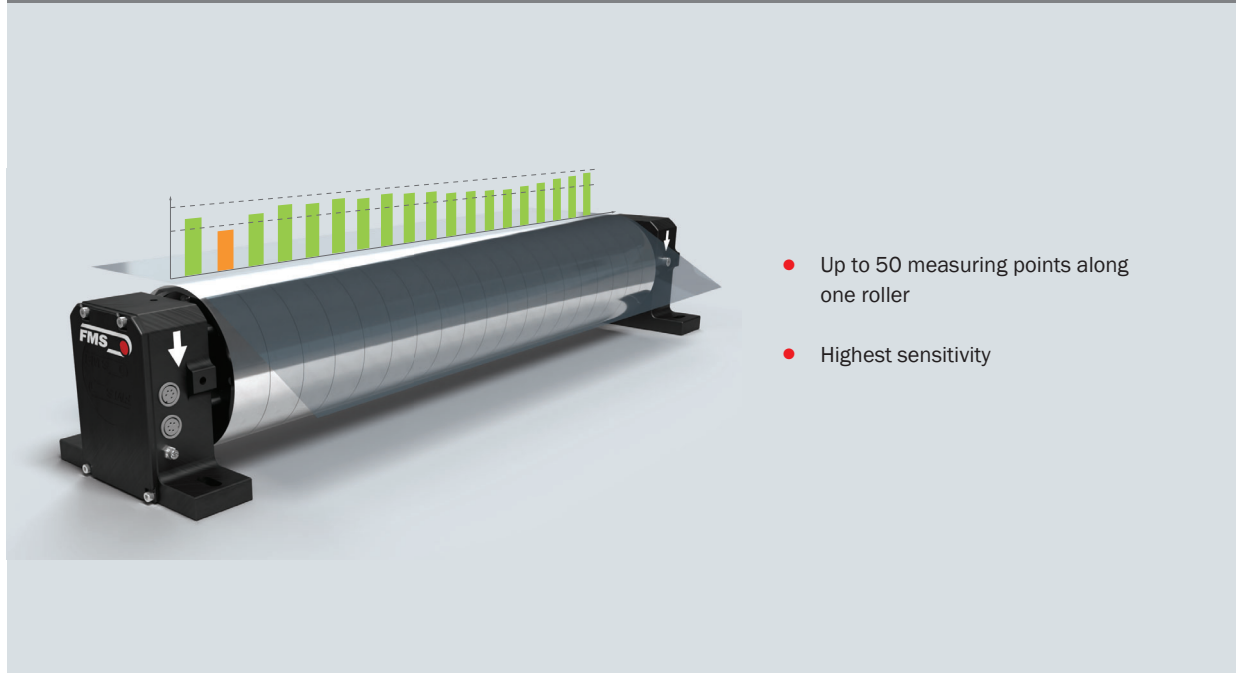
**FMS-segFORCE** : Coating line

- Up to 50 measuring points along one roller
- Highest sensitivity

Fully equipped segmented measuring roller with brackets (type P pillow block) for universal mounting on the machine frame. Only a 24 (18 to 38) VDC power supply and a compressed air connection are required. Data connection is realized with an RJ-45 socket.

**FMS-segFORCE** : Data display and processing – slitter / rewinder

**FMS-segFORCE Analysis Tool**

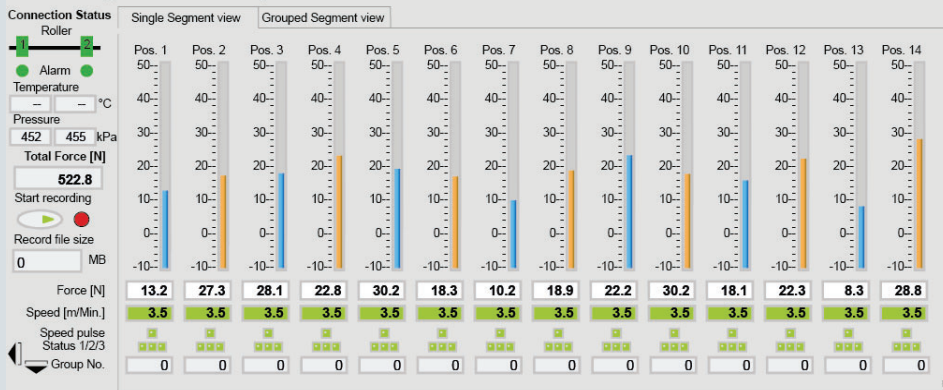



- Quick detection of faulty winding or differential friction shafts
- Clear display of different tension values of the individual webs
- Tension monitoring of up to 50 individual sections

Measuring values of the individual segments.

The different color of the bar graphs shows the affiliation to the respective measuring roller.

**FMS-segFORCE** : Data display and processing – Coating line

**FMS-segFORCE Analysis Tool**

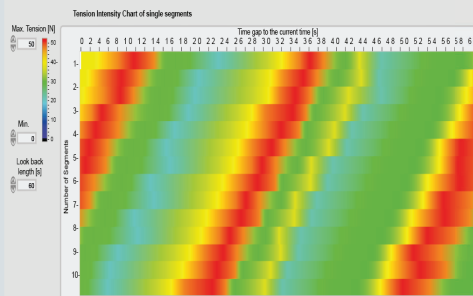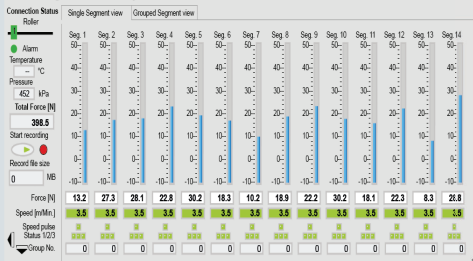


- Tension profile for best understanding of the process
- Fast detection and elimination of process or material related faults and malfunctions
- Fast quality assessment of the delivered parent rolls


Top: Measuring values from each individual segment.

Bottom: Waterfall diagram of a repeating defect pattern. This defect pattern can only be detected with a segmented tension roller.

**FMS-segFORCE : Dimensions slit / rewriter**

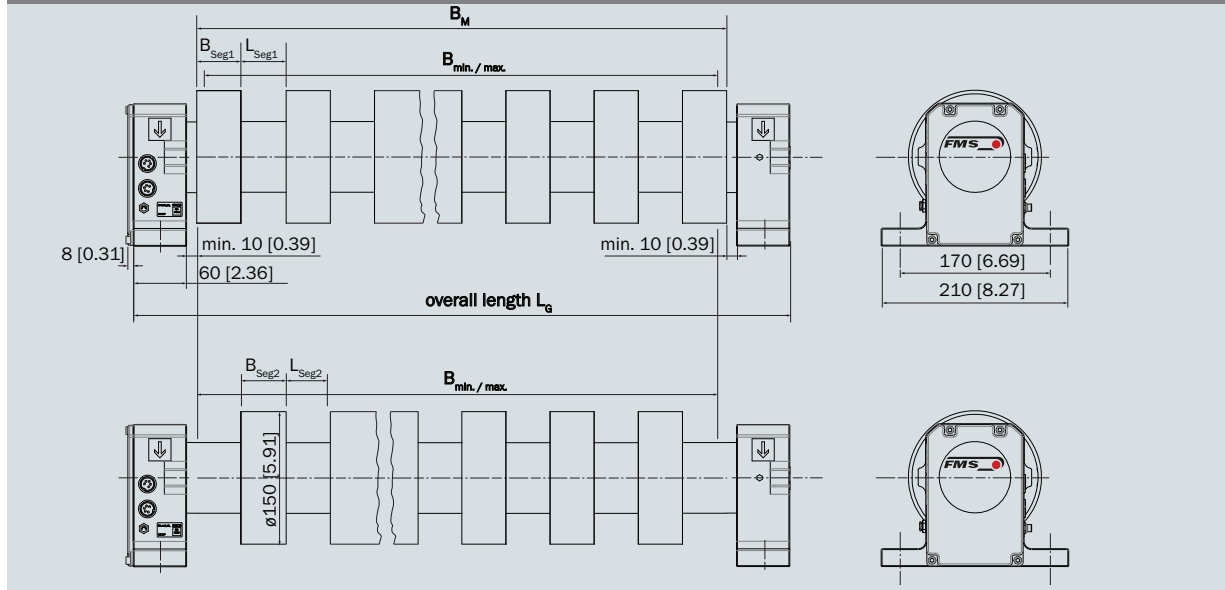


**FMS-segFORCE : Dimensions for tension profile**

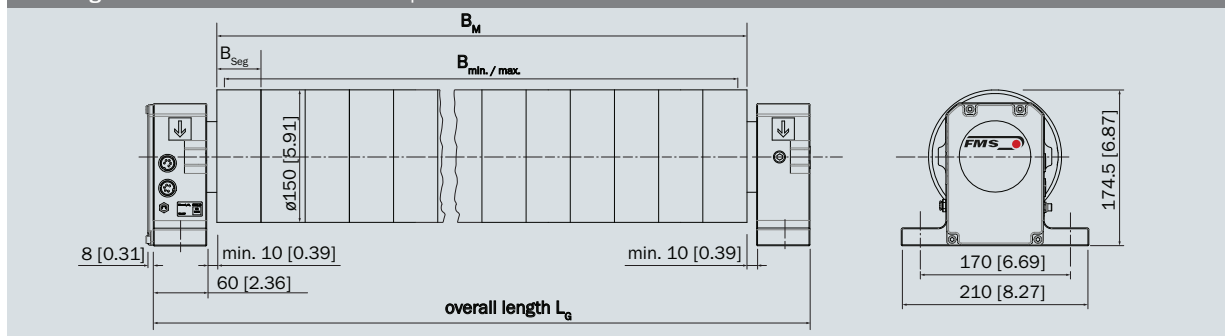

**FMS-segFORCE : Dimensions in mm [in.]**

Maximum width of measuring roller $B_M$	2000 [78.74]
Segment widths $B_{Seg}$	36, 40, 50, 75, 100, 150, 200 [1.42, 1.57, 1.97, 2.95, 3.94, 9.84, 7.84] customized dimensions upon request
Maximum number of segments per measuring roller	50

**FMS-segFORCE : Bracket orientation type P "pillow block"**

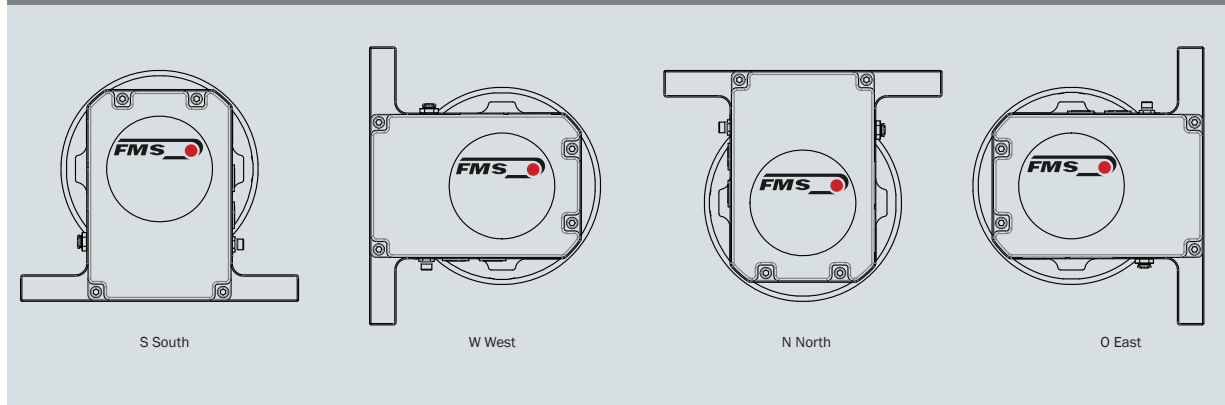

FMS-segFORCE : Order code measuring roller					
<b>SFA</b>	<b>-1850</b>	<b>.A</b>	<b>.PN</b>	<b>.L3</b>	<b>.PNET .Hxxx</b>
					Other options
					Ethernet interface (PROFINET)
					Connector side L left, R right (in direction of rotating segment)
					Axis alignment (time-encoded)
					Bracket type P pillow block
					Bracket orientation N North, S South, O East, W West
					Design revision
					Size, installation dimension, overall length in mm
					Series FMS-segFORCE (axis and side brackets)

FMS-segFORCE : Order code segment(s)					
<b>SFS</b>	<b>-50-150</b>	<b>.A</b>	<b>.50</b>	<b>.E</b>	
					Roller material and surface finish
					E Aluminum anodized blank, EB Al. anodized black, A other coatings or finish
					Nominal force in N
					Design revision
					Size
					Segment width and diameter in mm
					Series FMS-segFORCE Segment

FMS-segFORCE : Technical data	
<b>Configuration</b>	via integrated web browser or optional LabVIEW Software
<b>Pressure air</b>	3 to 6 bar, dried

FMS-segFORCE : Technical data force sensor	
<b>Accuracy class</b>	± 0.3 % (F <sub>Nenn</sub> )
<b>Measuring range</b>	50:1
<b>Temperature coefficient</b>	± 0.1 % / 10 K
<b>Temperature range</b>	- 10 to +50 °C (14 F to 122 F)
<b>Protection class</b>	IP40
<b>Overload protection</b>	10-times nominal force
<b>Ball bearing</b>	61822 with labyrinth seal
<b>Material</b>	high-strength aluminum

FMS-segFORCE : Technical data pre-amplifier on the force sensor	
<b>Resolution A/D converter</b>	± 32768 Digit (16 Bit)
<b>Measuring error</b>	< 0.05 % FS
<b>Protection class</b>	IP40 (installed)
<b>Power supply</b>	24 VDC (18 to 36 VDC) / 5 W
<b>Temperature range</b>	-10 to +50 °C (14 to 122 °F)

FMS-segFORCE : PROFINET RT Features	
<b>Cycle time</b>	2.5 ms for RT_CLASS_1
<b>Baud Rate</b>	100 Mbit/s
<b>Topology recognition</b>	LLDP, SNMP V1, Physical Device Record Objects
<b>Cyclic process data</b>	number of segments, number of segment groups, status pressure air, overall tension of all segments, temperature electronics, pressure in pressure system, actual readings single segments, actual readings segment groups, web speed single segments, web speed segment groups, number of segment groups, ID of segment group
<b>Acyclic communication</b>	Read and Write enable, disable group mode
<b>Media redundancy</b>	Media Redundancy Protocol (MRP) – Client
<b>Supported protocols</b>	RTC Real Time Cyclic Protocol, RT_CLASS_1 (unsynchronized), RTA Real Time Acyclic Protocol, DCP Discovery and Configuration Protocol, DCE/RPC Distributed Computing Environment/Remote Procedure Calls: Connectionless RPC, LLDP Link Layer Discovery Protocol, PTP Precision Transparent Clock Protocol, SNMP Simple Network Management Protocol
<b>Identification &amp; Maintenance</b>	Reading and Writing of I & M1-3
<b>Integrated Switch</b>	2 Port
<b>Additionally supported features</b>	VLAN- and priority tagging
<b>Remote Flash Update</b>	Flash update routine for the upload of software updates
<b>PROFINET RT specification</b>	V 2.3, legacy startup of specification V 2.2 is supported



**FMS-segFORCE** : Typical Application**FMS-segFORCE** : Scope of supply

- measuring roller with configured segments
- integrated central electronics
- two brackets type P "pillow block" with connectors
- connecting cable, 10 m, with M8 socket for power supply

**FMS-segFORCE** : Accessories

- FMS-segFORCE Analysis software for data display and recording

**Other products** : Force Sensor, Measuring Amplifier, Tension Controller

RMGZ9-Series	C203-Series	Measuring Amplifier	Tension Controller
			

**About us**

FMS Force Measuring Systems AG is the market leader in the field of web tension measurement, control and specialist for web guiding solutions. For the wire industry we are the only manufacturer offering a complete range of technologies for force measurement, data processing and radio transmission of signals.

Our in house developed products are used in the manufacturing industry, converting, metals, paper, textiles, as well as in cable and wire rope production. Utilising the latest technology, high quality components and a firm understanding of customer applications, FMS supports customers worldwide in the effort to maximize the productivity of their machines. Since 1993, our highly qualified employees have been creating high-end solutions for machine builders and plant operators. As an owner-managed company, we pride ourselves on being personal and approachable with the ability to make decisive moves fast.

**World Headquarters: FMS Force Measuring Systems AG**

Aspstrasse 6 • 8154 Oberglatt (Switzerland) • Phone + 41 44 852 80 80 • Fax + 41 44 850 60 06  
info@fms-technology.com • [www.fms-technology.com](http://www.fms-technology.com)

All data have been prepared and checked carefully. However, we cannot assume liability for any errors or incompleteness. Subject to modifications serving progress. / 004