



**JIECANG**

**TECHNOLOGY  
DRIVES  
INTELLIGENT LIFE**



## ABOUT JIECANG

Zhejiang Jiecang Linear Motion Technology Co. Ltd, was founded in 2000 and was listed in September, 2018 on the Shanghai stock exchange (603583.SH). JIECANG is a technology group focusing on the research, development, production and sales of linear motion products.

The company integrates global resources, provides intelligent motion and control solutions for industries like intelligent office, medical care, intelligent home and industrial automation. Using technology to drive intelligent life.

As a national high-tech enterprise, JIECANG took the lead in drafting of Chinese national industry standard for DC linear actuators and electric lifting tables.

Currently, JIECANG has subsidiaries and production bases in Asia Pacific, Europe and America with a total area of 595,000 square meters and more than 3500 employees.

## JIECANG LINEAR MOTION--A RELIABLE PARTNER



### AHEAD OF THE FIELD

JIECANG has promoted the industrialization and standardization of the domestic electrical lifting desks industry.



### CUSTOMIZATION

With experienced engineering groups, JIECANG is able to customize for its customers innovation.



### FINEST WORKMANSHIP

JIECANG pays extremely close attention to details to create the high-quality of products. We focus on research and design, the best raw materials, precise production as well as full extensive tests. A warranty for 5 years is provided.



### INNOVATIVE RESEARCH

JIECANG has three R&D centers in Xinchang, Hangzhou and Taiwan with over 200 engineers. Over 400 projects were patented with the cooperation with European and American experts and famous institutions.



### PRODUCTION CAPACITY

With fully automatic production lines, JIECANG is capable of timely delivery to domestic and foreign customers with million annual production scale.



### GLOBAL BRANCHES

JIECANG has subsidiaries and production bases in Europe, America and Asia, aiming at meeting all our customers' requirements on time. Our services and quality have gained recognition in over 100 countries and thousands of customers worldwide.



### STRONG SENSE OF SOCIAL DUTIES

JIECANG takes its corporate social responsibility seriously, which include philanthropic efforts, employee, tax and environmental issues, and give back to society, customers, stockholders and staffs.



### INTELLIGENT CYBER SYSTEMS

Bluetooth 5.0 module is connected to the control box of each electric adjustable desk, which is combined with an intelligent gateway to realize the network of adjustable desks and unified controls, station booking, the adjustable desk uses data cloud management.



### SMART BOOKING

The smart adjustable desk can be booked through a work card or a mobile phone. If the person leaves with his ID card or mobile phone, the booking will be automatically ended by the system, so that the desk will be updated to "available for booking" again.



### VOICE CONTROL

JIECANG develops its own intelligent voice control system to control the operation of the electric adjustable desk.



### MOBILE APP

Our APP provides the way to control the adjustable desks more intelligent and convenient. By Bluetooth or QR code scanning, you can change the height of desks, set the memory of the height, use the sedentary reminder and so on.



### ANTI-COLLISION TECHNOLOGY

When the electric adjustable desk touches an object during operation, the anti-collision system will activate and immediately stop the movement of the table to prevent collision and injury to the user or the table itself.



### GREEN ENERGY-SAVING AND ENVIRONMENTAL PROTECTION

0.1W standby consumption: JIECANG applies advanced power management technology to all control boxes to reduce standby power consumption of the lifting system. PVC free: The cables for the adjustable desk of JIECANG are PVC free. We pay attention to environmental protection and your health.



CERTIFICATION

JIECANG have passed ISO9001, ISO14001, ISO27001, OHSAS18001 and other management systems, and our products have passed UL,CE, ROHS, SAA, PSE, KC, BIFMA and other international certifications.






# JC35TS-R13S

1 PERSON DESK FRAME

SURFACE COLOR






Black / White / Silver

-

Color can be customized

TECHNICAL PARAMETER


|               |        |             |      |
|---------------|--------|-------------|------|
| Height        | (mm)   | Width       | (mm) |
| 595 ~ 1245    |        | 1085 ~ 1800 |      |
| Speed         | (mm/s) | Noise       | (dB) |
| 40            |        | < 50        |      |
| Load Capacity | (N)    |             |      |
| 1250          |        |             |      |

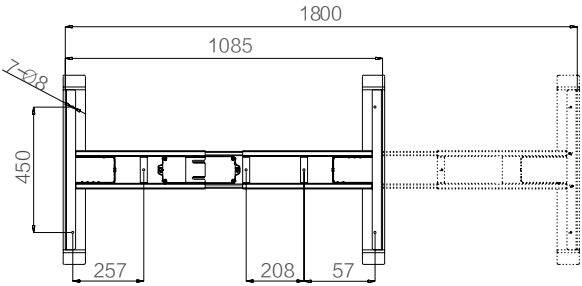

# JC35TS – R13SF

ZOOM80 FAST ADJUSTABLE DESK FRAME

SURFACE COLOR




Black / White / Silver

–

Color can be customized

TECHNICAL PARAMETER


|               |        |             |      |
|---------------|--------|-------------|------|
| Height        | (mm)   | Width       | (mm) |
| 602 ~ 1252    |        | 1085 ~ 1800 |      |
| Speed         | (mm/s) | Noise       | (dB) |
| 80            |        | < 55        |      |
| Load Capacity | (N)    |             |      |
| 800           |        |             |      |

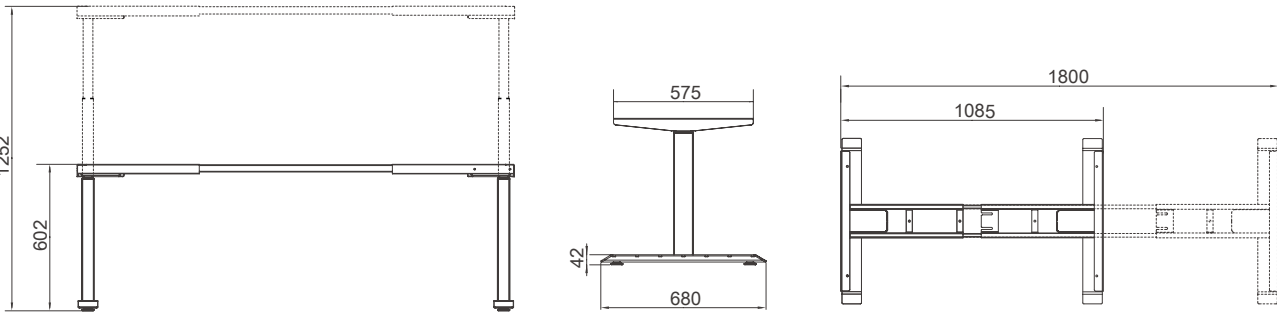

# JC35TS – ZS83S

1 PERSON DESK FRAME

SURFACE COLOR




Black / White / Silver

–

Color can be customized

TECHNICAL PARAMETER


|               |        |             |      |
|---------------|--------|-------------|------|
| Height        | (mm)   | Width       | (mm) |
| 636 ~ 1286    |        | 1085 ~ 1800 |      |
| Speed         | (mm/s) | Noise       | (dB) |
| 40            |        | < 50        |      |
| Load Capacity | (N)    |             |      |
| 1250          |        |             |      |

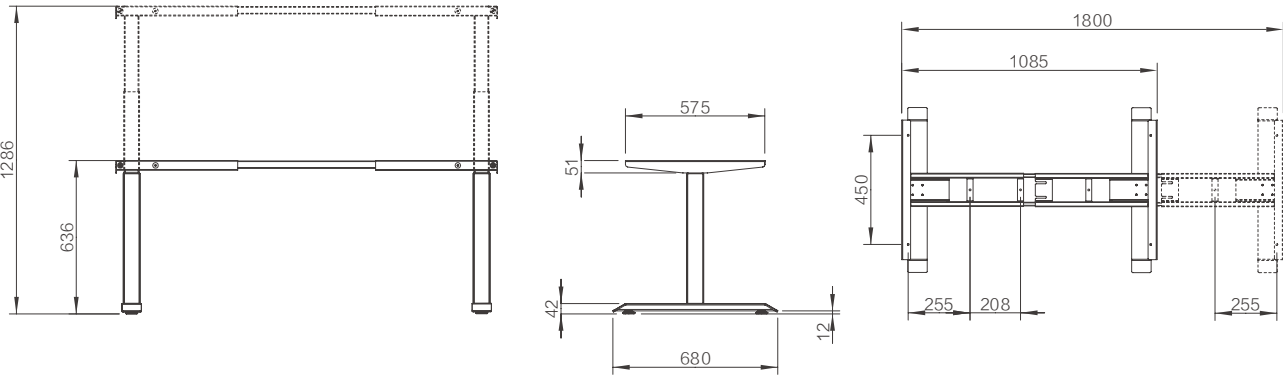

# JC35TS-EZ4.0

QUICK INSTALL DESK FRAME

SURFACE COLOR



Black / White / Silver


Color can be customized

TECHNICAL PARAMETER

|               |        |             |      |
|---------------|--------|-------------|------|
| Height        | (mm)   | Width       | (mm) |
| 610 ~ 1260    |        | 1165 ~ 1565 |      |
| Speed         | (mm/s) | Noise       | (dB) |
| 40            |        | < 50        |      |
| Load Capacity | (N)    |             |      |
| 1250          |        |             |      |




INSTALLATION STEPS

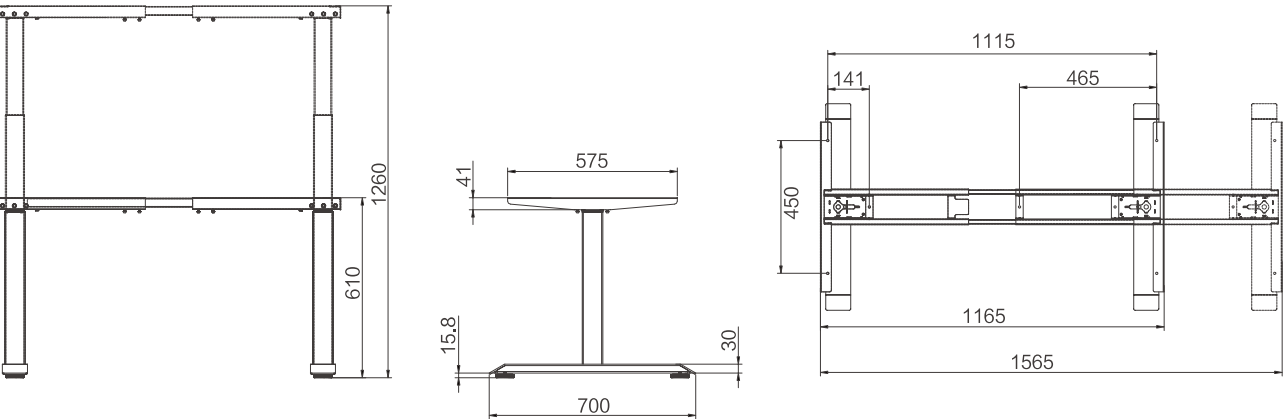

# JC35TS-EZ3.0

QUICK INSTALL DESK FRAME

SURFACE COLOR



Black / White / Silver



Color can be customized

TECHNICAL PARAMETER

|               |        |             |      |
|---------------|--------|-------------|------|
| Height        | (mm)   | Width       | (mm) |
| 605 ~ 1255    |        | 1165 ~ 1585 |      |
| Speed         | (mm/s) | Noise       | (dB) |
| 40            |        | < 50        |      |
| Load Capacity | (N)    |             |      |
| 1200          |        |             |      |



INSTALLATION STEPS

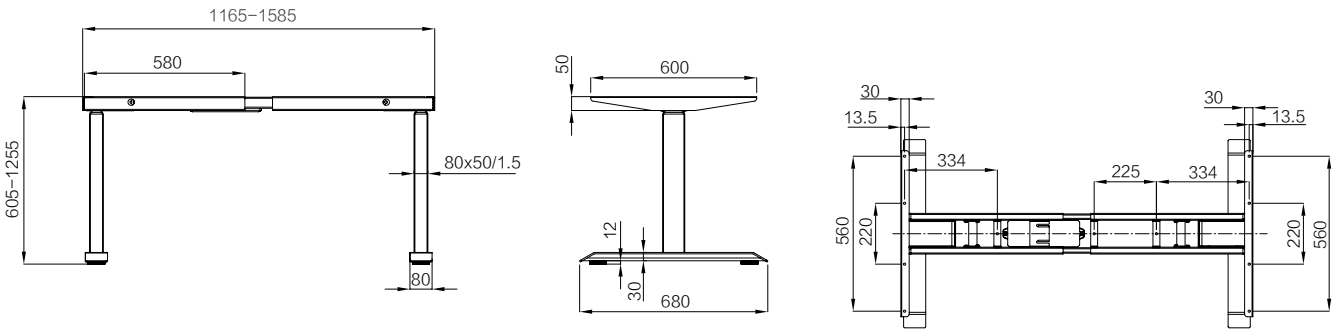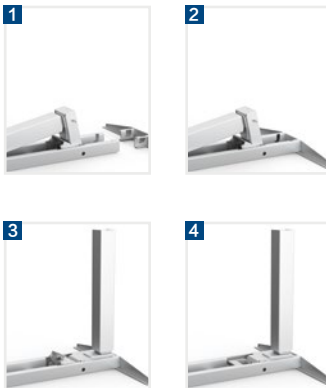




# JC35TF-DC2R

## ODETTE DESK FRAME

### SURFACE COLOR






Black / White / Silver

-

Color can be customized

### TECHNICAL PARAMETER

|            |        |               |      |
|------------|--------|---------------|------|
| Height     | (mm)   | Load Capacity | (N)  |
| 700 ~ 1150 |        | 1000          |      |
| Speed      | (mm/s) | Noise         | (dB) |
| 32         |        | < 55          |      |

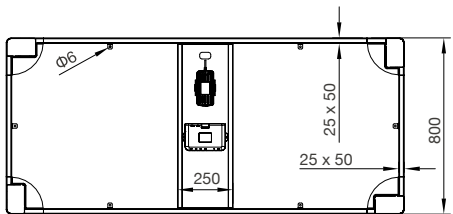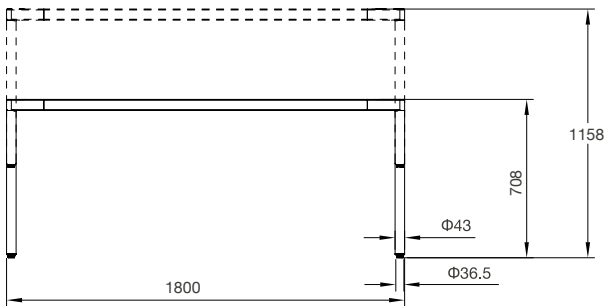






# JC35TT-R13S-120°

3 PERSON WORKSTATION DESK FRAME

SURFACE COLOR



Black / White / Silver

Color can be customized

TECHNICAL PARAMETER

Height (mm)

595 ~ 1245

Speed (mm/s)



40

Load Capacity (N)

1500

Noise (dB)

< 50

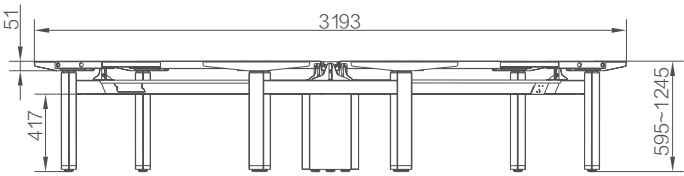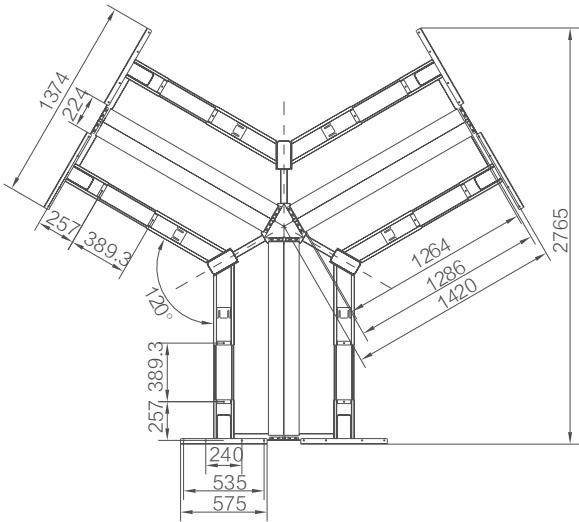

# JC35TT-C13S-120°



# JC35TT-R13R-90°





# JC35TT-R12S-180°





Width (mm)

1050 ~ 1900

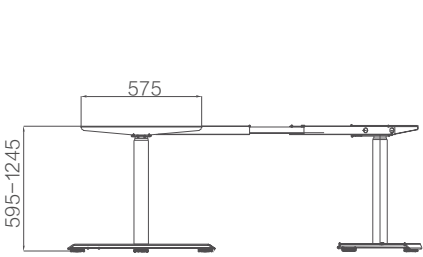



Width (mm)

1085 ~ 1800

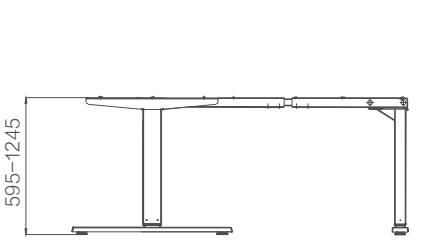

Width (mm)

1995 ~ 2995

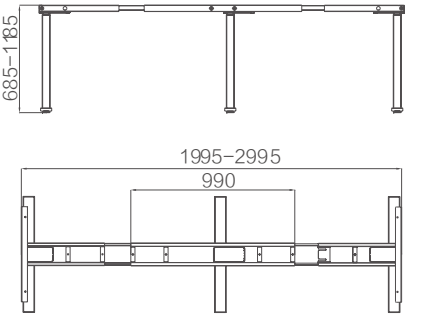








# JC35TF-R13S-2

2 PERSON WORKSTATION DESK FRAME

SURFACE COLOR



Black / White / Silver



-

Color can be customized

TECHNICAL PARAMETER

|               |        |             |      |
|---------------|--------|-------------|------|
| Height        | (mm)   | Width       | (mm) |
| 595 ~ 1245    |        | 1100 ~ 1700 |      |
| Speed         | (mm/s) | Noise       | (dB) |
| 40            |        | < 50        |      |
| Load Capacity | (N)    |             |      |
| 1250          |        |             |      |


FRAME DETAIL

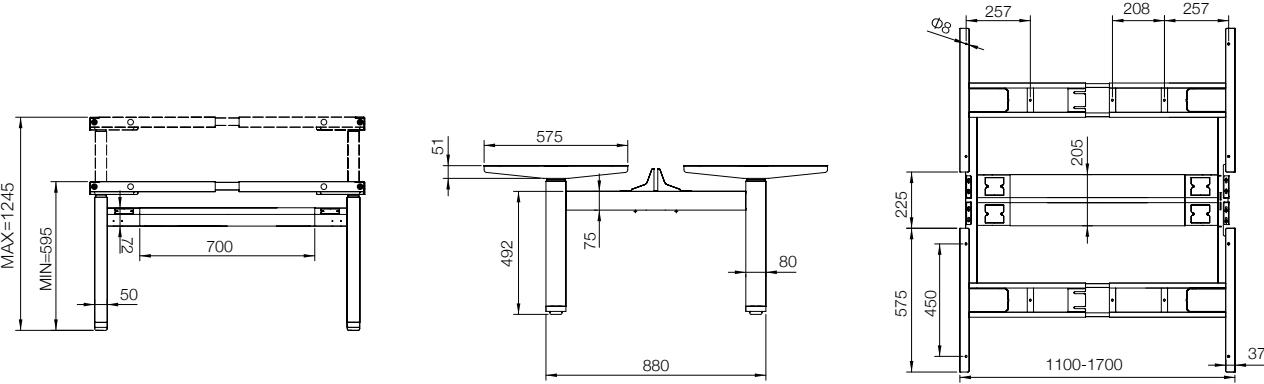

# JC35TF-R13S-4

4 PERSON WORKSTATION DESK FRAME

SURFACE COLOR



Black / White / Silver



-

Color can be customized

TECHNICAL PARAMETER

|               |        |             |      |
|---------------|--------|-------------|------|
| Height        | (mm)   | Width       | (mm) |
| 595 ~ 1245    |        | 1100 ~ 1700 |      |
| Speed         | (mm/s) | Noise       | (dB) |
| 40            |        | < 50        |      |
| Load Capacity | (N)    |             |      |
| 1250          |        |             |      |


FRAME DETAIL

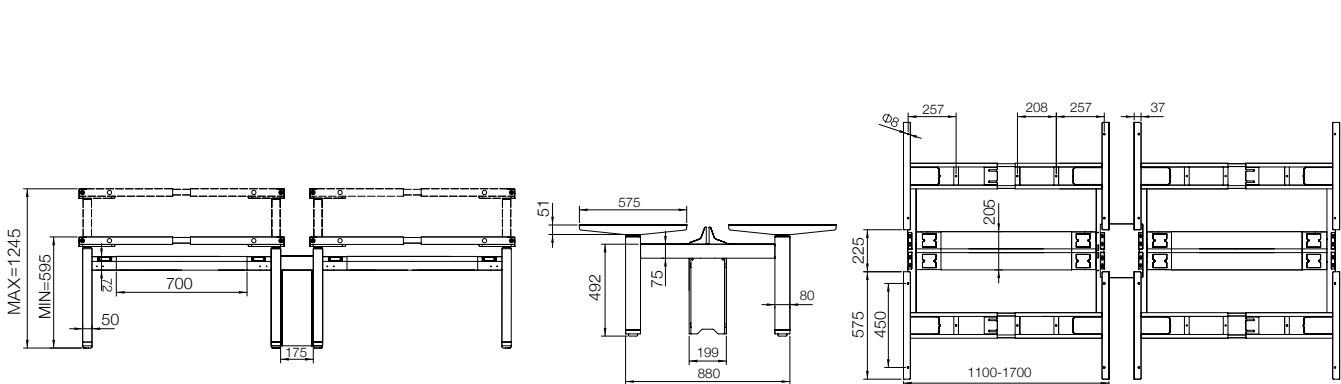

# JC35TS-R12R-TH

SINGLE-MOTOR ADJUSTABLE DESK FRAME

SURFACE COLOR






Black / White / Silver

-

Color can be customized

TECHNICAL PARAMETER


|            |        |               |      |
|------------|--------|---------------|------|
| Height     | (mm)   | Load Capacity | (N)  |
| 681 ~ 1180 |        | 700           |      |
| Speed      | (mm/s) | Noise         | (dB) |
| 25         |        | < 50          |      |

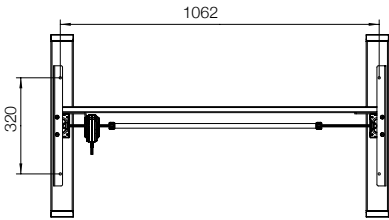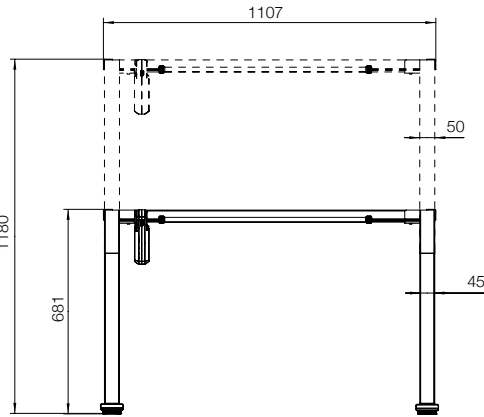

# JC35TO-S33S

1 LEG ADJUSTABLE TABLE BASE

SURFACE COLOR






Black / White / Silver

-

Color can be customized

TECHNICAL PARAMETER

|            |        |               |      |
|------------|--------|---------------|------|
| Height     | (mm)   | Load Capacity | (N)  |
| 585 ~ 1235 |        | 800           |      |
| Speed      | (mm/s) | Noise         | (dB) |
| 40         |        | < 50          |      |

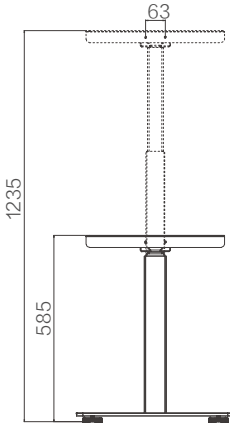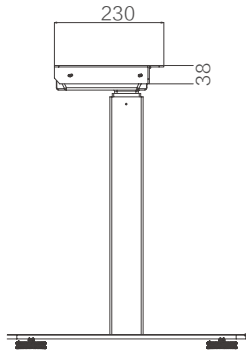




# JC35TO-C13S

1 LEG ADJUSTABLE TABLE BASE

SURFACE COLOR



Black / White / Silver

-

Color can be customized

TECHNICAL PARAMETER

Height (mm)

595 ~ 1245

Speed (mm/s)




40

Load Capacity (N)

500

Noise (dB)

< 50

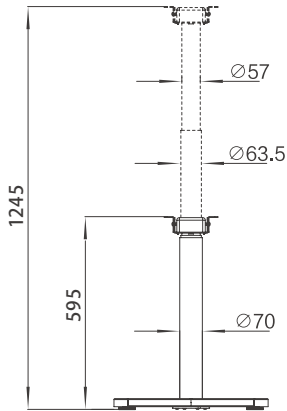

# JC35TO-C12R-Q

1 LEG GASDYNAMIC DESK FRAME

SURFACE COLOR



Black / White / Silver

-

Color can be customized

TECHNICAL PARAMETER

Height (mm)




670 ~ 987

Reversing Locking (N)

1000

Load Capacity (N)


Can meet customer needs

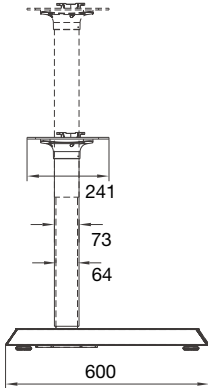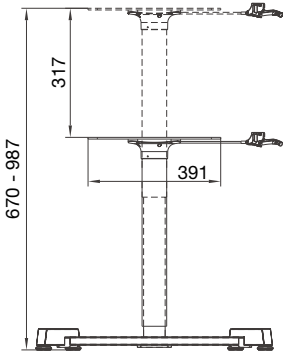

# JSSY-S22S

HAND CRANK ADJUSTABLE DESK FRAME

SURFACE COLOR




Black / White / Silver

Color can be customized

TECHNICAL PARAMETER

|            |            |               |      |
|------------|------------|---------------|------|
| Height     | (mm)       | Width         | (mm) |
| 690 ~ 1150 |            | 1010 ~ 1450   |      |
| Speed      | (mm/cycle) | Load Capacity | (N)  |
| 16         |            | 800           |      |

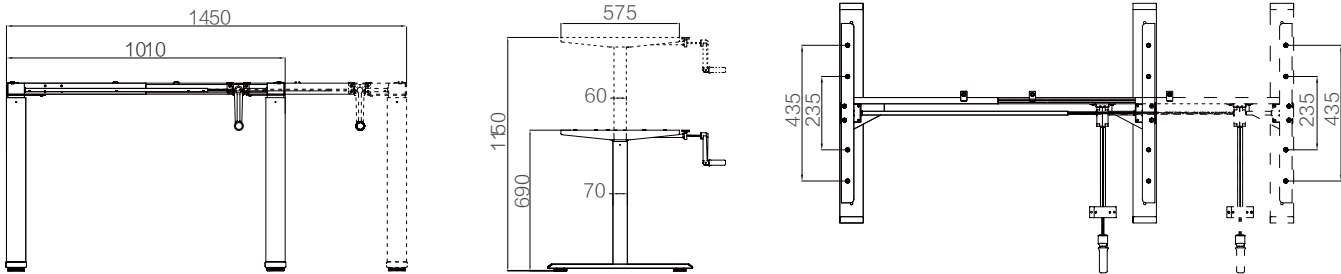

# JC35SD

DESK CONVERTER

SURFACE COLOR



Black / White

TECHNICAL PARAMETER

|          |        |               |      |
|----------|--------|---------------|------|
| Height   | (mm)   | Load Capacity | (N)  |
| 85 ~ 525 |        | 50            |      |
| Speed    | (mm/s) | Noise         | (dB) |
| 35       |        | < 50          |      |



TECHNICAL PARAMETER

|          |        |               |      |
|----------|--------|---------------|------|
| Height   | (mm)   | Load Capacity | (N)  |
| 85 ~ 525 |        | 50            |      |
| Speed    | (mm/s) | Noise         | (dB) |
| 35       |        | < 50          |      |

TECHNICAL PARAMETER

|          |        |               |      |
|----------|--------|---------------|------|
| Height   | (mm)   | Load Capacity | (N)  |
| 26 ~ 461 |        | 50            |      |
| Speed    | (mm/s) | Noise         | (dB) |
| 35       |        | < 50          |      |

# LIFTING COLUMN

## LIFTING COLUMNS BRING POSSIBILITIES OF INNOVATION FOR FURNITURE

The lifting column is one of the most important component to compose intelligent adjustable furniture. It is widely used in various height adjustable workstations, meeting desks, talk tables and other adjustable products.

### MULTIPLE CHOICES, CUSTOMIZED AS YOU WANT

Rectangle, square, circular, elliptical and other diversified appearance designs.  
Two or Three segments columns can meet the demands of our customer's height choice.  
No-hole and oil-free design, made for a better appearance and for an easier maintenance.  
Compatible with JIECANG motor of comprehensive mechanical properties, high stability, high load, low noise, excellent performance.



# CUSTOM COLOR

## 200+ COLORS ARE OPTIONAL

Multiple colors can match various application scenarios.  
The actual color plate shall prevail.

### CLASSIC COLORS



RAL 9016




RAL 7045



RAL 9005



RAL 9003



RAL 9010



RAL 9018



RAL 7043



RAL 9017

### OTHER COLORS



RAL 9002



RAL 1000



RAL 6018



RAL 3012



RAL 7032



RAL 6027



RAL 1016



RAL 6001



RAL 3024



RAL 4006



RAL 5012



RAL 2003



RAL 6016



RAL 3001



RAL 8003



RAL 5013



RAL 8011



RAL 6028



RAL 3004



RAL 8016



# 3-STAGE LIFTING COLUMNS

TECHNICAL PARAMETER

Stroke (mm)

650

Height (mm)

560 ~ 1210


Load Capacity (N)

800


Speed (mm/s)

40

JS36DR1-3-S

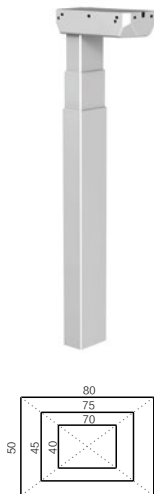

JS36DR1-3-R

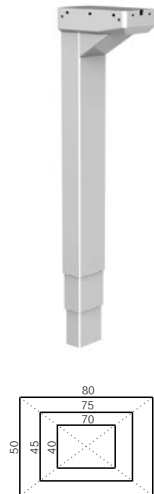

JS36DR2-3-S




JS36DR3-3-S




JS36DR4-3-S




JS36DR7-3-S

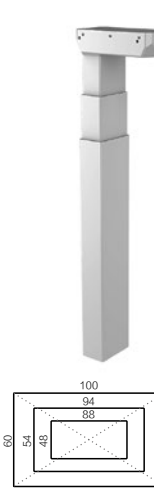


JS36DS1-3-S

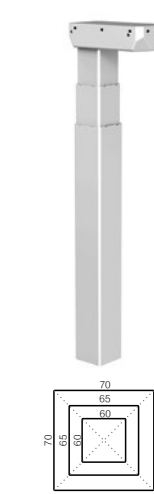

JS36DS1-3-R

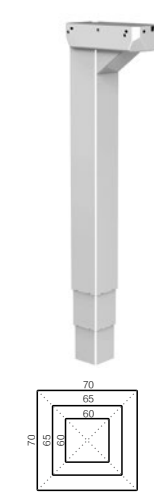

JS36DS3-3-S

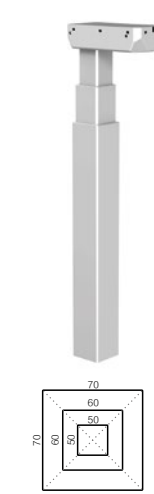


JS36DS4-3-S




JS36DS4-3-R



JS36DS5-3-S

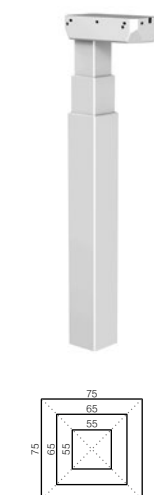

JS36DS9-3-S

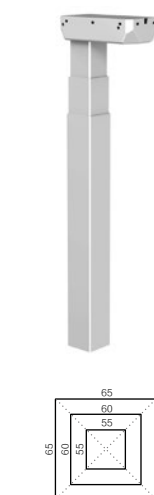

JS36DC1-3-S



JS36DC1-3-R



JS36DE1-3-S



JS36DE2-3-S




## 2-STAGE LIFTING COLUMNS

TECHNICAL PARAMETER

|                                                                                                 |        |
|-------------------------------------------------------------------------------------------------|--------|
|  Stroke        | (mm)   |
| 500                                                                                             |        |
|  Height        | (mm)   |
| 650 ~ 1150                                                                                      |        |
|  Load Capacity | (N)    |
| 800                                                                                             |        |
|  Speed         | (mm/s) |
| 32                                                                                              |        |


JS36DR1-2-S




JS36DR1-2-R



JS36DS5-2-S



JS36DS9-2-S



JS36DC1-2-S



JS36DE1-2-S




## INLINE LIFTING COLUMNS


TECHNICAL PARAMETER

|                                                                                                   |        |
|---------------------------------------------------------------------------------------------------|--------|
|  Stroke        | (mm)   |
| 650                                                                                               |        |
|  Height        | (mm)   |
| 560 ~ 1210                                                                                        |        |
|  Load Capacity | (N)    |
| 800                                                                                               |        |
|  Speed         | (mm/s) |
| 40                                                                                                |        |


JS36ZR2-3-S




JS36ZR4-3-S

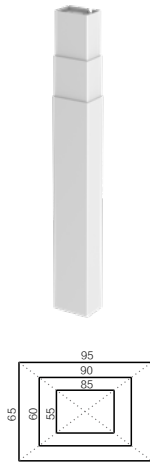

JS36ZS8-3-S



JS36ZS10-3-S




JS36ZC1-3-S



TECHNICAL PARAMETER

|                                                                                                     |        |
|-----------------------------------------------------------------------------------------------------|--------|
|  Stroke        | (mm)   |
| 500                                                                                                 |        |
|  Height        | (mm)   |
| 650 ~ 1150                                                                                          |        |
|  Load Capacity | (N)    |
| 800                                                                                                 |        |
|  Speed         | (mm/s) |
| 32                                                                                                  |        |

JS36ZR2-2-S



JS36ZS1-2-S



JS36ZC1-2-S



JS36ZE1-2-S



# LIFTING COLUMNS FOR SPECIAL USE

JC35EN-2K



TECHNICAL PARAMETER

|             |                   |              |
|-------------|-------------------|--------------|
| Stroke (mm) | Load Capacity (N) | Speed (mm/s) |
| 400         | 1500              | 30           |
| Height (mm) | Section size (mm) |              |
| 560 ~ 1050  | 145x112 / 164x131 |              |

JC35EN3A



TECHNICAL PARAMETER

|             |                                     |              |
|-------------|-------------------------------------|--------------|
| Stroke (mm) | Load Capacity (N)                   | Speed (mm/s) |
| 665         | 1000                                | 35           |
| Height (mm) | Section size (mm)                   |              |
| 525 ~ 1190  | 125.3x92.3 / 130.3x163.3<br>150x183 |              |

JS36H2



TECHNICAL PARAMETER

|             |                   |              |
|-------------|-------------------|--------------|
| Stroke (mm) | Load Capacity (N) | Speed (mm/s) |
| 500         | 500               | 30           |

# CONTROL BOX



JCB36N1



JCB36N2



JCB36N3



JCB36N4



JCB35NS1



JCB35NS2

|                      |         |         |         |         |          |          |
|----------------------|---------|---------|---------|---------|----------|----------|
| Model                | JCB36N1 | JCB36N2 | JCB36N3 | JCB36N4 | JCB35NS1 | JCB35NS2 |
| Columnconnect No.    | 1~2     | 1~2     | 1~3     | 1~4     | 1        | 1~2      |
| InputVoltage (V)     | 110/230 | 110/230 | 110/230 | 100~240 | 100~240  | 110/230  |
| Transformerpower (W) | 200     | 400     | 500     | 600     | 130      | 400      |



CONTROL BOX



JCB35NH2



JCB36M



JCB36MH3



JCB36M1



JCB36M3



JCB36M4

|                      |          |        |          |         |         |         |
|----------------------|----------|--------|----------|---------|---------|---------|
| Model                | JCB35NH2 | JCB36M | JCB36MH3 | JCB36M1 | JCB36M3 | JCB36M4 |
| Columnconnect No.    | 1~2      | 1~2    | 1~3      | 1       | 2       | 4       |
| InputVoltage (V)     | 100~240  | 18~33  | 24~32    | 29      | 29      | 33      |
| Transformerpower (W) | 400      | 144    | 240      | 144     | 144     | 576     |

HANDSET



JCHT35K

- 4 Memory Buttons
- Black
- LED



JCHT35K9

- 4 Memory Buttons
- Black
- LED
- USB Charger



JCHT35K11

- 3 Memory Buttons
- Water-proof on the Front Side
- Silicone Button
- 90° mounting angle
- Black / White / Grey / Green



JCHT35K24A

- Up&Down Button
- Seesaw Button



JCHT35K24B

- Up&Down Button
- Seesaw Button
- LED



JCHT35K24C

- 3 Memory Buttons
- Seesaw Button
- LED
- USB Charger



JCHT35K24S

- 3 Memory Buttons
- Seesaw Button
- LED
- Bluetooth
- USB Charger



JCHT35K20

- Operate by tilting for up and down
- Acrylic Material
- With different back light color options
- Shapes can be customized



JCHT35K23

- 2 Memory Buttons
- Acrylic Material
- With different back light color options
- Sedentary Reminder
- OLED

# HANDSET



JCHT35K26A

- Up&Down Button
- Top Mounted
- Multiple colors
- Silicone Button



JCHT35K26B

- Up&Down Button
- Top Mounted
- Multiple colors
- LED
- Silicone Button



JCHT35K26C

- 3 Memory Buttons
- Top Mounted
- Multiple colors
- LED
- Silicone Button



JCHT35K26A

- Up&Down Button
- Side Mounted
- Multiple colors
- Silicone Button



JCHT35K26B

- Up&Down Button
- Side Mounted
- Multiple colors
- LED
- Silicone Button



JCHT35K22

- 3 Memory Buttons
- Water-proof on the Front Side
- Silicone Button
- 34° mounting angle
- Black / White / Grey / Green



JCHT35K49A

- Up&Down Button
- USB Charger



JCHT35K49B

- Up&Down Button
- LED
- USB Charger



JCHT35K49C

- 3 Memory Buttons
- LED
- Child lock function
- USB Charger

# HANDSET



JCHT35K50A

- Operate by tilting for up and down
- Indicator lights



JCHT35K50B

- Operate by tilting for up and down
- LED



JCHT35K50C

- 2 Memory locations
- Operate by tilting for up and down
- OLED
- Sedentary Reminder
- Child lock function



JCHT35K52C

- 2 Memory Buttons
- LED
- DIY keyboard keys
- Light adjustment



JCHT35M13

- 3 Memory Buttons
- Touch Screen
- LED
- 34° or 90° mounting angle



JCHT35L

- Up&Down Button
- Black



JCHT35M6

- 3 Memory Buttons
- Touch Screen
- OLED
- Operate by rotating for up and down
- Sedentary Reminder



JCHT35M33A

- Made of leather
- Up&Down Buttons



JCHT35M33C

- Made of leather
- Up&Down Buttons
- 2 Memory locations

# HANDSET



JCHT35K32C

- 3 Memory Buttons
- Water-proof on the Front Side
- Silicone Button
- LED



JCHT35K33C

- 3 Memory Buttons
- Water-proof on the Front Side
- Silicone Button
- LED



JCHT35M18C

- 3 Memory Buttons
- Water-proof on the Front Side
- Touch Screen
- Light Wake
- LED



JCHT35M19C

- 3 Memory Buttons
- Water-proof on the Front Side
- Touch Screen
- Light Wake
- LED

# ACCESSORIES

CUSTOMIZED LIFTING SCREEN



JC35SP01

- Length: 900-1500mm
- Width: 600mm
- Thickness: 15-30mm
- LoadCapacity: 100N
- Stroke: 485mm

2.4G WIRELESS ADAPTER



JCP35N-2.4G

- Input power: 5V
- Remote control frequency: 2.4GHz
- Transmission distance: 8M

LITHIUM BATTERY



JCP35PA-B-3

- Mobile office
- Low power consumption
- USB charger
- Safe & fast charging

BLUETOOTH ADAPTER



JCP35N-BLT

- Plug in the Bluetooth receiver box on the control box, then turn on the Bluetooth and control the adjustable table through the APP on mobile phone

CABLE CHAIN



J-TSXXG01

- Standard size(mm): 90\*120\*1400
- Accept any customized length
- Color: White/Black/Chroma

USB CHARGER



JCP35U

- Color: Black / White
- Charging for Mobile device, desktop
- Tighten with screws or fix with clamps
- Fit with JCB35NS2 control box

SIX AXIS SENSOR



JCB35N-6AXIS

- Intelligent anti-collision accessories
- High sensitivity, stable operation

WIRELESS CHARGER




JCP35WA-A

- Power the phone wirelessly
- Under the desktop
- Compatible with control boxes: JCB35NS1, JCB35NS2



# WIRE MANAGEMENT



JCXC01

- Length: 762mm
- Width: 99.8mm
- Height: 74.5mm



JCXC02

- Length: 950mm
- Width: 205mm
- Height: 73.5mm



JCXC03

- Length: 1351mm
- Width: 200mm
- Height: 72mm



JCXC04

- Length: 1264mm
- Width: 192.4mm
- Height: 71.8mm



JCXC05

- Length: 1000mm
- Width: 136mm
- Height: 18mm



JCXC06

- Length: 900mm
- Width: 173mm
- Height: 60mm

# FOOT SERIES



JCF001

- Length: 680mm
- Width: 80mm
- Hole Pattern: 58\*34mm



JCF084

- Length: 580mm
- Width: 80mm
- Hole Pattern: 52\*26mm



JCF254

- Length: 700mm
- Width: 85mm
- Hole Pattern: 58\*34mm



JCF197

- Length: 700mm
- Width: 60mm
- Hole Pattern: 14\*14mm



JCF095

- Length: 700mm
- Width: 80mm
- Hole Pattern: 58\*34mm



JCF073

- Length: 975mm/625mm
- Width: 80mm
- Hole Pattern: 58\*34mm



JCF072

- Length: 700mm
- Width: 78mm
- Hole Pattern: 58\*34mm



JCF093

- Length: 603mm
- Width: 73mm
- Hole Pattern: 52\*26mm



JCF323

- Length: 680mm
- Width: 80mm
- Hole Pattern: 58\*34mm/52\*26mm

# FOOT SERIES



**JCF125**

- Length: 700mm
- Width: 80mm
- Hole Pattern: 58\*34mm



**JCF157**

- Length: 700mm
- Width: 65mm
- Hole Pattern: 50\*40mm



**JCF130**

- Length: 700mm
- Width: 70mm
- Hole Pattern: 32.5\*32.5mm




**JCF074**

- Length: 90mm
- Width: 60mm
- Hole Pattern: 58\*34mm



**JCF076**

- Length: 80mm
- Width: 50mm
- Hole Pattern: 58\*34mm



**JCF119**

- Length: 91mm
- Width: 57mm
- Hole Pattern: 58\*34mm

# CONTROL SYSTEM

START A HEALTHY OFFICES STATE, MAKE YOUR LIFE FULL OF POSSIBILITIES

Up & Down control / Sit & Stand reminder / Office data statistics / used in mobile and computer



**AIDESK Control System**

- Control UP & DOWN by mobile phone
- Applicable for android and IOS system
- Sedentary reminder function





**AIWORKING Desk Control Software**

- Control by computer software
- Display the height
- Show the standing-time and calorie-buring results
- To memory the height of standing and sitting
- Statistical datas and health management

---

## Headquarters

---

### Xinchang

📍 ADD : Provincial High Tech Park, Xinchang County, Zhejiang Province, China

✉ EMAIL : jc35@jiechang.com

☎ TEL : +86-575-86297980

✉ FAX : +86-575-86297960

---

## Global Divisions

---

### Ningbo

📍 ADD : Linxu Road&Chaosheng North Crossroad, Cidong Economic Development Area, Cixi, Ningbo, Zhejiang, China

### Guangzhou

📍 ADD : No.114, Building 4, Qixi creative park, No.24 Xinyi road, Fangcun avenue east, Liwan district, Guangzhou, China

✉ EMAIL : sales24@jiechang.com

☎ TEL : 020-89114036

✉ FAX : 020-89114037

### America

📍 ADD : 500 West Street, Cedar Springs, MI 49319

✉ EMAIL : john@jiechang.com

☎ TEL : +616-952-0630

### Germany

📍 ADD : Emanuel-Leutze-Str.11, 40547 Düsseldorf, Germany

✉ EMAIL : jing@jiechang.com

☎ TEL : +49(0)21156677116

### Japan

📍 ADD : 1F, 13-34-3, Ikebukuro, Toshimaku, Tokyo, 171-0014, Japan

✉ EMAIL : jsjp03@jiechang.co.jp

☎ TEL : +03-6206-6856

✉ FAX : +03-6206-6857

### India

📍 ADD : 1204, Best Sky Tower, Netaji Subhash Place Pitampura, Delhi-110034

✉ EMAIL : fahim@jiechang.com

☎ TEL : +91-7483686104

### Malaysia

📍 ADD : 79200 Iskandar Puteri, Johor, Malaysia

☎ TEL : +60 12-685 7772

### Brazil

📍 ADD : JSTAR do Brasil Importação e Comércio Ltda.São Paulo, SP

✉ EMAIL : felipe.grams@jstarmovimento.com

☎ TEL : +551195550-9512

**BIBUS®**  
SUPPORTING YOUR SUCCESS

BIBUS SK, s.r.o  
Trnavská 31, SK-94 901 Nitra

Tel.: 037/ 7777 911 Email: sale@bibus.sk  
Fax.: 037/ 7777 999 http://www.bibus.sk



2022.01