


G700[®]

DESIGNED FOR THE TOUGHEST JOBS

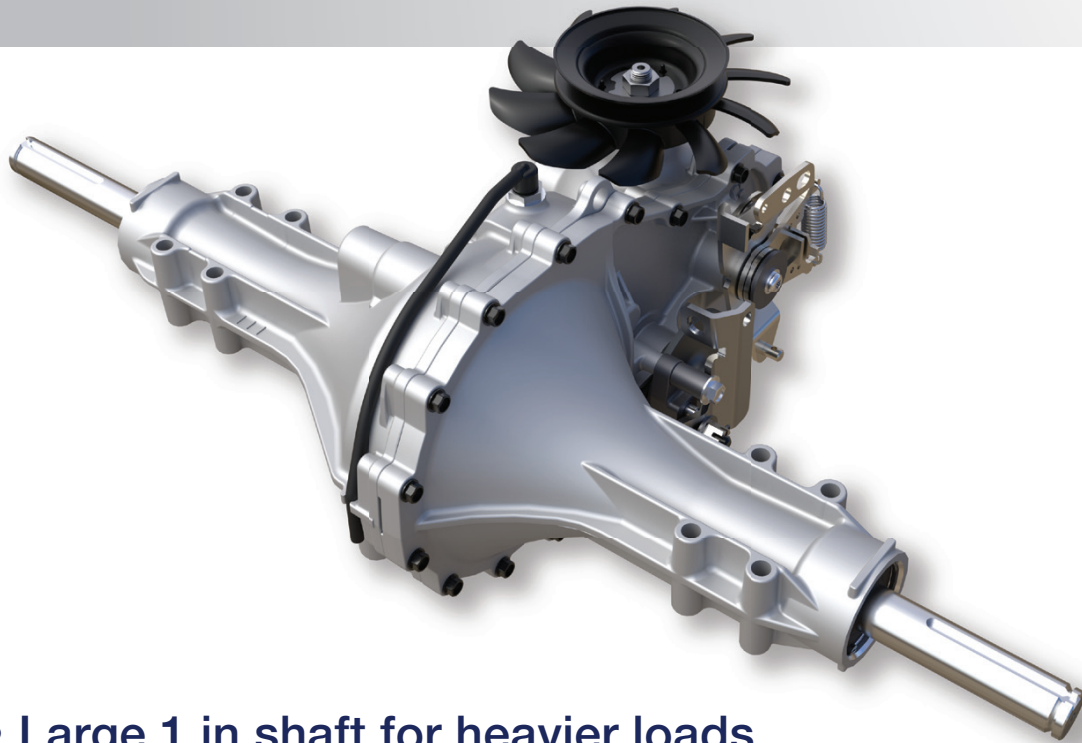

- Large 1 in shaft for heavier loads
- External oil filter for easier maintenance
- Rugged die-cast aluminium housing

SPECIFICATIONS

Overall Transaxle Reduction	27.5:1
Pump Displacement	.61 in ³ /rev - 10cc/rev
Motor Displacement	.97 in ³ /rev - 16cc/rev
Charge Pump Displacement	.11 in ³ /rev - 1.9cc/rev
Input Speeds	
MAX HI-IDLE (NO LOAD)	3600 rpm
MIN (LOADED)	1800 rpm
Output Torque	
CONTINUOUS	230 lb-ft - 312 Nm
INTERMITTENT	445 lb-ft - 603 Nm
Weight on Tires (per unit)	
MAX w/ 20in TIRES	770 lb - 350 kg
MAX w/ 22in TIRES	700 lb - 318 kg
MAX w/ 23in TIRES	665 lb - 302 kg
Axle Shaft Diameter	1.0 in - 25.4 mm
Weight of Unit	42 lbs - 19 kg

Specifications subject to change without notice