


EZT[®]

Zero Turn Hydrostatic Transaxle

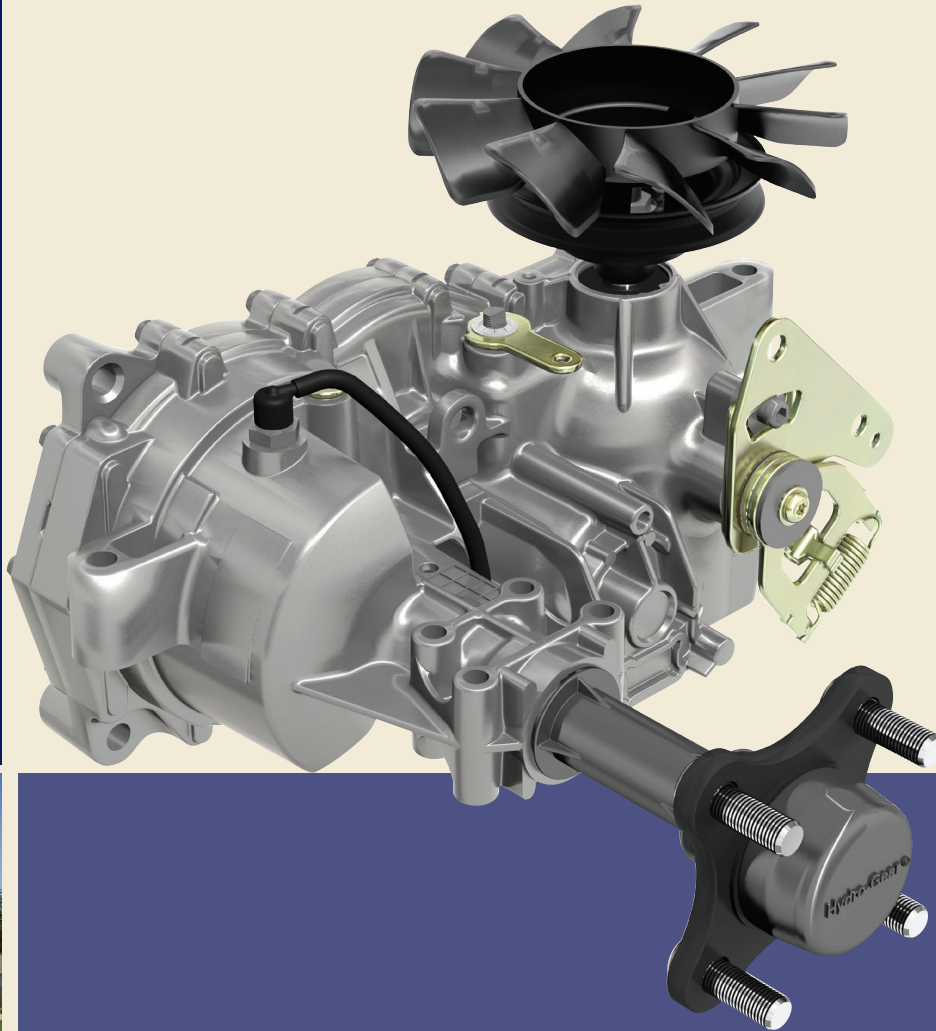

FORWARD MOTION THROUGH FORWARD THINKING[®]


 **HYDRO-GEAR[®]**
FORWARD MOTION THROUGH FORWARD THINKING

BIBUS

BIBUS s.r.o.
+420 547 125 300
www.bibus.cz

EZT[®]

Zero Turn Hydrostatic Transaxle

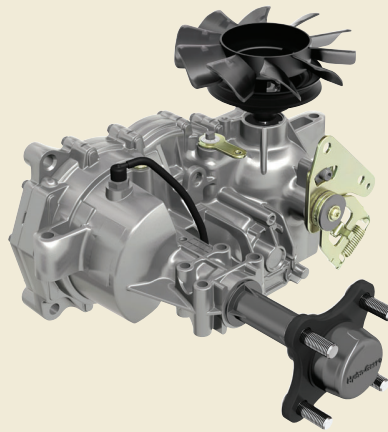

Factory pre-set neutral

Bypass mechanism

Speed and directional control

Return to Neutral option

Several fan and pulley kit options

Belt deflector option

Industry leading warranty and service support



SPECIFICATIONS		EZT
		ZC
Overall Transaxle Reduction		19.2:1
Input Speeds		
Maximum Hi-Idle [No Load]	rpm	3000
Minimum [Loaded]	rpm	1800
Output Torque		
Continuous	lb-ft [Nm]	115 [155]
Intermittent	lb-ft [Nm]	150 [203]
Weight on Tires (per unit)		
Maximum with 18" tires	lb [kg]	340 [154]
Axle Shaft Diameter		
	in [mm]	1.00 [25.4]
Axle Shaft End Options		Type: Two Flats or 4-Bolt Flange
Parking Brake Type		External Cog or Disc
Weight of Unit		
	lb [kg]	29 [13]

Specifications subject to change without notice.

BLN-0052
03/2012

**HYDRO-GEAR[®]**
FORWARD MOTION THROUGH FORWARD THINKING

A World Leader in Hydrostatic Transaxles * Axial Piston Pumps & Motors * LSHT Wheel Motors * Electric L&G Systems
1411 South Hamilton Street * Sullivan, IL 61951 * Phone (217) 728-2581 * Fax (217) 728-7665 * www.hydro-gear.com

BIBUS

BIBUS s.r.o.
+420 547 125 300
www.bibus.cz