



Butterfly Flange SAE 1 1/2" to SAE 5"

The **asa** butterfly flange with SAE and DIN connections allows the combination with an elastic element (rubber compensator) to make a short compensating and economical connection with the pump port. The lever position can be changed through our new mechanism. The handle direction (clockwise or counter clockwise) can be changed by turning the switch bracket. Please note that the butterfly flange may only be opened in mounted state and with greased or lubricated sealing. The adapter flange may only be welded with demounted butterfly flange.

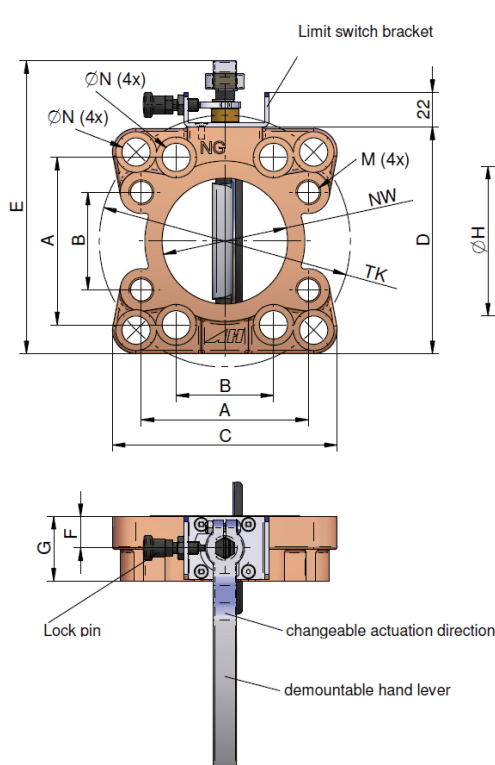

possible valve positions and actuating directions^{*)}

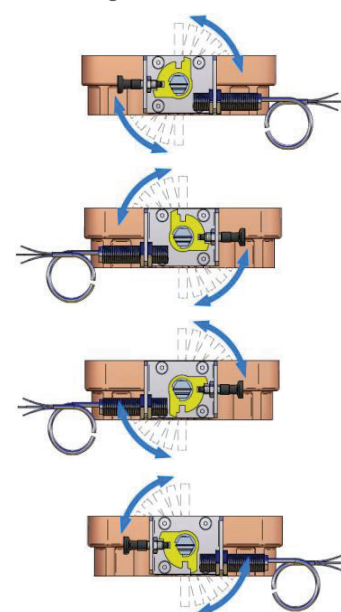

^{*)}...the shown valve is attached with the optional available inductive limit switch. Please contact us to discover all functions and options.

Technical Data

order number	description	size		A	B	C	D	E	F	G	Ø H	J	M	Ø N	NW	TK	weight
		SAE	DIN	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		[mm]	[mm]	[mm]	[kg]
SDA0040	AF 40	1 ½"	40	70	35,7	102	120	162	25	43	60	23,5	M12	13,5	40	110	2,17
SDA0050	AF 50	2"	50	77,8	42,9	111	112	155	20	43	73	35,8	M12	13,5	48	125	2,20
SDA0063	AF 63	2 ½"	65	89	50,8	111	119	161	20	40	83	55,3	M12	13,5	63	125	2,15
SDA0080	AF 80	3"	80	106,4	62	144	145	187	20	41	95	73,9	M16	18	80	160	2,98
SDA0100	AF 100	4"	100	130,2	77,8	163	162	205	20	43	123	98,2	M16	18	100	180	4,01
SDA0125	AF 125	5"	125	152,4	92	185	185	227	20	43	148	124,0	M16	18	125	210	4,80

Working Ranges

max. working pressure	7 bar(absolute)
max. differential pressure	6 bar
temperature range	-20°C to +80°C

Materials

housing	cast iron
lever	steel
valve disc	aluminium
seals	NBR

Options

limit switch	mechanical or inductive type
--------------	------------------------------



This data sheet and the corresponding scale drawings are to be used as a general guideline and technical overview of our products. Please contact us if more exact information is needed. As we are constantly improving our products, their characteristics, dimensions and weights may also change, although we do our best to incorporate these changes continually. asa assumes no liability for any information therein, any errors, omissions, misprints, nor any direct or indirect damages, losses or costs resulting therefrom. Any cooling performances and general technical values indicated in this catalogue are measured at a test bench according to asa testing procedures. Because there is no standardized testing procedure, tests used by other manufacturers could have different results. Due to different conditions in testing and application environments the cooling performance may also vary by +/- 15%. Therefore we recommend all products to be checked under the system operating conditions. This is also true of vibrations and mechanical stress as well as for pressure peaks and thermal stress and any other relevant factors. General tolerances according to DIN ISO 2768-m, General tolerances for casted parts according to EN ISO 8062-3 (DCTG 10). Tolerances for rubber parts are according to ISO 3302-1 (class M4-F+C). The tolerances of welding seams are defined by quality group D according to EN ISO 10042, if it is not specified on the actual scale drawing or data sheet. In addition to that we point out that any data sheet and corresponding scale drawing is no substitution for the manual.

DD-butterfly-flange-en-rev1-rev1

© asa hydraulik, December 2017

page1/1