


Compact cylinder double acting/single rod

# SSD2 Series

● Bore size:  $\phi 12/\phi 16/\phi 20/\phi 25/\phi 32/\phi 40/\phi 50/\phi 63/\phi 80/\phi 100$

JIS symbol



## Specifications

Item	SSD2											
	SSD2-L (with switch)											
Bore size mm	$\phi 12$	$\phi 16$	$\phi 20$	$\phi 25$	$\phi 32$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$		
Actuation	Double acting											
Working fluid	Compressed air											
Max. working pressure MPa	1.0											
Min. working pressure MPa	0.1					0.05						
Proof pressure MPa	1.6											
Ambient temperature °C	-10 to 60 (no freezing)											
Port size	M5				Rc1/8 *1		Rc1/4		Rc3/8			
Stroke tolerance mm	With rubber cushion											
	Without cushion											
Working piston speed mm/s	50 to 500					50 to 300						
Cushion	With or without cushion can be selected											
Lubrication	Not required (use turbine oil class 1 ISO VG32 if lubrication is necessary)											
Allowable absorbed Energy J	With rubber cushion		0.03	0.05	0.10	0.16	0.16	0.44	0.75	0.78	2.51	3.92
	Without cushion		0.004	0.01	0.016	0.021	0.025	0.092	0.1	0.12	0.27	0.56

\*1: The  $\phi 32$  bore size with a 5 mm stroke and without a switch has a port size of M5.

## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\phi 12$	5/10/15/20	30	1
$\phi 16$	25/30		
$\phi 20$	5/10/15/20/25	50	
$\phi 25$	30/35/40/45/50		
$\phi 32$	5/10/15/20/25/30/	100	
$\phi 40$	35/40/45/50/75/100		
$\phi 50$	10/15/20/25	30/35/40/45/50	
$\phi 63$	75/100		
$\phi 80$			
$\phi 100$			

\*1: When using the type with switch, refer to the table of the min. stroke with switch.

\*2: If the stroke exceeds the max. stroke, refer to the long stroke on page 792.

\*3: Refer to pages 763 and 765 for the min. stroke with mounting bracket LB.

## Min. stroke with switch (With 2 switches)

Bore size (mm)	T0H/V / T5H/V	T2H/V / T3H/V
$\phi 12$	10 (5)	5
$\phi 16$		
$\phi 20$	5	
$\phi 25$		
$\phi 32$		
$\phi 40$		
$\phi 50$		
$\phi 63$		
$\phi 80$		
$\phi 100$		


\*1: Less than 10mm stroke of 2-color LED, off-delay, AC magnetic field proof with T1\*, T8\* switches are not available.

\*2: Values in ( ) are for the type with 1 on rod side.

## Custom stroke

### ● SSD2 Series

Item	Standard product		Optional products	
	Standard stroke body with spacer		Dedicated unit (-S)	
Model No.	Refer to How to order.		Add "-S" option code to the model No.	
Description	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.		Dedicated units of the required stroke are available.	
Stroke range	Bore size	Stroke range	Bore size	Stroke range
	12/16	1 to 29	12, 16	6 to 29
	20 to 25	1 to 49	20, 25	6 to 49
	32 to 100	1 to 99	32 to 100	11 to 99
Example of model No.	Model No.: SSD2-32-38 A +2 mm spacer is added to the SSD2-32-40 standard cylinder to create 38 mm stroke. B + stroke is 63 mm.		Model No.: SSD2-32-41-S Dedicated units for 41 mm stroke are available. B + stroke is 64 mm.	

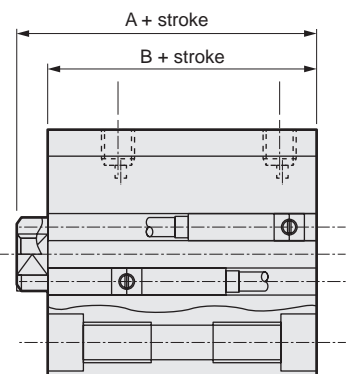

### Switch specifications (F-switch)

● 1-color/2-color LED

Item	2-wire proximity		3-wire proximity		2-wire proximity		3-wire proximity		
	F2S		F3S		F2H/F2V	F2YH/F2YV	F3H/F3V	F3PH/F3PV (made to order)	F3YH/F3YV
Applications	Dedicated for programmable controller		For programmable controller, relay		Dedicated for programmable controller		For programmable controller, relay		
Output method	-		NPN output		-		NPN output	PNP output	NPN output
Power supply voltage	-		10 to 28 VDC		-		10 to 28 VDC	4.5 to 28 VDC	10 to 28 VDC
Load voltage	10 to 30 VDC		30 VDC or less		10 to 30 VDC		30 VDC or less		
Load current	5 to 20 mA		50 mA or less		5 to 20 mA		50 mA or less		
Indicator	LED (Lit when ON)				Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Yellow LED (Lit when ON)		Red/green LED (Lit when ON)
Leakage current	1 mA or less		10 µA or less		1 mA or less		10 µA or less		
Weight	g				1 m:10 3 m:29				

### Switch specifications (T-switch)

● 1-color/2-color LED/for AC magnetic field proof

Item	2-wire proximity		2-wire proximity				3-wire proximity				2-wire reed				2-wire proximity	
	T1H/T1V	T2H/T2V T2JH/T2JV	T2YH/ T2YV	T2WH/ T2WV	T3H/ T3V	T3PH/ T3PV	T3YH/ T3YV	T3WH/ T3WV	T0H/T0V	T5H/T5V		T8H/T8V		T2YD(*4) T2YDT		
Applications	For programmable controller, relay, compact solenoid valve	Dedicated for programmable controller				For programmable controller, relay				For programmable controller, relay	For programmable controller, relay, IC circuit (no indicator lamp), serial connection		For programmable controller, relay		For programmable controller	
Output method	-		-				NPN output				-		-		-	
Pwr. supp. V.	-		-				10 to 28 VDC				-		-		-	
Load voltage	85 to 265 VAC	10 to 30 VDC	24 VDC ±10%		30 VDC or less				12/24 VDC	100/110 VAC	5/12/24 VDC	100/110 VAC	12/24 VDC	110 VAC	220 VAC	24 VDC ±10%
Load current	5 to 100 mA	5 to 20 mA (*3)		100mA or less		50mA or less		5 to 50 mA	7 to 20 mA	50 mA or less	20 mA or less	5 to 50 mA	7 to 20 mA	7 to 10 mA	5 to 20 mA	
Indicator	LED (Lit when ON)	LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	No indicator lamp		LED (Lit when ON)		Red/green LED (Lit when ON)		
Leakage current	≤ 1 mA at 100 VAC, ≤ 2 mA at 200 VAC	1 mA or less		10 µA or less				0 mA				1 mA or less				
Weight	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80		1 m:18 3 m:49 5 m:80			1 m:33 3 m:87 5 m:142		1 m:61 3 m:166 5 m:272		

\*1: Refer to Ending Page 1 for detailed switch specifications and dimensions.

\*2: Switches other than the above models, such as switches with connectors, are also available. Refer to Ending Page 1.

\*3: The max. load current is 20 mA at 25°C. The current is lower than 20 mA if the operating ambient temperature around the switch is higher than 25°C. (5 to 10 mA at 60°C)

\*4: Switch for AC magnetic field (T2YD/T2YDT) cannot be used in DC magnetic field.

\*5: The F-switch uses a bend-resistant lead wire.

### Cylinder weight table (the weight of the switches is when there are 2 cylinder switches.)

(Unit: g)

Stroke (mm)	5		10		15		20		25		30		35		40		45		50		75		100	
	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch
ø12	36	86	44	86	53	95	61	103	70	112	72	114	-	-	-	-	-	-	-	-	-	-	-	-
ø16	48	104	59	104	69	114	80	125	91	136	102	147	-	-	-	-	-	-	-	-	-	-	-	-
ø20	63	118	75	150	88	163	101	176	113	188	126	201	139	214	152	227	165	240	203	278	-	-	-	-
ø25	87	178	102	193	118	209	134	225	150	241	165	256	181	272	197	288	213	304	228	319	-	-	-	-
ø32	122	236	144	258	166	280	188	302	209	323	231	345	253	367	275	389	297	411	318	432	494	542	604	652
ø40	183	326	210	353	236	379	263	406	290	433	316	459	342	485	369	512	395	538	472	565	646	695	776	825
ø50	-	-	341	535	383	577	425	619	467	661	510	704	552	746	594	788	636	830	678	872	1025	1082	1235	1292
ø63	-	-	507	786	562	841	617	896	672	951	727	1006	782	1061	838	1117	893	1172	948	1227	1438	1502	1713	1777
ø80	-	-	928	1341	1015	1428	1101	1514	1188	1601	1274	1687	1361	1774	1448	1861	1535	1948	1621	2034	2401	2467	2833	2899
ø100	-	-	1433	2000	1547	2114	1660	2227	1774	2341	1888	2455	2002	2569	2115	2682	2229	2796	2343	2910	3406	3478	3973	4045

### Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa											
		0.05	0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø12	Push	-	11.3	17.0	22.6	33.9	45.2	56.5	67.9	79.2	90.5	1.02x10 <sup>2</sup>	1.13x10 <sup>2</sup>
	Pull	-	8.48	12.7	17.0	25.4	33.9	42.4	50.9	59.4	67.9	76.3	84.8
ø16	Push	-	20.1	30.2	40.2	60.3	80.4	1.01x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.61x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.01x10 <sup>2</sup>
	Pull	-	15.1	22.6	30.2	45.2	60.3	75.4	90.5	1.06x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.36x10 <sup>2</sup>	1.51x10 <sup>2</sup>
ø20	Push	-	31.4	47.1	62.8	94.2	1.26x10 <sup>2</sup>	1.57x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.20x10 <sup>2</sup>	2.51x10 <sup>2</sup>	2.83x10 <sup>2</sup>	3.14x10 <sup>2</sup>
	Pull	-	23.6	35.3	47.1	70.7	94.2	1.18x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.65x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.12x10 <sup>2</sup>	2.36x10 <sup>2</sup>
ø25	Push	-	49.1	73.6	98.2	1.47x10 <sup>2</sup>	1.96x10 <sup>2</sup>	2.45x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.44x10 <sup>2</sup>	3.93x10 <sup>2</sup>	4.42x10 <sup>2</sup>	4.91x10 <sup>2</sup>
	Pull	-	37.8	56.7	75.6	1.13x10 <sup>2</sup>	1.51x10 <sup>2</sup>	1.89x10 <sup>2</sup>	2.27x10 <sup>2</sup>	2.64x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.40x10 <sup>2</sup>	3.78x10 <sup>2</sup>
ø32	Push	-	80.4	1.21x10 <sup>2</sup>	1.61x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.22x10 <sup>2</sup>	4.02x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.63x10 <sup>2</sup>	6.43x10 <sup>2</sup>	7.24x10 <sup>2</sup>	8.04x10 <sup>2</sup>
	Pull	-	60.3	90.5	1.21x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.62x10 <sup>2</sup>	4.22x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.43x10 <sup>2</sup>	6.03x10 <sup>2</sup>
ø40	Push	-	1.26x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.51x10 <sup>2</sup>	3.77x10 <sup>2</sup>	5.03x10 <sup>2</sup>	6.28x10 <sup>2</sup>	7.54x10 <sup>2</sup>	8.80x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.13x10 <sup>3</sup>	1.26x10 <sup>3</sup>
	Pull	-	1.06x10 <sup>2</sup>	1.58x10 <sup>2</sup>	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>
ø50	Push	-	1.96x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.93x10 <sup>2</sup>	5.89x10 <sup>2</sup>	7.85x10 <sup>2</sup>	9.82x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.37x10 <sup>3</sup>	1.57x10 <sup>3</sup>	1.77x10 <sup>3</sup>	1.96x10 <sup>3</sup>
	Pull	-	1.65x10 <sup>2</sup>	2.47x10 <sup>2</sup>	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>
ø63	Push	1.56x10 <sup>2</sup>	3.12x10 <sup>2</sup>	4.68x10 <sup>2</sup>	6.23x10 <sup>2</sup>	9.35x10 <sup>2</sup>	1.25x10 <sup>3</sup>	1.56x10 <sup>3</sup>	1.87x10 <sup>3</sup>	2.18x10 <sup>3</sup>	2.49x10 <sup>3</sup>	2.81x10 <sup>3</sup>	3.12x10 <sup>3</sup>
	Pull	1.40x10 <sup>2</sup>	2.80x10 <sup>2</sup>	4.20x10 <sup>2</sup>	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>	2.24x10 <sup>3</sup>	2.52x10 <sup>3</sup>	2.80x10 <sup>3</sup>
ø80	Push	2.51x10 <sup>2</sup>	5.03x10 <sup>2</sup>	7.54x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.51x10 <sup>3</sup>	2.01x10 <sup>3</sup>	2.51x10 <sup>3</sup>	3.02x10 <sup>3</sup>	3.52x10 <sup>3</sup>	4.02x10 <sup>3</sup>	4.52x10 <sup>3</sup>	5.03x10 <sup>3</sup>
	Pull	2.27x10 <sup>2</sup>	4.54x10 <sup>2</sup>	6.80x10 <sup>2</sup>	9.07x10 <sup>2</sup>	1.36x10 <sup>3</sup>	1.81x10 <sup>3</sup>	2.27x10 <sup>3</sup>	2.72x10 <sup>3</sup>	3.17x10 <sup>3</sup>	3.63x10 <sup>3</sup>	4.08x10 <sup>3</sup>	4.54x10 <sup>3</sup>
ø100	Push	3.93x10 <sup>2</sup>	7.85x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.57x10 <sup>3</sup>	2.36x10 <sup>3</sup>	3.14x10 <sup>3</sup>	3.93x10 <sup>3</sup>	4.71x10 <sup>3</sup>	5.50x10 <sup>3</sup>	6.28x10 <sup>3</sup>	7.07x10 <sup>3</sup>	7.85x10 <sup>3</sup>
	Pull	3.57x10 <sup>2</sup>	7.15x10 <sup>2</sup>	1.07x10 <sup>3</sup>	1.43x10 <sup>3</sup>	2.14x10 <sup>3</sup>	2.86x10 <sup>3</sup>	3.57x10 <sup>3</sup>	4.29x10 <sup>3</sup>	5.00x10 <sup>3</sup>	5.72x10 <sup>3</sup>	6.43x10 <sup>3</sup>	7.15x10 <sup>3</sup>

# SSD2 Series

## How to order

No switch (without magnet for switch)

**SSD2** - 12 - 5 - N - LB - I

With switch (built-in magnet for switch)

**SSD2-L** - 12 - 10 - T0H - R - N - LB - I

**A** Model No.

**B** Bore size

**C** Port thread

**D** Cushion

**E** Stroke

**F** Switch model No.

\*1

\*2

\*3

\*8

\*9

**G** Switch quantity

**H** Option

\*4

### ⚠ Precautions for model No. selection

\*1 : The T2YD\* switch cannot be mounted on the ø12 and ø16 bore sizes.

\*2 : The T8\* switch cannot be mounted on the ø12 to ø32 bore sizes.

\*3 : The F-switch can only be mounted on the piping port surface of bore sizes ø20 and ø25.

\*4 : Piston rod of ø12 to ø25 is stainless steel as standard. C-snap ring is stainless steel instead of steel. The rod end male thread nut is stainless steel.

\*5 : The mounting bracket is included at shipment.

\*6 : The projection dimension of piston rod WF when LB or FA is selected is different from that of the standard. Refer to the dimensions on pages 761, 763, 765 and 766. The number of the specified protruding dimension will be added at the end of the model No. printed on the metal plate on the body.

\*7 : "I" and "Y" cannot be selected together.

\*8 : The F-switch with L type lead wire on ø20 models cannot be selected on strokes of 15 mm or under.

\*9 : Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.

\*10 : Refer to pages 750 and 751 for combinations of variations/options.

\*11 : F-switch cannot be selected.

[Example of model No.]

**SSD2-L-12-10-T0H-R-N-LB-I**

Model: Compact cylinder, standard

**B** Bore size : ø12 mm

**C** Port thread : Rc thread

**D** Cushion : No cushion

**E** Stroke : 10mm

**F** Switch model No. : Reed switch T0H, lead wire length 1 m

**G** Switch quantity : 1 on rod side

**H** Option : Rod end male thread

**I** Mounting bracket : Axial foot

**J** Accessory : Rod eye

**I** Mounting bracket

\*5

\*6

**J** Accessory

\*7

Code	Description
<b>A Model No.</b>	
SSD2	Double acting/single rod
SSD2-L	Double acting/single rod/with switch

<b>B Bore size (mm)</b>	
12	ø12
16	ø16
20	ø20
25	ø25
32	ø32
40	ø40
50	ø50
63	ø63
80	ø80
100	ø100

<b>C Port thread</b>	
Blank	Rc thread
NN	NPT thread (ø32 and over) (made-to-order product)
GN	G thread (ø32 and over) (made-to-order product)

<b>D Cushion</b>	
Blank	Without cushion
D	With rubber cushion

<b>E Stroke (mm)</b>	
Refer to the stroke table on the following page.	

<b>F Switch model No.</b>		Indicator	Lead wire	Bore size																	
Axial lead wire	Radial lead wire			12	16	20	25	32	40	50	63	80	100								
-	F2S*	1-color LED	2-wire			●	●														
-	F3S*		3-wire			●	●														
F2H*	F2V*		2-wire			●	●														
F3H*	F3V*	1-color LED (PNP output) (custom)	3-wire			●	●														
F3PH*	F3PV*		3-wire			●	●														
F2YH*	F2YV*		2-wire			●	●														
F3YH*	F3YV*	2-color LED	3-wire			●	●														
T0H*	T0V*		1-color LED	2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
T5H*	T5V*			2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
T8H*	T8V*	2-wire		●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
T1H*	T1V*	1-color LED	2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
T2H*	T2V*		2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
T3H*	T3V*		3-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
T3PH*	T3PV*	1-color LED (PNP output)	3-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
T2WH*	T2WV*		2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
T2YH*	T2YV*		2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
T3WH*	T3WV*	2-color LED	3-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
T3YH*	T3YV*		3-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
T2YD*	-		2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
T2YDT*	-	2-color LED for AC magnetic field	2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
T2JH*	T2JV*		2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	

<b>* Lead wire length</b>	
Blank	1 m (standard)
3	3 m (option)
5	5 m (option)

<b>G Switch quantity</b>	
R	1 on rod side
H	1 on head side
D	2

<b>H Option</b>		Bore size (mm)											
		12	16	20	25	32	40	50	63	80	100		
Blank	Rod end female thread	●	●	●	●	●	●	●	●	●	●		
N	Rod end male thread	●	●	●	●	●	●	●	●	●	●		
P6	Copper and PTFE free specifications	Supported as standard									●	●	●
M *4	Piston rod material (stainless steel)	●	●	●	●	●	●	●	●	●	●		
S	Dedicated unit for custom stroke	●	●	●	●	●	●	●	●	●	●		
P4	Specifications for	●	●	●	●	●	●	●	●	●	●		
P40	rechargeable battery	●	●	●	●	●	●	●	●	●	●		

<b>I Mounting bracket</b>	
Blank	Without mounting bracket
LB	Axial foot
CB	Clevis bracket (pin and snap ring included)
FA	Rod side flange
FB	Head side flange

<b>J Accessory (available when rod end male thread "N" is selected)</b>	
I	Rod eye
Y	Rod clevis (pin and snap ring included)

### [Stroke table]

Stroke (mm)	Applicable bore size										
	12	16	20	25	32	40	50	63	80	100	
Standard stroke	5	●	●	●	●	●	●				
	10	●	●	●	●	●	●	●	●	●	●
	15	●	●	●	●	●	●	●	●	●	●
	20	●	●	●	●	●	●	●	●	●	●
	25	●	●	●	●	●	●	●	●	●	●
	30	●	●	●	●	●	●	●	●	●	●
	35			●	●	●	●	●	●	●	●
	40			●	●	●	●	●	●	●	●
	45			●	●	●	●	●	●	●	●
	50			●	●	●	●	●	●	●	●
	75					●	●	●	●	●	●
	100					●	●	●	●	●	●
Min. stroke (mm) *1	1										
Max. stroke (mm)	30		50			100					
Custom stroke *2	In 1 mm increments										

\*1: Less than 5 mm for 1-color LED switch and less than 10 mm for the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch are not available.

Refer to page 752 for the min. stroke with switch.

\*2: The total length when using a custom stroke is the same as that when using the next longer standard stroke.

\*3: Refer to pages 763 and 765 for the min. stroke with mounting bracket LB.

### How to order switch

**SW - T0H**

Switch model No.  
(Item ㉔ on page 754)

### How to order mounting bracket

Bore size (mm)	ø12	ø16	ø20	ø25	ø32	ø40	ø50
<b>Mounting bracket</b>							
Foot (LB)	SSD2-LB-12	SSD2-LB-16	SSD2-LB-20	SSD2-LB-25	SSD2-LB-32	SSD2-LB-40	SSD2-LB-50
Flange (FA/FB)	SSD2-FA-12	SSD2-FA-16	SSD2-FA-20	SSD2-FA-25	SSD2-FA-32	SSD2-FA-40	SSD2-FA-50
Clevis bracket (CB)	SSD2-CB-12	SSD2-CB-16	SSD2-CB-20	SSD2-CB-25	SSD2-CB-32	SSD2-CB-40	SSD2-CB-50
<b>Bore size (mm)</b>	<b>ø63</b>	<b>ø80</b>	<b>ø100</b>				
<b>Mounting bracket</b>							
Foot (LB)	SSD2-LB-63	SSD2-LB-80	SSD2-LB-100				
Flange (FA/FB)	SSD2-FA-63	SSD2-FA-80	SSD2-FA-100				
Clevis bracket (CB)	SSD2-CB-63	SSD2-CB-80	SSD2-CB-100				

\*1: The foot mounting bracket is provided as 2 pcs./set.

Specifications for rechargeable battery (catalog No. CC-1226A)

- Design compatible with rechargeable battery manufacturing process

**SSD2**..... **P4\***

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ


FK

Spd  
Contr


Ending

## Internal structure and parts list (ø12 to 50) (no cushion)


● SSD2-L-12 to 25 (double acting/with switch)

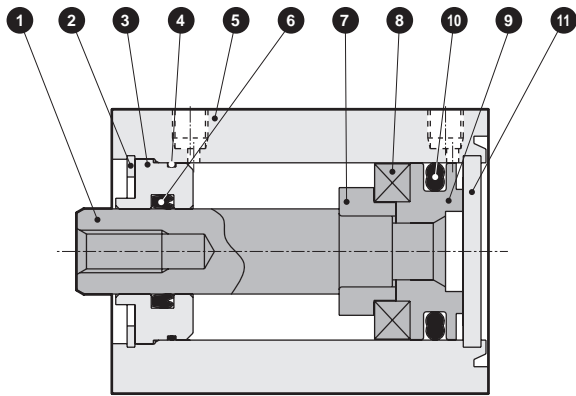


● SSD2-L-32 to 50 (double acting/with switch)

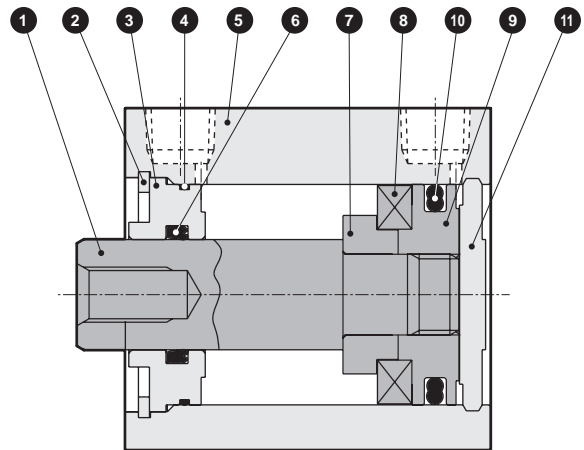

● SSD2-12 to 25 (double acting)

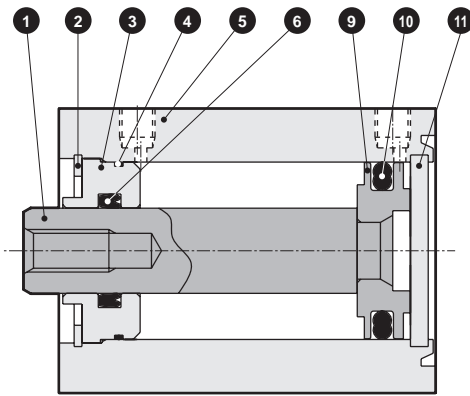

● SSD2-32 to 50 (double acting)

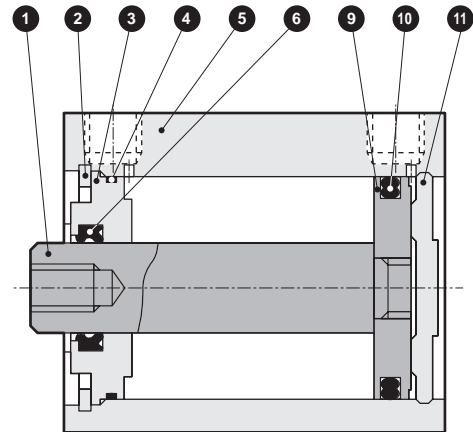


No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	ø12 to ø25: Stainless steel ø32 to ø50: Steel	ø16 to ø50: Industrial chrome plating	7	Spacer	Aluminum alloy	ø12 to ø32: Chromate
2	C-snap ring	Steel	Zinc phosphate	8	Magnet	Plastic	
3	Rod metal	Special aluminum	Alumite	9	Piston	Aluminum alloy	Chromate
4	Rod metal gasket	Nitrile rubber		10	Piston packing	Nitrile rubber	
5	Body	Aluminum alloy	Hard alumite	11	Cover	ø12 to ø25: Stainless steel ø32 to ø50: Aluminum alloy	ø32 to ø50: Alumite
6	Rod packing	Nitrile rubber					

### Repair parts list


Bore size (mm)	Kit No.	Repair parts No.
ø12	SSD2-12K	4 6 10
ø16	SSD2-16K	
ø20	SSD2-20K	
ø25	SSD2-25K	
ø32	SSD2-32K	
ø40	SSD2-40K	
ø50	SSD2-50K	

### Internal structure and parts list (ø63 to 100) (no cushion)

● SSD2-L-63 to 100 (double acting/with switch)

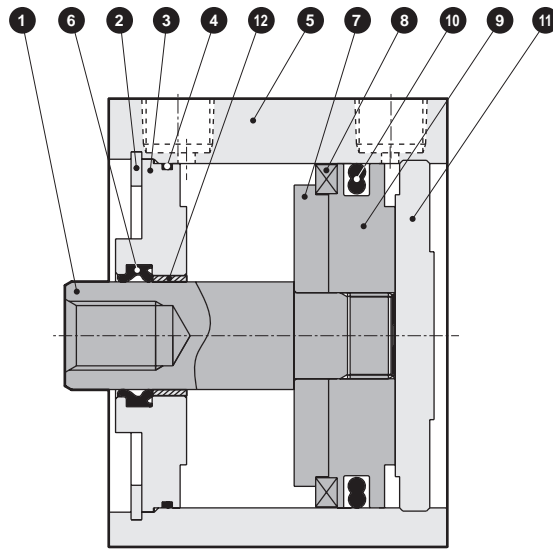

● SSD2-63 to 100 (double acting)

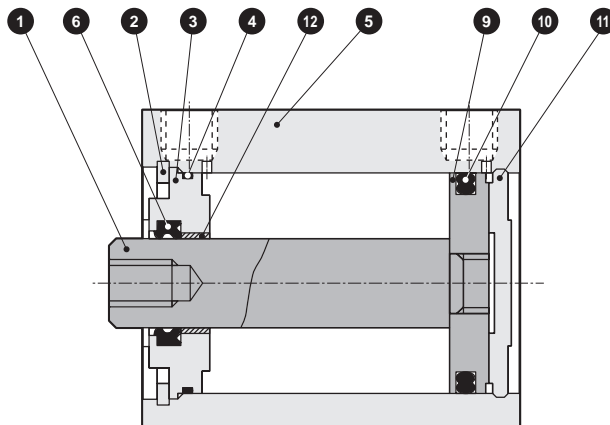

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	Steel	Industrial chrome plating	7	Spacer	Aluminum alloy	
2	C-snap ring	Steel	Zinc phosphate	8	Magnet	Plastic	
3	Rod metal	Aluminum alloy	Chromate	9	Piston	Aluminum alloy	Chromate
4	Rod metal gasket	Nitrile rubber		10	Piston packing	Nitrile rubber	
5	Body	Aluminum alloy	Hard alumite	11	Cover	Aluminum alloy	Alumite
6	Rod packing	Nitrile rubber		12	Bush	Oiles drymet	*1

\*1: Material is steel for copper and PTFE free specifications.

### Repair parts list

Bore size (mm)	Kit No.	Repair parts No.
ø63	SSD2-63K	4 6 10
ø80	SSD2-80K	
ø100	SSD2-100K	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ


FK

Spd  
Contr


Ending

## Internal structure and parts list (ø12 to 50) (with rubber cushion)


● SSD2-L-12D to 32D (double acting/with switch)

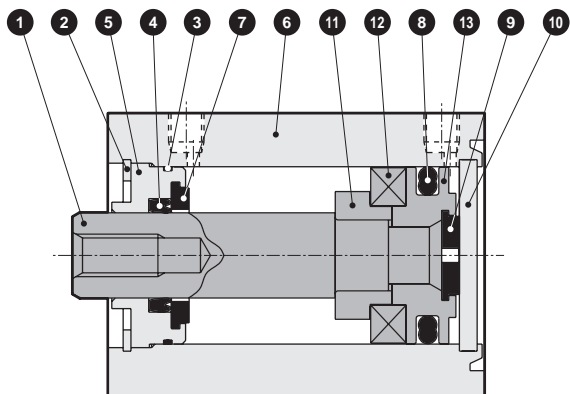


● SSD2-L-40D to 50D (double acting/with switch)

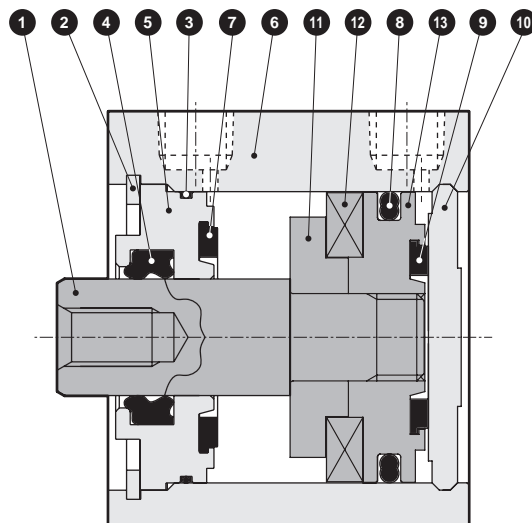

● SSD2-12D to 32D (double acting)

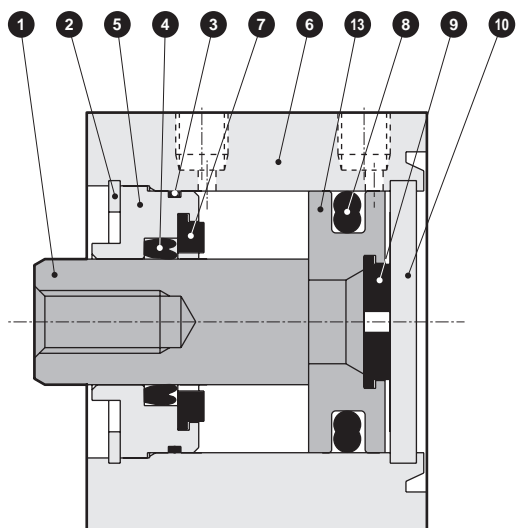

● SSD2-40D, 50D (double acting)

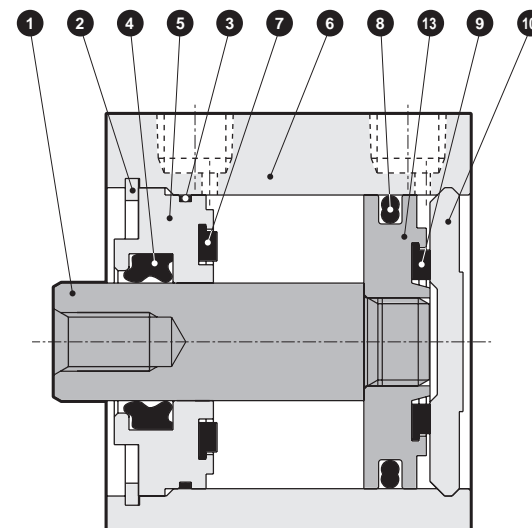


No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	ø12 to ø25: Stainless steel ø32 to ø50: Steel	ø16 to ø50: Industrial chrome plating	8	Piston packing	Nitrile rubber	
2	C-snap ring	Steel	Zinc phosphate	9	Cushion rubber (H)	Urethane rubber	
3	Rod metal gasket	Nitrile rubber		10	Cover	ø12 to ø25: Stainless steel ø32 to ø50: Aluminum alloy	ø32 to ø50: Alumite
4	Rod packing	Nitrile rubber		11	Spacer	Aluminum alloy	ø12 to ø32: Chromate
5	Rod metal	Aluminum alloy	Alumite	12	Magnet	Plastic	
6	Body	Aluminum alloy	Hard alumite	13	Piston	Aluminum alloy	Chromate
7	Cushion rubber (R)	Urethane rubber					

### Repair parts list


Bore size (mm)	Kit No.	Repair parts No.
ø12	SSD2-12DK	3 4 7 8 9
ø16	SSD2-16DK	
ø20	SSD2-20DK	
ø25	SSD2-25DK	
ø32	SSD2-32DK	
ø40	SSD2-40DK	
ø50	SSD2-50DK	

### Internal structure and parts list (ø63 to 100) (with rubber cushion)

● SSD2-L-63D to 100D (double acting/with switch)

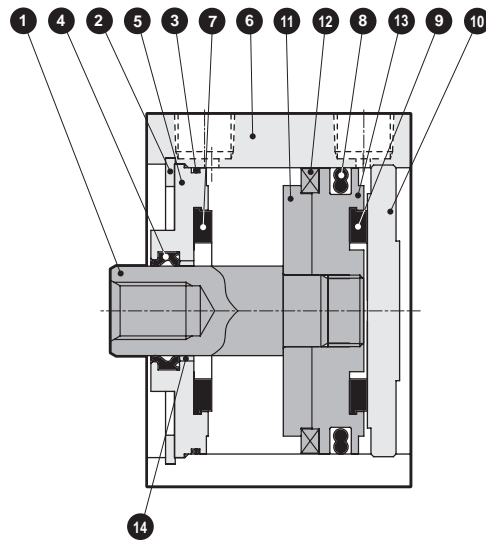

● SSD2-63D to 100D (double acting)

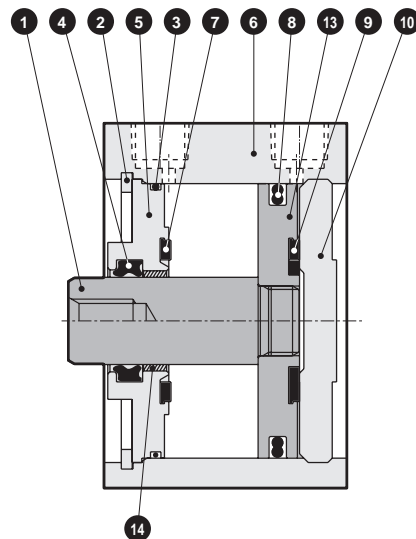

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	Steel	Industrial chrome plating	8	Piston packing	Nitrile rubber	
2	C-snap ring	Steel	Zinc phosphate	9	Cushion rubber (H)	Urethane rubber	
3	Rod metal gasket	Nitrile rubber		10	Cover	Aluminum alloy	Alumite
4	Rod packing	Nitrile rubber		11	Spacer	Aluminum alloy	
5	Rod metal	Aluminum alloy	Chromate	12	Magnet	Plastic	
6	Body	Aluminum alloy	Hard alumite	13	Piston	Aluminum alloy	Chromate
7	Cushion rubber (R)	Urethane rubber		14	Bush	Oiles drymet	

### Repair parts list

Bore size (mm)	Kit No.	Repair parts No.
ø63	SSD2-63DK	
ø80	SSD2-80DK	3 4 7 8 9
ø100	SSD2-100DK	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending






# SSD2 Series

## Dimensions





● SSD2-L-12 to 25 (with switch, TOH/V, T5H/V, T2H/V, T3H/V)  
 ø12/ø16

● Rod end male thread

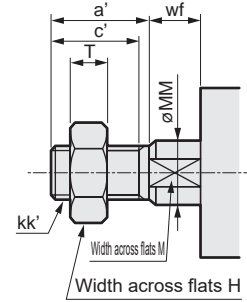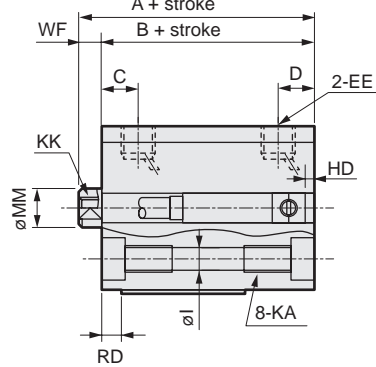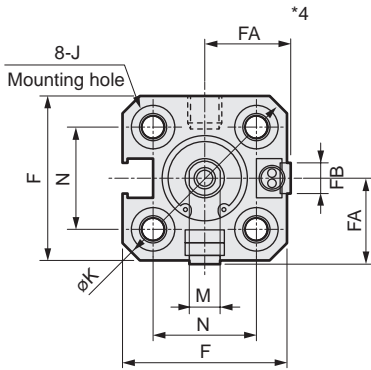

ø20/ø25

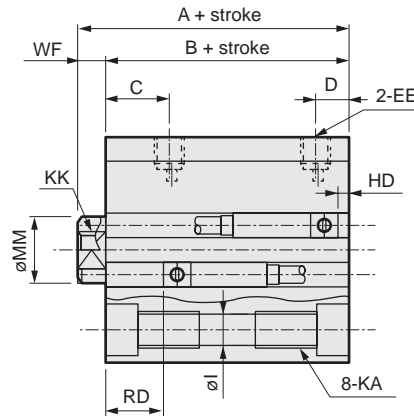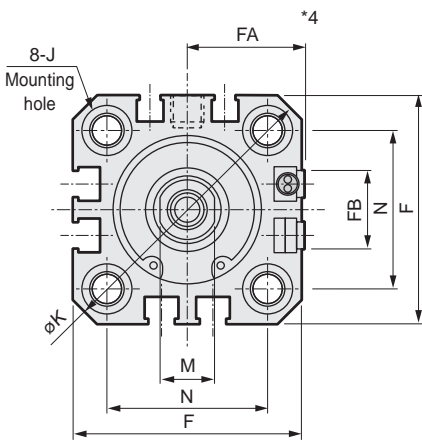

Code		Common dimensions with switch																
Bore size (mm)	A <sup>*1</sup>	B <sup>*1</sup>	C	D	EE	F	FA <sup>*4</sup>	FB	I	J	K	KA	KK	M	MM	N	WF	
ø12	25.5	22	5.5	5.5	M5	25	13(16.5)	4.5	3.5	6.5 spot face depth 3.5	32	M4 depth 7	M3 depth 6	5	6	15.5	3.5	
ø16	25.5	22	5.5	5.5	M5	29	15(18.5)	4.5	3.5	6.5 spot face depth 3.5	38	M4 depth 7	M4 depth 8	6	8	20	3.5	
ø20	34	29.5	8	5.5	M5	36	18.5(22)	12.5	5.5	9 spot face depth 5.5	47	M6 depth 11	M5 depth 7	8	10	25.5	4.5	
ø25	37.5	32.5	11	6	M5	40	20.5(24)	13.5	5.5	9 spot face depth 5.5	51	M6 depth 11	M6 depth 12	10	12	28	5	
Switch dimensions	Reed TOH/TOV, T5H/T5V <sup>*6</sup>				Proximity T2H/T2V, T3H/T3V <sup>*6</sup>				Proximity T2WH/T2WV, T3WH/T3WV <sup>*6</sup>				Proximity F2H/F2V, F3H/F3V, F2YH/F2YV, F3YH/F3YV				Proximity F2S/F3S	
	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD		
ø12	1.5(0)	1.5(3)	1.5(0)	1.5(3)	3.5(2)	3.5(5)												
ø16	0	4	0	4.5	1	6												
ø20	3	7.5	3	7.5	5	9.5	7.5	12	6.5	11								
ø25	4	9.5	4	9.5	6	11.5	8.5	14	7.5	13								

\*1 : To calculate A + stroke or B + stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value.

(Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

· For ø16: A + stroke = 35.5 B + stroke = 32

When you have selected "S" (dedicated unit for custom stroke), apply the custom stroke of 7 mm.

· For ø16: A + stroke = 32.5 B + stroke = 29

\*2 : HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.

\*3: Refer to page 1044 for HD, RD and protruding dimensions of the 2-color LED, off-delay, AC magnetic field proof, T1\* and T8\* switches.

\*4 : Dimensions in ( ) of FA are for the L-shaped lead wire.

\*5: For dimensions of individual accessories, refer to pages 1046 to 1049.

\*6 : Dimensions in ( ) of codes HD and RD are for the type with rubber cushion.

\*7 : Only F-switch is available for the ø20 or ø25 piping port surface.


● Rod end male thread

Code	a'	c'	H	kk'	M	MM	T	wf
ø12	10.5	9	8	M5	5	6	3.2	3.5
ø16	12	10	10	M6	6	8	3.6	3.5
ø20	14	12	13	M8	8	10	5	4.5
ø25	17.5	15	17	M10x1.25	10	12	6	5


### Dimensions with mounting bracket



- Axial foot (LB) with switch  
SSD2-L-12 to 25 -LB

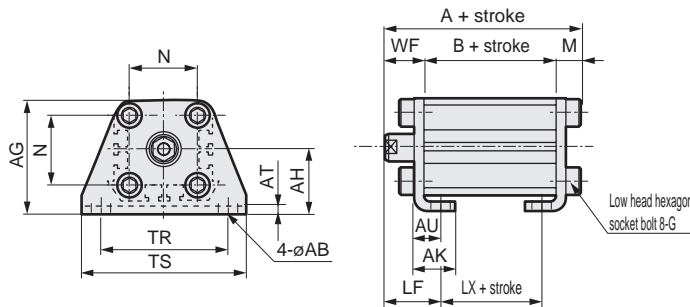

Rod end male thread




Code	Common dimensions						Female thread					
	Bore size (mm)	AB	AG	AH	AK	AT	AU	G	N	TR	TS	M
ø12	5	29.5	17	12.5	2	8	M4x10	15.5	34	44	4.8	
ø16	5	33.5	19	13	2	8	M4x10	20	38	48	4.8	
ø20	7	42	24	15	3.2	9.2	M6x16	25.5	48	62	7.2	
ø25	7	46	26	16.5	3.2	10.7	M6x16	28	52	66	7.2	


  

Code	Male thread											
	Bore size (mm)	WF	LF	A	B	LX	a'	wf	LF	A	B	LX
ø12	13.5	19.5	40.3	22	10	10.5	13.5	19.5	50.8	22	10	
ø16	13.5	19.5	40.3	22	10	12	13.5	19.5	52.3	22	10	
ø20	14.5	20.5	51.2	29.5	17.5	14	14.5	20.5	65.2	29.5	17.5	
ø25	15	22.5	54.7	32.5	17.5	17.5	15	22.5	72.2	32.5	17.5	

- Clevis bracket (CB) with switch  
SSD2-L-12 to 25 -CB

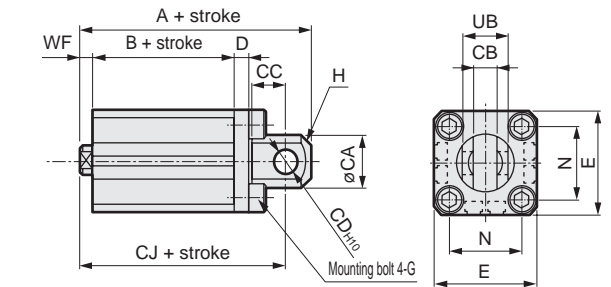

Rod end male thread




Code	Common dimensions										
	Bore size (mm)	CA	CB	CC	CD	D	E	G	H	N	UB
ø12	12	5.2 <sup>+0.2</sup> <sub>0</sub>	7	5	4	25	M4x12	C1.5	15.5	10 <sup>-0.1</sup> <sub>-0.3</sub>	
ø16	15	6.6 <sup>+0.3</sup> <sub>0</sub>	8	5	5	29	M4x12	C2	20	12 <sup>-0.1</sup> <sub>-0.4</sub>	
ø20	20	8.2 <sup>+0.2</sup> <sub>0</sub>	12	8	5	36	M6x16	C4	25.5	16 <sup>-0.1</sup> <sub>-0.3</sub>	
ø25	24	10.2 <sup>+0.2</sup> <sub>0</sub>	14	10	5	40	M6x16	C5	28	20 <sup>-0.1</sup> <sub>-0.3</sub>	


  

Code	Female thread			Male thread						
	Bore size (mm)	WF	A	B	CJ	a'	wf	A	B	CJ
ø12	3.5	45.5	22	39.5	10.5	3.5	56	22	39.5	
ø16	3.5	46.5	22	40.5	12	3.5	58.5	22	40.5	
ø20	4.5	61	29.5	52	14	4.5	75	29.5	52	
ø25	5	67.5	32.5	57.5	17.5	5	85	32.5	57.5	

- Rod side flange (FA) with switch  
SSD2-L-12 to 25 -FA

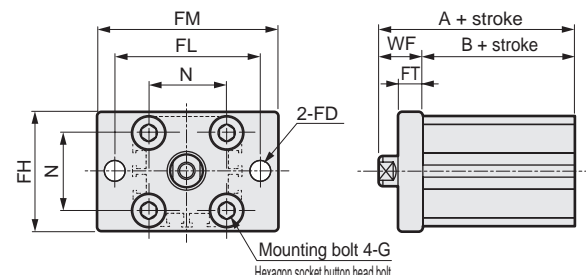

Rod end male thread




Code	Common dimensions							
	Bore size (mm)	FD	FH	FL	FM	FT	N	G
ø12	4.5	25	45	55	5.5	15.5	M4x12	
ø16	4.5	30	45	55	5.5	20	M4x12	
ø20	6.6	39	48	60	8	25.5	M6x16	
ø25	6.6	42	52	64	8	28	M6x16	


  

Code	Female thread			Male thread				
	Bore size (mm)	WF	A	B	a'	wf	A	B
ø12	13.5	35.5	22	10.5	13.5	46	22	
ø16	13.5	35.5	22	12	13.5	47.5	22	
ø20	14.5	44	29.5	14	14.5	58	29.5	
ø25	15	47.5	32.5	17.5	15	65	32.5	

- Head side flange (FB) with switch  
SSD2-L-12 to 25 -FB

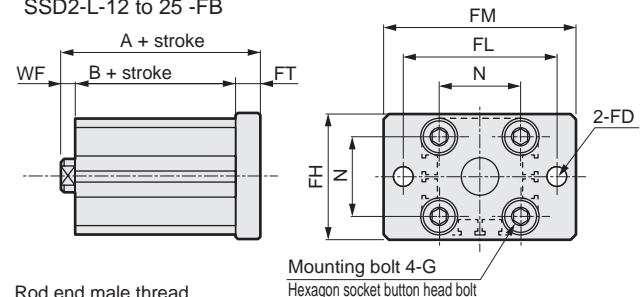

Rod end male thread



Code	Common dimensions							
	Bore size (mm)	FD	FH	FL	FM	FT	N	G
ø12	4.5	25	45	55	5.5	15.5	M4x12	
ø16	4.5	30	45	55	5.5	20	M4x12	
ø20	6.6	39	48	60	8	25.5	M6x16	
ø25	6.6	42	52	64	8	28	M6x16	

Code	Female thread			Male thread				
	Bore size (mm)	WF	A	B	a'	wf	A	B
ø12	3.5	31	22	10.5	3.5	41.5	22	
ø16	3.5	31	22	12	3.5	43	22	
ø20	4.5	42	29.5	14	4.5	56	29.5	
ø25	5	45.5	32.5	17.5	5	63	32.5	

SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending




## Dimensions





● SSD2-12 to 25 (without switch)

● Rod end male thread

ø12/ø16

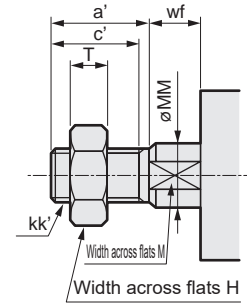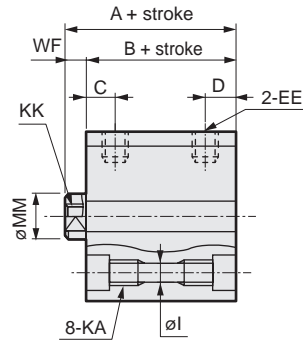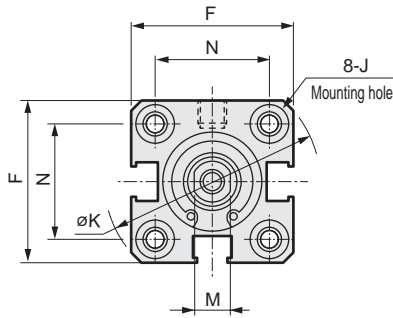

ø20/ø25

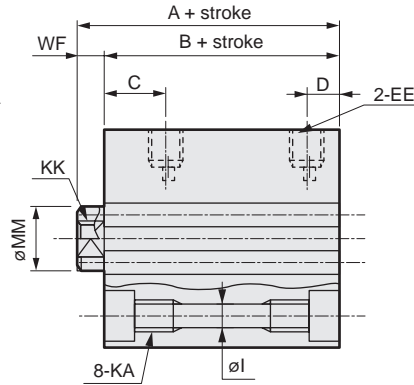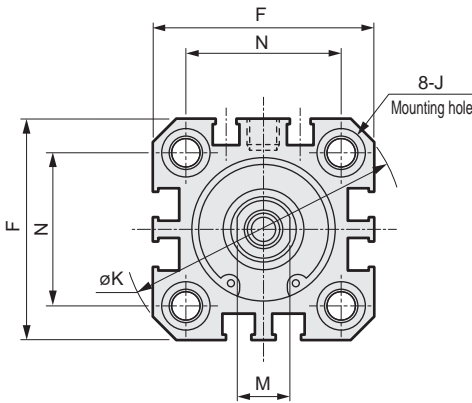

Code	Dimensions without switch and common dimensions															
	Bore size (mm)	A <sup>*1</sup>	B <sup>*1</sup>	C	D	EE	F	I	J	K	KA	KK	M	MM	N	WF
SRG3	ø12	20.5	17	5.5	5.5	M5	25	3.5	6.5 spot face depth 3.5	32	M4 depth 7	M3 depth 6	5	6	15.5	3.5
SRM3	ø16	20.5	17	5.5	5.5	M5	29	3.5	6.5 spot face depth 3.5	38	M4 depth 7	M4 depth 8	6	8	20	3.5
SRT3	ø20	24	19.5	8	5.5	M5	36	5.5	9 spot face depth 5.5	47	M6 depth 11	M5 depth 7	8	10	25.5	4.5
	ø25	27.5	22.5	11	6	M5	40	5.5	9 spot face depth 5.5	51	M6 depth 11	M6 depth 12	10	12	28	5

● Rod end male thread

Code	a'	c'	H	kk'	M	MM	T	wf	
MRG2	ø12	10.5	9	8	M5	5	6	3.2	3.5
SM-25	ø16	12	10	10	M6	6	8	3.6	3.5
ShkAbs	ø20	14	12	13	M8	8	10	5	4.5
	ø25	17.5	15	17	M10x1.25	10	12	6	5

\*1 : To calculate A + stroke or B + stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value.  
(Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

· For ø16: A + stroke = 30.5 / B + stroke = 27


When you have selected "S" (dedicated unit for custom stroke), apply the custom stroke of 7 mm.

· For ø16: A + stroke = 27.5 / B + stroke = 24


\*2: For dimensions of individual accessories, refer to pages 1046 to 1049.

### Dimensions with mounting bracket

- Axial foot (LB) without switch  
SSD2-12 to 25 -LB

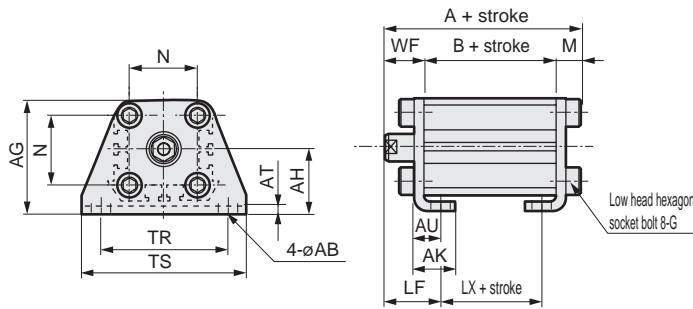

Rod end male thread

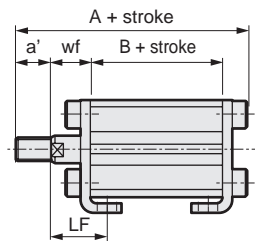


Code	Common dimensions										Female thread			
Bore size (mm)	AB	AG	AH	AK	AT	AU	G	N	TR	TS	M			
ø12	5	29.5	17	12.5	2	8	M4x10	15.5	34	44	4.8			
ø16	5	33.5	19	13	2	8	M4x10	20	38	48	4.8			
ø20	7	42	24	15	3.2	9.2	M6x16	25.5	48	62	7.2			
ø25	7	46	26	16.5	3.2	10.7	M6x16	28	52	66	7.2			

Code	Male thread										
Bore size (mm)	WF	LF	A	B	LX	a'	wf	LF	A	B	LX
ø12	13.5	19.5	35.3	17	5	10.5	13.5	19.5	45.8	17	5
ø16	13.5	19.5	35.3	17	5	12	13.5	19.5	47.3	17	5
ø20	14.5	20.5	41.2	19.5	7.5	14	14.5	20.5	55.2	19.5	7.5
ø25	15	22.5	44.7	22.5	7.5	17.5	15	22.5	62.2	22.5	7.5

Note: ø20: LB cannot be selected for 5 mm stroke.

- Rod side flange (FA) without switch  
SSD2-12 to 25 -FA

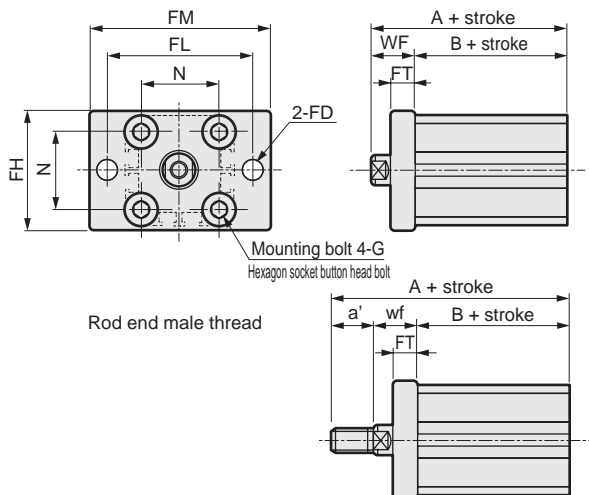


Rod end male thread

Code	Common dimensions						
Bore size (mm)	FD	FH	FL	FM	FT	N	G
ø12	4.5	25	45	55	5.5	15.5	M4x12
ø16	4.5	30	45	55	5.5	20	M4x12
ø20	6.6	39	48	60	8	25.5	M6x16
ø25	6.6	42	52	64	8	28	M6x16


  

Code	Female thread				Male thread		
Bore size (mm)	WF	A	B	a'	wf	A	B
ø12	13.5	30.5	17	10.5	13.5	41	17
ø16	13.5	30.5	17	12	13.5	42.5	17
ø20	14.5	34	19.5	14	14.5	48	19.5
ø25	15	37.5	22.5	17.5	15	55	22.5

- Clevis bracket (CB) without switch  
SSD2-12 to 25 -CB

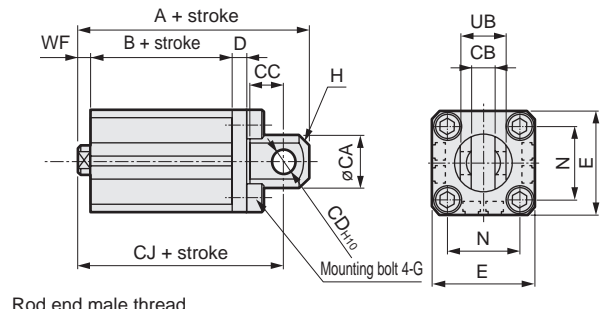

Rod end male thread

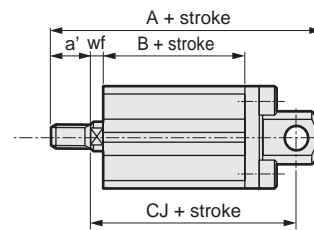


Code	Common dimensions									
Bore size (mm)	CA	CB	CC	CD	D	E	G	H	N	UB
ø12	12	5.2 <sup>+0.2</sup>	7	5	4	25	M4x12	C1.5	15.5	10 <sup>+0.1</sup> <sub>-0.3</sub>
ø16	15	6.6 <sup>+0.3</sup>	8	5	5	29	M4x12	C2	20	12 <sup>+0.1</sup> <sub>-0.4</sub>
ø20	20	8.2 <sup>+0.2</sup>	12	8	5	36	M6x16	C4	25.5	16 <sup>+0.1</sup> <sub>-0.3</sub>
ø25	24	10.2 <sup>+0.2</sup>	14	10	5	40	M6x16	C5	28	20 <sup>+0.1</sup> <sub>-0.3</sub>

Code	Female thread			Male thread					
Bore size (mm)	WF	A	B	CJ	a'	wf	A	B	CJ
ø12	3.5	40.5	17	34.5	10.5	3.5	51	17	34.5
ø16	3.5	41.5	17	35.5	12	3.5	53.5	17	35.5
ø20	4.5	51	19.5	42	14	4.5	65	19.5	42
ø25	5	57.5	22.5	47.5	17.5	5	75	22.5	47.5

- Head side flange (FB) without switch  
SSD2-12 to 25 -FB

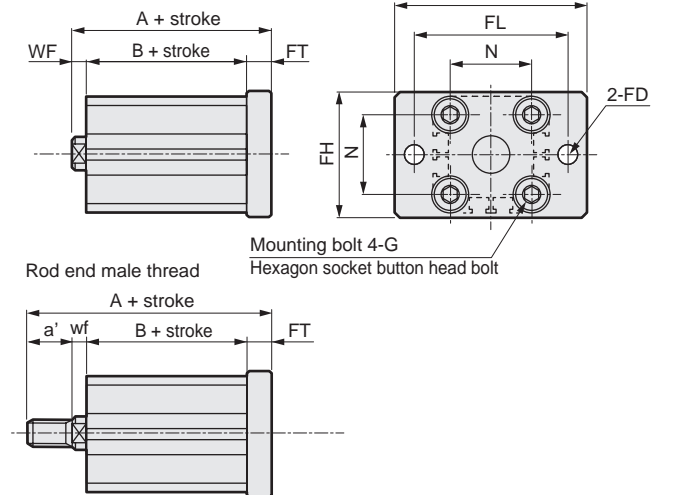

Rod end male thread

Code	Common dimensions						
Bore size (mm)	FD	FH	FL	FM	FT	N	G
ø12	4.5	25	45	55	5.5	15.5	M4x12
ø16	4.5	30	45	55	5.5	20	M4x12
ø20	6.6	39	48	60	8	25.5	M6x16
ø25	6.6	42	52	64	8	28	M6x16


Code	Female thread				Male thread		
Bore size (mm)	WF	A	B	a'	wf	A	B
ø12	3.5	26	17	10.5	3.5	36.5	17
ø16	3.5	26	17	12	3.5	38	17
ø20	4.5	32	19.5	14	4.5	46	19.5
ø25	5	35.5	22.5	17.5	5	53	22.5

SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending


## Dimensions




### ● SSD2-L-32 to 100 (with switch, TOH/V, T5H/V, T2H/V, T3H/V)

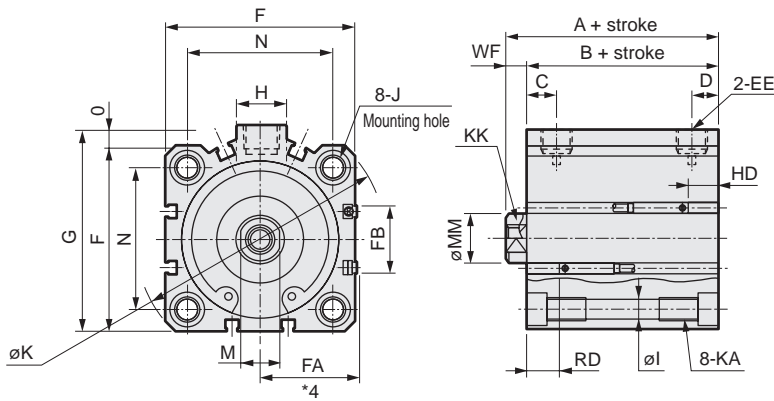

### ● Rod end male thread



### ● SSD2-32 to 100 (without switch)

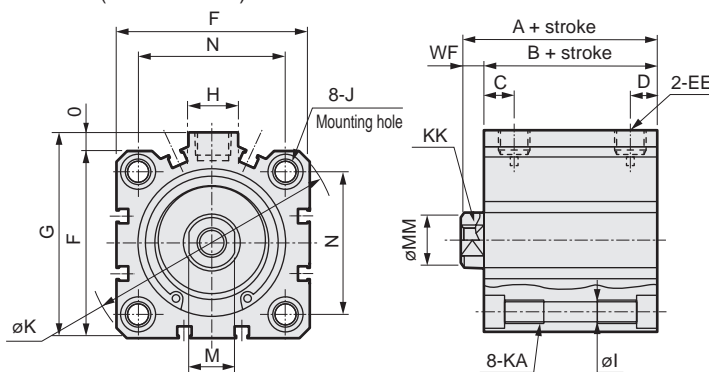

Code	No switch		Common dimensions with switch																			
	A <sup>*1, *6</sup>	B <sup>*1, *6</sup>	A <sup>*1</sup>	B <sup>*1</sup>	C <sup>*8</sup>	D <sup>*8</sup>	EE	F	FA <sup>*4</sup>	FB	G	H	I	J	K	KA	KK	M	MM	N	O	WF
ø32	30(40)	23(33)	40	33	8(10)	8(5.5)	Rc1/8 <sup>7</sup>	45	23(26.5)	20.5	49.5	12.5	5.5	9 spot face Depth 5.5	60	M6 depth 11	M8 depth 13	14	16	34	4.5	7
ø40	36.5(46.5)	29.5(39.5)	46.5	39.5	12(11.5)	8.5(8)	Rc1/8	52	26.5(30)	27.5	57	15	5.5	9 spot face Depth 5.5	69	M6 depth 11	M8 depth 13	14	16	40	5	7
ø50	38.5(48.5)	30.5(40.5)	48.5	40.5	10.5	10.5	Rc1/4	64	32.5(36)	28.5	71	18	6.9	11 spot face Depth 6.5	86	M8 depth 13	M10 depth 15	17	20	50	7	8
ø63	44(54)	36(46)	54	46	13	11	Rc1/4	77	39(42.5)	28.5	84	23	8.7	14 spot face Depth 9	103	M10 depth 25	M10 depth 15	17	20	60	7	8
ø80	53.5(63.5)	43.5(53.5)	63.5	53.5	16	13	Rc3/8	98	49.5(53)	28.5	104	31	10.5	17.5 spot face Depth 11	132	M12 depth 28	M16 depth 21	22	25	77	6	10
ø100	65(75)	53(63)	75	63	23	15	Rc3/8	117	59(62.5)	28.5	123.5	38	10.5	17.5 spot face Depth 11	156	M12 depth 28	M20 depth 27	27	30	94	6.5	12
Switch dimensions	Reed T0H/T0V, T5H/T5V						Proximity T2H/T2V, T3H/T3V						Proximity T2WH/T2WV, T3WH/T3WV									
	HD <sup>*2</sup>		RD <sup>*2</sup>		HD <sup>*2</sup>		RD <sup>*2</sup>		HD		RD											
ø32	4		9.5		4		9.5		6		11.5											
ø40	7		12		7		12		8.5		13.5											
ø50	7.5		12.5		7.5		12.5		9		14											
ø63	12.5		13		12.5		13		14		14.5											
ø80	17.5		15.5		17.5		15.5		19		17											
ø100	23		19.5		23		19.5		24.5		21											

\*1 : To calculate A + stroke or B + stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value.  
(Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

· For ø32: A + stroke = 40 B + stroke = 33

When you have selected "S" (dedicated unit for custom stroke), apply the custom stroke of 7 mm.

· For ø32: A + stroke = 37 B + stroke = 30

\*2 : HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.

\*3 : Refer to page 1044 for HD, RD and protruding dimensions of the 2-color LED, off-delay, AC magnetic field proof, T1\* and T8\* switches.

\*4 : Dimensions in ( ) of FA are for the L-shaped lead wire.

\*5 : For dimensions of individual accessories, refer to pages 1046 to 1049.

\*6 : Dimensions in ( ) of codes A and B are for strokes of more than 50 mm.

\*7 : The ø32 bore size with a 5 mm stroke and without a switch has a port size of M5.\*8


Dimensions in ( ) of codes C and D are when the value is for a 5 mm stroke without switch.

### ● Rod end male thread

Code	a'	c'	H	kk'	M	MM	T	wf
ø32	23.5	20.5	22	M14x1.5	14	16	8	5
ø40	23.5	20.5	22	M14x1.5	14	16	8	5
ø50	28.5	26	27	M18x1.5	17	20	11	5
ø63	28.5	26	27	M18x1.5	17	20	11	5
ø80	35.5	32.5	32	M22x1.5	22	25	13	8
ø100	35.5	32.5	41	M26x1.5	27	30	16	8

## Dimensions

- Axial foot (LB)  
SSD2-(L)-32 to 100 -LB

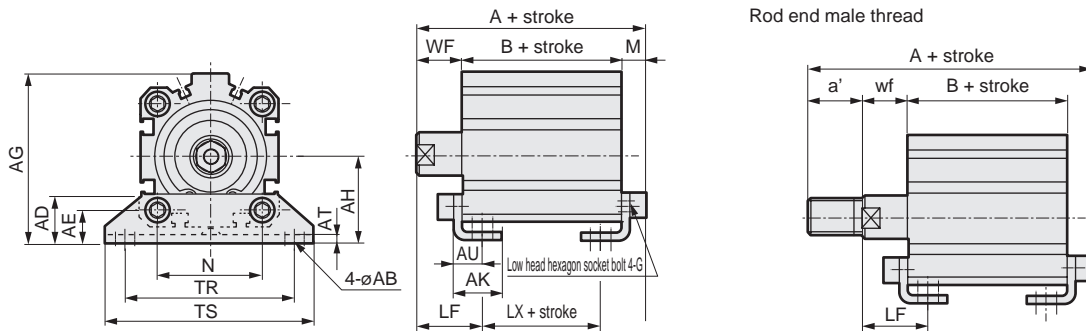

Code	Common dimensions										Female thread					Male thread					
	AB	AD	AE	AG	AH	AK	AT	AU	G	N	TR	TS	M	WF	LF	No switch			With switch		
Bore size (mm)	AB	AD	AE	AG	AH	AK	AT	AU	G	N	TR	TS	M	WF	LF	A	B	LX	A	B	LX
ø32	7	18.5	13	57	30	17	3.2	11.2	M6x16	34	57	71	7.2	17	25	47.2(57.2)	23(33)	7(17)	57.2	33	17
ø40	7	18	13	64	33	18.2	3.2	11.2	M6x16	40	64	78	7.2	17	25	53.7(63.7)	29.5(39.5)	13.5(23.5)	63.7	39.5	23.5
ø50	9	22	14	78	39	22.7	3.2	14.7	M8x20	50	79	95	8.2	18	29.5	56.7(66.7)	30.5(40.5)	7.5(17.5)	66.7	40.5	17.5
ø63	11	26	16	91.5	46	25.2	3.2	16.2	M10x25	60	95	113	9.2	18	31	63.2(73.2)	36(46)	10(20)	73.2	46	20
ø80	13	31.5	20.5	114	59	30.5	4.5	19.5	M12x40	77	118	140	11.5	20	35	75(85)	43.5(53.5)	13.5(23.5)	85	53.5	23.5
ø100	13	35	24	136	71	35.5	6	23	M12x40	94	137	162	13	22	39	88(98)	53(63)	19(29)	98	63	29


  

Code	Male thread			No switch			With switch		
	a'	wf	LF	A	B	LX	A	B	LX
ø32	23.5	15	23	68.7(78.7)	23(33)	7(17)	78.7	33	17
ø40	23.5	15	23	75.2(85.2)	29.5(39.5)	13.5(23.5)	85.2	39.5	23.5
ø50	28.5	15	26.5	82.2(92.2)	30.5(40.5)	7.5(17.5)	92.2	40.5	17.5
ø63	28.5	15	28	88.7(98.7)	36(46)	10(20)	98.7	46	20
ø80	35.5	18	33	108.5(118.5)	43.5(53.5)	13.5(23.5)	118.5	53.5	23.5
ø100	35.5	18	35	119.5(129.5)	53(63)	19(29)	129.5	63	29

Note: LB cannot be selected when B + stroke is at or less than the stroke value below.  
ø80: 72 or less, ø: 69 or less

\* Dimensions in ( ) are for strokes of more than 50 mm.

- Clevis bracket (CB)  
SSD2-(L)-32 to 100 -CB

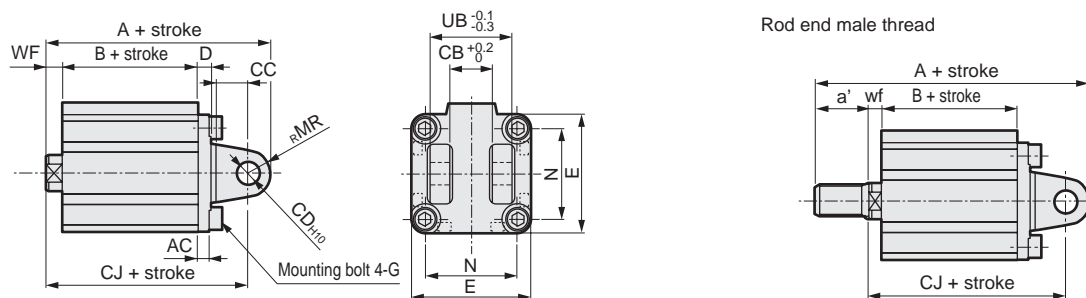

Code	Common dimensions										Female thread					Male thread									
	AC	CB	CC	CD	D	E	G	MR	N	UB	WF	No switch			With switch			a'		No switch			With switch		
Bore size (mm)	AC	CB	CC	CD	D	E	G	MR	N	UB	WF	A	B	CJ	A	B	CJ	a'	wf	A	B	CJ	A	B	CJ
ø32	4.5	18.2	14	10	5	45	M6x16	10	34	36	7	60(70)	23(33)	50	70	33	60	23.5	5	81.5(91.5)	23(33)	48	91.5	33	58
ø40	5	18.2	14	10	6	52	M6x16	10	40	36	7	68.5(78.5)	29.5(39.5)	58.5	78.5	39.5	68.5	23.5	5	90(100)	29.5(39.5)	56.5	100	39.5	66.5
ø50	6	22.2	20	14	7	64	M8x20	14	50	44	8	80.5(90.5)	30.5(40.5)	66.5	90.5	40.5	76.5	28.5	5	106(116)	30.5(40.5)	63.5	116	40.5	73.5
ø63	7	22.2	20	14	8	77	M10x25	14	60	44	8	88(98)	36(46)	74	98	46	84	28.5	5	113.5(123.5)	36(46)	71	123.5	46	81
ø80	9	28.2	27	18	10	98	M12x40	18	77	56	10	109.5(119.5)	43.5(53.5)	91.5	119.5	53.5	101.5	35.5	8	143(153)	43.5(53.5)	89.5	153	53.5	99.5
ø100	12	32.2	31	22	13	117	M12x40	22	94	64	12	132(142)	53(63)	110	142	63	120	35.5	8	163.5(173.5)	53(63)	106	173.5	63	116



\* Dimensions in ( ) are for strokes of more than 50 mm.

- SCP\*3
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS2
- CKV2
- CAV2/COVP/N2
- SSD2
- SSG
- SSD
- CAT
- MDC2
- MVC
- SMG
- MSD/MSDG
- FC\*
- STK
- SRL3
- SRG3
- SRM3
- SRT3
- MRL2
- MRG2
- SM-25
- ShkAbs
- FJ
- FK
- Spd Contr
- Ending


## Dimensions



- Rod side flange (FA)  
SSD2-(L)-32 to 100 -FA

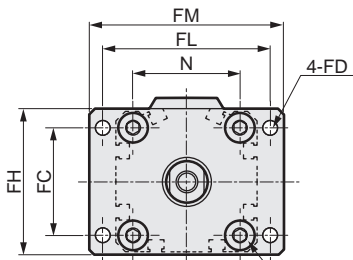

Rod end male thread





Mounting bolt 4-G  
 ø32 to ø63: Hexagon socket button head bolt  
 ø80/ø100: Special bolt


Code	Common dimensions								Female thread				Male thread							
	Bore size (mm)	FC	FD	FH	FL	FM	FT	N	G	WF	No switch		With switch		a'	wf	No switch		With switch	
											A	B	A	B			A	B	A	B
SSD	ø32	34	5.5	48	56	65	8	34	M6x16	17	40(50)	23(33)	50	33	23.5	15	61.5(71.5)	23(33)	71.5	33
SSD	ø40	40	5.5	54	62	72	8	40	M6x16	17	46.5(56.5)	29.5(39.5)	56.5	39.5	23.5	15	68(78)	29.5(39.5)	78	39.5
SSD	ø50	50	6.6	67	76	89	9	50	M8x20	18	48.5(58.5)	30.5(40.5)	58.5	40.5	28.5	15	74(84)	30.5(40.5)	84	40.5
SSD	ø63	60	9	80	92	108	9	60	M10x25	18	54(64)	36(46)	64	46	28.5	15	79.5(89.5)	36(46)	89.5	46
SSD	ø80	77	11	99	116	134	11	77	M12x40	20	63.5(73.5)	43.5(53.5)	73.5	53.5	35.5	18	97(107)	43.5(53.5)	107	53.5
SSD	ø100	94	11	117	136	154	11	94	M12x40	22	75(85)	53(63)	85	63	35.5	18	106.5(116.5)	53(63)	116.5	63

\* Dimensions in ( ) are for strokes of more than 50 mm.

- Head side flange (FB)  
SSD2-(L)-32 to 100 -FB



Rod end male thread



Mounting bolt 4-G  
 ø32 to ø63: Hexagon socket button head bolt  
 ø80/ø100: Special bolt

Code	Common dimensions								Female thread				Male thread							
	Bore size (mm)	FC	FD	FH	FL	FM	FT	N	G	WF	No switch		With switch		a'	wf	No switch		With switch	
											A	B	A	B			A	B	A	B
SSD	ø32	34	5.5	48	56	65	8	34	M6x16	7	38(48)	23(33)	48	33	23.5	5	59.5(69.5)	23(33)	69.5	33
SSD	ø40	40	5.5	54	62	72	8	40	M6x16	7	44.5(54.5)	29.5(39.5)	54.5	39.5	23.5	5	66(76)	29.5(39.5)	76	39.5
SSD	ø50	50	6.6	67	76	89	9	50	M8x20	8	47.5(57.5)	30.5(40.5)	57.5	40.5	28.5	5	73(83)	30.5(40.5)	83	40.5
SSD	ø63	60	9	80	92	108	9	60	M10x25	8	53(63)	36(46)	63	46	28.5	5	78.5(88.5)	36(46)	88.5	46
SSD	ø80	77	11	99	116	134	11	77	M12x40	10	64.5(74.5)	43.5(53.5)	74.5	53.5	35.5	8	98(108)	43.5(53.5)	108	53.5
SSD	ø100	94	11	117	136	154	11	94	M12x40	12	76(86)	53(63)	86	63	35.5	8	107.5(117.5)	53(63)	117.5	63

\* Dimensions in ( ) are for strokes of more than 50 mm.

---

# MEMO

---

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

**SSG**

**SSD**

**CAT**

**MDC2**

**MVC**

**SMG**

MSD/  
MSDG

**FC\***

**STK**

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs


FJ

FK

Spd  
Contr

Ending





Compact cylinder double acting/single rod (large bore size)

# SSD2 Series

● Bore size:  $\phi 125/\phi 140/\phi 160/\phi 180/\phi 200$

JIS symbol



## Specifications

Item	SSD2 SSD2-L (with switch)					
	$\phi 125$	$\phi 140$	$\phi 160$	$\phi 180$	$\phi 200$	
Bore size mm	$\phi 125$	$\phi 140$	$\phi 160$	$\phi 180$	$\phi 200$	
Actuation	Double acting					
Working fluid	Compressed air					
Max. working pressure MPa	1.0 ( $\approx 150$ psi, 10 bar)			0.7 ( $\approx 100$ psi, 7 bar)		
Min. working pressure MPa	0.05 ( $\approx 7.3$ psi, 0.5 bar)					
Proof pressure MPa	1.6 ( $\approx 230$ psi, 16 bar)			1.05 ( $\approx 150$ psi, 10.5 bar)		
Ambient temperature $^{\circ}\text{C}$	-10 ( $14^{\circ}\text{F}$ ) to 60 ( $140^{\circ}\text{F}$ ) (no freezing)					
Port size	Rc3/8			Rc1/2		
Stroke tolerance mm	$+2.0$ 0					
Working piston speed mm/s	50 to 300			20 to 300		
Cushion	With rubber cushion (standard)					
Lubrication	Not required (use turbine oil class 1 ISO VG32 if necessary for lubrication)					
Allowable absorbed energy J	With rubber cushion Without cushion	6.52	6.52	7.78	12.4	-

## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\phi 125$	10, 20, 30, 40, 50 75, 100, 125, 150 175, 200, 250, 300	300	1
$\phi 140$			
$\phi 160$			
$\phi 180$			
$\phi 200$			

\*1: For the type with switch, refer to the table of switch mounting quantity and minimum stroke.

## Number of installed switches and min. stroke (mm)

Switch quantity	1	2	3	4	5
Switch model No.	T*	T*	T*	T*	T*
Bore size (mm)					
$\phi 125$	5	5	40	55	70
$\phi 140$	5	5	40	55	70
$\phi 160$	5	5	40	55	70
$\phi 180$	5	5	40	55	70
$\phi 200$	5	5	40	55	70

Note: Less than 10 mm with the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch is not available.

### Switch specifications

● 1-color/2-color LED/for AC magnetic field proof

Item	2-wire proximity		2-wire proximity			3-wire proximity				2-wire reed						2-wire proximity	
	T1H/T1V	T2H/T2V T2JH/T2JV	T2YH/ T2YV	T2WH/ T2WV	T3H/T3V	T3PH/ T3PV	T3YH/ T3YV	T3WH/ T3WV	T0H/T0V		T5H/T5V		T8H/T8V		T2YD(*4) T2YDT		
Applications	For programmable controller, relay, compact solenoid valve	Dedicated for programmable controller			For programmable controller, relay				For programmable controller, relay		For programmable controller, relay, IC circuit (no indicator lamp), serial connection		For programmable controller, relay		For programmable controller		
Output method	-			NPN output	PNP output	NPN output	NPN output	-		-							
Pwr. supp. V.	-			10 to 28 VDC				-									
Load voltage	85 to 265 VAC		10 to 30 VDC		24 VDC ±10%		30 VDC or less			12/24 VDC	100/110 VAC	5/12/24 VDC	100/110 VAC	12/24 VDC	110 VAC	220 VAC	24 VDC ±10%
Load current	5 to 100 mA		5 to 20 mA (*3)			100 mA or less		50 mA or less		5 to 50 mA	7 to 20 mA	50 mA or less	20 mA or less	5 to 50 mA	7 to 20 mA	7 to 10 mA	5 to 20 mA
Indicator	LED (Lit when ON)	LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)		No indicator lamp		LED (Lit when ON)		Red/green LED (Lit when ON)		
Leakage current	≤ 1 mA at 100 VAC ≤ 2 mA at 200 VAC	1 mA or less			10 µA or less				0 mA						1 mA or less		
Weight g	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80		1 m:33 3 m:87 5 m:142		1 m:61 3 m:166 5 m:272					

\*1: Refer to Ending Page 1 for detailed switch specifications and dimensions.

\*2: Switches other than the above models, such as switches with connectors, are also available. Refer to Ending Page 1.

\*3: The max. load current is 20 mA at 25°C. The current is lower than 20 mA if the operating ambient temperature around the switch is higher than 25°C. (5 to 10 mA at 60°C)

\*4: Switch for AC magnetic field (T2YD/T2YDT) cannot be used in DC magnetic field.

### Cylinder weight table (the weight of the switches is when there are 2 cylinder switches.)

(Unit: kg)

Stroke (mm)	10		20		30		40		50		75		100	
	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch
ø125	4.58	4.68	4.85	4.95	5.11	5.21	5.38	5.48	5.64	5.74	6.30	6.40	6.97	7.07
ø140	6.36	6.47	6.66	6.77	6.97	7.08	7.27	7.38	7.58	7.69	8.34	8.45	9.10	9.21
ø160	8.64	8.76	9.02	9.14	9.40	9.52	9.78	9.90	10.16	10.28	11.11	11.23	12.06	12.18
ø180	12.98	13.06	13.38	13.46	13.78	13.86	14.18	14.26	14.58	14.66	15.59	15.67	16.59	16.67
ø200	17.23	17.31	17.69	17.77	18.16	18.24	18.62	18.70	19.08	19.16	20.23	20.31	21.39	21.47

Stroke (mm)	125		150		175		200		250		300	
	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch
ø125	7.63	7.73	8.30	8.40	8.96	9.06	9.62	9.72	10.95	11.05	12.27	12.37
ø140	9.86	9.97	10.63	10.74	11.39	11.50	12.15	12.26	13.68	13.79	15.20	15.31
ø160	13.01	13.13	13.96	14.08	14.91	15.03	15.86	15.98	17.76	17.88	19.66	19.78
ø180	17.59	17.67	18.59	18.67	19.60	19.68	20.60	20.68	22.60	22.68	24.61	24.69
ø200	22.54	22.62	23.70	23.78	24.85	24.93	26.01	26.09	28.32	28.40	30.63	30.71

### Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa										
		0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø125	Push	1.23x10 <sup>3</sup>	1.84x10 <sup>3</sup>	2.45x10 <sup>3</sup>	3.68x10 <sup>3</sup>	4.91x10 <sup>3</sup>	6.14x10 <sup>3</sup>	7.36x10 <sup>3</sup>	8.59x10 <sup>3</sup>	9.82x10 <sup>3</sup>	1.10x10 <sup>4</sup>	1.23x10 <sup>4</sup>
	Pull	1.13x10 <sup>3</sup>	1.70x10 <sup>3</sup>	2.26x10 <sup>3</sup>	3.39x10 <sup>3</sup>	4.52x10 <sup>3</sup>	5.65x10 <sup>3</sup>	6.79x10 <sup>3</sup>	7.92x10 <sup>3</sup>	9.05x10 <sup>3</sup>	1.02x10 <sup>4</sup>	1.13x10 <sup>4</sup>
ø140	Push	1.54x10 <sup>3</sup>	2.31x10 <sup>3</sup>	3.08x10 <sup>3</sup>	4.62x10 <sup>3</sup>	6.16x10 <sup>3</sup>	7.70x10 <sup>3</sup>	9.24x10 <sup>3</sup>	1.08x10 <sup>4</sup>	1.23x10 <sup>4</sup>	1.39x10 <sup>4</sup>	1.54x10 <sup>4</sup>
	Pull	1.44x10 <sup>3</sup>	2.16x10 <sup>3</sup>	2.89x10 <sup>3</sup>	4.33x10 <sup>3</sup>	5.77x10 <sup>3</sup>	7.22x10 <sup>3</sup>	8.66x10 <sup>3</sup>	1.01x10 <sup>4</sup>	1.15x10 <sup>4</sup>	1.30x10 <sup>4</sup>	1.44x10 <sup>4</sup>
ø160	Push	2.01x10 <sup>3</sup>	3.02x10 <sup>3</sup>	4.02x10 <sup>3</sup>	6.03x10 <sup>3</sup>	8.04x10 <sup>3</sup>	1.01x10 <sup>4</sup>	1.21x10 <sup>4</sup>	1.41x10 <sup>4</sup>	1.61x10 <sup>4</sup>	1.81x10 <sup>4</sup>	2.01x10 <sup>4</sup>
	Pull	1.88x10 <sup>3</sup>	2.83x10 <sup>3</sup>	3.77x10 <sup>3</sup>	5.65x10 <sup>3</sup>	7.54x10 <sup>3</sup>	9.42x10 <sup>3</sup>	1.13x10 <sup>4</sup>	1.32x10 <sup>4</sup>	1.51x10 <sup>4</sup>	1.70x10 <sup>4</sup>	1.88x10 <sup>4</sup>
ø180	Push	2.54x10 <sup>3</sup>	3.82x10 <sup>3</sup>	5.09x10 <sup>3</sup>	7.63x10 <sup>3</sup>	1.02x10 <sup>4</sup>	1.27x10 <sup>4</sup>	1.53x10 <sup>4</sup>	1.78x10 <sup>4</sup>	-	-	-
	Pull	2.39x10 <sup>3</sup>	3.58x10 <sup>3</sup>	4.77x10 <sup>3</sup>	7.16x10 <sup>3</sup>	9.54x10 <sup>3</sup>	1.19x10 <sup>4</sup>	1.43x10 <sup>4</sup>	1.67x10 <sup>4</sup>	-	-	-
ø200	Push	3.14x10 <sup>3</sup>	4.71x10 <sup>3</sup>	6.28x10 <sup>3</sup>	9.43x10 <sup>3</sup>	1.26x10 <sup>4</sup>	1.57x10 <sup>4</sup>	1.89x10 <sup>4</sup>	2.20x10 <sup>4</sup>	-	-	-
	Pull	3.02x10 <sup>3</sup>	4.52x10 <sup>3</sup>	6.03x10 <sup>3</sup>	9.05x10 <sup>3</sup>	1.21x10 <sup>4</sup>	1.51x10 <sup>4</sup>	1.81x10 <sup>4</sup>	2.11x10 <sup>4</sup>	-	-	-

# SSD2 (Large bore size) Series

## How to order

No switch (without magnet for switch)

**SSD2** - (125) - ( ) - (50) - ( ) - (N)

With switch (built-in magnet for switch)

**SSD2-L** - (200) - ( ) - (100) - (T0H) - (R) - (N)

**A** Model No.

**B** Bore size

**C** Port thread

**D** Stroke

**E** Switch model No.

\*1

**F** Switch quantity

**G** Option

### ⚠ Precautions for model No. selection

\*1: Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.

### [Example of model No.]

#### SSD2-L-125-50-T0H-R-N

Model: Compact cylinder, standard

- B** Bore size : 125 mm
- C** Port thread : Rc thread
- D** Stroke : 50mm
- E** Switch model No. : Reed T0H switch  
· Lead wire length 1 m
- F** Switch quantity : 1 on rod side
- G** Option : Rod end male thread

Code	Description						
<b>A Model No.</b>							
<b>SSD2</b>	Double acting/single rod						
<b>SSD2-L</b>	Double acting/single rod/with switch						
<b>B Bore size (mm)</b>							
<b>125</b>	ø125						
<b>140</b>	ø140						
<b>160</b>	ø160						
<b>180</b>	ø180						
<b>200</b>	ø200						
<b>C Port thread</b>							
<b>Blank</b>	Rc thread						
<b>NN</b>	NPT thread (ø125 to ø160) (made-to-order product)						
<b>GN</b>	G thread (ø125 to ø160) (made-to-order product)						
<b>D Stroke (mm)</b>							
Refer to the stroke table on the following page.							
<b>E Switch model No.</b>							
Lead wire	Lead wire	Contact	Voltage		Indicator	Lead Line	
			AC	DC			
Straight	L-shaped	Reed	●	●	1-color LED	2-wire	
			●	●	No indicator lamp		
			●	●	1-color LED		
			●	○	1-color LED	2-wire	
			○	●			
		Proximity	○	○	●	1-color LED	3-wire
				○	○		
				○	●	2-color LED	2-wire
				○	○		
				○	○		
○	○	1-color LED off-delay	2-wire				
○	○	2-color LED for AC magnetic field	2-wire				
○	○						
<b>* Lead wire length</b>							
<b>Blank</b>	1 m (standard)						
<b>3</b>	3 m (option)						
<b>5</b>	5 m (option)						
<b>F Switch quantity</b>							
<b>R</b>	1 on rod side						
<b>H</b>	1 on head side						
<b>D</b>	2						
<b>G Option</b>							
<b>Blank</b>	Rod end female thread						
<b>N</b>	Rod end male thread						
<b>P4</b>	Specifications for rechargeable battery						
<b>P40</b>							

### [Stroke table]

Stroke (mm)	Applicable bore size					
	ø125	ø140	ø160	ø180	ø200	
Standard stroke	10	●	●	●	●	●
	20	●	●	●	●	●
	30	●	●	●	●	●
	40	●	●	●	●	●
	50	●	●	●	●	●
	75	●	●	●	●	●
	100	●	●	●	●	●
	125	●	●	●	●	●
	150	●	●	●	●	●
	175	●	●	●	●	●
	200	●	●	●	●	●
	250	●	●	●	●	●
	300	●	●	●	●	●
Min. stroke (mm) *1	1					
Max. stroke (mm)	300					
Custom stroke *2	In 1 mm increments					

\*1: Less than 5 mm for 1-color LED switch and less than 10 mm for the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch are not available.

Refer to page 768 for the number of installed switches and the min. stroke.

\*2: Total length dimension with custom stroke is handled as custom stroke dedicated length.

### How to order switch

**SW - T0H**

Switch model No.  
(Item ㊦ on page 770)


SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/ COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/ MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending

# SSD2 (Large bore size) Series


SCP\*3  
CMK2  
CMA2  
SCM  
SCG  
SCA2  
SCS2  
CKV2  
CAV2/  
COVPIN2  
SSD2  
SSG  
SSD  
CAT  
MDC2  
MVC  
SMG  
MSD/  
MSDG  
FC\*  
STK  
SRL3  
SRG3  
SRM3  
SRT3  
MRL2  
MRG2  
SM-25  
ShkAbs  
FJ  
FK  
Spd  
Contr  
Ending

## Internal structure and parts list (ø125 to ø160) (with cushion)

● SSD2-L-125 to 160 (double acting/single rod/with switch)

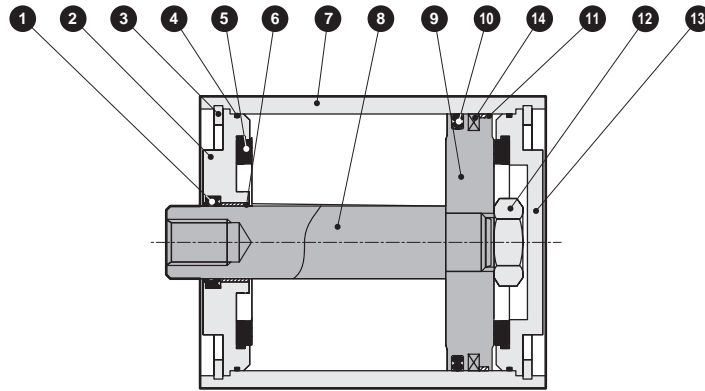

● SSD2-125 to 160 (double acting/single rod/without switch)

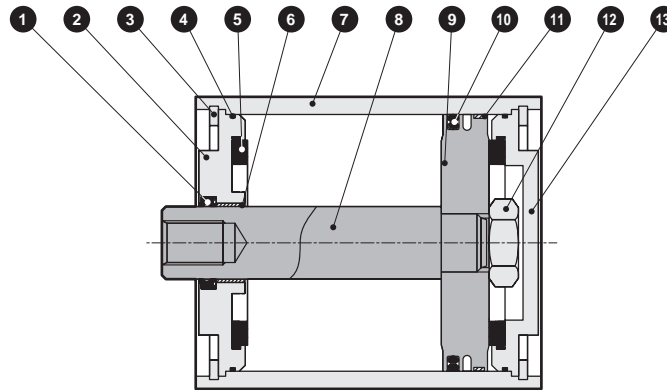

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Rod packing	Nitrile rubber		9	Piston	Aluminum die-casting	
2	Rod metal	Aluminum die-casting	Chromate	10	Piston packing	Nitrile rubber	
3	C-snap ring	Steel	Zinc phosphate	11	Wear ring	Polyacetal resin	
4	Metal gasket	Nitrile rubber		12	Hexagon nut	Steel	Zinc chromate
5	Cushion rubber	Urethane rubber		13	Base plate	Aluminum die-casting	Chromate
6	Bush	Oiles drymet		14	Magnet	Rubber	With switch only
7	Body	Aluminum alloy	Hard alumite				
8	Piston rod	Steel	Industrial chrome plating				


## Repair parts list

Bore size (mm)	Kit No.	Repair parts No.
ø125	SSD2-125K	1 4 5 10 11
ø140	SSD2-140K	
ø160	SSD2-160K	


\*1: Specify the kit No. when placing an order.

## Internal structure and parts list (ø180, ø200)

- SSD2-L-180, 200 (double acting/single rod/with switch)

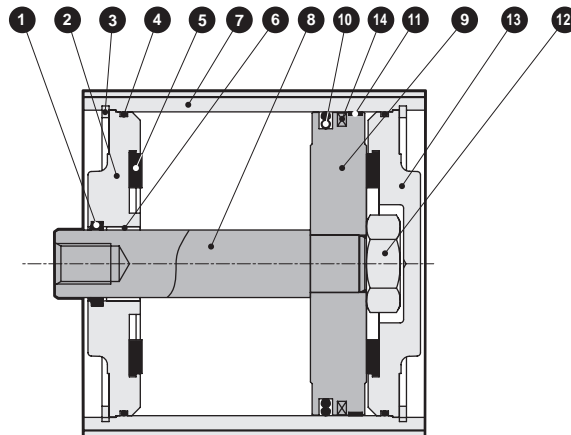

- SSD2-180, 200 (double acting/single rod/without switch)

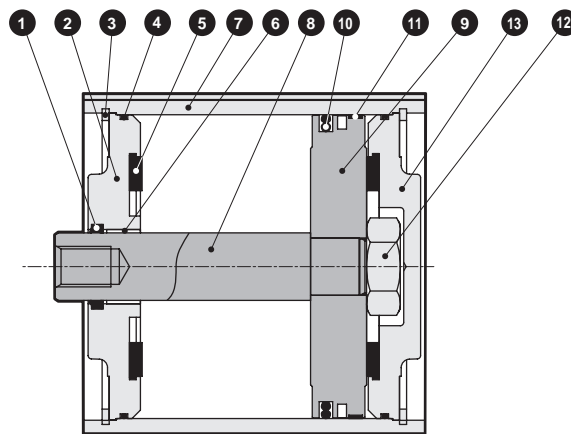

### Parts list

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Rod packing	Nitrile rubber		9	Piston	Aluminum alloy	
2	Rod metal	Cast iron	Paint	10	Piston packing	Nitrile rubber	
3	C-snap ring	Steel	Zinc phosphate	11	Wear ring	Polyacetal resin	
4	Gasket	Nitrile rubber		12	Hexagon nut	Steel	Zinc chromate
5	Cushion rubber	Urethane rubber		13	Cover	Cast iron	Paint
6	Bush	Oiles drymet		14	Magnet	Rubber	With switch only
7	Body	Aluminum alloy	Hard alumite				
8	Piston rod	Steel	Industrial chrome plating				

### Repair parts list

Bore size (mm)	Kit No.	Repair parts No.
ø180	SSD2-180K	1 4 5 10 11
ø200	SSD2-200K	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending


# SSD2 (Large bore size) Series

## Dimensions (ø125 to ø160)



● SSD2-(L)-125 to 160 (double acting/single rod)

● Rod end male thread

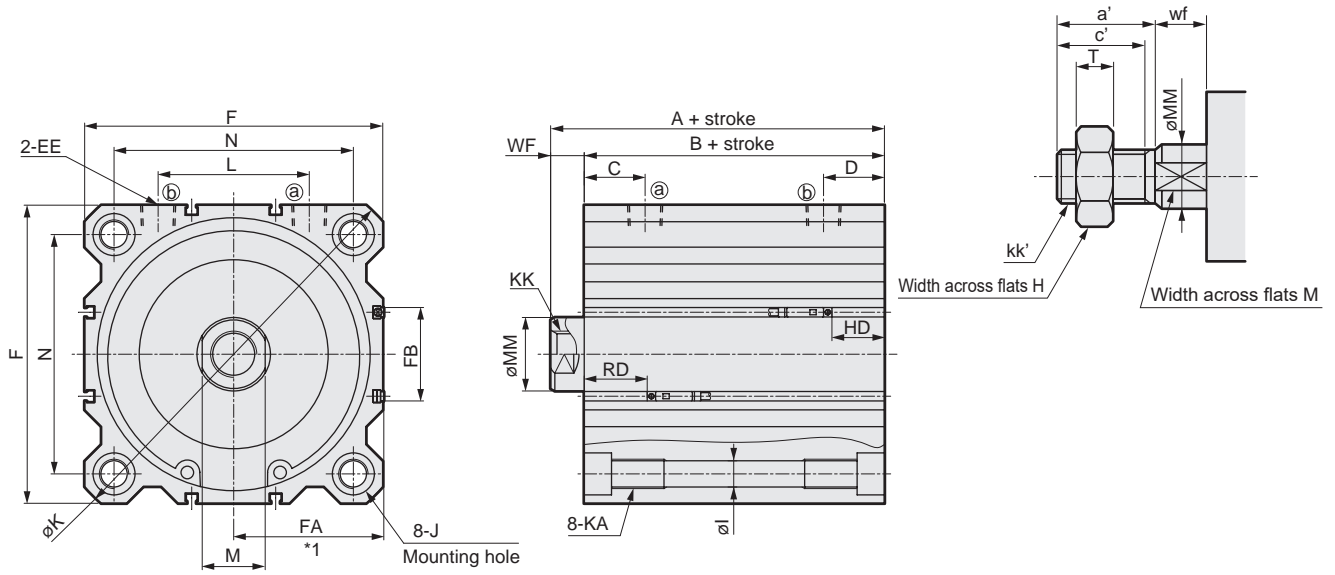

Code	Common dimensions with switch															
Bore size (mm)	A	B	C	D	EE	F	I	J	K	KA	KK	L	M	MM	N	WF
ø125	99	83	29	29	Rc3/8	142	12.5	20 spot face depth 13	190	M14 depth 25	M22 depth 30	72	30	35	114	16
ø140	99	83	27.5	27.5	Rc3/8	158	12.5	20 spot face depth 13	210	M14 depth 25	M22 depth 30	80	30	35	128	16
ø160	108	91	30	30	Rc3/8	178	14.7	23 spot face depth 15.2	238	M16 depth 28	M24 depth 33	90	36	40	144	17

Code	T0H/V, T2H/V, T3H/V, T5/V				T2YH/V, T3YH/V, T2JH/V				T1H/V, T2YD				T2WH/V, T3WH/V				T8H/V			
Bore size (mm)	HD	RD	FA *1	FB	HD	RD	FA *1	FB	HD	RD	FA *1	FB	HD	RD	FA *1	FB	HD	RD	FA *1	FB
ø125	30	35	71.5 (75)	44.5	28.5	33.5	77 (80)	48	28.5	33.5	82.5 (85.5)	48	31.5	36.5	71.5 (75)	44.5	24	29	77 (80)	48
ø140	31.5	33.5	79.5 (83)	44.5	30	32	85 (88)	48	30	32	90.5 (93.5)	48	33	35	79.5 (83)	44.5	25.5	27.5	85 (88)	48
ø160	34	39	89.5 (93)	48.5	32.5	37.5	95 (98)	52	32.5	37.5	100.5 (103.5)	52	35.5	40.5	89.5 (93)	48.5	28	33	95 (98)	52

\*1: Dimensions in ( ) of FA are for the L-shaped lead wire.

### Dimensions of rod end male thread


Code	a'	c'	H	kk'	M	MM	T	wf
ø125	45	42	46	M30x1.5	30	35	18	13
ø140	45	42	46	M30x1.5	30	35	18	13
ø160	50	47	55	M36x1.5	36	40	21	14

### Dimensions (ø180, ø200)



● SSD2-(L)-180, 200 (double acting/single rod)

● Rod end male thread

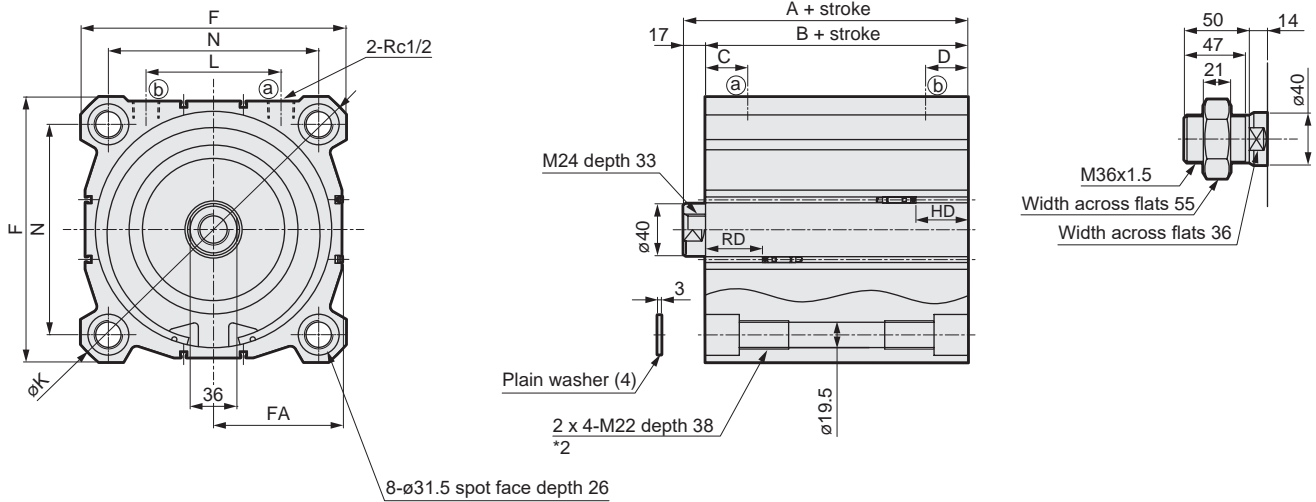

Code	A	B	C	D	F	K	L	N							
Bore size (mm)															
ø180	119	102	32.5	32.5	204	270	104	162							
ø200	126	109	33.5	33.5	226	300	110	182							
Code	T0H/V, T2H/V, T3H/V, T5H/V			T2YH/V, T3YH/V, T2JH/V			T1H/V, T2YD			T2WH/V, T3WH/V			T8H/V		
Bore size (mm)	HD	RD	FA <sup>*1</sup>	HD	RD	FA <sup>*1</sup>	HD	RD	FA <sup>*1</sup>	HD	RD	FA <sup>*1</sup>	HD	RD	FA <sup>*1</sup>
ø180	39.5	43.5	99 (102.5)	38.5	42.5	104.5 (107.5)	38.5	42.5	110 (113)	41.5	45.5	99 (102.5)	33.5	37.5	104.5 (107.5)
ø200	44.5	45.5	109.5 (113)	43.5	44.5	115 (118)	43.5	44.5	120.5 (123.5)	46.5	47.5	109.5 (113)	38.5	39.5	115 (118)

\*1: Dimensions in ( ) of FA are for the L-shaped lead wire.

\*2: 2x4-M22 through hole for 20 mm or less stroke.

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs


FJ

FK

Spd  
Contr

Ending





Compact cylinder, double acting/single rod/high load

# SSD2-K Series

- Bore size:  $\phi 12/\phi 16/\phi 20/\phi 25/\phi 32$   
 $\phi 40/\phi 50/\phi 63/\phi 80/\phi 100$



## Specifications

Item	SSD2-K SSD2-KL (with switch)											
	mm		$\phi 12$	$\phi 16$	$\phi 20$	$\phi 25$	$\phi 32$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$
Bore size	mm		$\phi 12$	$\phi 16$	$\phi 20$	$\phi 25$	$\phi 32$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$
Actuation	Double acting											
Working fluid	Compressed air											
Max. working pressure	MPa	1.0 ( $\approx 150$ psi, 10 bar)										
Min. working pressure	MPa	0.1 ( $\approx 15$ psi, 1 bar)						0.05 ( $\approx 7.3$ psi, 0.5 bar)				
Proof pressure	MPa	1.6 ( $\approx 230$ psi, 16 bar)										
Ambient temperature	$^{\circ}\text{C}$	-10 ( $14^{\circ}\text{F}$ ) to 60 ( $140^{\circ}\text{F}$ ) (no freezing)										
Port size		M5				Rc1/8		Rc1/4		Rc3/8		
Stroke tolerance	mm	+2.0 0										
Working piston speed	mm/s	50 to 500						50 to 300				
Cushion		Rubber cushion										
Lubrication		Not required (use turbine oil ISO VG32 if necessary for lubrication)										
Allowable absorbed energy	J	0.04	0.09	0.16	0.16	0.40	0.63	0.98	1.56	2.51	3.92	

## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\phi 12$	5/10/15/20	30	1
$\phi 16$	25/30		
$\phi 20$	5/10/15/20/25	50	
$\phi 25$	30/35/40/45/50		
$\phi 32$	5/10/15/20/25/30/	100	
$\phi 40$	35/40/45/50/75/100		
$\phi 50$	10/15/20/25		
$\phi 63$	30/35/40/45/50		
$\phi 80$	75/100		
$\phi 100$			

\*1: When using the type with switch, refer to the table of the min. stroke with switch.

\*2: Refer to page 789 for the min. stroke with mounting bracket LB.

## Min. stroke with switch (1 or 2 switches)

Bore size (mm)	T0H/V / T5H/V	T2H/V / T3H/V
$\phi 12$	10(5)	5
$\phi 16$		
$\phi 20$	5	
$\phi 25$		
$\phi 32$		
$\phi 40$		
$\phi 50$		
$\phi 63$		
$\phi 80$		
$\phi 100$		


\*1: Less than 10 mm with the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch is not available.

\*2: Values in ( ) are for the type with 1 on rod side.

## Custom stroke

### ● SSD2-K Series

Item	Standard products		Optional products	
	Standard stroke body with spacer		Dedicated unit (-S)	
Model No.	Refer to How to order.		Add "-S" option code to the model No.	
Description	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.		Dedicated units of the required stroke are available.	
Stroke range	Bore size	Stroke range	Bore size	Stroke range
	12/16	1 to 29	12, 16	6 to 29
	20 to 25	1 to 49	20, 25	6 to 49
	32 to 100	1 to 99	32 to 100	11 to 99
Example of model No.	Model No.: SSD2-K-32-41 A +4 mm spacer is added to the SSD2-K-32-45 standard cylinder to create 41 mm stroke. B + stroke is 88 mm.		Model No.: SSD2-K-32-41-S Dedicated units for 41 mm stroke are available. B + stroke is 74mm.	

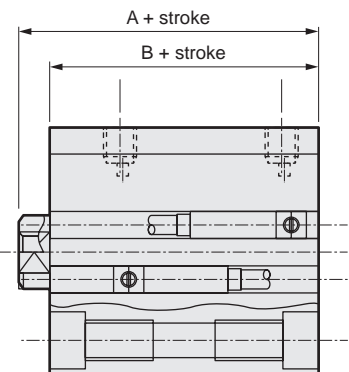

### Switch specifications (F-switch)

● 1-color/2-color LED

Item	2-wire proximity		3-wire proximity		2-wire proximity		3-wire proximity			
	F2S		F3S		F2H/F2V		F2YH/ F2YV	F3H/F3V	F3PH/F3PV (made to order)	F3YH/F3YV
Applications	Dedicated for programmable controller		For programmable controller, relay		Dedicated for programmable controller		For programmable controller, relay			
Output method	-		NPN output		-		NPN output	PNP output	NPN output	
Power supply voltage	-		10 to 28 VDC		-		10 to 28 VDC	4.5 to 28 VDC	10 to 28 VDC	
Load voltage	10 to 30 VDC		30 VDC or less		10 to 30 VDC		24 VDC ±10%		30 VDC or less	
Load current	5 to 20 mA		50 mA or less		5 to 20 mA		50 mA or less			
Indicator	LED (Lit when ON)				Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Yellow LED (Lit when ON)		Red/green LED (Lit when ON)	
Leakage current	1 mA or less		10 µA or less		1 mA or less		10 µA or less			
Weight	g				1 m:10 3 m:29					

### Switch specifications (T-switch)

● 1-color/2-color LED/for AC magnetic field proof

Item	2-wire proximity		2-wire proximity		3-wire proximity				2-wire reed				2-wire proximity												
	T1H/T1V		T2H/T2V/ T2JH/T2JV		T2YH/ T2YV		T2WH/ T2WV		T3H/T3V		T3PH/ T3PV		T3YH/ T3YV		T3WH/ T3WV		T0H/T0V	T5H/T5V		T8H/T8V		T2YD(*4) T2YDT			
Applications	For programmable controller, relay, compact solenoid valve		Dedicated for programmable controller		For programmable controller, relay				For programmable controller, relay		For programmable controller, relay, IC circuit (no indicator lamp), serial connection		For programmable controller, relay		For programmable controller										
Output method	-		-		NPN output	PNP output	NPN output	NPN output	-				-		-										
Pwr. supp. V.	-		-		10 to 28 VDC				-				-		-										
Load voltage	85 to 265 VAC		10 to 30 VDC		24 VDC ±10%		30 VDC or less				12/24 VDC		100/110 VAC		5/12/24 VDC		100/110 VAC		12/24 VDC		110 VAC		220 VAC		24 VDC ±10%
Load current	5 to 100 mA		5 to 20 mA (*3)		100 mA or less		50 mA or less		5 to 50 mA		7 to 20 mA		50 mA or less		20 mA or less		5 to 50 mA		7 to 20 mA		7 to 10 mA		5 to 20 mA		
Indicator	LED (Lit when ON)		LED (Lit when ON)		Red/green LED (Lit when ON)		Red/green LED (Lit when ON)		LED (Lit when ON)		Yellow LED (Lit when ON)		Red/green LED (Lit when ON)		Red/green LED (Lit when ON)		LED (Lit when ON)		No indicator lamp		LED (Lit when ON)		Red/green LED (Lit when ON)		
Leakage current	≤ 1 mA at 100 VAC, ≤ 2 mA at 200 VAC		1 mA or less		10 µA or less				0 mA				1 mA or less												
Weight g	1 m:33 3 m:87 5 m:142		1 m:18 3 m:49 5 m:80		1 m:33 3 m:87 5 m:142		1 m:18 3 m:49 5 m:80		1 m:18 3 m:49 5 m:80		1 m:33 3 m:87 5 m:142		1 m:18 3 m:49 5 m:80		1 m:33 3 m:87 5 m:142		1 m:61 3 m:166 5 m:272								

\*1: Refer to Ending Page 1 for detailed switch specifications and dimensions.

\*2: Switches other than the above models, such as switches with connectors, are also available. Refer to Ending Page 1.

\*3: The max. load current is 20 mA at 25°C. The current is lower than 20 mA if the operating ambient temperature around the switch is higher than 25°C. (5 to 10 mA at 60°C)

\*4: Switch for AC magnetic field (T2YD/T2YDT) cannot be used in DC magnetic field.

\*5: The F-switch uses a bend-resistant lead wire.

### Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa											
		0.05	0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø12	Push	-	11.3	17.0	22.6	33.9	45.2	56.5	67.9	79.2	90.5	1.02x10 <sup>2</sup>	1.13x10 <sup>2</sup>
	Pull	-	8.48	12.7	17.0	25.4	33.9	42.4	50.9	59.4	67.9	76.3	84.8
ø16	Push	-	20.1	30.2	40.2	60.3	80.4	1.01x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.61x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.01x10 <sup>2</sup>
	Pull	-	15.1	22.6	30.2	45.2	60.3	75.4	90.5	1.06x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.36x10 <sup>2</sup>	1.51x10 <sup>2</sup>
ø20	Push	-	31.4	47.1	62.8	94.2	1.26x10 <sup>2</sup>	1.57x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.20x10 <sup>2</sup>	2.51x10 <sup>2</sup>	2.83x10 <sup>2</sup>	3.14x10 <sup>2</sup>
	Pull	-	23.6	35.3	47.1	70.7	94.2	1.18x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.65x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.12x10 <sup>2</sup>	2.36x10 <sup>2</sup>
ø25	Push	-	49.1	73.6	98.2	1.47x10 <sup>2</sup>	1.96x10 <sup>2</sup>	2.45x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.44x10 <sup>2</sup>	3.93x10 <sup>2</sup>	4.42x10 <sup>2</sup>	4.91x10 <sup>2</sup>
	Pull	-	37.8	56.7	75.6	1.13x10 <sup>2</sup>	1.51x10 <sup>2</sup>	1.89x10 <sup>2</sup>	2.27x10 <sup>2</sup>	2.64x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.40x10 <sup>2</sup>	3.78x10 <sup>2</sup>
ø32	Push	-	80.4	1.21x10 <sup>2</sup>	1.61x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.22x10 <sup>2</sup>	4.02x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.63x10 <sup>2</sup>	6.43x10 <sup>2</sup>	7.24x10 <sup>2</sup>	8.04x10 <sup>2</sup>
	Pull	-	60.3	90.5	1.21x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.62x10 <sup>2</sup>	4.22x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.43x10 <sup>2</sup>	6.03x10 <sup>2</sup>
ø40	Push	-	1.26x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.51x10 <sup>2</sup>	3.77x10 <sup>2</sup>	5.03x10 <sup>2</sup>	6.28x10 <sup>2</sup>	7.54x10 <sup>2</sup>	8.80x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.13x10 <sup>3</sup>	1.26x10 <sup>3</sup>
	Pull	-	1.06x10 <sup>2</sup>	1.58x10 <sup>2</sup>	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>
ø50	Push	-	1.96x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.93x10 <sup>2</sup>	5.89x10 <sup>2</sup>	7.85x10 <sup>2</sup>	9.82x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.37x10 <sup>3</sup>	1.57x10 <sup>3</sup>	1.77x10 <sup>3</sup>	1.96x10 <sup>3</sup>
	Pull	-	1.65x10 <sup>2</sup>	2.47x10 <sup>2</sup>	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>
ø63	Push	-	1.56x10 <sup>2</sup>	3.12x10 <sup>2</sup>	4.68x10 <sup>2</sup>	6.23x10 <sup>2</sup>	9.35x10 <sup>2</sup>	1.25x10 <sup>3</sup>	1.56x10 <sup>3</sup>	1.87x10 <sup>3</sup>	2.18x10 <sup>3</sup>	2.49x10 <sup>3</sup>	2.81x10 <sup>3</sup>
	Pull	-	1.40x10 <sup>2</sup>	2.80x10 <sup>2</sup>	4.20x10 <sup>2</sup>	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>	2.24x10 <sup>3</sup>	2.52x10 <sup>3</sup>
ø80	Push	-	2.51x10 <sup>2</sup>	5.03x10 <sup>2</sup>	7.54x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.51x10 <sup>3</sup>	2.01x10 <sup>3</sup>	2.51x10 <sup>3</sup>	3.02x10 <sup>3</sup>	3.52x10 <sup>3</sup>	4.02x10 <sup>3</sup>	4.52x10 <sup>3</sup>
	Pull	-	2.27x10 <sup>2</sup>	4.54x10 <sup>2</sup>	6.80x10 <sup>2</sup>	9.07x10 <sup>2</sup>	1.36x10 <sup>3</sup>	1.81x10 <sup>3</sup>	2.27x10 <sup>3</sup>	2.72x10 <sup>3</sup>	3.17x10 <sup>3</sup>	3.63x10 <sup>3</sup>	4.08x10 <sup>3</sup>
ø100	Push	-	3.93x10 <sup>2</sup>	7.85x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.57x10 <sup>3</sup>	2.36x10 <sup>3</sup>	3.14x10 <sup>3</sup>	3.93x10 <sup>3</sup>	4.71x10 <sup>3</sup>	5.50x10 <sup>3</sup>	6.28x10 <sup>3</sup>	7.07x10 <sup>3</sup>
	Pull	-	3.57x10 <sup>2</sup>	7.15x10 <sup>2</sup>	1.07x10 <sup>3</sup>	1.43x10 <sup>3</sup>	2.14x10 <sup>3</sup>	2.86x10 <sup>3</sup>	3.57x10 <sup>3</sup>	4.29x10 <sup>3</sup>	5.00x10 <sup>3</sup>	5.72x10 <sup>3</sup>	6.43x10 <sup>3</sup>

# SSD2-K Series

## How to order

No switch (without magnet for switch)

SSD2-K - 12 - 10 - N - LB - I

With switch (built-in magnet for switch)

SSD2-KL - 12 - 10 - T0H - R - N - LB - I

A Bore size

B Port thread

C Stroke

D Switch model No.

- \*1
- \*2
- \*3
- \*8
- \*9

E Switch quantity

F Option

\*4

G Mounting bracket

\*5 \*6

### ⚠ Precautions for model No. selection

- \*1 : The T2YD\* switch cannot be mounted on the ø12 and ø16 bore sizes.
- \*2 : The T8\* switch cannot be mounted on ø12 and ø16.
- \*3 : The F-switch can only be mounted on the piping port surface of bore sizes ø20 and ø25.
- \*4 : Piston rod of ø12 to ø25 is stainless steel as standard. C-snap ring is stainless steel instead of steel. The rod end male thread nut is stainless steel.
- \*5 : The mounting bracket is included at shipment.
- \*6 : The projection dimension of piston rod WF when LB or FA is selected is different from that of the standard. Refer to the dimensions on pages 783, 785, 787, 789 and 790. The number of the specified protruding dimension will be added at the end of the model No. printed on the metal plate on the body.
- \*7 : "I" and "Y" cannot be selected together.
- \*8 : The F-switch with L type lead wire on ø20 models cannot be selected on strokes 10 mm or under.
- \*9 : Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.
- \*10 : Refer to pages 750 and 751 for combinations of variations/options.
- \*11 : F-switch cannot be selected.

### [Example of model No.]

#### SSD2-KL-12-10-T0H-R-N

Model: Compact cylinder, high load

- A Bore size : ø12 mm
- B Port thread : Rc thread
- C Stroke : 10mm
- D Switch model No. : Reed T0H switch  
· Lead wire 1 m
- E Switch quantity : 1 on rod side
- F Option : Rod end male thread

- G Mounting bracket : Without mounting bracket
- H Accessory : Rod eye

Code	Description
<b>A Bore size (mm)</b>	
12	ø12
16	ø16
20	ø20
25	ø25
32	ø32
40	ø40
50	ø50
63	ø63
80	ø80
100	ø100

<b>B Port thread</b>	
Blank	Rc thread
NN	NPT thread (ø32 and over) (made-to-order product)
GN	G thread (ø32 and over) (made-to-order product)

<b>C Stroke (mm)</b>
Refer to the stroke table on the following page.

<b>D Switch model No.</b>		Lead wire	Voltage	Indicator	Lead wire	Bore size														
Lead wire	Lead wire					12	16	20	25	32	40	50	63	80	100					
Straight	L-shaped	Contact	AC	DC	Proximity	1-color LED	2-wire			●	●									
							3-wire			●	●									
Proximity	Reed	Proximity	AC	DC	Proximity	1-color LED (PNP output) (custom)	2-wire			●	●									
							3-wire			●	●									
Proximity	Reed	Proximity	AC	DC	Proximity	2-color LED	2-wire			●	●									
							3-wire			●	●									
Proximity	Reed	Proximity	AC	DC	Proximity	1-color LED	2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●
							3-wire	●	●	●	●	●	●	●	●	●	●	●	●	●
Proximity	Reed	Proximity	AC	DC	Proximity	No indicator lamp	2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●
							3-wire	●	●	●	●	●	●	●	●	●	●	●	●	●
Proximity	Reed	Proximity	AC	DC	Proximity	1-color LED	2-wire			●	●	●	●	●	●	●	●	●	●	●
							3-wire			●	●	●	●	●	●	●	●	●	●	●
Proximity	Reed	Proximity	AC	DC	Proximity	1-color LED (PNP output)	2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●
							3-wire	●	●	●	●	●	●	●	●	●	●	●	●	●
Proximity	Reed	Proximity	AC	DC	Proximity	2-color LED	2-wire			●	●	●	●	●	●	●	●	●	●	●
							3-wire			●	●	●	●	●	●	●	●	●	●	●
Proximity	Reed	Proximity	AC	DC	Proximity	AC magnetic field	2-wire			●	●	●	●	●	●	●	●	●	●	●
							3-wire			●	●	●	●	●	●	●	●	●	●	●
Proximity	Reed	Proximity	AC	DC	Proximity	1-color LED off-delay	2-wire			●	●	●	●	●	●	●	●	●	●	●
							3-wire			●	●	●	●	●	●	●	●	●	●	●

<b>* Lead wire length</b>	
Blank	1 m (standard)
3	3 m (option)
5	5 m (option)

<b>E Switch quantity</b>	
R	1 on rod side
H	1 on head side
D	2

<b>F Option</b>		Bore size (ø)									
Option	Description	12	16	20	25	32	40	50	63	80	100
Blank	Rod end female thread	●	●	●	●	●	●	●	●	●	●
N	Rod end male thread	●	●	●	●	●	●	●	●	●	●
M *4	Piston rod material (stainless steel)	●	●	●	●	●	●	●	●	●	●
P6	Copper and PTFE free	Standard	●	●	●	●	●	●	●	●	●
S	Dedicated unit for custom stroke	●	●	●	●	●	●	●	●	●	●
P4	Specifications for rechargeable battery	●	●	●	●	●	●	●	●	●	●
P40		●	●	●	●	●	●	●	●	●	●

<b>G Mounting bracket</b>	
Blank	Without mounting bracket
LB	Axial foot
CB	Clevis bracket (pin and snap ring included)
FA	Rod side flange
FB	Head side flange

<b>H Accessory (available when rod end male thread "N" is selected)</b>	
I	Rod eye
Y	Rod clevis (pin and snap ring included)

### [Stroke table]

Stroke (mm)	Applicable bore size									
	12	16	20	25	32	40	50	63	80	100
5	●	●	●	●	●	●				
10	●	●	●	●	●	●	●	●	●	●
15	●	●	●	●	●	●	●	●	●	●
20	●	●	●	●	●	●	●	●	●	●
25	●	●	●	●	●	●	●	●	●	●
30	●	●	●	●	●	●	●	●	●	●
35			●	●	●	●	●	●	●	●
40			●	●	●	●	●	●	●	●
45			●	●	●	●	●	●	●	●
50			●	●	●	●	●	●	●	●
75					●	●	●	●	●	●
100					●	●	●	●	●	●

\*1: Less than 5 mm with 1-color LED switch and less than 10 mm with the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch are not available.

Refer to page 776 for the min. stroke with switch.

\*2: The total length is the same as that of the next longer standard stroke.

\*3: Refer to page 789 for the min. stroke with mounting bracket LB.

### How to order switch

SW - T0H

Switch model No.  
(Item ① on page 778)

### Cylinder weight table (the weight of the switches is when there are 2 cylinder switches.)

(Unit: g)

Stroke (mm)	5		10		15		20		25		30		35		40		45		50		75		100	
	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch
ø12	44	86	53	95	61	103	70	112	78	121	87	129	-	-	-	-	-	-	-	-	-	-	-	-
ø16	59	104	69	114	80	125	91	136	102	147	113	158	-	-	-	-	-	-	-	-	-	-	-	-
ø20	75	150	88	163	101	176	113	188	126	201	138	213	151	226	163	238	176	251	188	263	-	-	-	-
ø25	102	193	118	209	134	225	150	241	165	256	182	273	198	289	214	305	230	321	246	337	-	-	-	-
ø32	167	281	188	302	209	323	231	345	253	367	275	389	297	411	318	432	340	454	361	475	534	583	642	690
ø40	236	379	263	406	290	433	316	459	342	485	369	512	396	539	422	565	449	592	475	618	702	751	834	883
ø50	-	-	425	619	467	661	510	704	553	747	594	788	636	830	678	872	720	914	762	956	1109	1166	1319	1376
ø63	-	-	617	896	672	951	727	1006	782	1061	838	1117	893	1172	948	1227	1003	1282	1058	1337	1548	1612	1823	1887
ø80	-	-	1101	1514	1188	1601	1274	1687	1361	1774	1448	1861	1535	1948	1621	2034	1708	2121	1794	2207	2574	2640	3006	3072
ø100	-	-	1660	2227	1774	2341	1888	2455	2002	2569	2115	2682	2229	2796	2343	2910	2457	3024	2571	3138	3636	3708	4206	4278

### How to order mounting bracket

Bore size (mm)	ø12	ø16	ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100
Foot (LB)	SSD2-LB-12	SSD2-LB-16	SSD2-LB-20	SSD2-LB-25	SSD2-LB-32	SSD2-LB-40	SSD2-LB-50	SSD2-LB-63	SSD2-LB-80	SSD2-LB-100
Flange (FA/FB)	SSD2-FA-12	SSD2-FA-16	SSD2-FA-20	SSD2-FA-25	SSD2-FA-32	SSD2-FA-40	SSD2-FA-50	SSD2-FA-63	SSD2-FA-80	SSD2-FA-100
Clevis bracket (CB)	SSD2-CB-12	SSD2-CB-16	SSD2-CB-20	SSD2-CB-25	SSD2-CB-32	SSD2-CB-40	SSD2-CB-50	SSD2-CB-63	SSD2-CB-80	SSD2-CB-100

\*1: The foot mounting bracket is provided as 2 pcs./set.

### Specifications for rechargeable battery (catalog No. CC-1226A)

- Design compatible with rechargeable battery manufacturing process

SSD2-K----- P4\*

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

SSD2

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK


Spd  
Contr

Ending


# SSD2-K Series

## Internal structure and parts list


● SSD2-KL-12 to 25 (double acting/single rod/with switch)

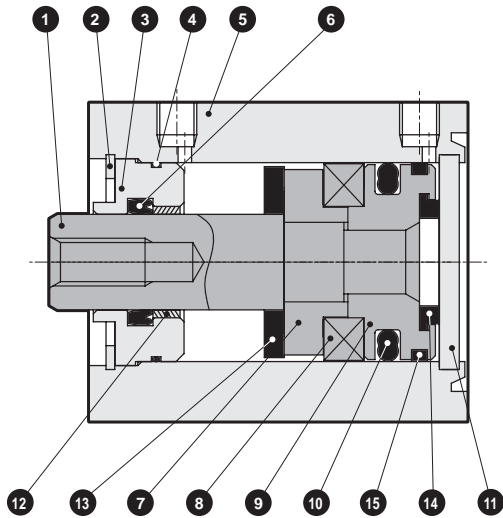


● SSD2-KL-32 (double acting/single rod high load/with switch)

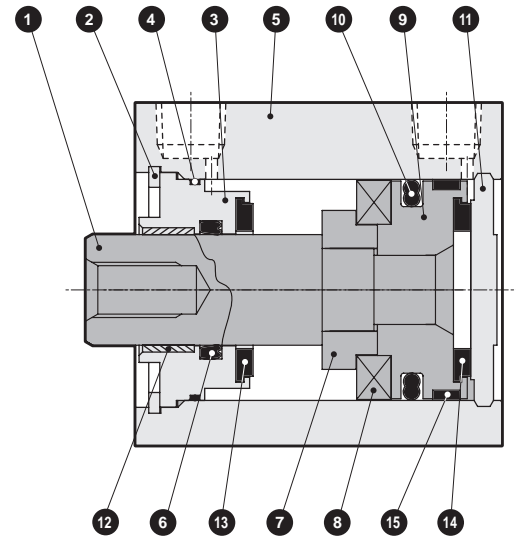

● SSD2-K-12 to 25 (double acting/single rod high load)

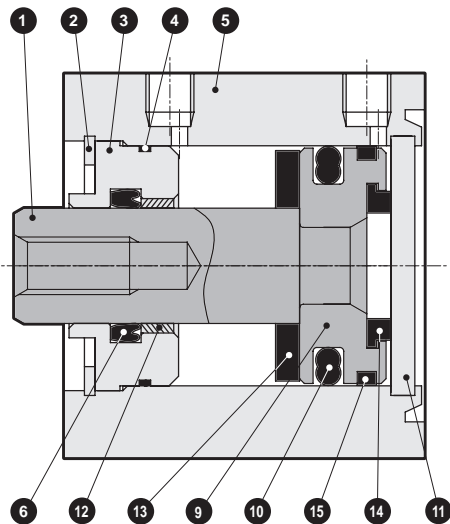

● SSD2-K-32 (double acting/single rod high load)

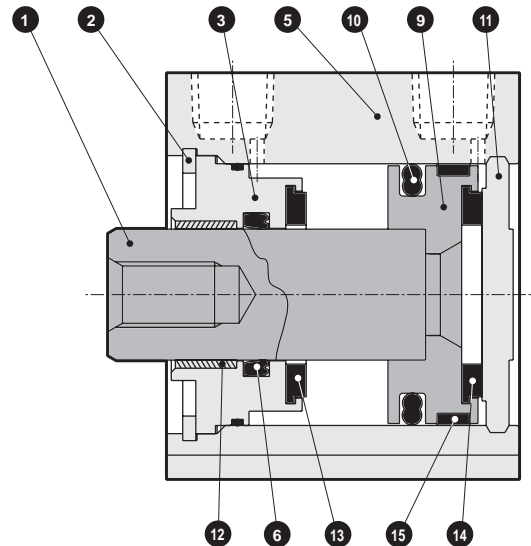

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	ø12 to ø25: Stainless steel ø32: Steel	ø16 to ø32 Industrial chrome plating	9	Piston	Aluminum alloy	Chromate
2	C-snap ring	Steel	Zinc phosphate	10	Piston packing	Nitrile rubber	
3	Rod metal	Special aluminum	Alumite (*2)	11	Cover	ø12 to ø25: Stainless steel ø32: Aluminum alloy	ø32: Alumite
4	Rod metal gasket	Nitrile rubber		12	Bush	Oiles drymet	ø20 to ø32 (*1)
5	Body	Aluminum alloy	Hard alumite	13	Cushion rubber (R)	Urethane rubber	
6	Rod packing	Nitrile rubber		14	Cushion rubber (H)	Urethane rubber	
7	Spacer	Aluminum alloy	Chromate	15	Wear ring	Polyacetal resin	
8	Magnet	Plastic					

\*1: Material is steel for copper and PTFE free specifications.


\*2: Chromate-coated for ø32.

## Repair parts list


Bore size (mm)	Kit No.	Repair parts No.
ø12	SSD2-K-12K	
ø16	SSD2-K-16K	
ø20	SSD2-K-20K	
ø25	SSD2-K-25K	
ø32	SSD2-K-32K	

### Internal structure and parts list

● SSD2-KL-40 to 100 (double acting/single rod/with switch)

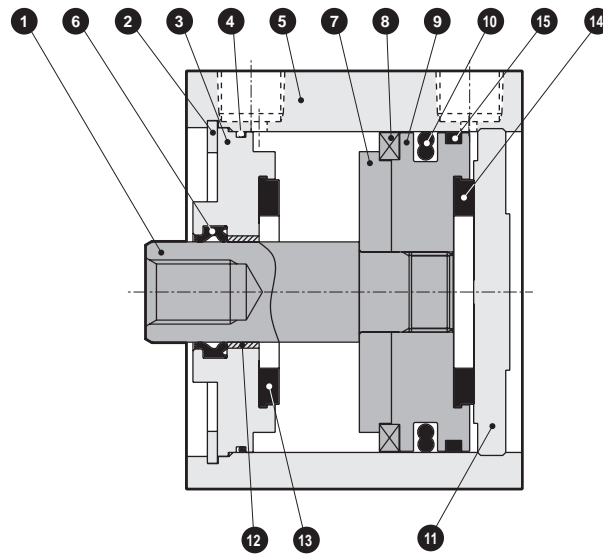

● SSD2-K-40 to 100 (double acting/single rod high load)

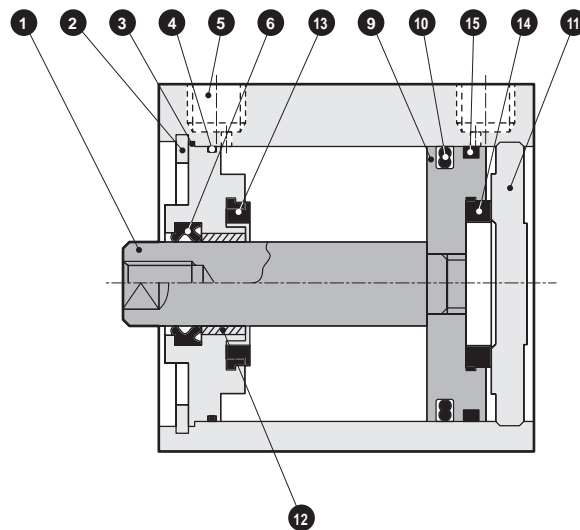

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	Steel	Industrial chrome plating	9	Piston	Aluminum alloy	Chromate
2	C-snap ring	Steel	Zinc phosphate	10	Piston packing	Nitrile rubber	
3	Rod metal	Aluminum alloy	Alumite (*2)	11	Cover	Aluminum alloy	Alumite
4	Rod metal gasket	Nitrile rubber		12	Bush	Oiles drymet	*1
5	Body	Aluminum alloy	Hard alumite	13	Cushion rubber (R)	Urethane rubber	
6	Rod packing	Nitrile rubber		14	Cushion rubber (H)	Urethane rubber	
7	Spacer	Aluminum alloy		15	Wear ring	Polyacetal resin	
8	Magnet	Plastic					

\*1: Material is steel for copper and PTFE free specifications.

\*2: Chromate-coated for ø40 and ø50.

### Repair parts list

Bore size (mm)	Kit No.	Repair parts No.
ø40	SSD2-K-40K	<div style="display: flex; flex-wrap: wrap; justify-content: center; gap: 5px;"> <span>4</span> <span>6</span> <span>10</span> </div> <div style="display: flex; flex-wrap: wrap; justify-content: center; gap: 5px;"> <span>13</span> <span>14</span> <span>15</span> </div>
ø50	SSD2-K-50K	
ø63	SSD2-K-63K	
ø80	SSD2-K-80K	
ø100	SSD2-K-100K	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending

# SSD2-K Series



## Dimensions




● SSD2-KL-12 to 25 (with switch)

● Rod end male thread

ø12/ø16

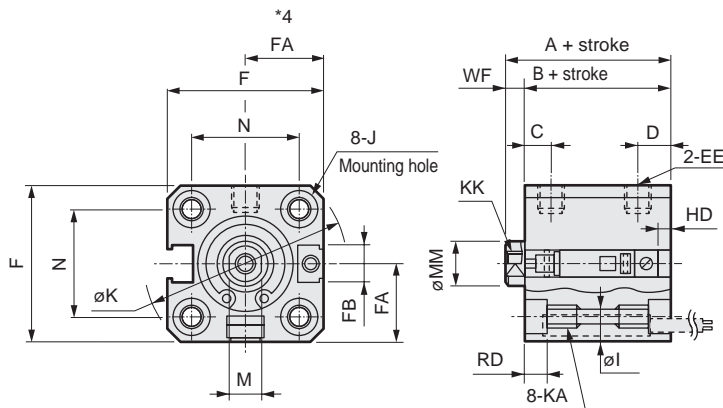

ø20/ø25

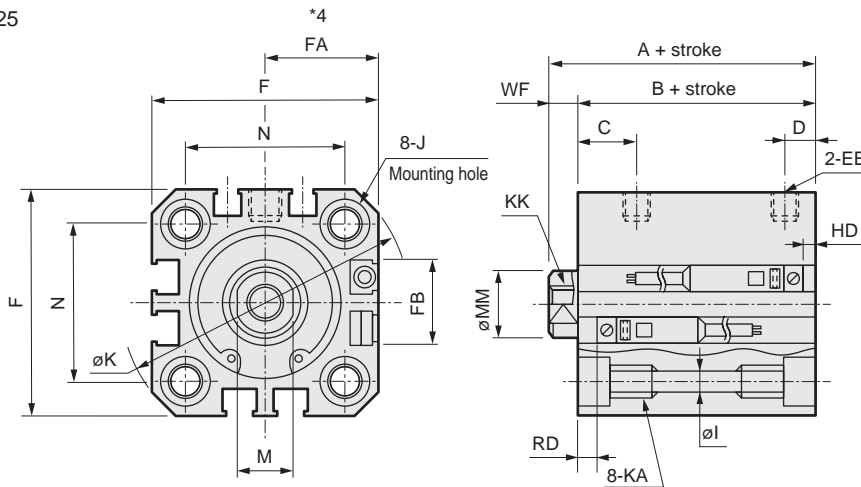

· Precautions regarding the switch mounting groove

\*1: Only F-switch is available for the ø20 or ø25 piping port surface.

Code	Common dimensions with switch																	
	Bore size (mm)	A <sup>*1</sup>	B <sup>*1</sup>	C	D	EE	F	FA <sup>*3</sup>	FB	I	J	K	KA	KK	M	MM	N	WF
STK	ø12	30.5	27	5.5	5.5	M5	25	13(16.5)	4.5	3.5	6.5 spot face depth 3.5	32	M4 depth 7	M3 depth 6	5	6	15.5	3.5
	ø16	30.5	27	5.5	5.5	M5	29	15(18.5)	4.5	3.5	6.5 spot face depth 3.5	38	M4 depth 7	M4 depth 8	6	8	20	3.5
SRL3	ø20	39	34.5	8	5.5	M5	36	18.5(22)	12.5	5.5	9 spot face depth 5.5	47	M6 depth 11	M5 depth 7	8	10	25.5	4.5
	ø25	42.5	37.5	11	6	M5	40	20.5(24)	13.5	5.5	9 spot face depth 5.5	51	M6 depth 11	M6 depth 12	10	12	28	5
Switch dimensions	Reed T0H/T0V, T5H/T5V		Proximity T2H/T2V, T3H/T3V		Proximity T2WH/T2WV, T3WH T3WV		Proximity F2H/F2V, F3H/F3V, F2YH/F2YV, F3YH/F3YV		Proximity F2S/F3S									
	Bore size (mm)	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD							
SRG3	ø12	4.5	3.5	4.5	3.5	6.5	5.5											
	ø16	3	5	3	5	5	7											
SRM3	ø20	6.5	9	6.5	9	8.5	11	11	13.5	10	12.5							
	ø25	6	12.5	6	12.5	8	14.5	10.5	17	9.5	16							

\*1 : To calculate A + stroke or B + stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value.

(Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

· For ø16: A + stroke = 40.5 B + stroke = 37

When you have selected "S" (dedicated unit for custom stroke), apply the custom stroke of 7 mm.

· For ø16: A + stroke = 37.5 B + stroke = 34

\*2: Refer to page 1045 for HD and RD dimensions of the 2-color LED, off-delay, AC magnetic field tolerant, T1\* and T8\* switches.

\*3: Refer to page 1045 for protruding dimensions of the 2-color LED, off-delay, AC magnetic field tolerant, T1\* and T8\* switches.

\*4 : Dimensions in ( ) of FA are for the L-shaped lead wire.

\*5: For dimensions of individual accessories, refer to pages 1046 to 1049.


● Dimensions of rod end male thread part

Code	a'	c'	H	kk'	M	MM	T	wf
Bore size (mm)								
ø12	10.5	9	8	M5	5	6	3.2	3.5
ø16	12	10	10	M6	6	8	3.6	3.5
ø20	14	12	13	M8	8	10	5	4.5
ø25	17.5	15	17	M10x1.25	10	12	6	5


### Dimensions with mounting bracket



- Axial foot (LB) with switch  
SSD2-KL-12 to 25 -LB

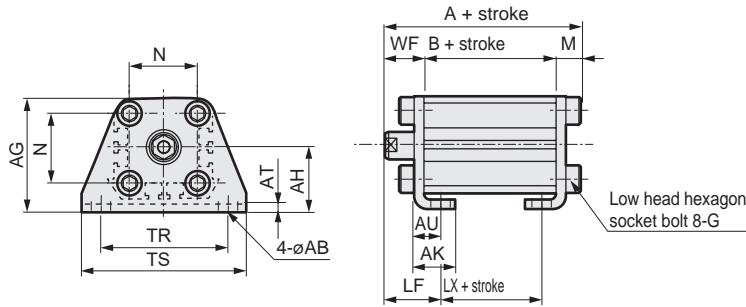

Rod end male thread




Code	Common dimensions						Female thread				
Bore size (mm)	AB	AG	AH	AK	AT	AU	G	N	TR	TS	M
ø12	5	29.5	17	12.5	2	8	M4x10	15.5	34	44	4.8
ø16	5	33.5	19	13	2	8	M4x10	20	38	48	4.8
ø20	7	42	24	15	3.2	9.2	M6x16	25.5	48	62	7.2
ø25	7	46	26	16.5	3.2	10.7	M6x16	28	52	66	7.2


  

Code	Male thread										
Bore size (mm)	WF	LF	A	B	LX	a'	wf	LF	A	B	LX
ø12	13.5	19.5	45.3	27	15	10.5	13.5	19.5	55.8	27	15
ø16	13.5	19.5	45.3	27	15	12	13.5	19.5	57.3	27	15
ø20	14.5	20.5	56.2	34.5	22.5	14	14.5	20.5	70.2	34.5	22.5
ø25	15	22.5	59.7	37.5	22.5	17.5	15	22.5	77.2	37.5	22.5

- Clevis bracket (CB) with switch  
SSD2-KL-12 to 25 -CB

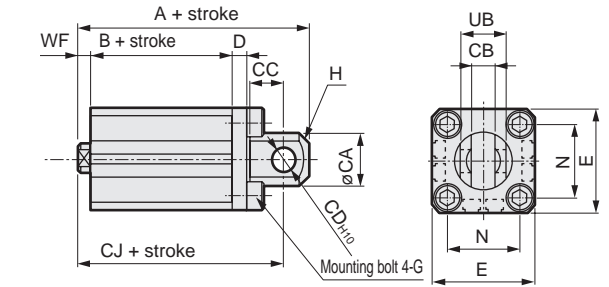

Rod end male thread

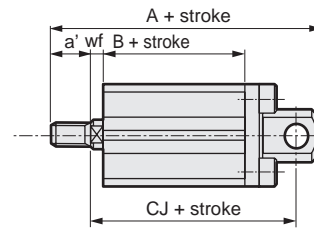


Code	Common dimensions									
Bore size (mm)	CA	CB	CC	CD	D	E	G	H	N	UB
ø12	12	5.2 <sup>+0.2</sup> <sub>0</sub>	7	5	4	25	M4x12	C1.5	15.5	10 <sup>3.1</sup> <sub>3.4</sub>
ø16	15	6.6 <sup>+0.3</sup> <sub>0</sub>	8	5	5	29	M4x12	C2	20	12 <sup>3.1</sup> <sub>3.4</sub>
ø20	20	8.2 <sup>+0.2</sup> <sub>0</sub>	12	8	5	36	M6x16	C4	25.5	16 <sup>3.1</sup> <sub>3.3</sub>
ø25	24	10.2 <sup>+0.2</sup> <sub>0</sub>	14	10	5	40	M6x16	C5	28	20 <sup>3.1</sup> <sub>3.3</sub>


  

Code	Female thread				Male thread				
Bore size (mm)	WF	A	B	CJ	a'	wf	A	B	CJ
ø12	3.5	50.5	27	44.5	10.5	3.5	61	27	44.5
ø16	3.5	51.5	27	45.5	12	3.5	63.5	27	45.5
ø20	4.5	66	34.5	57	14	4.5	80	34.5	57
ø25	5	72.5	37.5	62.5	17.5	5	90	37.5	62.5

- Rod side flange (FA) with switch  
SSD2-KL-12 to 25 -FA

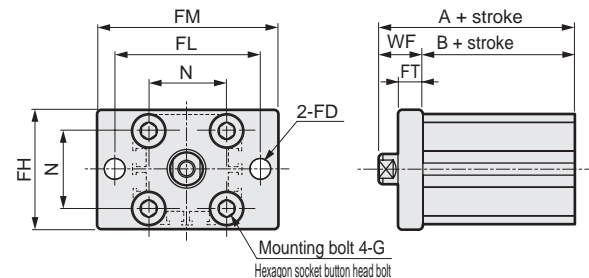

Rod end male thread




Code	Common dimensions						
Bore size (mm)	FD	FH	FL	FM	FT	N	G
ø12	4.5	25	45	55	5.5	15.5	M4x12
ø16	4.5	30	45	55	5.5	20	M4x12
ø20	6.6	39	48	60	8	25.5	M6x16
ø25	6.6	42	52	64	8	28	M6x16


  

Code	Female thread				Male thread		
Bore size (mm)	WF	A	B	a'	wf	A	B
ø12	13.5	40.5	27	10.5	13.5	51	27
ø16	13.5	40.5	27	12	13.5	52.5	27
ø20	14.5	49	34.5	14	14.5	63	34.5
ø25	15	52.5	37.5	17.5	15	70	37.5

- Head side flange (FB) with switch  
SSD2-KL-12 to 25 -FB

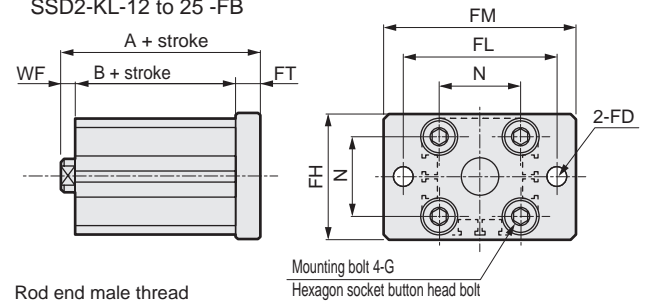

Rod end male thread



Code	Common dimensions						
Bore size (mm)	FD	FH	FL	FM	FT	N	G
ø12	4.5	25	45	55	5.5	15.5	M4x12
ø16	4.5	30	45	55	5.5	20	M4x12
ø20	6.6	39	48	60	8	25.5	M6x16
ø25	6.6	42	52	64	8	28	M6x16

Code	Female thread				Male thread		
Bore size (mm)	WF	A	B	a'	wf	A	B
ø12	3.5	36	27	10.5	3.5	46.5	27
ø16	3.5	36	27	12	3.5	48	27
ø20	4.5	47	34.5	14	4.5	61	34.5
ø25	5	50.5	37.5	17.5	5	68	37.5



# SSD2-K Series




## Dimensions





● SSD2-K-12 to 25 (without switch)

● Rod end male thread

ø12/ø16

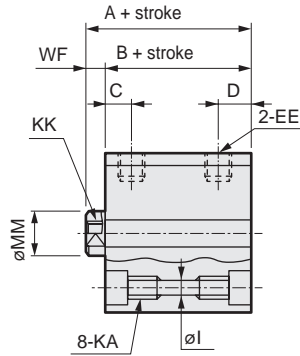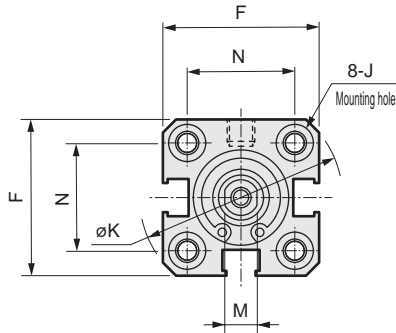

ø20/ø25

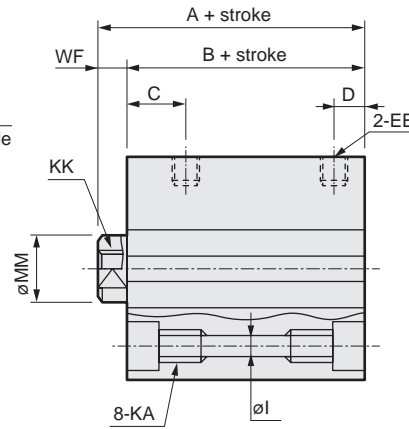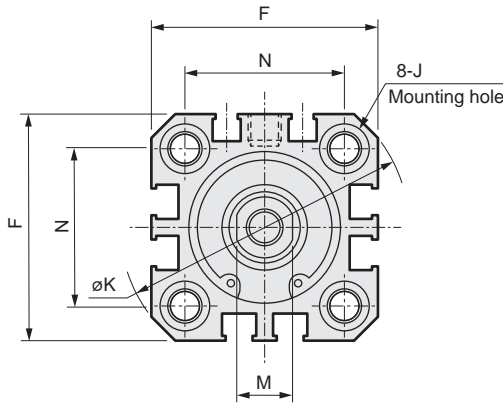

Code	Dimensions without switch and common dimensions															
	Bore size (mm)	A <sup>*1</sup>	B <sup>*1</sup>	C	D	EE	F	I	J	K	KA	KK	M	MM	N	WF
SRG3	ø12	25.5	22	5.5	5.5	M5	25	3.5	6.5 spot face depth 3.5	32	M4 depth 7	M3 depth 6	5	6	15.5	3.5
SRM3	ø16	25.5	22	5.5	5.5	M5	29	3.5	6.5 spot face depth 3.5	38	M4 depth 7	M4 depth 8	6	8	20	3.5
SRT3	ø20	29	24.5	8	5.5	M5	36	5.5	9 spot face depth 5.5	47	M6 depth 11	M5 depth 7	8	10	25.5	4.5
SRL3	ø25	32.5	27.5	11	6	M5	40	5.5	9 spot face depth 5.5	51	M6 depth 11	M6 depth 12	10	12	28	5

\*1 : To calculate A+ stroke or B+ stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value.

(Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

• For ø16: A + stroke = 35.5 B + stroke = 32

When you have selected "S" (dedicated unit for custom stroke), apply the custom stroke of 7 mm.

• For ø16: A + stroke = 32.5 B + stroke = 29

\*2: For dimensions with accessories and of individual accessories, refer to pages 1046 to 1049.


● Dimensions of rod end male thread part

Code	a'	c'	H	kk'	M	MM	T	wf	
FJ	ø12	10.5	9	8	M5	5	6	3.2	3.5
FK	ø16	12	10	10	M6	6	8	3.6	3.5
Spd Contr	ø20	14	12	13	M8	8	10	5	4.5
Ending	ø25	17.5	15	17	M10x1.25	10	12	6	5


### Dimensions with mounting bracket



- Axial foot (LB) without switch  
SSD2-K-12 to 25 -LB

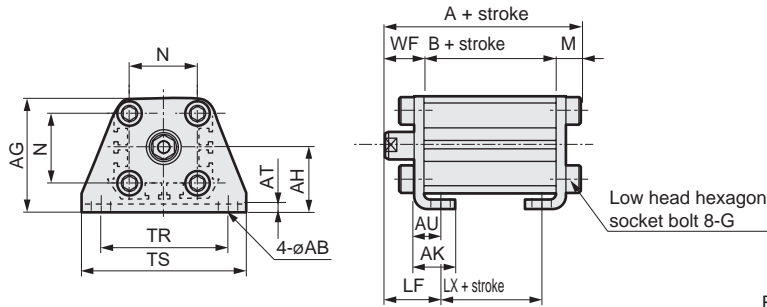

Rod end male thread




Code	Common dimensions											Female thread				
	Bore size (mm)	AB	AG	AH	AK	AT	AU	G	N	TR	TS	M				
ø12	5	29.5	17	12.5	2	8	M4x10	15.5	34	44	4.8					
ø16	5	33.5	19	13	2	8	M4x10	20	38	48	4.8					
ø20	7	42	24	15	3.2	9.2	M6x16	25.5	48	62	7.2					
ø25	7	46	26	16.5	3.2	10.7	M6x16	28	52	66	7.2					


  

Code	Male thread											
	Bore size (mm)	WF	LF	A	B	LX	a'	wf	LF	A	B	LX
ø12	13.5	19.5	40.3	22	10	10.5	13.5	19.5	50.8	22	10	
ø16	13.5	19.5	40.3	22	10	12	13.5	19.5	52.3	22	10	
ø20	14.5	20.5	46.2	24.5	12.5	14	14.5	20.5	60.2	24.5	12.5	
ø25	15	22.5	49.7	27.5	12.5	17.5	15	22.5	67.2	27.5	12.5	

- Clevis bracket (CB) without switch  
SSD2-K-12 to 25 -CB

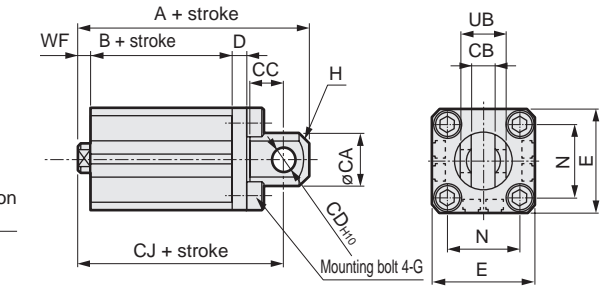


Rod end male thread




Code	Common dimensions										Female thread				Male thread					
	Bore size (mm)	CA	CB	CC	CD	D	E	G	H	N	UB	WF	A	B	CJ	a'	wf	A	B	CJ
ø12	12	5.2 <sup>+0.2</sup> <sub>0</sub>	7	5	4	25	M4x12	C1.5	15.5	10 <sup>-0.1</sup> <sub>0.3</sub>		3.5	45.5	22	39.5	10.5	3.5	56	22	39.5
ø16	15	6.6 <sup>+0.3</sup> <sub>0</sub>	8	5	5	29	M4x12	C2	20	12 <sup>-0.1</sup> <sub>0.4</sub>		3.5	46.5	22	40.5	12	3.5	58.5	22	40.5
ø20	20	8.2 <sup>+0.2</sup> <sub>0</sub>	12	8	5	36	M6x16	C4	25.5	16 <sup>-0.1</sup> <sub>0.3</sub>		4.5	56	24.5	47	14	4.5	70	24.5	47
ø25	24	10.2 <sup>+0.2</sup> <sub>0</sub>	14	10	5	40	M6x16	C5	28	20 <sup>-0.1</sup> <sub>0.3</sub>		5	62.5	27.5	52.5	17.5	5	80	27.5	52.5

- Rod side flange (FA) without switch  
SSD2-K-12 to 25 -FA

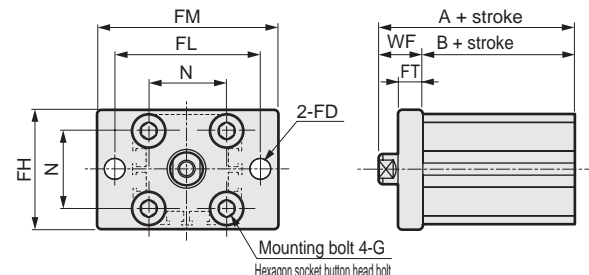

Rod end male thread




Code	Common dimensions						
	Bore size (mm)	FD	FH	FL	FM	FT	N
ø12	4.5	25	45	55	5.5	15.5	M4x12
ø16	4.5	30	45	55	5.5	20	M4x12
ø20	6.6	39	48	60	8	25.5	M6x16
ø25	6.6	42	52	64	8	28	M6x16


  

Code	Female thread				Male thread			
	Bore size (mm)	WF	A	B	a'	wf	A	B
ø12	13.5	35.5	22	10.5	13.5	46	22	
ø16	13.5	35.5	22	12	13.5	47.5	22	
ø20	14.5	39	24.5	14	14.5	53	24.5	
ø25	15	42.5	27.5	17.5	15	60	27.5	

- Head side flange (FB) without switch  
SSD2-K-12 to 25 -FB

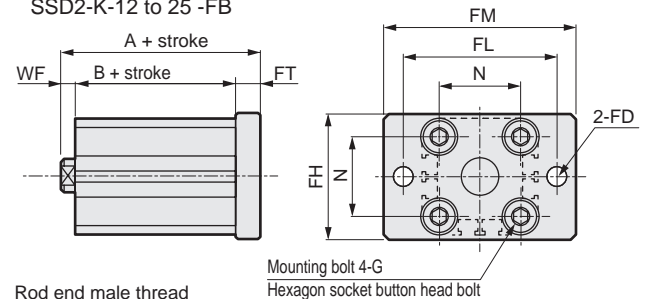

Rod end male thread



Code	Common dimensions						
	Bore size (mm)	FD	FH	FL	FM	FT	N
ø12	4.5	25	45	55	5.5	15.5	M4x12
ø16	4.5	30	45	55	5.5	20	M4x12
ø20	6.6	39	48	60	8	25.5	M6x16
ø25	6.6	42	52	64	8	28	M6x16

Code	Female thread				Male thread			
	Bore size (mm)	WF	A	B	a'	wf	A	B
ø12	3.5	31	22	10.5	3.5	41.5	22	
ø16	3.5	31	22	12	3.5	43	22	
ø20	4.5	37	24.5	14	4.5	51	24.5	
ø25	5	40.5	27.5	17.5	5	58	27.5	

- SCP\*3
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS2
- CKV2
- CAV2/COVP/N2
- SSD2**
- SSG
- SSD
- CAT
- MDC2
- MVC
- SMG
- MSD/MSDG
- FC\*
- STK
- SRL3
- SRG3
- SRM3
- SRT3
- MRL2
- MRG2
- SM-25
- ShkAbs
- FJ
- FK
- Spd Contr
- Ending




# SSD2-K Series

## Dimensions



● SSD2-KL-32 to 100 (with switch)

● Rod end male thread

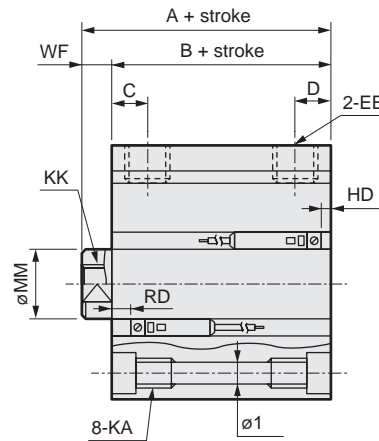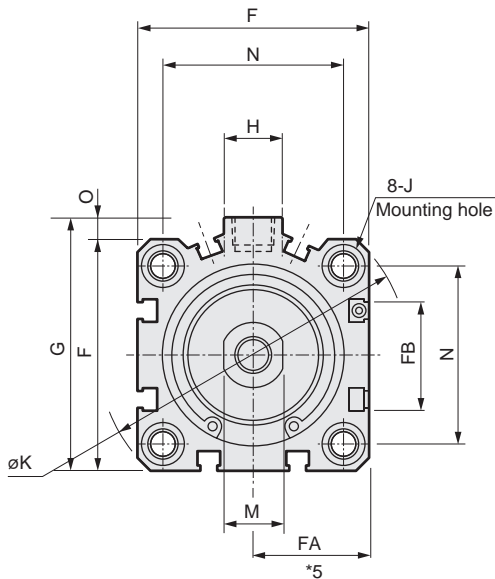

Code	Common dimensions with switch																			
Bore size (mm)	A <sup>*1</sup>	B <sup>*1</sup>	C	D	EE	F	FA <sup>*5</sup>	FB	G	H	I	J	K	KA	KK	M	MM	N	O	WF
ø32	50	43	8	8	Rc1/8	45	23(26.5)	20.5	49.5	12.5	5.5	9 spot face depth 5.5	60	M6 depth 11	M8 depth 13	14	16	34	4.5	7
ø40	56.5	49.5	12	8.5	Rc1/8	52	26.5(30)	27.5	57	15	5.5	9 spot face depth 5.5	69	M6 depth 11	M8 depth 13	14	16	40	5	7
ø50	58.5	50.5	10.5	10.5	Rc1/4	64	32.5(36)	28.5	71	18	6.9	11 spot face depth 6.5	86	M8 depth 13	M10 depth 15	17	20	50	7	8
ø63	64	56	13	11	Rc1/4	77	39(42.5)	28.5	84	23	8.7	14 spot face depth 9	103	M10 depth 25	M10 depth 15	17	20	60	7	8
ø80	73.5	63.5	16	13	Rc3/8	98	49.5(53)	28.5	104	31	10.5	17.5 spot face depth 11	132	M12 depth 28	M16 depth 21	22	25	77	6	10
ø100	85	73	23	15	Rc3/8	117	59(62.5)	28.5	123.5	38	10.5	17.5 spot face depth 11	156	M12 depth 28	M20 depth 27	27	30	94	6.5	12

Switch dimensions	Reed T0H/T0V, T5H/T5V		Proximity T2H/T2V, T3H/T3V		Proximity T2WH/T2WV, T3WH/T3WV	
	HD	RD	HD	RD	HD	RD
ø32	9	15	9	15	11	17
ø40	9.5	19.5	9.5	19.5	11	21
ø50	10	20	10	20	11.5	21.5
ø63	17.5	18	17.5	18	19	19.5
ø80	22	20.5	22.5	20.5	24	22
ø100	28	24.5	28	24.5	29.5	26

\*1 : To calculate A + stroke or B + stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value.  
(Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

· For ø40: A + stroke = 60 B + stroke = 53

When you have selected "S" (dedicated unit for custom stroke), apply the custom stroke of 7 mm.

· For ø40: A + stroke = 57 B + stroke = 50

\*2 : HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.

\*3: Refer to page 1045 for HD and RD dimensions of the 2-color LED, off-delay, AC magnetic field tolerant, T1\* and T8\* switches.

\*4: Refer to page 1045 for protruding dimensions of the 2-color LED, off-delay, AC magnetic field tolerant, T1\* and T8\* switches.

\*5 : Dimensions in ( ) of FA are for the L-shaped lead wire.

\*6: For dimensions with accessories and of individual accessories, refer to pages 1046 to 1049.


● Dimensions of rod end male thread part

Code	a'	c'	H	kk'	M	MM	T	wf
ø32	23.5	20.5	22	M14x1.5	14	16	8	5
ø40	23.5	20.5	22	M14x1.5	14	16	8	5
ø50	28.5	26	27	M18x1.5	17	20	11	5
ø63	28.5	26	27	M18x1.5	17	20	11	5
ø80	35.5	32.5	32	M22x1.5	22	25	13	8
ø100	35.5	32.5	41	M26x1.5	27	30	16	8

### Dimensions with mounting bracket



- Axial foot (LB) with switch  
SSD2-KL-32 to 100 -LB

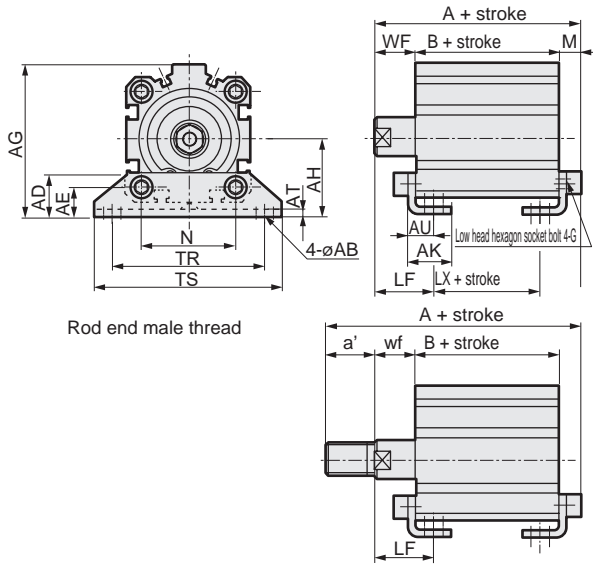


Code	Common dimensions											Female thread			
	Bore size (mm)	AB	AD	AE	AG	AH	AK	AT	AU	G	N	TR	TS		
ø32	7	18.5	13	57	30	17	3.2	11.2	M6x16	34	57	71			
ø40	7	18	13	64	33	18.2	3.2	11.2	M6x16	40	64	78			
ø50	9	22	14	78	39	22.7	3.2	14.7	M8x20	50	79	95			
ø63	11	26	16	91.5	46	25.2	3.2	16.2	M10x25	60	95	113			
ø80	13	31.5	20.5	114	59	30.5	4.5	19.5	M12x40	77	118	140			
ø100	13	35	24	136	71	35.5	6	23	M12x40	94	137	162			

Code	Male thread											
	Bore size (mm)	M	WF	LF	A	B	LX	a'	wf	LF	A	B
ø32	7.2	17	25	67.2	43	27	23.5	15	23	88.7	43	27
ø40	7.2	17	25	73.7	49.5	33.5	23.5	15	23	95.2	49.5	33.5
ø50	8.2	18	29.5	76.7	50.5	27.5	28.5	15	26.5	102.2	50.5	27.5
ø63	9.2	18	31	83.2	56	30	28.5	15	28	108.7	56	30
ø80	11.5	20	35	95	63.5	33.5	35.5	18	33	128.5	63.5	33.5
ø100	13	22	39	108	73	39	35.5	18	35	139.5	73	39

- Rod side flange (FA)  
SSD2-KL-32 to 100 -FA

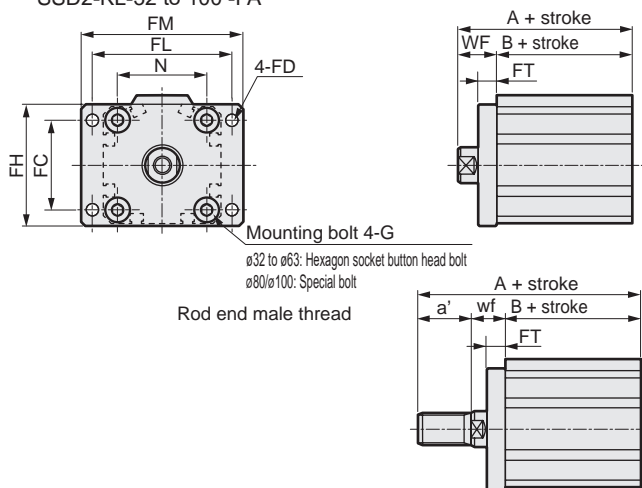


Code	Common dimensions							
	Bore size (mm)	FC	FD	FH	FL	FM	FT	N
ø32	34	5.5	48	56	65	8	34	M6x16
ø40	40	5.5	54	62	72	8	40	M6x16
ø50	50	6.6	67	76	89	9	50	M8x20
ø63	60	9	80	92	108	9	60	M10x25
ø80	77	11	99	116	134	11	77	M12x40
ø100	94	11	117	136	154	11	94	M12x40

Code	Female thread				Male thread			
	Bore size (mm)	WF	A	B	a'	wf	A	B
ø32	17	60	43	23.5	15	81.5	43	
ø40	17	66.5	49.5	23.5	15	88	49.5	
ø50	18	68.5	50.5	28.5	15	94	50.5	
ø63	18	74	56	28.5	15	99.5	56	
ø80	20	83.5	63.5	35.5	18	117	63.5	
ø100	22	95	73	35.5	18	126.5	73	

- Clevis bracket (CB) with switch  
SSD2-KL-32 to 100 -CB

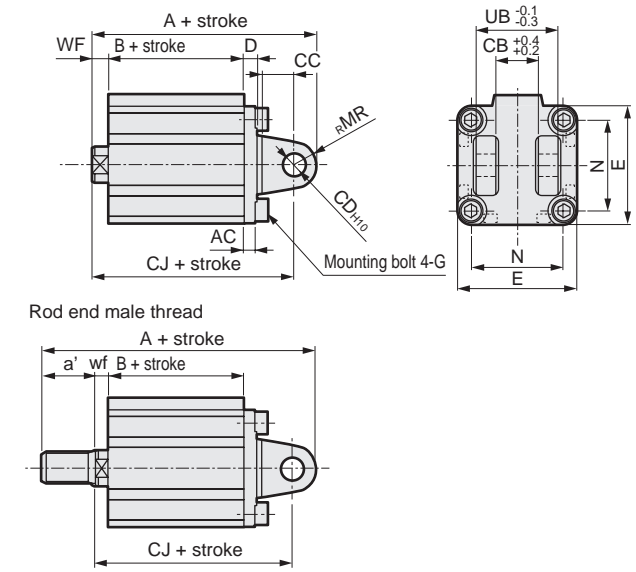


Code	Common dimensions									
	Bore size (mm)	AC	CB	CC	CD	D	E	G	MR	N
ø32	4.5	18.2	14	10	5	45	M6x16	10	34	36
ø40	5	18.2	14	10	6	52	M6x16	10	40	36
ø50	6	22.2	20	14	7	64	M8x20	14	50	44
ø63	7	22.2	20	14	8	77	M10x25	14	60	44
ø80	9	28.2	27	18	10	98	M12x40	18	77	56
ø100	12	32.2	31	22	13	117	M12x40	22	94	64

Code	Female thread					Male thread				
	Bore size (mm)	WF	A	B	CJ	a'	wf	A	B	CJ
ø32	7	80	43	70	23.5	5	101.5	43	68	
ø40	7	88.5	49.5	78.5	23.5	5	110	49.5	76.5	
ø50	8	100.5	50.5	86.5	28.5	5	126	50.5	83.5	
ø63	8	108	56	94	28.5	5	133.5	56	91	
ø80	10	129.5	63.5	111.5	35.5	8	163	63.5	109.5	
ø100	12	152	73	130	35.5	8	183.5	73	126	

\* A pin and a snap ring are included.

- Head side flange (FB)  
SSD2-KL-32 to 100 -FB

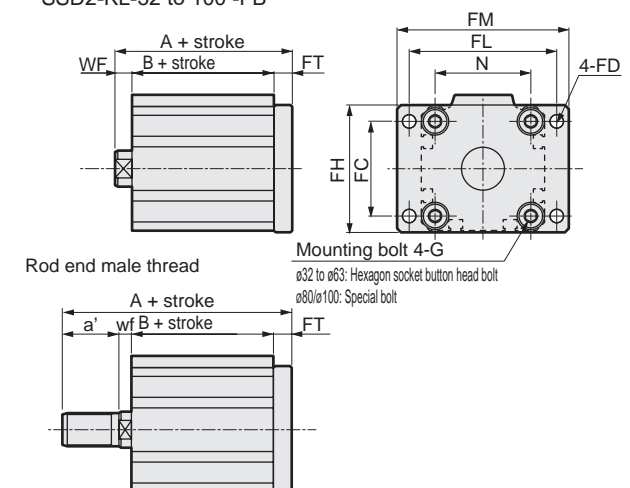

Code	Common dimensions							
	Bore size (mm)	FC	FD	FH	FL	FM	FT	N
ø32	34	5.5	48	56	65	8	34	M6x16
ø40	40	5.5	54	62	72	8	40	M6x16
ø50	50	6.6	67	76	89	9	50	M8x20
ø63	60	9	80	92	108	9	60	M10x25
ø80	77	11	99	116	134	11	77	M12x40
ø100	94	11	117	136	154	11	94	M12x40

Code	Female thread				Male thread			
	Bore size (mm)	WF	A	B	a'	wf	A	B
ø32	7	58	43	23.5	5	79.5	43	
ø40	7	64.5	49.5	23.5	5	86	49.5	
ø50	8	67.5	50.5	28.5	5	93	50.5	
ø63	8	73	56	28.5	5	98.5	56	
ø80	10	84.5	63.5	35.5	8	118	63.5	
ø100	12	96	73	35.5	8	127.5	73	

SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending


# SSD2-K Series

## Dimensions



● SSD2-K-32 to 100 (without switch)

● Rod end male thread

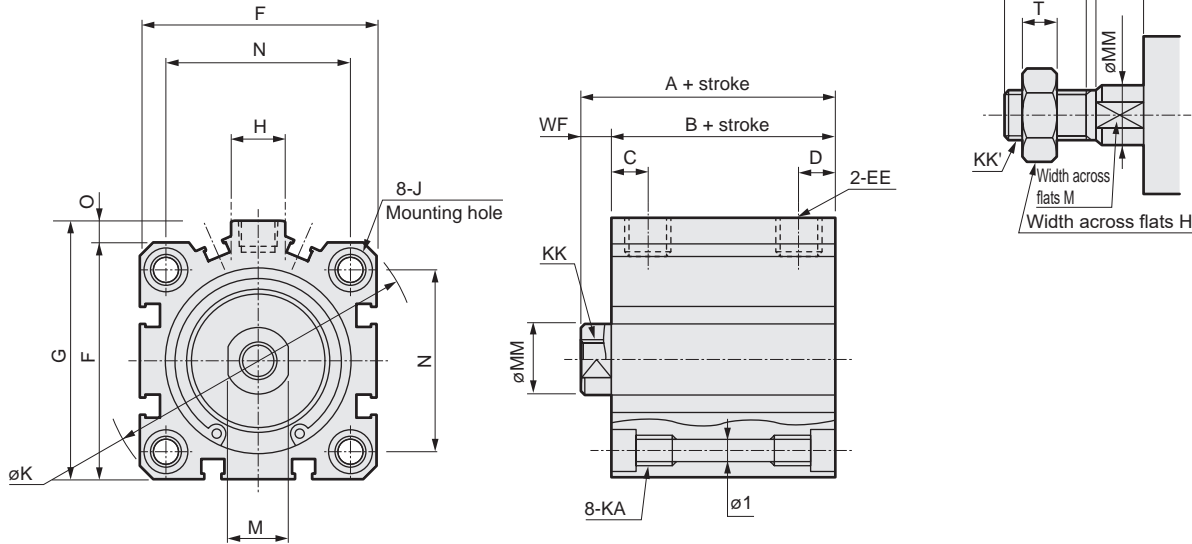

Code	Dimensions without switch and common dimensions												
Bore size (mm)	A <sup>*1, *3</sup>	B <sup>*1, *3</sup>	C	D	EE	F	G	H	I	J	K	KA	KK
ø32	40(50)	33(43)	8	8	Rc1/8	45	49.5	12.5	5.5	9 spot face depth 5.5	60	M6 depth 11	M8 depth 13
ø40	46.5(56.5)	39.5(49.5)	12	8.5	Rc1/8	52	57	15	5.5	9 spot face depth 5.5	69	M6 depth 11	M8 depth 13
ø50	48.5(58.5)	40.5(50.5)	10.5	10.5	Rc1/4	64	71	18	6.9	11 spot face depth 6.5	86	M8 depth 13	M10 depth 15
ø63	54(64)	46(56)	13	11	Rc1/4	77	84	23	8.7	14 spot face depth 9	103	M10 depth 25	M10 depth 15
ø80	63.5(73.5)	53.5(63.5)	16	13	Rc3/8	98	104	31	10.5	17.5 spot face depth 11	132	M12 depth 28	M16 depth 21
ø100	75(85)	63(73)	23	15	Rc3/8	117	123.5	38	10.5	17.5 spot face depth 11	156	M12 depth 28	M20 depth 27

Code	Dimensions without switch and common dimensions				
Bore size (mm)	M	MM	N	O	WF
ø32	14	16	34	4.5	7
ø40	14	16	40	5	7
ø50	17	20	50	7	8
ø63	17	20	60	7	8
ø80	22	25	77	6	10
ø100	27	30	94	6.5	12

\*1 : To calculate A + stroke or B + stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value.

(Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

· For ø40: A + stroke = 50 B + stroke = 43

When you have selected "S" (dedicated unit for custom stroke), apply the custom stroke of 7 mm.

· For ø40: A + stroke = 47 B + stroke = 40

\*2: For dimensions of individual accessories, refer to pages 1046 to 1049.

\*3 : Dimensions in ( ) of codes A and B are for strokes of more than 50 mm.


● Dimensions of rod end male thread part

Code	a'	c'	H	kk'	M	MM	T	wf
ø32	23.5	20.5	22	M14x1.5	14	16	8	5
ø40	23.5	20.5	22	M14x1.5	14	16	8	5
ø50	28.5	26	27	M18x1.5	17	20	11	5
ø63	28.5	26	27	M18x1.5	17	20	11	5
ø80	35.5	32.5	32	M22x1.5	22	25	13	8
ø100	35.5	32.5	41	M26x1.5	27	30	16	8

### Dimensions with mounting bracket



- Axial foot (LB) without switch  
SSD2-K-32 to 100 -LB

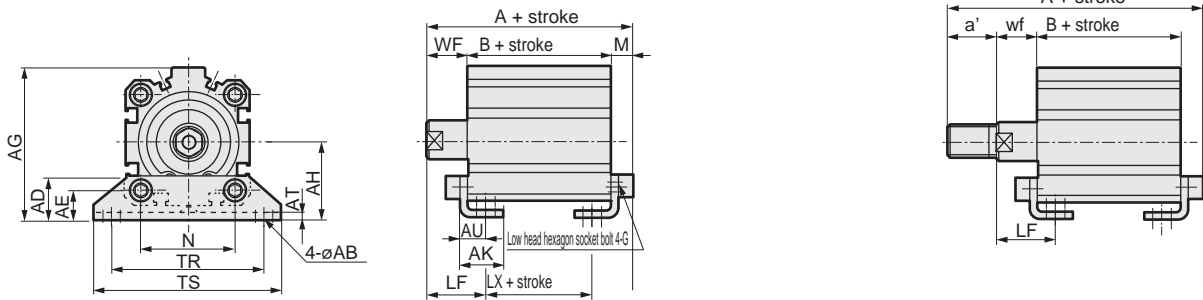


Code	Common dimensions													Female thread			
	AB	AD	AE	AG	AH	AK	AT	AU	G	N	TR	TS	M	WF	LF	A	B
ø32	7	18.5	13	57	30	17	3.2	11.2	M6x16	34	57	71	7.2	17	25	57.2(67.2)	33(43)
ø40	7	18	13	64	33	18.2	3.2	11.2	M6x16	40	64	78	7.2	17	25	63.7(73.7)	39.5(49.5)
ø50	9	22	14	78	39	22.7	3.2	14.7	M8x20	50	79	95	8.2	18	29.5	66.7(76.7)	40.5(50.5)
ø63	11	26	16	91.5	46	25.2	3.2	16.2	M10x25	60	95	113	9.2	18	31	73.2(83.2)	46(56)
ø80	13	31.5	20.5	114	59	30.5	4.5	19.5	M12x40	77	118	140	11.5	20	35	85(95)	53.5(63.5)
ø100	13	35	24	136	71	35.5	6	23	M12x40	94	137	162	13	22	39	98(108)	63(73)

Code	Male thread						
	LX	a'	wf	LF	A	B	LX
ø32	17(27)	23.5	15	23	78.7(88.7)	33(43)	17(27)
ø40	23.5(33.5)	23.5	15	23	85.2(95.2)	39.5(49.5)	23.5(33.5)
ø50	17.5(27.5)	28.5	15	26.5	92.2(102.2)	40.5(50.5)	17.5(27.5)
ø63	20(30)	28.5	15	28	98.7(108.7)	46(56)	20(30)
ø80	23.5(33.5)	35.5	18	33	118.5(128.5)	53.5(63.5)	23.5(33.5)
ø100	29(39)	35.5	18	35	129.5(139.5)	63(73)	29(39)

Note: ø80: LB cannot be selected for 15 mm stroke or less.

\* Dimensions in ( ) are for strokes of more than 50 mm.

- Clevis bracket (CB) without switch  
SSD2-K-32 to 100 -CB

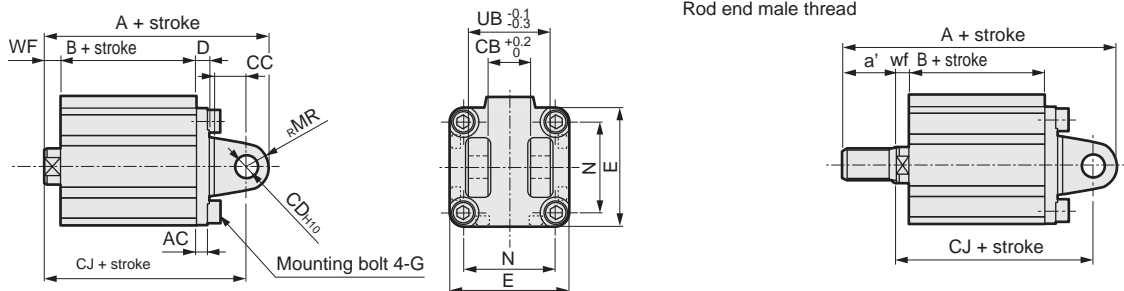

Code	Common dimensions										Female thread				Male thread				
	AC	CB	CC	CD	D	E	G	MR	N	UB	WF	A	B	CJ	a'	wf	A	B	CJ
ø32	4.5	18.2	14	10	5	45	M6x16	10	34	36	7	70(80)	33(43)	60	23.5	5	91.5(101.5)	33(43)	58
ø40	5	18.2	14	10	6	52	M6x16	10	40	36	7	78.5(88.5)	39.5(49.5)	68.5	23.5	5	100(110)	39.5(49.5)	66.5
ø50	6	22.2	20	14	7	64	M8x20	14	50	44	8	90.5(100.5)	40.5(50.5)	76.5	28.5	5	116(126)	40.5(50.5)	73.5
ø63	7	22.2	20	14	8	77	M10x25	14	60	44	8	98(108)	46(56)	84	28.5	5	123.5(133.5)	46(56)	81
ø80	9	28.2	27	18	10	98	M12x40	18	77	56	10	119.5(129.5)	53.5(63.5)	101.5	35.5	8	153(163)	53.5(63.5)	99.5
ø100	12	32.2	31	22	13	117	M12x40	22	94	64	12	142(152)	63(73)	120	35.5	8	173.5(183.5)	63(73)	116

\*1 Dimensions in ( ) are for strokes of more than 50 mm.  
\*2 A pin and a snap ring are included.

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

SSD2

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr



Ending

# SSD2-K Series




## Dimensions with mounting bracket

- Rod side flange (FA) without switch  
SSD2-K-32 to 100 -FA

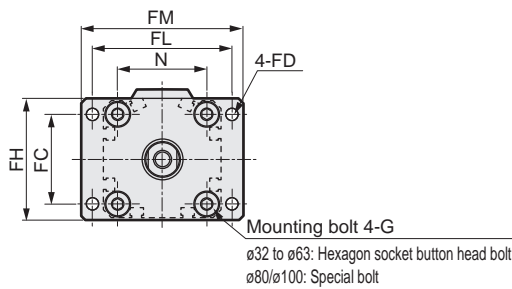


Rod end male thread




Code	Common dimensions								Female thread			Male thread				
	Bore size (mm)	FC	FD	FH	FL	FM	FT	N	G	WF	A	B	a'	wf	A	B
SSD2	ø32	34	5.5	48	56	65	8	34	M6x16	17	50(60)	33(43)	23.5	15	71.5(81.59)	33(43)
SSG	ø40	40	5.5	54	62	72	8	40	M6x16	17	56.5(66.5)	39.5(49.5)	23.5	15	78(88)	39.5(49.5)
SSD	ø50	50	6.6	67	76	89	9	50	M8x20	18	58.5(68.5)	40.5(50.5)	28.5	15	84(94)	40.5(50.5)
	ø63	60	9	80	92	108	9	60	M10x25	18	64(74)	46(56)	28.5	15	89.5(99.5)	46(56)
CAT	ø80	77	11	99	116	134	11	77	M12x40	20	73.5(83.5)	53.5(63.5)	35.5	18	107(117)	53.5(63.5)
	ø100	94	11	117	136	154	11	94	M12x40	22	85(95)	63(73)	35.5	18	116.5(126.5)	63(73)

\* Dimensions in ( ) are for strokes of more than 50 mm.

- Head side flange (FB) without switch  
SSD2-K-32 to 100 -FB

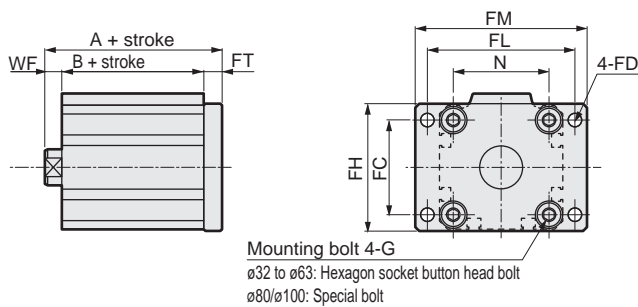

Rod end male thread



Code	Common dimensions								Female thread			Male thread				
	Bore size (mm)	FC	FD	FH	FL	FM	FT	N	G	WF	A	B	a'	wf	A	B
MRG2	ø32	34	5.5	48	56	65	8	34	M6x16	7	48(58)	33(43)	23.5	5	69.5(79.5)	33(43)
SM-25	ø40	40	5.5	54	62	72	8	40	M6x16	7	54.5(64.5)	39.5(49.5)	23.5	5	76(86)	39.5(49.5)
ShkAbs	ø50	50	6.6	67	76	89	9	50	M8x20	8	57.5(67.5)	40.5(50.5)	28.5	5	83(93)	40.5(50.5)
	ø63	60	9	80	92	108	9	60	M10x25	8	63(73)	46(56)	28.5	5	88.5(98.5)	46(56)
FJ	ø80	77	11	99	116	134	11	77	M12x40	10	74.5(84.5)	53.5(63.5)	35.5	8	108(118)	53.5(63.5)
	ø100	94	11	117	136	154	11	94	M12x40	12	86(96)	63(73)	35.5	8	117.5(127.5)	63(73)

\* Dimensions in ( ) are for strokes of more than 50 mm.

---

# MEMO

---

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

**SSG**

**SSD**

**CAT**

**MDC2**

**MVC**

**SMG**

MSD/  
MSDG

**FC\***

**STK**

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending





Compact cylinder double acting/single rod/long stroke

# SSD2 Series (long stroke)

- Bore size:  $\phi 12/\phi 16/\phi 20/\phi 25/\phi 32$   
 $\phi 40/\phi 50/\phi 63/\phi 80/\phi 100$



## Specifications

Item	SSD2										
	SSD2-L (with switch)										
Bore size mm	$\phi 12$	$\phi 16$	$\phi 20$	$\phi 25$	$\phi 32$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$	
Actuation	Double acting										
Working fluid	Compressed air										
Max. working pressure MPa	1.0 ( $\approx 150$ psi, 10 bar)										
Min. working pressure MPa	0.1 ( $\approx 15$ psi, 1 bar)							0.05 ( $\approx 7.3$ psi, 0.5 bar)			
Proof pressure MPa	1.6 ( $\approx 230$ psi, 16 bar)										
Ambient temperature $^{\circ}\text{C}$	-10 ( $14^{\circ}\text{F}$ ) to 60 ( $140^{\circ}\text{F}$ ) (no freezing)										
Port size	M5				Rc1/8			Rc1/4		Rc3/8	
Stroke tolerance mm	+2.0 0										
Working piston speed mm/s	50 to 500							50 to 300			
Cushion	Rubber cushion										
Lubrication	Not required (use turbine oil ISO VG32 if necessary for lubrication)										
Allowable absorbed energy J	0.04	0.09	0.16	0.16	0.40	0.63	0.98	1.56	2.51	3.92	


## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)
$\phi 12$	35/40/45/50/75/100	100
$\phi 16$		
$\phi 20$	75/100/125/150/175/200	200
$\phi 25$	75/100/125/150/175/200/250/300	300
$\phi 32$	125/150/175/200/250/300	
$\phi 40$		
$\phi 50$		
$\phi 63$		
$\phi 80$		
$\phi 100$		

## Custom stroke

### ● SSD2 Series

Item	Standard products	
	Standard stroke body with spacer	
Model No.	Refer to How to order.	
Description	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.	
Stroke range	Bore size	Stroke range
	12/16	31 to 99
	20	51 to 199
	25	51 to 299
Example of model No.	32 to 100	101 to 299
	Model No.: SSD2-32-121 A +4 mm spacer is added to the SSD2-32-125 standard cylinder to create 121 mm stroke. B + stroke is 170.5mm.	

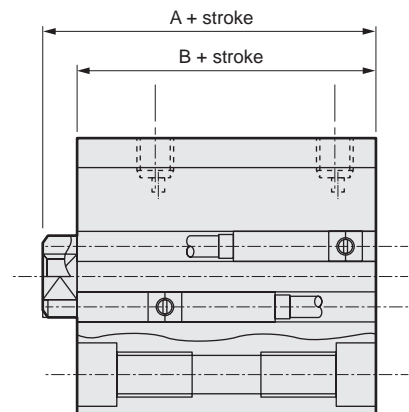

### Switch specifications (F-switch)

● 1-color/2-color LED

Item	2-wire proximity		3-wire proximity		2-wire proximity		3-wire proximity		
	F2S		F3S		F2H/F2V	F2YH/F2YV	F3H/F3V	F3PH/F3PV (made to order)	F3YH/F3YV
Applications	Dedicated for programmable controller		For programmable controller, relay		Dedicated for programmable controller		For programmable controller, relay		
Output method	-		NPN output		-		NPN output	PNP output	NPN output
Power supply voltage	-		10 to 28 VDC		-		10 to 28 VDC	4.5 to 28 VDC	10 to 28 VDC
Load voltage	10 to 30 VDC		30 VDC or less		10 to 30 VDC	24 VDC ±10%	30 VDC or less		
Load current	5 to 20 mA		50 mA or less		5 to 20 mA		50 mA or less		
Indicator	LED (Lit when ON)				Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Yellow LED (Lit when ON)		Red/green LED (Lit when ON)
Leakage current	1 mA or less		10 µA or less		1 mA or less		10 µA or less		
Weight	g		1 m:10 3 m:29						

### Switch specifications (T-switch)

● 1-color/2-color LED/for AC magnetic field proof

Item	2-wire proximity		2-wire proximity		3-wire proximity				2-wire reed				2-wire proximity		
	T1H/T1V	T2H/T2V T2JH/T2JV	T2YH/ T2YV	T2WH/ T2WV	T3H/T3V	T3PH/ T3PV	T3YH/ T3YV	T3WH/ T3WV	T0H/T0V	T5H/T5V	T8H/T8V		T2YD(*4) T2YDT		
Applications	For programmable controller, relay, compact solenoid valve	Dedicated for programmable controller		For programmable controller, relay				For programmable controller, relay	For programmable controller, relay, IC circuit (no indicator lamp), serial connection	For programmable controller, relay		For programmable controller			
Output method	-		-		NPN output	PNP output	NPN output	NPN output	-				-		
Pwr. supp. V.	-		-		10 to 28 VDC				-				-		
Load voltage	85 to 265 VAC	10 to 30 VDC	24 VDC ±10%	30 VDC or less				12/24 VDC	100/110 VAC	5/12/24 VDC	100/110 VAC	12/24 VDC	110 VAC	220 VAC	24 VDC ±10%
Load current	5 to 100 mA	5 to 20 mA (*3)		100 mA or less	50 mA or less			5 to 50 mA	7 to 20 mA	50 mA or less	20 mA or less	5 to 50 mA	7 to 20 mA	7 to 10 mA	5 to 20 mA
Indicator	LED (Lit when ON)	LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	No indicator lamp	LED (Lit when ON)		Red/green LED (Lit when ON)		
Leakage current	≤1 mA at 100 VAC, ≤2 mA at 200 VAC	1 mA or less		10 µA or less				0 mA				1 mA or less			
Weight g	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:18	3 m:49	5 m:80	1 m:33 3 m:87 5 m:142	1 m:61 3 m:166 5 m:272		

\*1: Refer to Ending Page 1 for detailed switch specifications and dimensions.

\*2: Switches other than the above models, such as switches with connectors, are also available. Refer to Ending Page 1.

\*3: The max. load current is 20 mA at 25°C. The current is lower than 20 mA if the operating ambient temperature around the switch is higher than 25°C. (5 to 10 mA at 60°C)

\*4: Switch for AC magnetic field (T2YD/T2YDT) cannot be used in DC magnetic field.

\*5: The F-switch uses a bend-resistant lead wire.

### Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa											
		0.05	0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø12	Push	-	11.3	17.0	22.6	33.9	45.2	56.5	67.9	79.2	90.5	1.02x10 <sup>2</sup>	1.13x10 <sup>2</sup>
	Pull	-	8.48	12.7	17.0	25.4	33.9	42.4	50.9	59.4	67.9	76.3	84.8
ø16	Push	-	20.1	30.2	40.2	60.3	80.4	1.01x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.61x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.01x10 <sup>2</sup>
	Pull	-	15.1	22.6	30.2	45.2	60.3	75.4	90.5	1.06x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.36x10 <sup>2</sup>	1.51x10 <sup>2</sup>
ø20	Push	-	31.4	47.1	62.8	94.2	1.26x10 <sup>2</sup>	1.57x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.20x10 <sup>2</sup>	2.51x10 <sup>2</sup>	2.83x10 <sup>2</sup>	3.14x10 <sup>2</sup>
	Pull	-	23.6	35.3	47.1	70.7	94.2	1.18x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.65x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.12x10 <sup>2</sup>	2.36x10 <sup>2</sup>
ø25	Push	-	49.1	73.6	98.2	1.47x10 <sup>2</sup>	1.96x10 <sup>2</sup>	2.45x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.44x10 <sup>2</sup>	3.93x10 <sup>2</sup>	4.42x10 <sup>2</sup>	4.91x10 <sup>2</sup>
	Pull	-	37.8	56.7	75.6	1.13x10 <sup>2</sup>	1.51x10 <sup>2</sup>	1.89x10 <sup>2</sup>	2.27x10 <sup>2</sup>	2.64x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.40x10 <sup>2</sup>	3.78x10 <sup>2</sup>
ø32	Push	-	80.4	1.21x10 <sup>2</sup>	1.61x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.22x10 <sup>2</sup>	4.02x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.63x10 <sup>2</sup>	6.43x10 <sup>2</sup>	7.24x10 <sup>2</sup>	8.04x10 <sup>2</sup>
	Pull	-	60.3	90.5	1.21x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.62x10 <sup>2</sup>	4.22x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.43x10 <sup>2</sup>	6.03x10 <sup>2</sup>
ø40	Push	-	1.26x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.51x10 <sup>2</sup>	3.77x10 <sup>2</sup>	5.03x10 <sup>2</sup>	6.28x10 <sup>2</sup>	7.54x10 <sup>2</sup>	8.80x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.13x10 <sup>3</sup>	1.26x10 <sup>3</sup>
	Pull	-	1.06x10 <sup>2</sup>	1.58x10 <sup>2</sup>	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>
ø50	Push	-	1.96x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.93x10 <sup>2</sup>	5.89x10 <sup>2</sup>	7.85x10 <sup>2</sup>	9.82x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.37x10 <sup>3</sup>	1.57x10 <sup>3</sup>	1.77x10 <sup>3</sup>	1.96x10 <sup>3</sup>
	Pull	-	1.65x10 <sup>2</sup>	2.47x10 <sup>2</sup>	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>
ø63	Push	1.56x10 <sup>2</sup>	3.12x10 <sup>2</sup>	4.68x10 <sup>2</sup>	6.23x10 <sup>2</sup>	9.35x10 <sup>2</sup>	1.25x10 <sup>3</sup>	1.56x10 <sup>3</sup>	1.87x10 <sup>3</sup>	2.18x10 <sup>3</sup>	2.49x10 <sup>3</sup>	2.81x10 <sup>3</sup>	3.12x10 <sup>3</sup>
	Pull	1.40x10 <sup>2</sup>	2.80x10 <sup>2</sup>	4.20x10 <sup>2</sup>	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>	2.24x10 <sup>3</sup>	2.52x10 <sup>3</sup>	2.80x10 <sup>3</sup>
ø80	Push	2.51x10 <sup>2</sup>	5.03x10 <sup>2</sup>	7.54x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.51x10 <sup>3</sup>	2.01x10 <sup>3</sup>	2.51x10 <sup>3</sup>	3.02x10 <sup>3</sup>	3.52x10 <sup>3</sup>	4.02x10 <sup>3</sup>	4.52x10 <sup>3</sup>	5.03x10 <sup>3</sup>
	Pull	2.27x10 <sup>2</sup>	4.54x10 <sup>2</sup>	6.80x10 <sup>2</sup>	9.07x10 <sup>2</sup>	1.36x10 <sup>3</sup>	1.81x10 <sup>3</sup>	2.27x10 <sup>3</sup>	2.72x10 <sup>3</sup>	3.17x10 <sup>3</sup>	3.63x10 <sup>3</sup>	4.08x10 <sup>3</sup>	4.54x10 <sup>3</sup>
ø100	Push	3.93x10 <sup>2</sup>	7.85x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.57x10 <sup>3</sup>	2.36x10 <sup>3</sup>	3.14x10 <sup>3</sup>	3.93x10 <sup>3</sup>	4.71x10 <sup>3</sup>	5.50x10 <sup>3</sup>	6.28x10 <sup>3</sup>	7.07x10 <sup>3</sup>	7.85x10 <sup>3</sup>
	Pull	3.57x10 <sup>2</sup>	7.15x10 <sup>2</sup>	1.07x10 <sup>3</sup>	1.43x10 <sup>3</sup>	2.14x10 <sup>3</sup>	2.86x10 <sup>3</sup>	3.57x10 <sup>3</sup>	4.29x10 <sup>3</sup>	5.00x10 <sup>3</sup>	5.72x10 <sup>3</sup>	6.43x10 <sup>3</sup>	7.15x10 <sup>3</sup>

# SSD2 (Long stroke) Series

## How to order

No switch (without magnet for switch)

**SSD2** - **12** - **100** - **N** - **LB** - **I**

With switch (built-in magnet for switch)

**SSD2-L** - **12** - **100** - **T0H** - **R** - **N** - **LB** - **I**

**A** Bore size

**B** Port thread

**C** Stroke

**D** Switch model No.

\*1

\*2

\*3

\*8

**E** Switch quantity

**F** Option  
\*4

**G** Mounting bracket  
\*5  
\*6

### ⚠ Precautions for model No. selection

\*1 : The T2YD\* switch cannot be mounted on the ø12 and ø16 bore sizes.

\*2 : The T8\* switch cannot be mounted on ø12 and ø16.

\*3 : The F-switch can only be mounted on the piping port surface of bore sizes ø20 and ø25.

\*4 : Piston rod of ø12 to ø25 is stainless steel as standard. C-snap ring is stainless steel instead of steel. The rod end male thread nut is stainless steel.

\*5 : The mounting bracket is included at shipment.

\*6 : The projection dimension of piston rod WF when LB or FA is selected is different from that of the standard. Refer to the dimensions on pages 799 and 801. The number of the specified protruding dimension will be added at the end of the model No. printed on the metal plate on the body.

\*7 : "I" and "Y" cannot be selected together.

\*8 : Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.

\*9 : Refer to pages 750 and 751 for combinations of variations/options.

\*10 : F-switch cannot be selected.

### [Example of model No.]

#### SSD2-L-12-100-T0H-R-N

Model: Compact cylinder, long stroke

**A** Bore size : ø12 mm

**B** Port thread : Rc thread

**C** Stroke : 100mm

**D** Switch model No. : Reed T0H switch  
· Lead wire 1 m

**E** Switch quantity : 1 on rod side

**F** Option : Rod end male thread

**H** Accessory

\*7

Code	Description
<b>A Bore size (mm)</b>	
12	ø12
16	ø16
20	ø20
25	ø25
32	ø32
40	ø40
50	ø50
63	ø63
80	ø80
100	ø100

<b>B Port thread</b>	
Blank	Rc thread
NN	NPT thread (ø32 and over) (made-to-order product)
GN	G thread (ø32 and over) (made-to-order product)

<b>C Stroke (mm)</b>
Refer to the stroke table on the following page.

<b>D Switch model No.</b>		Contact	Voltage	Indicator	Lead wire	Bore size																		
Lead wire Straight	Lead wire L-shaped					AC	DC	12	16	20	25	32	40	50	63	80	100							
-	F2S*	Proximity	●	1-color LED	2-wire			●																
-	F3S*				3-wire			●																
F2H*	F2V*				2-wire			●	●															
F3H*	F3V*	3-wire					●	●																
F3PH*	F3PV*	Proximity	●	1-color LED (PNP output) (custom)	3-wire			●	●															
F2YH*	F2YV*				2-wire			●	●															
F3YH*	F3YV*				3-wire					●	●													
T0H*	T0V*	Reed	●	1-color LED	2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
T5H*	T5V*				2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
T8H*	T8V*				2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
T1H*	T1V*	Proximity	●	1-color LED	2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
T2H*	T2V*				2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
T3H*	T3V*				3-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
T3PH*	T3PV*	Proximity	●	1-color LED (PNP output)	3-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
T2WH*	T2WV*				2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
T2YH*	T2YV*				2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
T3WH*	T3WV*	Proximity	●	2-color LED	3-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
T3YH*	T3YV*				3-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
T2YD*	-				2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
T2YDT*	-	Proximity	●	AC magnetic field	2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●		
T2JH*	T2JV*				2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

<b>* Lead wire length</b>	
Blank	1 m (standard)
3	3 m (option)
5	5 m (option) <span style="float:right">*10</span>

<b>E Switch quantity</b>	
R	1 on rod side
H	1 on head side
D	2

<b>F Option</b>		Bore size (ø)									
Option	Description	12	16	20	25	32	40	50	63	80	100
Blank	Rod end female thread	●	●	●	●	●	●	●	●	●	●
N	Rod end male thread	●	●	●	●	●	●	●	●	●	●
M *4	Piston rod material (stainless steel)	●	●	●	●	●	●	●	●	●	●
P6	Copper and PTFE free	Standard	●	●	●	●	●	●	●	●	●
P4	Specifications for	●	●	●	●	●	●	●	●	●	●
P40	rechargeable battery	●	●	●	●	●	●	●	●	●	●

<b>G Mounting bracket</b>	
Blank	Without mounting bracket
LB	Axial foot
CB	Clevis bracket (pin and snap ring included)
FA	Rod side flange
FB	Head side flange


<b>H Accessory (available when rod end male thread "N" is selected)</b>	
I	Rod eye
Y	Rod clevis (pin and snap ring included)

### [Stroke table]

Stroke (mm)	Applicable bore size									
	ø12	ø16	ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100
Standard stroke	35	●	●							
	40	●	●							
	45	●	●							
	50	●	●							
	75	●	●	●	●					
	100	●	●	●	●					
	125			●	●	●	●	●	●	●
	150			●	●	●	●	●	●	●
	175			●	●	●	●	●	●	●
	200			●	●	●	●	●	●	●
	250				●	●	●	●	●	●
300				●	●	●	●	●	●	
Max. stroke (mm)	100	200	300							
Custom stroke *1	In 1 mm increments									

\*1: The total length is the same as that of the next longer standard stroke.

### How to order switch



Switch model No.  
(Item ① on page 794)

### Cylinder weight table (the weight of the switches is when there are 2 cylinder switches.)

(Unit: g)

Stroke (mm)	35		40		45		50		75		100		125		150		175		200		250		300	
	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch
ø12	144	146	153	155	161	163	170	172	212	214	255	257	-	-	-	-	-	-	-	-	-	-	-	-
ø16	179	180	190	191	201	202	212	213	267	268	322	323	-	-	-	-	-	-	-	-	-	-	-	-
ø20	-	-	-	-	-	-	-	-	321	326	383	388	446	451	508	513	571	576	633	638	-	-	-	-
ø25	-	-	-	-	-	-	-	-	412	417	492	497	572	577	652	657	732	737	812	817	972	977	1132	1137
ø32	-	-	-	-	-	-	-	-	-	-	-	-	790	799	897	905	1003	1012	1111	1119	1326	1334	1541	1549
ø40	-	-	-	-	-	-	-	-	-	-	-	-	1000	1016	1133	1148	1265	1281	1398	1413	1663	1678	1928	1943
ø50	-	-	-	-	-	-	-	-	-	-	-	-	1553	1571	1779	1796	2004	2022	2217	2234	2642	2659	3067	3084
ø63	-	-	-	-	-	-	-	-	-	-	-	-	2138	2162	2413	2437	2688	2712	2963	2987	3512	3536	4062	4086
ø80	-	-	-	-	-	-	-	-	-	-	-	-	3478	3505	3911	3937	4343	4370	4776	4802	5640	5666	6505	6531
ø100	-	-	-	-	-	-	-	-	-	-	-	-	4816	4848	5386	5418	5956	5988	6526	6558	7667	7699	8807	8839

### How to order mounting bracket

Bore size (mm)	ø12	ø16	ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100
Foot (LB)	SSD2-LB-12	SSD2-LB-16	SSD2-LB-20	SSD2-LB-25	SSD2-LB-32	SSD2-LB-40	SSD2-LB-50	SSD2-LB-63	SSD2-LB-80	SSD2-LB-100
Flange (FA/FB)	SSD2-FA-12	SSD2-FA-16	SSD2-FA-20	SSD2-FA-25	SSD2-FA-32	SSD2-FA-40	SSD2-FA-50	SSD2-FA-63	SSD2-FA-80	SSD2-FA-100
Clevis bracket (CB)	SSD2-CB-12	SSD2-CB-16	SSD2-CB-20	SSD2-CB-25	SSD2-CB-32	SSD2-CB-40	SSD2-CB-50	SSD2-CB-63	SSD2-CB-80	SSD2-CB-100

\*1: The foot mounting bracket is provided as 2 pcs./set.

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending




# SSD2 (Long stroke) Series

## Internal structure and parts list

● SSD2 (long stroke) -L-12, 16  
(double acting/single rod/with switch)

● SSD2 (long stroke) -L-20 to 100  
(double acting/single rod/with switch)




ø20: Over 100 to 200 mm stroke  
ø25: Over 150 to 300 mm stroke  
ø32 to ø50: Over 150 to 300 mm stroke  
ø63 to ø100: Over 200 to 300 mm stroke

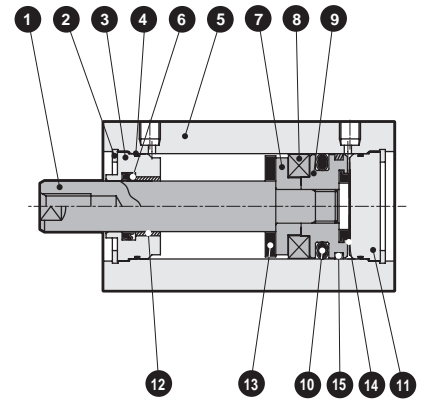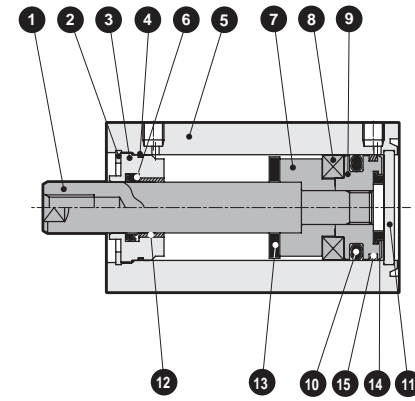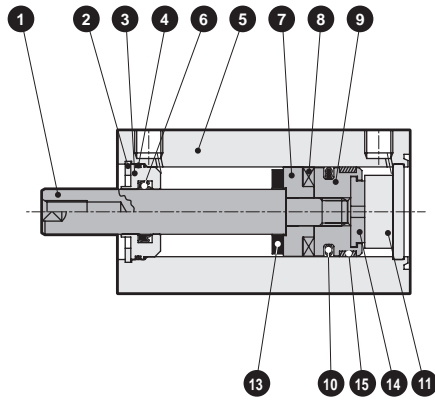

● SSD2 (long stroke) -12, 16  
(double acting/single rod)

● SSD2 (long stroke) -20 to 100  
(double acting/single rod)

ø20: Over 100 to 200 mm stroke  
ø25: Over 150 to 300 mm stroke  
ø32 to ø50: Over 150 to 300 mm stroke  
ø63 to ø100: Over 200 to 300 mm stroke

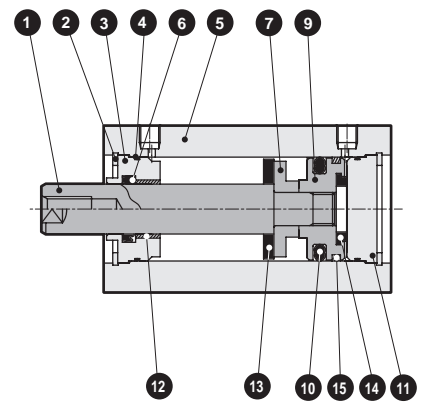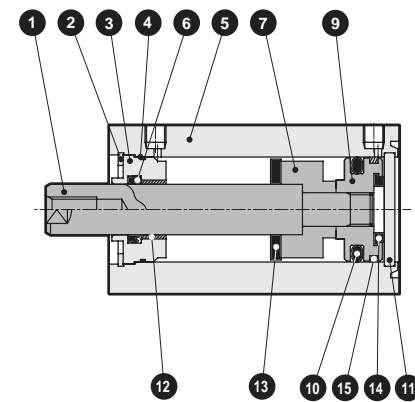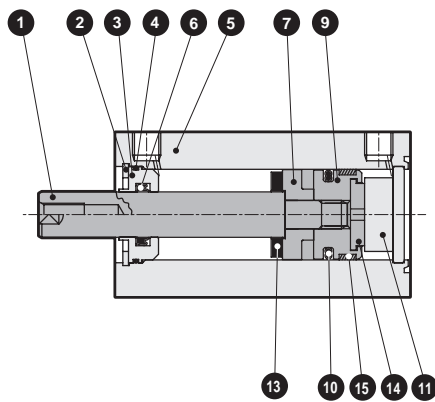

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	ø12 to 25: Stainless steel ø32 to 100: Steel	ø16 to 100 Industrial chrome plating	9	Piston	Aluminum alloy	Chromate
2	C-snap ring	Steel	Zinc phosphate	10	Piston packing	Nitrile rubber	
3	Rod metal	Special aluminum	Chromate	11	Cover	ø12 to 25: Stainless steel ø32 to 100: Aluminum alloy	ø32 to 100: Alumite (*1)
4	Rod metal gasket	Nitrile rubber		12	Bush	Oiles drymet	ø20 to 100 (*2)
5	Body	Aluminum alloy	Hard alumite	13	Cushion rubber (R)	Urethane rubber	
6	Rod packing	Nitrile rubber		14	Cushion rubber (H)	Urethane rubber	
7	Spacer	Aluminum alloy	ø12 to ø32: Chromate	15	Wear ring	Polyacetal resin	
8	Magnet	Plastic					

\*1: For ø20 with more than 100 mm stroke and ø25 with more than 150 mm stroke, the standard cover material is aluminum alloy with chromate coating noted in remarks.

\*2: Material is steel for copper and PTFE free specifications.

## Repair parts list

Same as SSD2-K Series (double acting/high load). Refer to pages 780 and 781.

---

# MEMO

---

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

**SSG**

**SSD**

**CAT**

**MDC2**

**MVC**

**SMG**

MSD/  
MSDG

**FC\***

**STK**

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending

# SSD2 (Long stroke) Series

## Dimensions






### ● SSD2 (long stroke) -(L)-12 to 25



\* The dimensions are common for types with and without switches.

ø12/ø16

### ● Rod end male thread

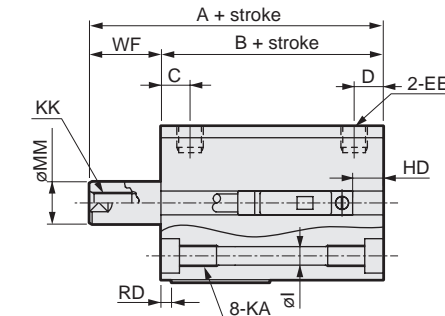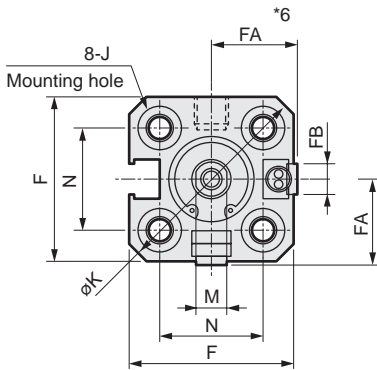

ø20/ø25

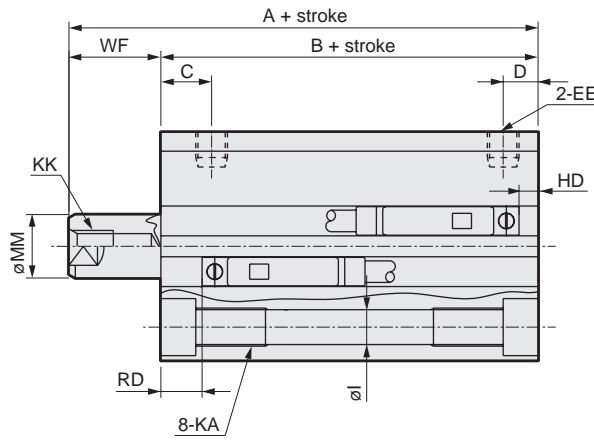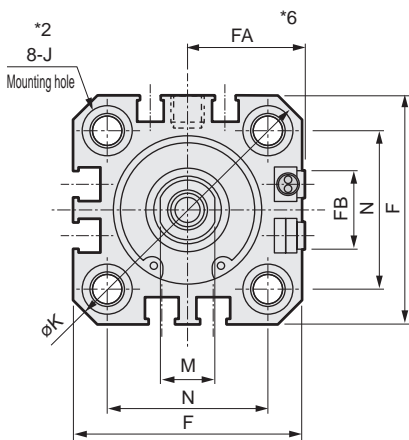

Precautions regarding the switch mounting groove

\*1: Only F-switch is available for the ø20 or ø25 piping port surface.

Code	Common dimensions with switch																
	A <sup>*1</sup>	B <sup>*1</sup>	C	D <sup>*3</sup>	EE	F	FA <sup>*6</sup>	FB	I	J <sup>*2</sup>	K	KA	KK	M	MM	N	WF
ø12	45.5	32	5.5	5.5	M5	25	13(16.5)	4.5	3.5	6.5 spot face depth 3.5	32	M4 depth 7	M3 depth 6	5	6	15.5	13.5
ø16	45.5	32	5.5	5.5	M5	29	15(18.5)	4.5	3.5	6.5 spot face depth 3.5	38	M4 depth 7	M4 depth 8	6	8	20	13.5
ø20	55.5	41	8	5.5(8)	M5	36	18.5(22)	12.5	5.5	9 spot face depth 5.5	47	M6 depth 11	M5 depth 7	8	10	25.5	14.5
ø25	59	44	11	6(11)	M5	40	20.5(24)	13.5	5.5	9 spot face depth 5.5	51	M6 depth 11	M6 depth 12	10	12	28	15

Switch dimensions	Reed T0H/T0V, T5H/T5V *3		Proximity T2H/T2V, T3H/T3V *3		Proximity T2WH/T2WV, T3WH/T3WV *3		Proximity F2H/F2V, F3H/F3V, F2YH/F2YV, F3YH/F3YV *3		Proximity F2S/F3S	
	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD
ø12	8.5	5	8.5	5	10.5	6.5				
ø16	8.5	5	8.5	5	10.5	6.5				
ø20	6(12.5)	16(10)	6(12.5)	16(10)	7.5(14)	17.5(12)	10(16.5)	20(14.5)	9(15.5)	19(13.5)
ø25	5.5(14)	19.5(12)	5.5(14)	19.5(12)	7(15.5)	21(14)	9.5(18)	23.5(16.5)	8.5(17)	22.5(15.5)

\*1 : To calculate A + stroke or B + stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value. (Example) If the custom stroke is 70 mm, apply the standard stroke 75 mm.

\*2 : No spot facing J for ø20 with more than 100 mm stroke and ø25 with more than 150 mm stroke.

\*3 : Values in ( ) are for ø20 with more than 100 mm stroke and ø25 with more than 150 mm stroke.

\*4 : Refer to page 1044 for HD and RD dimensions of the 2-color LED, off-delay, AC magnetic field tolerant, T1\* and T8\* switches.

\*5 : Refer to page 1044 for protruding dimensions of the 2-color LED, off-delay, AC magnetic field tolerant, T1\* and T8\* switches.

\*6 : Dimensions in ( ) of FA are for the L-shaped lead wire.

\*7 : For dimensions of individual accessories, refer to pages 1046 to 1049.


### ● Dimensions of rod end male thread part

Code	a'	c'	H	kk'	M	MM	T	wf
ø12	10.5	9	8	M5	5	6	3.2	13.5
ø16	12	10	10	M6	6	8	3.6	13.5
ø20	14	12	13	M8	8	10	5	14.5
ø25	17.5	15	17	M10x1.25	10	12	6	15


### Dimensions with mounting bracket



- Axial foot (LB)  
SSD2-(L)-12 to 25 -LB

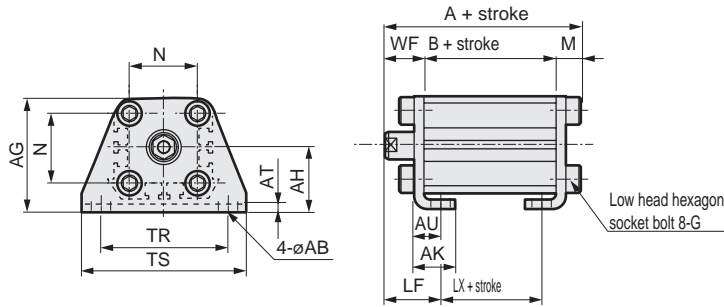

Rod end male thread




Code	Common dimensions						Female thread				
Bore size (mm)	AB	AG	AH	AK	AT	AU	G	N	TR	TS	M
ø12	5	29.5	17	12.5	2	8	M4x10	15.5	34	44	4.8
ø16	5	33.5	19	13	2	8	M4x10	20	38	48	4.8
ø20	7	42	24	15	3.2	9.2	M6x16	25.5	48	62	7.2
ø25	7	46	26	16.5	3.2	10.7	M6x16	28	52	66	7.2


  

Code	Male thread			Without/with switch		
Bore size (mm)	WF	LF	LX	a'	wf	LF
ø12	13.5	19.5	50.3	32	20	10.5
ø16	13.5	19.5	50.3	32	20	12
ø20	14.5	20.5	62.7	41	29	14
ø25	15	22.5	66.2	44	29	17.5

- Clevis bracket (CB)  
SSD2-(L)-12 to 25 -CB

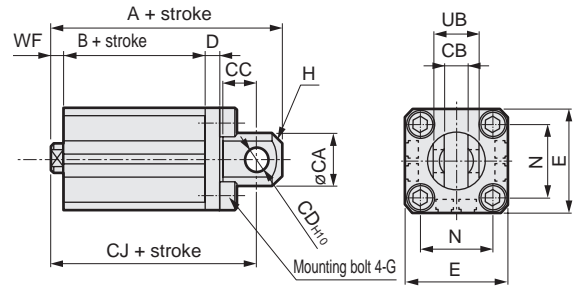

Rod end male thread




Code	Common dimensions									
Bore size (mm)	CA	CB	CC	CD	D	E	G	H	N	UB
ø12	12	5.2 <sup>+0.2</sup> <sub>0</sub>	7	5	4	25	M4x12	C1.5	15.5	10 <sup>+0.1</sup> <sub>-0.3</sub>
ø16	15	6.6 <sup>+0.3</sup> <sub>0</sub>	8	5	5	29	M4x12	C2	20	12 <sup>+0.1</sup> <sub>-0.4</sub>
ø20	20	8.2 <sup>+0.2</sup> <sub>0</sub>	12	8	5	36	M6x16	C4	25.5	16 <sup>+0.1</sup> <sub>-0.3</sub>
ø25	24	10.2 <sup>+0.2</sup> <sub>0</sub>	14	10	5	40	M6x16	C5	28	20 <sup>+0.1</sup> <sub>-0.3</sub>

Code	Female thread			Male thread		
Bore size (mm)	WF	Without/with switch	Without/with switch	a'	wf	Without/with switch
ø12	13.5	65.5	32	59.5	10.5	13.5
ø16	13.5	66.5	32	60.5	12	13.5
ø20	14.5	82.5	41	73.5	14	14.5
ø25	15	89	44	79	17.5	15

- Rod side flange (FA)  
SSD2-(L)-12 to 25 -FA

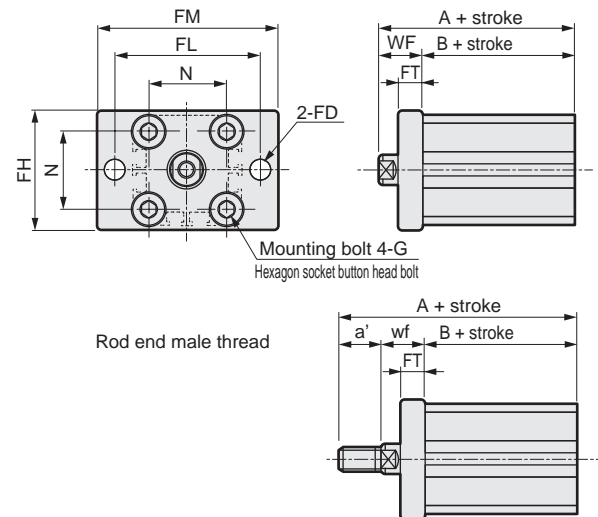


Rod end male thread

Code	Common dimensions						
Bore size (mm)	FD	FH	FL	FM	FT	N	G
ø12	4.5	25	45	55	5.5	15.5	M4x12
ø16	4.5	30	45	55	5.5	20	M4x12
ø20	6.6	39	48	60	8	25.5	M6x16
ø25	6.6	42	52	64	8	28	M6x16

Code	Female thread		Male thread	
Bore size (mm)	WF	Without/with switch	a'	wf
ø12	13.5	45.5	32	10.5
ø16	13.5	45.5	32	12
ø20	14.5	55.5	41	14
ø25	15	59	44	17.5

- Head side flange (FB)  
SSD2-(L)-12 to 25 -FB

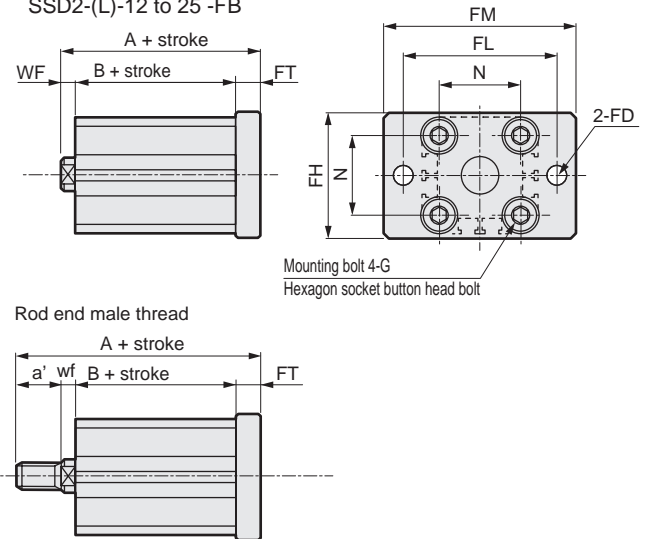

Rod end male thread

Code	Common dimensions						
Bore size (mm)	FD	FH	FL	FM	FT	N	G
ø12	4.5	25	45	55	5.5	15.5	M4x12
ø16	4.5	30	45	55	5.5	20	M4x12
ø20	6.6	39	48	60	8	25.5	M6x16
ø25	6.6	42	52	64	8	28	M6x16

Code	Female thread		Male thread	
Bore size (mm)	WF	Without/with switch	a'	wf
ø12	13.5	51	32	10.5
ø16	13.5	51	32	12
ø20	14.5	63.5	41	14
ø25	15	67	44	17.5

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd Contr

Ending



# SSD2 (Long stroke) Series


## Dimensions



● SSD2 (long stroke) -(L)-32 to 100

● Rod end male thread

\* The dimensions are common for types with and without switches.

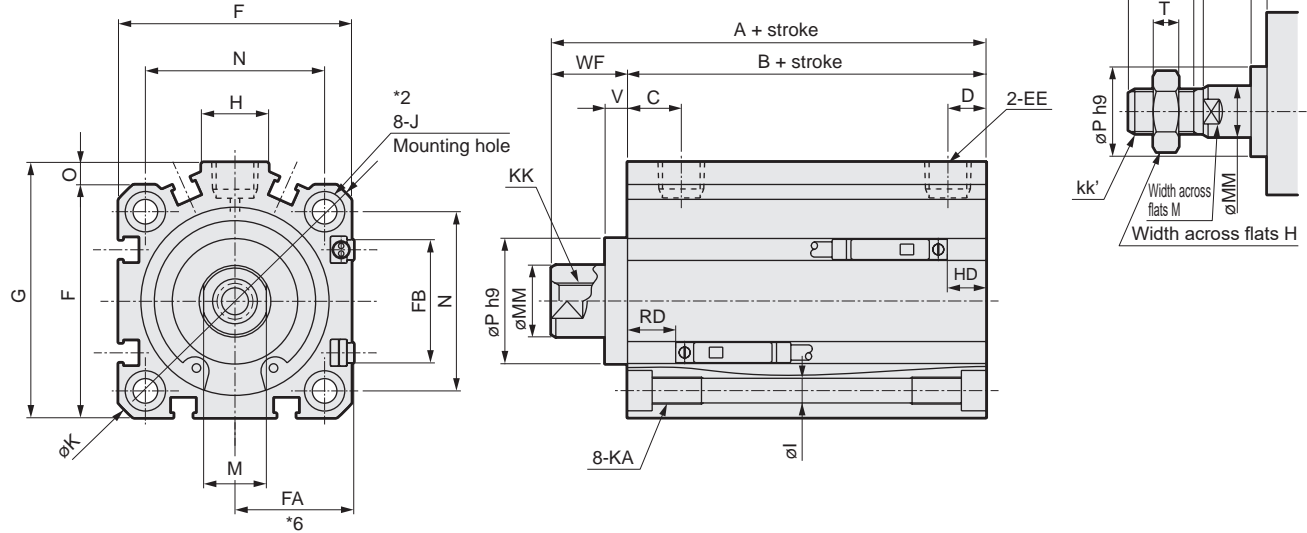

Code	Common dimensions with switch																					
Bore size (mm)	A <sup>*1</sup>	B <sup>*1</sup>	C	D <sup>*3</sup>	EE	F	FA <sup>*6</sup>	FB	G	H	I	J	K	KA	KK	M	MM	N	O	P	V	WF
ø32	62.5	45.5	8	8	Rc1/8	45	23(26.5)	20.5	49.5	12.5	5.5	9 spot face depth 5.5	60	M6 depth 11	M8 depth 13	14	16	34	4.5	22	5	17
ø40	72	55	12	8.5(12)	Rc1/8	52	26.5(30)	27.5	57	15	5.5	9 spot face depth 5.5	69	M6 depth 11	M8 depth 13	14	16	40	5	28	5	17
ø50	73.5	55.5	10.5	10.5	Rc1/4	64	32.5(36)	28.5	71	18	6.9	11 spot face depth 6.5	86	M8 depth 13	M10 depth 15	17	20	50	7	35	5	18
ø63	75	57	13	11(13)	Rc1/4	77	39(42.5)	28.5	84	23	8.7	14 spot face depth 9	103	M10 depth 25	M10 depth 15	17	20	60	7	35	5	18
ø80	86	66	16	13(16)	Rc3/8	98	49.5(53)	28.5	104	31	10.5	17.5 spot face depth 11	132	M12 depth 28	M16 depth 21	22	25	77	6	43	5	20
ø100	97.5	75.5	23	15(23)	Rc3/8	117	59(62.5)	28.5	123.5	38	10.5	17.5 spot face depth 11	156	M12 depth 28	M20 depth 27	27	30	94	6.5	59	5	22
Switch dimensions	Reed T0H/T0V, T5H/T5V *3				Proximity T2H/T2V, T3H/T3V *3				Proximity T2WH/T2WV, T3WH/T3WV *3													
Bore size (mm)	HD		RD		HD		RD		HD		RD											
ø32	8.5(16)		18(10)		8.5(16)		18(10)		10(17.5)		19.5(12)											
ø40	9.5(19)		26.5(16.5)		9.5(19)		26.5(16.5)		11(20.5)		28(18.5)											
ø50	10(19)		26(17)		10(19)		26(17)		11.5(20.5)		27.5(19)											
ø63	17.5(23)		20(14.5)		17.5(23)		20(14.5)		19(24.5)		21.5(16.5)											
ø80	22.5(28)		24(18.5)		22.5(28)		24(18.5)		24(29.5)		25.5(20.5)											
ø100	28(33.5)		28(22.5)		28(33.5)		28(22.5)		29.5(35)		29.5(24.5)											

\*1 : To calculate A + stroke or B + stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value. (Example) If the custom stroke is 121 mm, apply the standard stroke 125 mm.

\*2 : No spot facing J for ø32 to ø50 with more than 150 mm stroke and ø63 to ø100 with more than 200 mm stroke.

\*3 : Values in ( ) are for ø32 to ø50 with more than 150 mm stroke and ø63 to ø100 with more than 200 mm stroke.

\*4 : Refer to page 1044 for HD and RD dimensions of the 2-color LED, off-delay, AC magnetic field tolerant, T1\* and T8\* switches.

\*5 : Refer to page 1044 for protruding dimensions of the 2-color LED, off-delay, AC magnetic field tolerant, T1\* and T8\* switches.

\*6 : Dimensions in ( ) of FA are for the L-shaped lead wire.

\*7 : For dimensions of individual accessories, refer to pages 1046 to 1049.


● Dimensions of rod end male thread part

Code	a'	c'	H	kk'	M	MM	T	wf
ø32	23.5	20.5	22	M14x1.5	14	16	8	15
ø40	23.5	20.5	22	M14x1.5	14	16	8	15
ø50	28.5	26	27	M18x1.5	17	20	11	15
ø63	28.5	26	27	M18x1.5	17	20	11	15
ø80	35.5	32.5	32	M22x1.5	22	25	13	18
ø100	35.5	32.5	41	M26x1.5	27	30	16	18

### Dimensions with mounting bracket



- Axial foot (LB)  
SSD2-(L)-32 to 100 -LB

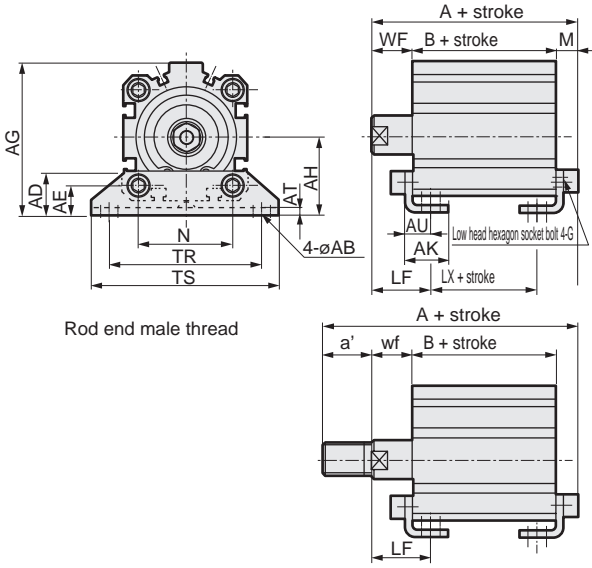


Code		Common dimensions										Female thread				
Bore size (mm)		AB	AD	AE	AG	AH	AK	AT	AU	G	N	TR	TS			
ø32		7	18.5	13	57	30	17	3.2	11.2	M6x16	34	57	71			
ø40		7	18	13	64	33	18.2	3.2	11.2	M6x16	40	64	78			
ø50		9	22	14	78	39	22.7	3.2	14.7	M8x20	50	79	95			
ø63		11	26	16	91.5	46	25.2	3.2	16.2	M10x25	60	95	113			
ø80		13	31.5	20.5	114	59	30.5	4.5	19.5	M12x40	77	118	140			
ø100		13	35	24	136	71	35.5	6	23	M12x40	94	137	162			

Code		Male thread											
Bore size (mm)		M	WF	LF	Without/with switch			a'	wf	LF	Without/with switch		
					A	B	LX				A	B	LX
ø32		7.2	17	25	69.7	45.5	29.5	23.5	15	23	91.2	45.5	29.5
ø40		7.2	17	25	79.2	55	39	23.5	15	23	100.7	55	39
ø50		8.2	18	29.5	81.7	55.5	32.5	28.5	15	26.5	107.2	55.5	32.5
ø63		9.2	18	31	84.2	57	31	28.5	15	28	109.7	57	31
ø80		11.5	20	35	97.5	66	36	35.5	18	33	131	66	36
ø100		13	22	39	110.5	75.5	41.5	35.5	18	35	142	75.5	41.5

- Rod side flange (FA)  
SSD2-(L)-32 to 100 -FA

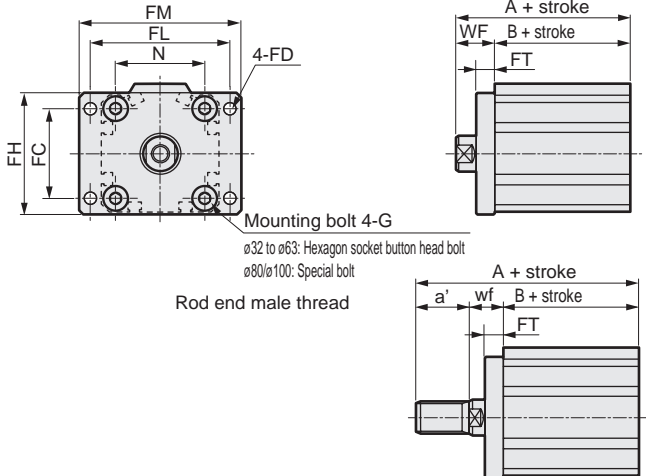


Code		Common dimensions							
Bore size (mm)		FC	FD	FH	FL	FM	FT	N	G
ø32		34	5.5	48	56	65	8	34	M6x16
ø40		40	5.5	54	62	72	8	40	M6x16
ø50		50	6.6	67	76	89	9	50	M8x20
ø63		60	9	80	92	108	9	60	M10x25
ø80		77	11	99	116	134	11	77	M12x40
ø100		94	11	117	136	154	11	94	M12x40

Code		Female thread				Male thread			
Bore size (mm)		WF	Without/with switch		a'	wf	Without/with switch		
			A	B			A	B	
ø32		17	62.5	45.5	23.5	15	84	45.5	
ø40		17	72	55	23.5	15	93.5	55	
ø50		18	73.5	55.5	28.5	15	99	55.5	
ø63		18	75	57	28.5	15	100.5	57	
ø80		20	86	66	35.5	18	119.5	66	
ø100		22	97.5	75.5	35.5	18	129	75.5	

- Clevis bracket (CB)  
SSD2-(L)-32 to 100 -CB

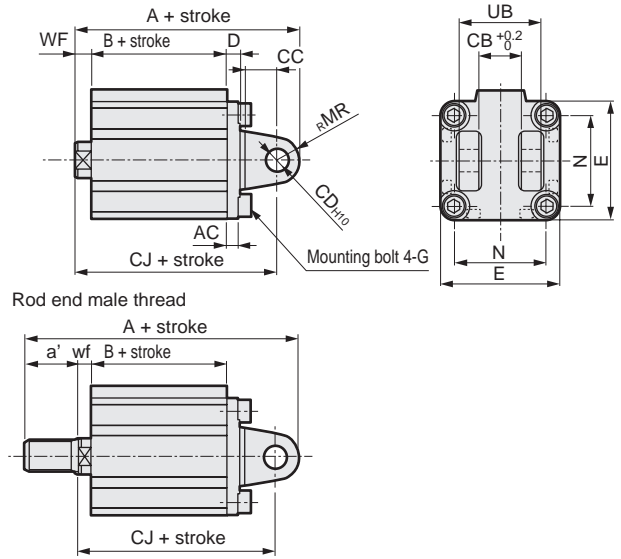


Code		Common dimensions									
Bore size (mm)		AC	CB	CC	CD	D	E	G	MR	N	UB
ø32		4.5	18.2	14	10	5	45	M6x16	10	34	36
ø40		5	18.2	14	10	6	52	M6x16	10	40	36
ø50		6	22.2	20	14	7	64	M8x20	14	50	44
ø63		7	22.2	20	14	8	77	M10x25	14	60	44
ø80		9	28.2	27	18	10	98	M12x40	18	77	56
ø100		12	32.2	31	22	13	117	M12x40	22	94	64

Code		Female thread				Male thread				
Bore size (mm)		WF	Without/with switch		a'	wf	Without/with switch			
			A	B			A	B		
ø32		17	92.5	45.5	82.5	23.5	15	114	45.5	80.5
ø40		17	104	55	94	23.5	15	125.5	55	92
ø50		18	115.5	55.5	101.5	28.5	15	141	55.5	98.5
ø63		18	119	57	105	28.5	15	144.5	57	102
ø80		20	142	66	124	35.5	18	175.5	66	122
ø100		22	164.5	75.5	142.5	35.5	18	196	75.5	138.5

- Head side flange (FB)  
SSD2-(L)-32 to 100 -FB

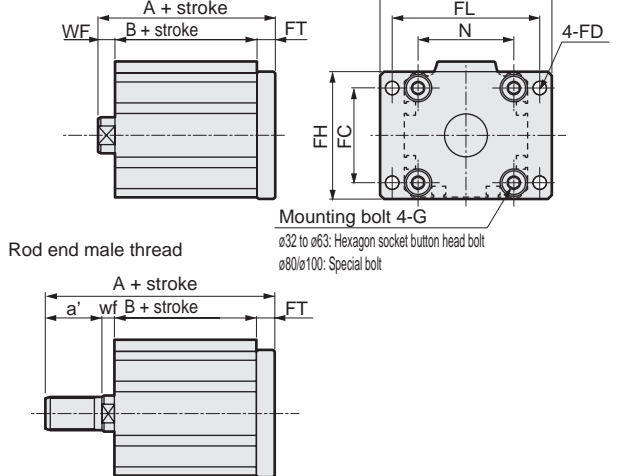

Code		Common dimensions							
Bore size (mm)		FC	FD	FH	FL	FM	FT	N	G
ø32		34	5.5	48	56	65	8	34	M6x16
ø40		40	5.5	54	62	72	8	40	M6x16
ø50		50	6.6	67	76	89	9	50	M8x20
ø63		60	9	80	92	108	9	60	M10x25
ø80		77	11	99	116	134	11	77	M12x40
ø100		94	11	117	136	154	11	94	M12x40

Code		Female thread				Male thread			
Bore size (mm)		WF	Without/with switch		a'	wf	Without/with switch		
			A	B			A	B	
ø32		17	70.5	45.5	23.5	15	92	45.5	
ø40		17	80	55	23.5	15	101.5	55	
ø50		18	82.5	55.5	28.5	15	108	55.5	
ø63		18	84	57	28.5	15	109.5	57	
ø80		20	97	66	35.5	18	130.5	66	
ø100		22	108.5	75.5	35.5	18	140	75.5	

- SCP\*3
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS2
- CKV2
- CAV2/COVP/N2
- SSD2**
- SSG
- SSD
- CAT
- MDC2
- MVC
- SMG
- MSD/MSDG
- FC\*
- STK
- SRL3
- SRG3
- SRM3
- SRT3
- MRL2
- MRG2
- SM-25
- ShkAbs
- FJ
- FK
- Spd Contr
- Ending

Compact cylinder single acting/push

# SSD2-X Series

Single acting/pull/with switch


# SSD2-Y Series

● Bore size:  $\varnothing 12/\varnothing 16/\varnothing 20/\varnothing 25/\varnothing 32/\varnothing 40/\varnothing 50$

JIS symbol SSD2-X



SSD2-Y



## Specifications

Item	SSD2-X SSD2-XL (with switch)				SSD2-Y SSD2-YL (with switch)			
	$\varnothing 12$	$\varnothing 16$	$\varnothing 20$	$\varnothing 25$	$\varnothing 32$	$\varnothing 40$	$\varnothing 50$	
Bore size mm	$\varnothing 12$	$\varnothing 16$	$\varnothing 20$	$\varnothing 25$	$\varnothing 32$	$\varnothing 40$	$\varnothing 50$	
Actuation	SSD2-X, XL: single acting/push, SSD2-Y, YL: single acting/pull							
Working fluid	Compressed air							
Max. working pressure MPa	1.0 ( $\approx 150$ psi, 10 bar)							
Min. working pressure MPa	0.2 ( $\approx 29$ psi, 2 bar)	0.17 ( $\approx 25$ psi, 1.7 bar)	0.12 ( $\approx 17$ psi, 1.2 bar)					
Proof pressure MPa	1.6 ( $\approx 230$ psi, 16 bar)							
Ambient temperature $^{\circ}\text{C}$	-10 ( $14^{\circ}\text{F}$ ) to 60 ( $140^{\circ}\text{F}$ ) (no freezing)							
Port size	M5			Rc1/8 *2		Rc1/4		
Stroke tolerance mm	+1.0 0							
Working piston speed mm/s	50 to 500							
Cushion	None							
Lubrication	Not required (use turbine oil ISO VG32 if necessary for lubrication)							
Allowable absorbed energy J	0.004	0.01	0.016	0.021	0.025	0.092	0.1	

\*1: Do not leave the single acting cylinder pressurized for a long time. If it is left pressurized for long periods, the piston rod may not return due to spring load when the pressure is released. Use the double acting if the cylinder needs to be left pressurized for long periods.

\*2: The  $\varnothing 32$  bore size with a 5 mm stroke and without a switch has a port size of M5.

## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\varnothing 12$	5, 10	10	5
$\varnothing 16$			
$\varnothing 20$			
$\varnothing 25$			
$\varnothing 32$			
$\varnothing 40$	10, 20	20	10
$\varnothing 50$			

\*1: When using the type with switch, refer to the table on the right.

\*2: Refer to pages 811 and 817 for the min. stroke with mounting bracket LB.

## Min. stroke with switch (1 or 2 switches)

Bore size (mm)	T0H/V / T5H/V	T2H/V / T3H/V
$\varnothing 12$	10 *2	5
$\varnothing 16$		
$\varnothing 20$	5	
$\varnothing 25$		
$\varnothing 32$		
$\varnothing 40$	10	10
$\varnothing 50$		

\*1: Less than 10 mm with the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch is not available.

\*2: 5 mm stroke is available only for the type with 1 on rod side.

## SSD2-X/SSD2-Y spring load

(Unit: N)

Bore size (mm)	Stroke (mm)	SSD2-X		SSD2-Y	
		When stroke = 0	At full stroke operation	When stroke = 0	At full stroke operation
12	5	4	14	3	10
	10	4	14	3	10
16	5	6	15	4	19
	10	6	15	4	19
20	5	6	15	5	27
	10	6	15	5	27
25	5	11	21	10	29
	10	11	21	10	29
32	5	23	30	20	29
	10	16	30	20	29
40	5	13	30	20	29
	10	21	39	20	29
50	10	30	50	24	83
	20	24	54	24	83

## Switch specifications (F-switch)

● 1-color/2-color LED

Item	2-wire proximity		3-wire proximity		2-wire proximity		3-wire proximity		
	F2S		F3S		F2H/F2V	F2YH/ F2YV	F3H/F3V	F3PH/F3PV (made to order)	F3YH/F3YV
Applications	Dedicated for programmable controller		For programmable controller, relay		Dedicated for programmable controller		For programmable controller, relay		
Output method	-		NPN output		-		NPN output	PNP output	NPN output
Power supply voltage	-		10 to 28 VDC		-		10 to 28 VDC	4.5 to 28 VDC	10 to 28 VDC
Load voltage	10 to 30 VDC		30 VDC or less		10 to 30 VDC   24 VDC ±10%		30 VDC or less		
Load current	5 to 20 mA		50 mA or less		5 to 20 mA		50 mA or less		
Indicator	LED (Lit when ON)				Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Yellow LED (Lit when ON)		Red/green LED (Lit when ON)
Leakage current	1 mA or less		10 µA or less		1 mA or less		10 µA or less		
Weight	g				1 m:10 3 m:29				

## Switch specifications (T-switch)

● 1-color/2-color LED/for AC magnetic field proof

Item	2-wire proximity		2-wire proximity		3-wire proximity				2-wire reed			2-wire proximity			
	T1H/T1V	T2H/T2V/ T2JH/T2JV	T2YH/ T2YV	T2WH/ T2WV	T3H/T3V	T3PH/ T3PV	T3YH/ T3YV	T3WH/ T3WV	T0H/T0V	T5H/T5V	T8H/T8V	T2YD(*4) T2YDT			
Applications	For programmable controller, relay, compact solenoid valve	Dedicated for programmable controller		For programmable controller, relay				For programmable controller, relay	For programmable controller, relay, IC circuit (no indicator lamp), serial connection	For programmable controller, relay		For programmable controller			
Output method	-		-		NPN output	PNP output	NPN output	NPN output	-			-			
Pwr. supp. V.	-		-		10 to 28 VDC				-			-			
Load voltage	85 to 265 VAC	10 to 30 VDC	24 VDC ±10%	30 VDC or less				12/24 VDC	100/110 VAC	5/12/24 VDC	100/110 VAC	12/24 VDC	110 VAC	220 VAC	24 VDC ±10%
Load current	5 to 100 mA	5 to 20 mA (*3)		100 mA or less		50 mA or less		5 to 50 mA	7 to 20 mA	50 mA or less	20 mA or less	5 to 50 mA	7 to 20 mA	7 to 10 mA	5 to 20 mA
Indicator	LED (Lit when ON)	LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	No indicator lamp	LED (Lit when ON)	Red/green LED (Lit when ON)			
Leakage current	≤ 1 mA at 100 VAC, ≤ 2 mA at 200 VAC	1 mA or less		10 µA or less				0 mA			1 mA or less				
Weight	g	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:61 3 m:166 5 m:272				

\*1: Refer to Ending Page 1 for detailed switch specifications and dimensions.

\*2: Switches other than the above models, such as switches with connectors, are also available. Refer to Ending Page 1.

\*3: The max. load current is 20 mA at 25°C. The current is lower than 20 mA if the operating ambient temperature around the switch is higher than 25°C. (5 to 10 mA at 60°C)

\*4: Switch for AC magnetic field (T2YD/T2YDT) cannot be used in DC magnetic field.

\*5: The F-switch uses a bend-resistant lead wire.

## Cylinder weight table (the weight of the switches is when there are 2 cylinder switches.)

(Unit: g)

Stroke (mm)	5		10		20	
	No switch	With switch	No switch	With switch	No switch	With switch
ø12	40	80	49	89	-	-
ø16	52	92	64	104	-	-
ø20	74	114	89	129	-	-
ø25	107	147	127	167	-	-
ø32	155	195	183	223	-	-
ø40	249	289	285	325	-	-
ø50	-	-	459	499	572	612

## Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa									
		0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø12	Push	-	22.6	33.9	45.2	56.5	67.9	79.2	90.5	1.02x10 <sup>2</sup>	1.13x10 <sup>2</sup>
	Pull	-	17.0	25.4	33.9	42.4	50.9	59.4	67.9	76.3	84.8
ø16	Push	-	40.2	60.3	80.4	1.01x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.61x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.01x10 <sup>2</sup>
	Pull	-	30.2	45.2	60.3	75.4	90.5	1.06x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.36x10 <sup>2</sup>	1.51x10 <sup>2</sup>
ø20	Push	-	62.8	94.2	1.26x10 <sup>2</sup>	1.57x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.20x10 <sup>2</sup>	2.51x10 <sup>2</sup>	2.83x10 <sup>2</sup>	3.14x10 <sup>2</sup>
	Pull	-	47.1	70.7	94.2	1.18x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.65x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.12x10 <sup>2</sup>	2.36x10 <sup>2</sup>
ø25	Push	-	98.2	1.47x10 <sup>2</sup>	1.96x10 <sup>2</sup>	2.45x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.44x10 <sup>2</sup>	3.93x10 <sup>2</sup>	4.42x10 <sup>2</sup>	4.91x10 <sup>2</sup>
	Pull	-	75.6	1.13x10 <sup>2</sup>	1.51x10 <sup>2</sup>	1.89x10 <sup>2</sup>	2.27x10 <sup>2</sup>	2.64x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.40x10 <sup>2</sup>	3.78x10 <sup>2</sup>
ø32	Push	1.21x10 <sup>2</sup>	1.61x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.22x10 <sup>2</sup>	4.02x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.63x10 <sup>2</sup>	6.43x10 <sup>2</sup>	7.24x10 <sup>2</sup>	8.04x10 <sup>2</sup>
	Pull	90.5	1.21x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.62x10 <sup>2</sup>	4.22x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.43x10 <sup>2</sup>	6.03x10 <sup>2</sup>
ø40	Push	1.88x10 <sup>2</sup>	2.51x10 <sup>2</sup>	3.77x10 <sup>2</sup>	5.03x10 <sup>2</sup>	6.28x10 <sup>2</sup>	7.54x10 <sup>2</sup>	8.80x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.13x10 <sup>3</sup>	1.26x10 <sup>3</sup>
	Pull	1.58x10 <sup>2</sup>	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>
ø50	Push	2.95x10 <sup>2</sup>	3.93x10 <sup>2</sup>	5.89x10 <sup>2</sup>	7.85x10 <sup>2</sup>	9.82x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.37x10 <sup>3</sup>	1.57x10 <sup>3</sup>	1.77x10 <sup>3</sup>	1.96x10 <sup>3</sup>
	Pull	2.47x10 <sup>2</sup>	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>

# SSD2-X Y Series


## How to order

No switch (without magnet for switch)

SSD2-X - 12 - 5 - N - LB - I

With switch (built-in magnet for switch)

SSD2-XL - 12 - 10 - T0H - R - N - LB - I

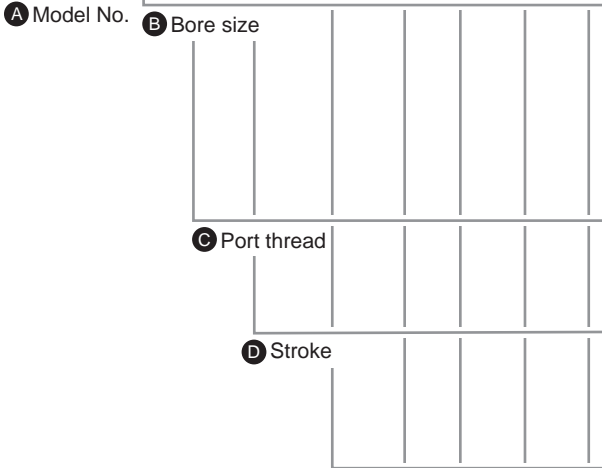

## Precautions for model No. selection

- \*1 : The T2YD\* switch cannot be mounted on the  $\phi 12$  and  $\phi 16$  bore sizes.
- \*2 : The T8\* switch cannot be mounted on the  $\phi 12$  to  $\phi 32$  bore sizes.
- \*3 : The F-switch can only be mounted on the piping port surface of bore sizes  $\phi 20$  and  $\phi 25$ .
- \*4 : Piston rod of  $\phi 12$  to  $\phi 25$  is stainless steel as standard. C-snap ring is stainless steel instead of steel. The rod end male thread nut is stainless steel.
- \*5 : The mounting bracket is included at shipment.
- \*6 : The projection dimension of piston rod WF when LB or FA is selected is different from that of the standard. Refer to the dimensions on pages 809, 811, 813, 815, 817 and 819. The number of the specified protruding dimension will be added at the end of the model No. printed on the metal plate on the body.
- \*7 : "I" and "Y" cannot be selected together.
- \*8 : The F-switch with L lead wire cannot be selected on  $\phi 20$  models.
- \*9 : Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.
- \*10: Refer to pages 750 and 751 for combinations of variations/options.
- \*11 : F-switch cannot be selected.
- \*12: Refer to pages 811 and 817 for the min. stroke with mounting bracket LB.

[Example of model No.]

**SSD2-XL-12-5-T0H-R-N**

Model: Compact cylinder

- A Model No. : Single acting push
- B Bore size :  $\phi 12$  mm
- C Port thread : Rc thread
- D Stroke : 5 mm
- E Switch model No. : Reed T0H switch/  
Lead wire length 1 m
- F Switch quantity : 1 on rod side
- G Option : Rod end male thread

- H Mounting bracket : \*5  
\*6

- I Accessory : \*7

Code	Description
<b>A Model No.</b>	
SSD2-X	Single acting/push
SSD2-XL	Single acting/push/with switch
SSD2-Y	Single acting/pull
SSD2-YL	Single acting/pull/with switch

<b>B Bore size (mm)</b>	
12	$\phi 12$
16	$\phi 16$
20	$\phi 20$
25	$\phi 25$
32	$\phi 32$
40	$\phi 40$
50	$\phi 50$

<b>C Port thread</b>	
Blank	Rc thread
NN	NPT thread ( $\phi 32$ and over) (made-to-order product)
GN	G thread ( $\phi 32$ and over) (made-to-order product)

<b>D Stroke (mm)</b>		Bore size (mm)						
		$\phi 12$	$\phi 16$	$\phi 20$	$\phi 25$	$\phi 32$	$\phi 40$	$\phi 50$
5	5	●	●	●	●	●	●	●
10	10	●	●	●	●	●	●	●
20	20							●

<b>E Switch model No.</b>		Voltage		Indicator	Lead wire	Bore size								
Lead wire	Lead wire	AC	DC			12	16	20	25	32	40	50		
Straight	L-shaped	Contact	●	●	1-color LED	2-wire			●	●				
						3-wire			●	●				
F2H*	F2V*	Proximity	●	●	1-color LED	2-wire			●	●				
						3-wire			●	●				
F3H*	F3V*	Proximity	●	●	1-color LED (PNP output) (custom)	3-wire			●	●				
F3PH*	F3PV*	Reed	●	●	2-color LED	2-wire			●	●				
						3-wire			●	●				
T0H*	T0V*	Reed	●	●	1-color LED	2-wire	●	●	●	●	●	●	●	●
T5H*	T5V*	Proximity	●	●	No indicator lamp	2-wire	●	●	●	●	●	●	●	●
T8H*	T8V*	Proximity	●	●	1-color LED	2-wire							●	●
T1H*	T1V*	Proximity	●	●	1-color LED	2-wire			●	●	●	●	●	●
T2H*	T2V*	Proximity	●	●	1-color LED (PNP output)	3-wire	●	●	●	●	●	●	●	●
T3H*	T3V*	Proximity	●	●	2-color LED	2-wire	●	●	●	●	●	●	●	●
T3PH*	T3PV*	Proximity	●	●	2-color LED	3-wire	●	●	●	●	●	●	●	●
T2WH*	T2WV*	Proximity	●	●	2-color LED	2-wire			●	●	●	●	●	●
T2YH*	T2YV*	Proximity	●	●	AC magnetic field	2-wire			●	●	●	●	●	●
T3WH*	T3WV*	Proximity	●	●	1-color LED off-delay	2-wire			●	●	●	●	●	●
T3YH*	T3YV*	Proximity	●	●	1-color LED off-delay	2-wire			●	●	●	●	●	●
T2YD*	-	Proximity	●	●	2-color LED	2-wire			●	●	●	●	●	●
T2YDT*	-	Proximity	●	●	AC magnetic field	2-wire			●	●	●	●	●	●
T2JH*	T2JV*	Proximity	●	●	1-color LED off-delay	2-wire			●	●	●	●	●	●

<b>* Lead wire length</b>	
Blank	1 m (standard)
3	3 m (option)
5	5 m (option)

<b>F Switch quantity</b>	
R	1 on rod side
H	1 on head side
D	2

<b>G Option</b>		Bore size (mm)						
		12	16	20	25	32	40	50
Blank	Rod end female thread	●	●	●	●	●	●	●
N	Rod end male thread	●	●	●	●	●	●	●
P6	Copper and PTFE free specifications	Supported as standard						
M *4	Piston rod material (stainless steel)	●	●	●	●	●	●	●
P4	Specifications for rechargeable battery	●	●	●	●	●	●	●
P40	(Made to order)	●	●	●	●	●	●	●

<b>H Mounting bracket</b>	
Blank	Without mounting bracket
LB	Axial foot
CB	Clevis bracket (pin and snap ring included)
FA	Rod side flange
FB	Head side flange

<b>I Accessory (available when rod end male thread "N" is selected)</b>	
I	Rod eye
Y	Rod clevis (pin and snap ring included)

### How to order switch

**SW** - **T0H**



Switch model No.  
(Item ㊦ on page 804)

### How to order mounting bracket

Bore size (mm)	ø12	ø16	ø20	ø25	ø32	ø40	ø50
<b>Mounting bracket</b>							
Foot (LB)	SSD2-LB-12	SSD2-LB-16	SSD2-LB-20	SSD2-LB-25	SSD2-LB-32	SSD2-LB-40	SSD2-LB-50
Flange (FA/FB)	SSD2-FA-12	SSD2-FA-16	SSD2-FA-20	SSD2-FA-25	SSD2-FA-32	SSD2-FA-40	SSD2-FA-50
Clevis bracket (CB)	SSD2-CB-12	SSD2-CB-16	SSD2-CB-20	SSD2-CB-25	SSD2-CB-32	SSD2-CB-40	SSD2-CB-50


\*1: The foot mounting bracket is provided as 2 pcs./set.

SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/ COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/ MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending


# SSD2-X Series

## Internal structure and parts list


● SSD2-XL-12 to 32 (single acting/push/with switch)

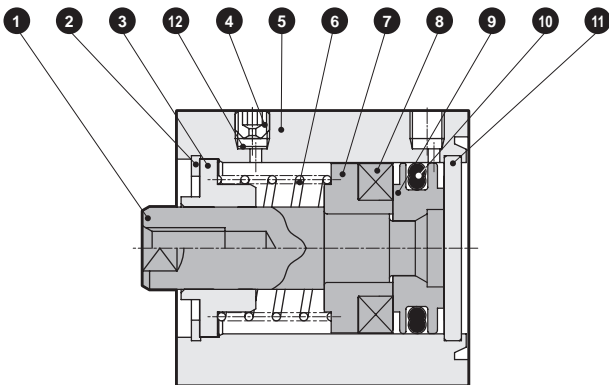


● SSD2-XL-40, 50 (single acting/push/with switch)

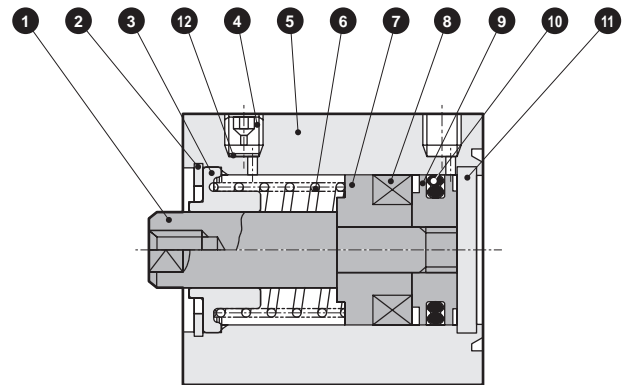

● SSD2-X-12 to 32 (single acting/push)

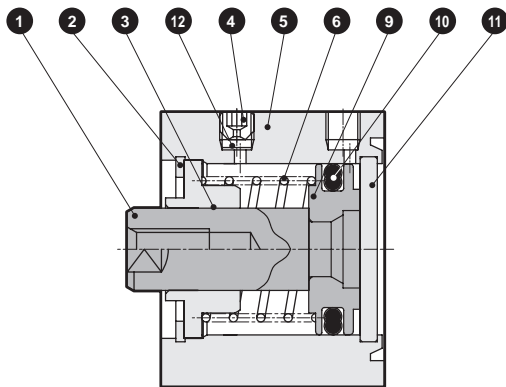

● SSD2-X-40, 50 (single acting/push)

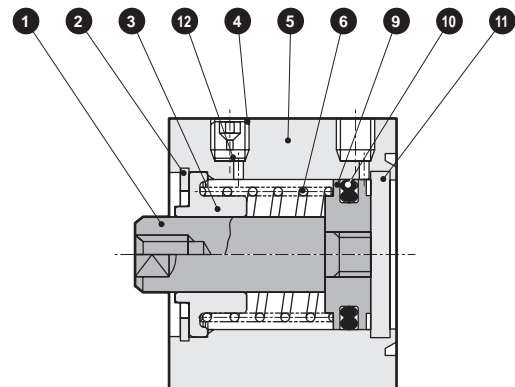


No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	ø12 to ø25: Stainless steel ø32 to ø50: Steel	ø16 to ø50: Industrial chrome plating	7	Spacer	Aluminum alloy	Chromate
2	C-snap ring	Steel	Zinc phosphate	8	Magnet	Plastic	
3	Rod metal	Special aluminum	Alumite	9	Piston	Aluminum alloy	Chromate
4	Plug	Stainless steel		10	Piston packing	Nitrile rubber	
5	Body	Aluminum alloy	Hard alumite	11	Cover	ø12 to ø25: Stainless steel ø32 to ø50: Aluminum alloy	ø32 to ø50: Alumite
6	Spring	Piano wire	Electrodeposition	12	Stainless steel wire mesh	Stainless steel	

## Repair parts list


Bore size (mm)	Kit No.	Repair parts No.
ø12	SSD2-X-12K	10
ø16	SSD2-X-16K	
ø20	SSD2-X-20K	
ø25	SSD2-X-25K	
ø32	SSD2-X-32K	
ø40	SSD2-X-40K	
ø50	SSD2-X-50K	

### Internal structure and parts list

● SSD2-YL (single acting/pull/with switch)

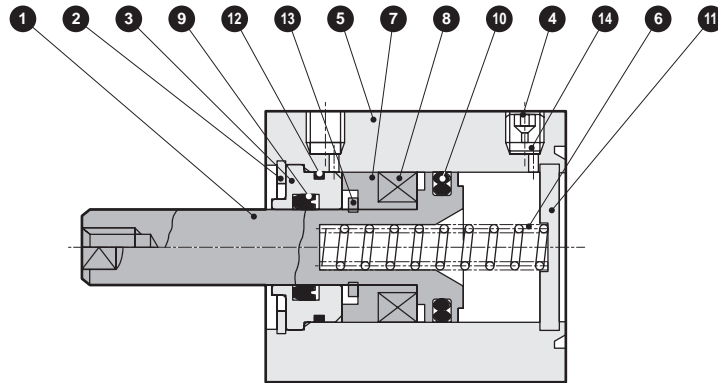

● SSD2-Y (single acting/pull)

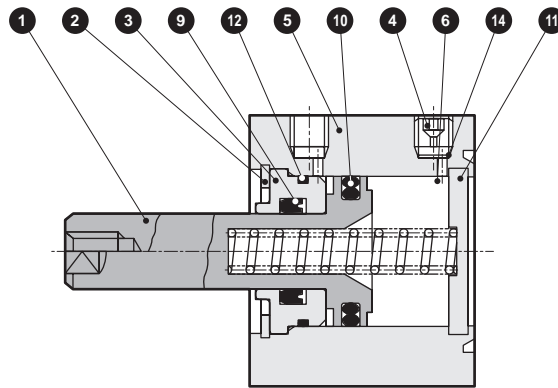

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston	Stainless steel		8	Magnet	Plastic	
2	C-snap ring	Steel	Zinc phosphate	9	Rod packing	Nitrile rubber	
3	Rod metal	Special aluminum alloy	Alumite	10	Piston packing	Nitrile rubber	
4	Plug	Stainless steel		11	Cover	ø12 to ø25: Stainless steel ø32 to ø50: Aluminum alloy	ø32 to ø50: Alumite
5	Body	Aluminum alloy	Hard alumite	12	Metal gasket	Nitrile rubber	
6	Spring	Piano wire	Electrodeposition	13	Round S type snap ring	Steel	Zinc phosphate
7	Spacer	Aluminum alloy	Chromate	14	Stainless steel wire mesh	Stainless steel	

### Repair parts list

Bore size (mm)	Kit No.	Repair parts No.
ø12	SSD2-Y-12K	<span style="border: 1px solid black; border-radius: 50%; padding: 2px;">9</span> <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">10</span> <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">12</span>
ø16	SSD2-Y-16K	
ø20	SSD2-Y-20K	
ø25	SSD2-Y-25K	
ø32	SSD2-Y-32K	
ø40	SSD2-Y-40K	
ø50	SSD2-Y-50K	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending






# SSD2-X Series

## Dimensions



● SSD2-XL-12 to 25 (with switch)

● Rod end male thread

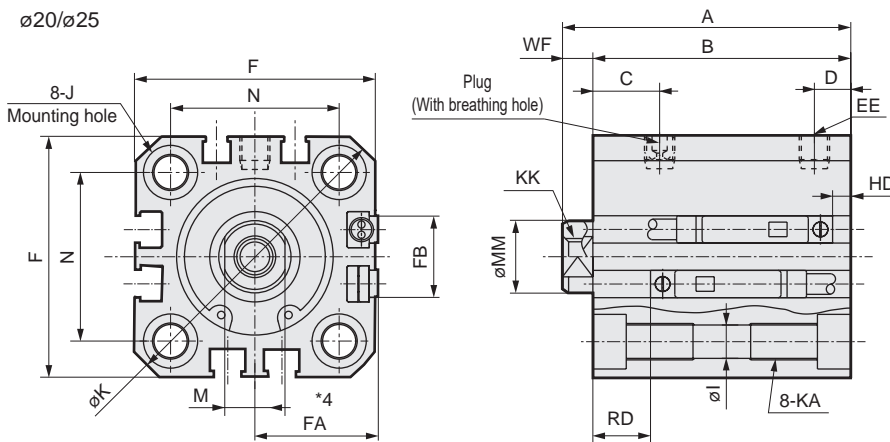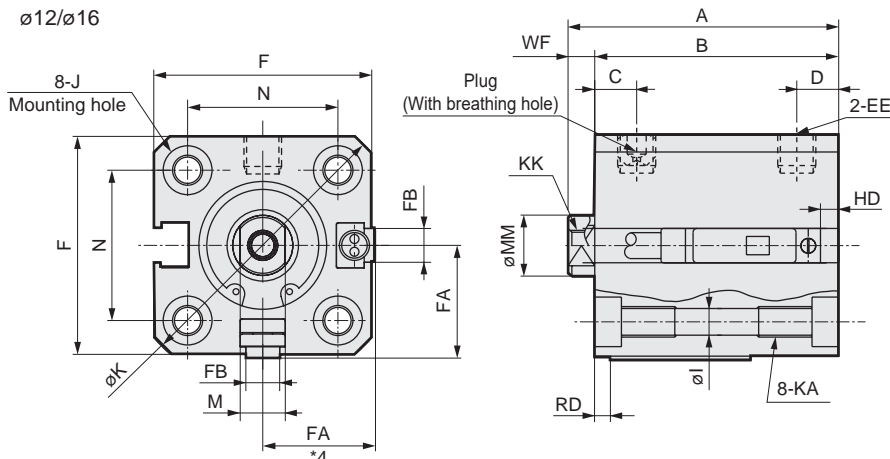

Code		Common dimensions with switch																	
Bore size (mm)		A	B	C	D	EE	F	FA <sup>*4</sup>	FB	I	J	K	KA	KK	M	MM	N	WF	
STK	Stroke	5	30.5	27	5.5	5.5	M5	25	13 (16.5)	4.5	3.5	6.5 spot face depth 3.5	32	M4 depth 7	M3 depth 6	5	6	15.5	3.5
		10	35.5	32															
SRL3	Stroke	5	30.5	27	5.5	5.5	M5	29	15 (18.5)	4.5	3.5	6.5 spot face depth 3.5	38	M4 depth 7	M4 depth 8	6	8	20	3.5
		10	35.5	32															
SRG3	Stroke	5	39	34.5	8	5.5	M5	36	18.5 (22)	12.5	5.5	9 spot face depth 5.5	47	M6 depth 11	M5 depth 7	8	10	25.5	4.5
		10	44	39.5															
SRM3	Stroke	5	42.5	37.5	11	6	M5	40	20.5 (24)	13.5	5.5	9 spot face depth 5.5	51	M6 depth 11	M6 depth 12	10	12	28	5
		10	47.5	42.5															
Switch dimensions	Bore size (mm)	Reed T0H/T0V, T5H/T5V		Proximity T2H/T2V, T3H/T3V		Proximity T2WH/T2WV, T3WH T3WV		Proximity F2H/F2V, F3H/F3V, F2YH/F2YV, F3YH/F3YV		Proximity F2S/F3S									
		HD	RD	HD	RD	HD	RD	HD	RD	HD	RD								
SRT3	Stroke	0	3	0	3	2	5												
		0	4	0	4.5	1	6												
MRL2	Stroke	3	7.5	3	7.5	5	9.5	7.5	12	6.5	11								
		4	9.5	4	9.5	6	11.5	8.5	14	7.5	13								

\*1 : Only F-switch is available for the  $\phi 20$  or  $\phi 25$  piping port surface.

\*2 : HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.

\*3: Refer to page 1044 for HD, RD and protruding dimensions of the 2-color LED, off-delay, AC magnetic field proof, T1\* and T8\* switches.

\*4 : Dimensions in ( ) of FA are for the L-shaped lead wire.

\*5: For dimensions of individual accessories, refer to pages 1046 to 1049.


● Rod end male thread

Code	a'	c'	H	kk'	M	MM	T	wf	
Spd Contr	$\phi 12$	10.5	9	8	M5	5	6	3.2	3.5
Ending	$\phi 16$	12	10	10	M6	6	8	3.6	3.5
	$\phi 20$	14	12	13	M8	8	10	5	4.5
	$\phi 25$	17.5	15	17	M10x1.25	10	12	6	5


### Dimensions with mounting bracket



- Axial foot (LB) with switch  
SSD2-XL-12 to 25 -LB

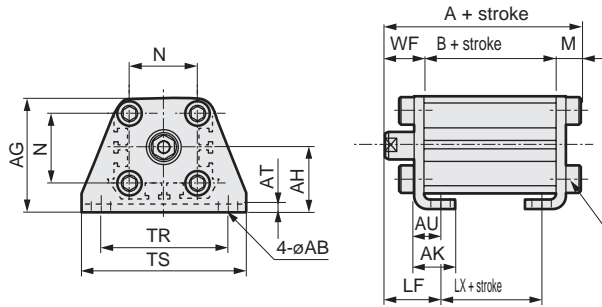

Rod end male thread




Code	Common dimensions										Female thread		
	AB	AG	AH	AK	AT	AU	G	N	TR	TS	M		
ø12	5	29.5	17	12.5	2	8	M4x10	15.5	34	44	4.8		
ø16	5	33.5	19	13	2	8	M4x10	20	38	48	4.8		
ø20	7	42	24	15	3.2	9.2	M6x16	25.5	48	62	7.2		
ø25	7	46	26	16.5	3.2	10.7	M6x16	28	52	66	7.2		


  

Code	Male thread										
	WF	LF	A	B	LX	a'	wf	LF	A	B	LX
ø12	13.5	19.5	40.3	22	10	10.5	13.5	19.5	50.8	22	10
ø16	13.5	19.5	40.3	22	10	12	13.5	19.5	52.3	22	10
ø20	14.5	20.5	51.2	29.5	17.5	14	14.5	20.5	65.2	29.5	17.5
ø25	15	22.5	54.7	32.5	17.5	17.5	15	22.5	72.2	32.5	17.5

- Rod side flange (FA) with switch  
SSD2-XL-12 to 25 -FA

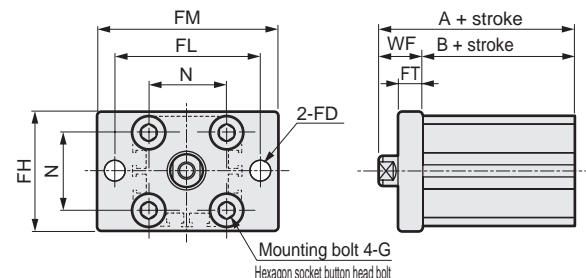

Rod end male thread




Code	Common dimensions						
	FD	FH	FL	FM	FT	N	G
ø12	4.5	25	45	55	5.5	15.5	M4x12
ø16	4.5	30	45	55	5.5	20	M4x12
ø20	6.6	39	48	60	8	25.5	M6x16
ø25	6.6	42	52	64	8	28	M6x16


  

Code	Female thread				Male thread		
	WF	A	B	a'	wf	A	B
ø12	13.5	35.5	22	10.5	13.5	46	22
ø16	13.5	35.5	22	12	13.5	47.5	22
ø20	14.5	44	29.5	14	14.5	58	29.5
ø25	15	47.5	32.5	17.5	15	65	32.5

- Clevis bracket (CB) with switch  
SSD2-XL-12 to 25 -CB

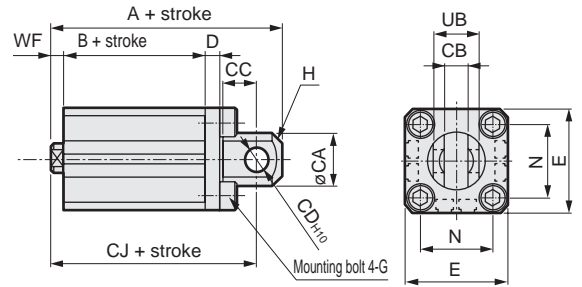

Rod end male thread




Code	Common dimensions									
	CA	CB	CC	CD	D	E	G	H	N	UB
ø12	12	5.2 <sup>+0.2</sup>	7	5	4	25	M4x12	C1.5	15.5	10 <sup>+0.1</sup> <sub>-0.3</sub>
ø16	15	6.6 <sup>+0.3</sup>	8	5	5	29	M4x12	C2	20	12 <sup>+0.1</sup> <sub>-0.4</sub>
ø20	20	8.2 <sup>+0.2</sup>	12	8	5	36	M6x16	C4	25.5	16 <sup>+0.1</sup> <sub>-0.3</sub>
ø25	24	10.2 <sup>+0.2</sup>	14	10	5	40	M6x16	C5	28	20 <sup>+0.1</sup> <sub>-0.3</sub>


  

Code	Female thread					Male thread				
	WF	With switch			a'	wf	With switch			
		A	B	CJ			A	B	CJ	
ø12	3.5	45.5	22	39.5	10.5	3.5	56	22	39.5	
ø16	3.5	46.5	22	40.5	12	3.5	58.5	22	40.5	
ø20	4.5	61	29.5	52	14	4.5	75	29.5	52	
ø25	5	67.5	32.5	57.5	17.5	5	85	32.5	57.5	

- Head side flange (FB) with switch  
SSD2-XL-12 to 25 -FB

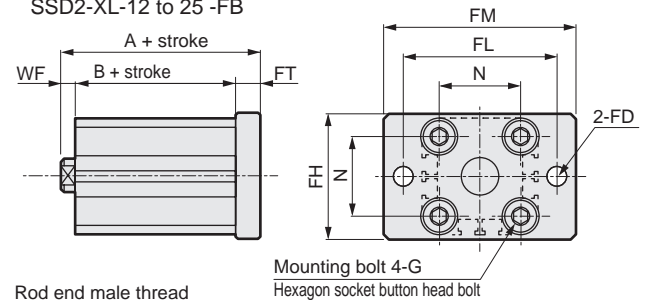

Rod end male thread



Code	Common dimensions						
	FD	FH	FL	FM	FT	N	G
ø12	4.5	25	45	55	5.5	15.5	M4x12
ø16	4.5	30	45	55	5.5	20	M4x12
ø20	6.6	39	48	60	8	25.5	M6x16
ø25	6.6	42	52	64	8	28	M6x16

Code	Female thread				Male thread			
	WF	With switch			a'	wf	With switch	
		A	B	CJ			A	B
ø12	3.5	31	22	10.5	3.5	41.5	22	
ø16	3.5	31	22	12	3.5	43	22	
ø20	4.5	42	29.5	14	4.5	56	29.5	
ø25	5	45.5	32.5	17.5	5	63	32.5	

# SSD2-X Series




## Dimensions





● SSD2-X-12 to 25 (without switch)

● Rod end male thread

ø12/ø16

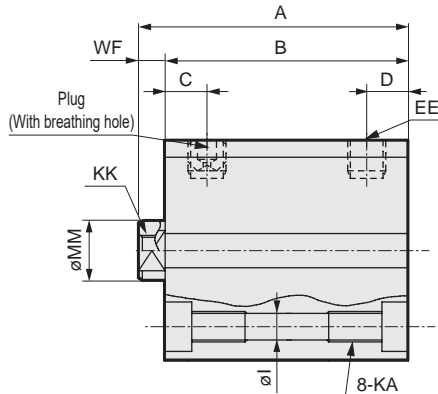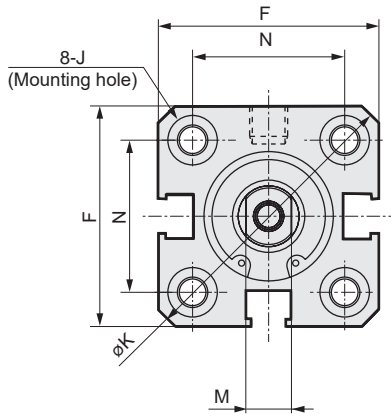

ø20/ø25

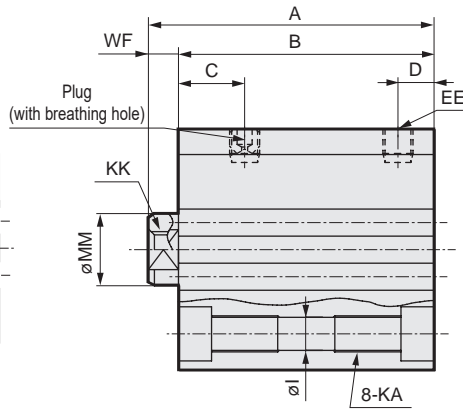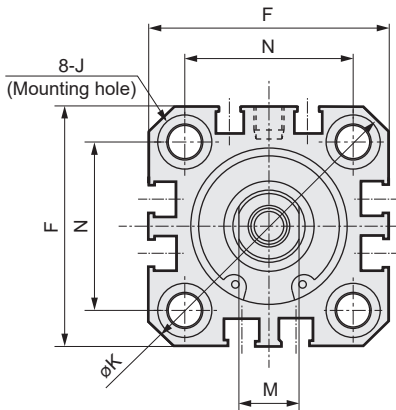

Code		Dimensions without switch and common dimensions															
Bore size (mm)		A	B	C	D	EE	F	I	J	K	KA	KK	M	MM	N	WF	
ø12	Stroke	5	25.5	22	5.5	5.5	M5	25	3.5	6.5 spot face depth 3.5	32	M4 depth 7	M3 depth 6	5	6	15.5	3.5
		10	30.5	27													
ø16	Stroke	5	25.5	22	5.5	5.5	M5	29	3.5	6.5 spot face depth 3.5	38	M4 depth 7	M4 depth 8	6	8	20	3.5
		10	30.5	27													
ø20	Stroke	5	29	24.5	8	5.5	M5	36	5.5	9 spot face depth 5.5	47	M6 depth 11	M5 depth 7	8	10	25.5	4.5
		10	34	29.5													
ø25	Stroke	5	32.5	27.5	11	6	M5	40	5.5	9 spot face depth 5.5	51	M6 depth 11	M6 depth 12	10	12	28	5
		10	37.5	32.5													

● Dimensions of rod end male thread part


Code	a'	c'	H	kk'	M	MM	T	wf
ø12	10.5	9	8	M5	5	6	3.2	3.5
ø16	12	10	10	M6	6	8	3.6	3.5
ø20	14	12	13	M8	8	10	5	4.5
ø25	17.5	15	17	M10x1.25	10	12	6	5

\*1: For dimensions of individual accessories, refer to pages 1046 to 1049.


## Dimensions with mounting bracket



- Axial foot (LB) without switch  
SSD2-X-12 to 25 -LB

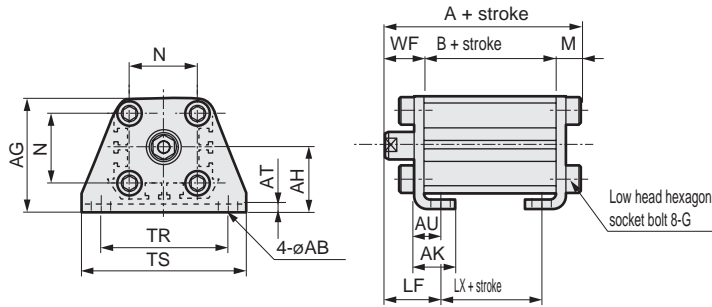

Rod end male thread




Code	Common dimensions										Female thread		
Bore size (mm)	AB	AG	AH	AK	AT	AU	G	N	TR	TS	M		
ø12	5	29.5	17	12.5	2	8	M4x10	15.5	34	44	4.8		
ø16	5	33.5	19	13	2	8	M4x10	20	38	48	4.8		
ø20	7	42	24	15	3.2	9.2	M6x16	25.5	48	62	7.2		
ø25	7	46	26	16.5	3.2	10.7	M6x16	28	52	66	7.2		


Code	Common dimensions										Male thread			
Bore size (mm)	WF	LF	A	B	LX	a'	wf	LF	A	B	LX			
ø12	13.5	19.5	35.3	17	5	10.5	13.5	19.5	45.8	17	5			
ø16	13.5	19.5	35.3	17	5	12	13.5	19.5	47.3	17	5			
ø20	14.5	20.5	41.2	19.5	7.5	14	14.5	20.5	55.2	19.5	7.5			
ø25	15	22.5	44.7	22.5	7.5	17.5	15	22.5	62.2	22.5	7.5			

Note: ø20: LB cannot be selected for 5 mm stroke.

- Rod side flange (FA) without switch  
SSD2-X-12 to 25 -FA

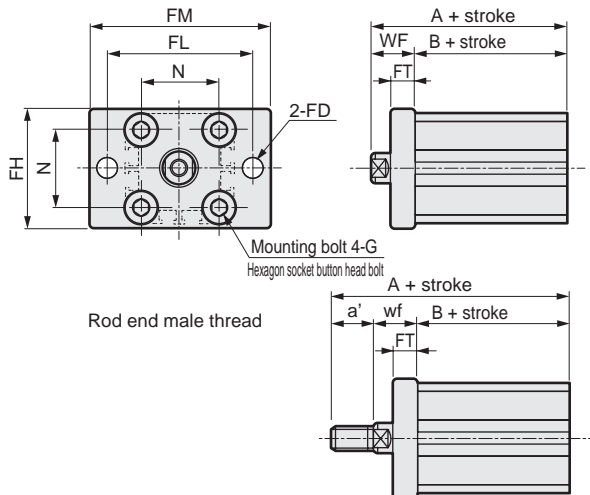

Rod end male thread




Code	Common dimensions						
Bore size (mm)	FD	FH	FL	FM	FT	N	G
ø12	4.5	25	45	55	5.5	15.5	M4x12
ø16	4.5	30	45	55	5.5	20	M4x12
ø20	6.6	39	48	60	8	25.5	M6x16
ø25	6.6	42	52	64	8	28	M6x16


  

Code	Female thread				Male thread		
Bore size (mm)	WF	A	B	a'	wf	A	B
ø12	13.5	30.5	17	10.5	13.5	41	17
ø16	13.5	30.5	17	12	13.5	42.5	17
ø20	14.5	34	19.5	14	14.5	48	19.5
ø25	15	37.5	22.5	17.5	15	55	22.5

- Clevis bracket (CB) without switch  
SSD2-X-12 to 25 -CB

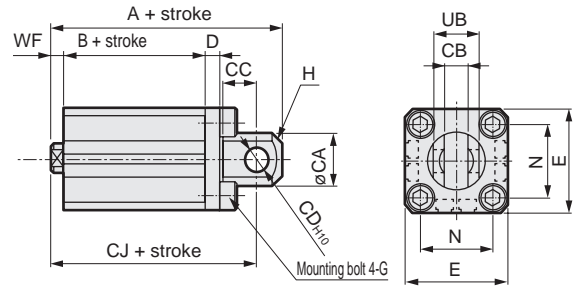

Rod end male thread




Code	Common dimensions									
Bore size (mm)	CA	CB	CC	CD	D	E	G	H	N	UB
ø12	12	5.2 <sup>+0.2</sup> <sub>0</sub>	7	5	4	25	M4x12	C1.5	15.5	10 <sup>-0.1</sup> <sub>-0.3</sub>
ø16	15	6.6 <sup>+0.3</sup> <sub>0</sub>	8	5	5	29	M4x12	C2	20	12 <sup>-0.1</sup> <sub>-0.4</sub>
ø20	20	8.2 <sup>+0.2</sup> <sub>0</sub>	12	8	5	36	M6x16	C4	25.5	16 <sup>-0.1</sup> <sub>-0.3</sub>
ø25	24	10.2 <sup>+0.2</sup> <sub>0</sub>	14	10	5	40	M6x16	C5	28	20 <sup>-0.1</sup> <sub>-0.3</sub>


  

Code	Female thread					Male thread				
Bore size (mm)	WF	No switch			a'	wf	No switch			
		A	B	CJ			A	B	CJ	
ø12	3.5	40.5	17	34.5	10.5	3.5	51	17	34.5	
ø16	3.5	41.5	17	35.5	12	3.5	53.5	17	35.5	
ø20	4.5	51	19.5	42	14	4.5	65	19.5	42	
ø25	5	57.5	22.5	47.5	17.5	5	75	22.5	47.5	

- Head side flange (FB) without switch  
SSD2-X-12 to 25 -FB

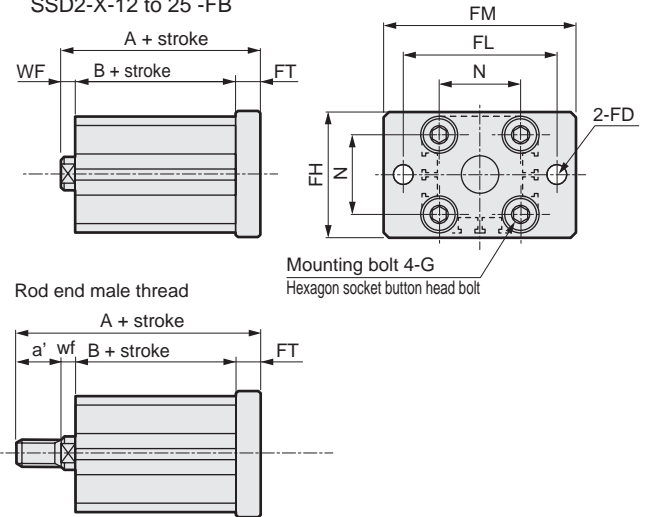

Rod end male thread



Code	Common dimensions						
Bore size (mm)	FD	FH	FL	FM	FT	N	G
ø12	4.5	25	45	55	5.5	15.5	M4x12
ø16	4.5	30	45	55	5.5	20	M4x12
ø20	6.6	39	48	60	8	25.5	M6x16
ø25	6.6	42	52	64	8	28	M6x16

Code	Female thread				Male thread		
Bore size (mm)	WF	No switch		a'	wf	No switch	
		A	B			A	B
ø12	3.5	26	17	10.5	3.5	36.5	17
ø16	3.5	26	17	12	3.5	38	17
ø20	4.5	32	19.5	14	4.5	46	19.5
ø25	5	35.5	22.5	17.5	5	53	22.5



SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending

# SSD2-X Series


## Dimensions





### ● SSD2-XL-32 to 50 (with switch)

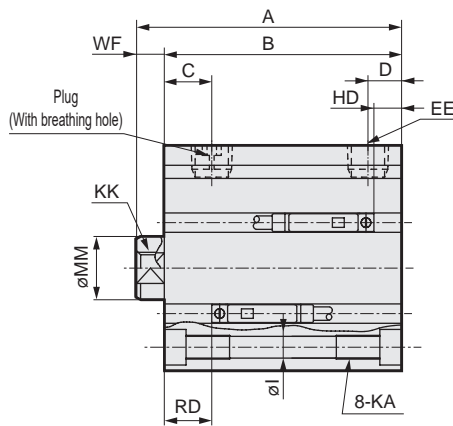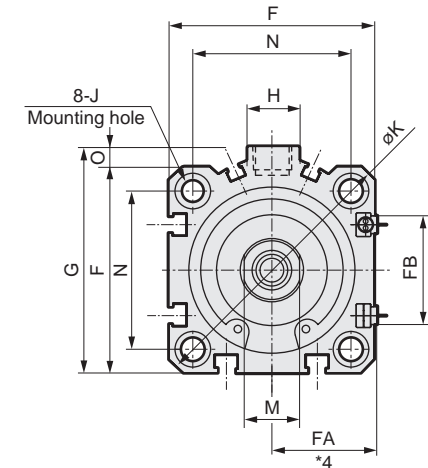

### ● Rod end male thread



### ● SSD2-X-32 to 50 (without switch)

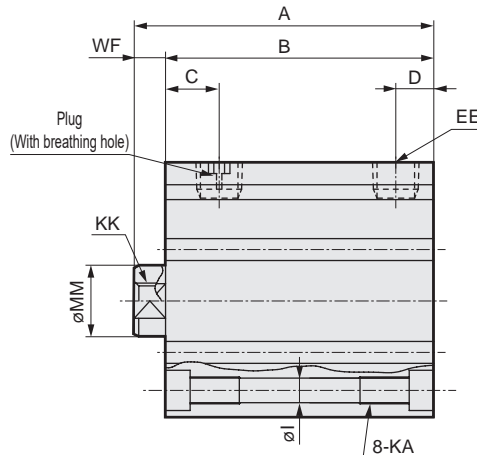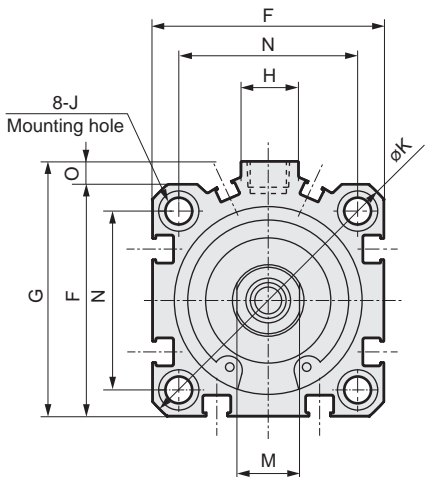

Code		No switch		Common dimensions with switch																					
Bore size (mm)		A	B	A	B	C <sup>*7</sup>	D <sup>*7</sup>	EE <sup>*6</sup>	F	FA <sup>*4</sup>	FB	G	H	I	J	K	KA	KK	M	MM	N	O	WF		
SRL3	ø32	Stroke	5	35	28	45	38	8	8	Rc1/8	45	23(26.5)	20.5	49.5	12.5	5.5	9 spot face depth 5.5	60	M6 depth 11	M8 depth 13	14	16	34	4.5	7
		Stroke	10	40	33	50	43	(10)	(5.5)																
SRG3	ø40	Stroke	5	41.5	34.5	51.5	44.5	12	8.5	Rc1/8	52	26.5(30)	27.5	57	15	5.5	9 spot face depth 5.5	69	M6 depth 11	M8 depth 13	14	16	40	5	7
		Stroke	10	46.5	39.5	56.5	49.5	(11.5)	(8)																
SRM3	ø50	Stroke	10	48.5	40.5	58.5	50.5	10.5	10.5	Rc1/4	64	32.5(36)	28.5	71	18	6.9	11 spot face depth 6.5	86	M8 depth 13	M10 depth 15	17	20	50	7	8
		Stroke	20	58.5	50.5	68.5	60.5																		
SRT3	Switch dimensions	Reed T0H/T0V, T5H/T5V					Proximity T2H/T2V, T3H/T3V					Proximity T2WH/T2WV, T3WH/T3WV													
MRL2	Bore size (mm)	HD <sup>*2</sup>		RD <sup>*2</sup>		HD <sup>*2</sup>		RD <sup>*2</sup>		HD		RD		HD		RD									
	ø32	4		9.5		4		9.5		6		11.5													
	ø40	7		12		7		12		8.5		13.5													
MRG2	ø50	7.5		12.5		7.5		12.5		9		14													

\*1 : To calculate A+ stroke or B+ stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value. (Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

\*2 : HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.

\*3 : Refer to page 1044 for HD, RD and protruding dimensions of the 2-color LED, off-delay, AC magnetic field proof, T1\* and T8\* switches.

\*4 : Dimensions in ( ) of FA are for the L-shaped lead wire.

\*5 : For dimensions of individual accessories, refer to pages 1046 to 1049.

\*6 : The ø32 bore size with a 5 mm stroke and without a switch has a port size of M5.\*7 : Dimensions in ( ) of codes C and D are when the value is for a 5 mm stroke without switch.


### ● Rod end male thread

Code	a'	c'	H	kk'	M	MM	T	wf
Bore size (mm)								
ø32	23.5	20.5	22	M14x1.5	14	16	8	5
ø40	23.5	20.5	22	M14x1.5	14	16	8	5
ø50	28.5	26	27	M18x1.5	17	20	11	5

## Dimensions with mounting bracket



- Axial foot (LB)  
SSD2-X(L)-32 to 50 -LB

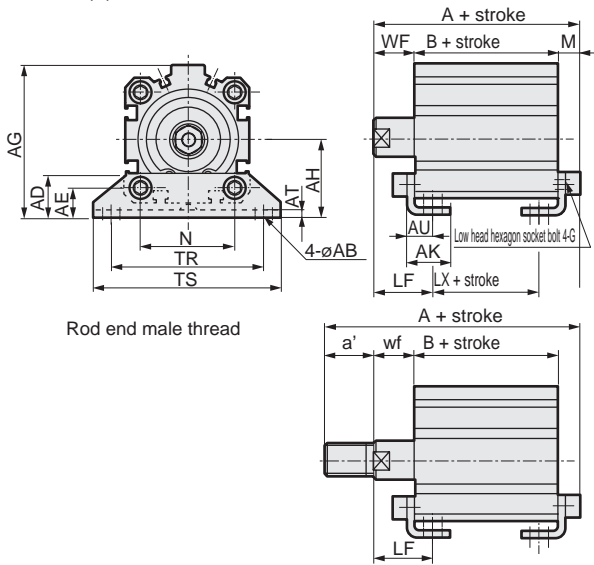

Code	Common dimensions							Female thread				
Bore size (mm)	AB	AD	AE	AG	AH	AK	AT	AU	G	N	TR	
ø32	7	18.5	13	57	30	17	3.2	11.2	M6x16	34	57	
ø40	7	18	13	64	33	18.2	3.2	11.2	M6x16	40	64	
ø50	9	22	14	78	39	22.7	3.2	14.7	M8x20	50	79	


Code	Common dimensions				No switch			With switch		
Bore size (mm)	TS	M	WF	LF	A	B	LX	A	B	LX
ø32	71	7.2	17	25	47.2(57.2)	23(33)	7(17)	57.2	33	17
ø40	78	7.2	17	25	53.7(63.7)	29.5(39.5)	13.5(23.5)	63.7	39.5	23.5
ø50	95	8.2	18	29.5	56.7(66.7)	30.5(40.5)	7.5(17.5)	66.7	40.5	17.5

Code	Male thread			No switch			With switch		
Bore size (mm)	a'	wf	LF	A	B	LX	A	B	LX
ø32	23.5	15	23	68.7(78.7)	23(33)	7(17)	78.7	33	17
ø40	23.5	15	23	75.2(85.2)	29.5(39.5)	13.5(23.5)	85.2	39.5	23.5
ø50	28.5	15	26.5	82.2(92.2)	30.5(40.5)	7.5(17.5)	92.2	40.5	17.5

\* Dimensions in ( ) are for strokes of more than 50 mm.

- Rod side flange (FA)  
SSD2-X(L)-32 to 50 -FA

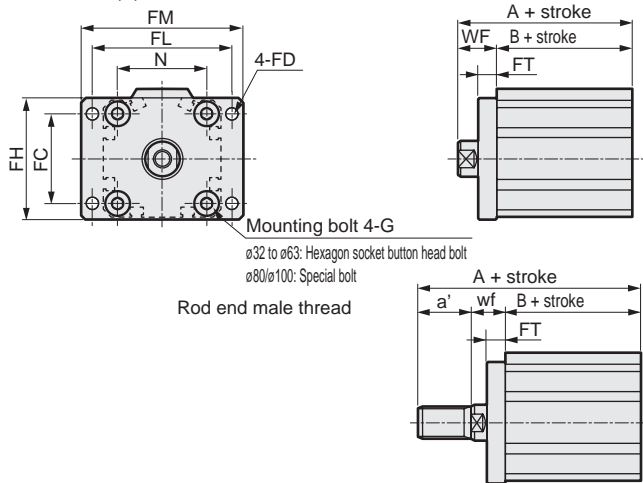

Code	Common dimensions							
Bore size (mm)	FC	FD	FH	FL	FM	FT	N	G
ø32	34	5.5	48	56	65	8	34	M6x16
ø40	40	5.5	54	62	72	8	40	M6x16
ø50	50	6.6	67	76	89	9	50	M8x20


Code	Female thread			
Bore size (mm)	WF	No switch		With switch
		A	B	A B
ø32	17	40(50)	23(33)	50 33
ø40	17	46.5(56.5)	29.5(39.5)	56.5 39.5
ø50	18	48.5(58.5)	30.5(40.5)	58.5 40.5

Code	Male thread				
Bore size (mm)	a'	wf	No switch		With switch
			A	B	A B
ø32	23.5	15	61.5(71.5)	23(33)	71.5 33
ø40	23.5	15	68(78)	29.5(39.5)	78 39.5
ø50	28.5	15	74(84)	30.5(40.5)	84 40.5

\* Dimensions in ( ) are for strokes of more than 50 mm.

- Clevis bracket (CB)  
SSD2-X(L)-32 to 50 -CB

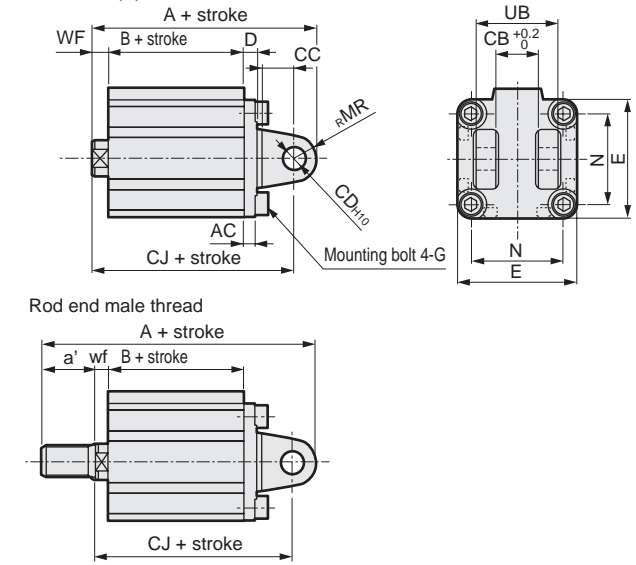

Code	Common dimensions									
Bore size (mm)	AC	CB	CC	CD	D	E	G	MR	N	UB
ø32	4.5	18.2	14	10	5	45	M6x16	10	34	36
ø40	5	18.2	14	10	6	52	M6x16	10	40	36
ø50	6	22.2	20	14	7	64	M8x20	14	50	44


  

Code	Female thread			
Bore size (mm)	WF	No switch		With switch
		A	B	CJ
ø32	7	60	23	50
ø40	7	68.5	29.5	58.5
ø50	8	80.5	30.5	66.5

Code	Male thread				
Bore size (mm)	a'	wf	No switch		With switch
			A	B	CJ
ø32	23.5	5	81.5	23	48
ø40	23.5	5	90	29.5	56.5
ø50	28.5	5	106	30.5	63.5

- Head side flange (FB)  
SSD2-X(L)-32 to 50 -FB

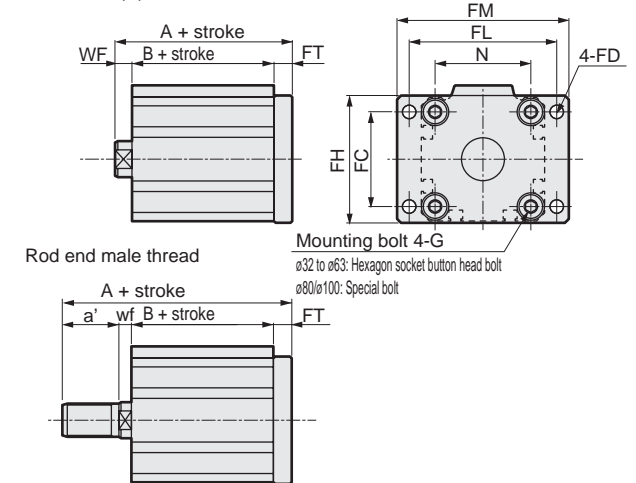

Code	Common dimensions							
Bore size (mm)	FC	FD	FH	FL	FM	FT	N	G
ø32	34	5.5	48	56	65	8	34	M6x16
ø40	40	5.5	54	62	72	8	40	M6x16
ø50	50	6.6	67	76	89	9	50	M8x20

Code	Female thread			
Bore size (mm)	WF	No switch		With switch
		A	B	A B
ø32	7	38	23	48 33
ø40	7	44.5	29.5	54.5 39.5
ø50	8	47.5	30.5	57.5 40.5

Code	Male thread				
Bore size (mm)	a'	wf	No switch		With switch
			A	B	A B
ø32	23.5	5	59.5	23	69.5 33
ø40	23.5	5	66	29.5	76 39.5
ø50	28.5	5	73	30.5	83 40.5





SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending

# SSD2-Y Series


## Dimensions



### ● SSD2-YL-12 to 25 (with switch)

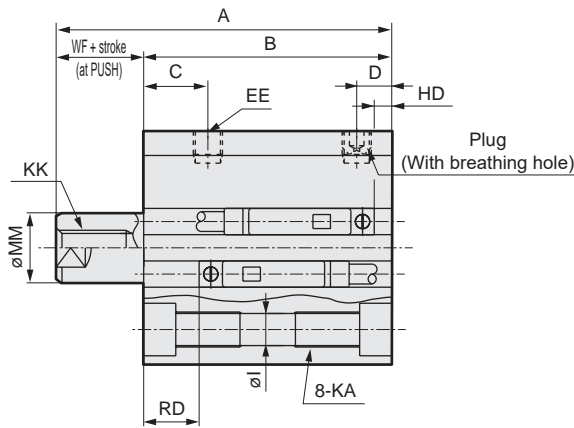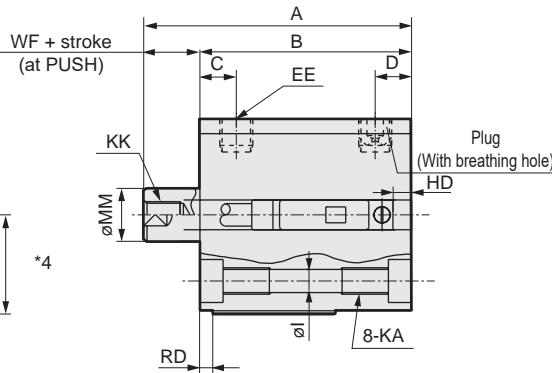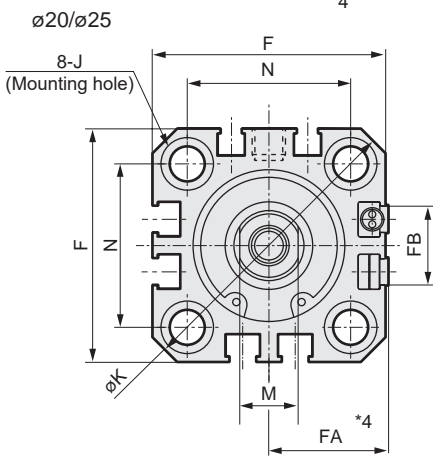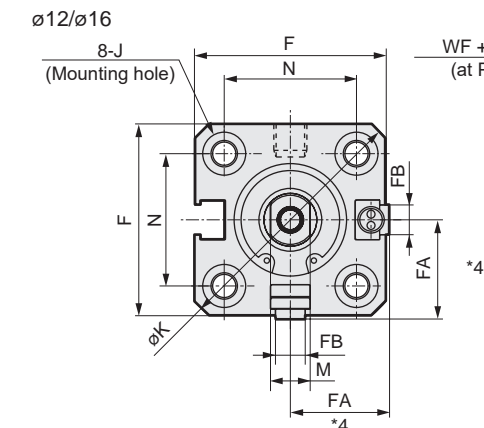

### ● Rod end male thread



Code		Common dimensions with switch																		
Bore size (mm)		A	B	C	D	EE	F	FA <sup>*4</sup>	FB	I	J	K	KA	KK	M	MM	N	WF		
STK	ø12	Stroke	5	35.5	27	5.5	5.5	M5	25	13(16.5)	4.5	3.5	6.5 spot face depth 3.5	32	M4 Depth 7	M3 Depth 6	5	6	15.5	3.5
		Stroke	10	45.5	32															
SRL3	ø16	Stroke	5	35.5	27	5.5	5.5	M5	29	15(18.5)	4.5	3.5	6.5 spot face depth 3.5	38	M4 Depth 7	M4 Depth 8	6	8	20	3.5
		Stroke	10	45.5	32															
SRG3	ø20	Stroke	5	44	34.5	8	5.5	M5	36	18.5(22)	12.5	5.5	9 spot face Depth 5.5	47	M6 Depth 11	M5 Depth 7	8	10	25.5	4.5
		Stroke	10	54	39.5															
SRM3	ø25	Stroke	5	47.5	37.5	11	6	M5	40	20.5(24)	13.5	5.5	9 spot face Depth 5.5	51	M6 Depth 11	M6 Depth 12	10	12	28	5
		Stroke	10	57.5	42.5															
Switch dimensions	Bore size (mm)	Reed T0H/T0V, T5H/T5V		Proximity T2H/T2V, T3H/T3V		Proximity T2WH/T2WV, T3WH T3WV		Proximity F2H/F2V, F3H/F3V, F2YH/F2YV, F3YH/F3YV		Proximity F2S/F3S										
		HD	RD	HD	RD	HD	RD	HD	RD	HD	RD									
MRL2	ø12	1.5	1.5	1.5	1.5	3.5	3.5													
	ø16	0	4	0	4.5	1	6													
	ø20	3	7.5	3	7.5	5	9.5	7.5	12	6.5	11									
MRG2	ø25	4	9.5	4	9.5	6	11.5	8.5	14	7.5	13									

\*1 : Only F-switch is available for the ø20 or ø25 piping port surface.

\*2 : HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.

\*3: Refer to page 1044 for HD, RD and protruding dimensions of the 2-color LED, off-delay, AC magnetic field proof, T1\* and T8\* switches.

\*4 : Dimensions in ( ) of FA are for the L-shaped lead wire.

\*5: For dimensions of individual accessories, refer to pages 1046 to 1049.


### ● Rod end male thread

Code	a'	c'	H	kk'	M	MM	T	wf
Spd Contr	ø12	10.5	9	8	M5	5	6	3.2
Ending	ø16	12	10	10	M6	6	8	3.5
	ø20	14	12	13	M8	8	10	4.5
	ø25	17.5	15	17	M10x1.25	10	12	5


### Dimensions with mounting bracket



- Axial foot (LB) with switch  
SSD2-YL-12 to 25 -LB

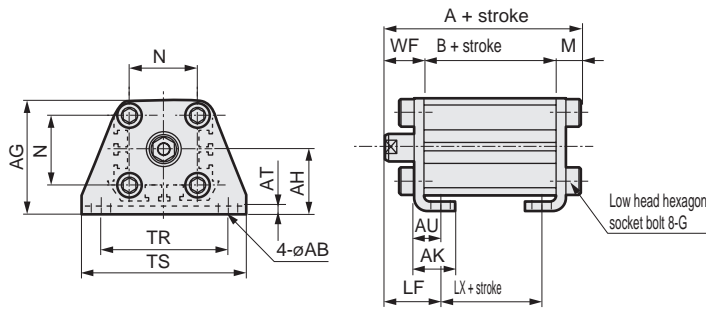

Rod end male thread




Code	Common dimensions										Female thread	
	Bore size (mm)	AB	AG	AH	AK	AT	AU	G	N	TR	TS	M
ø12	5	29.5	17	12.5	2	8	M4x10	15.5	34	44	4.8	
ø16	5	33.5	19	13	2	8	M4x10	20	38	48	4.8	
ø20	7	42	24	15	3.2	9.2	M6x16	25.5	48	62	7.2	
ø25	7	46	26	16.5	3.2	10.7	M6x16	28	52	66	7.2	


  

Code	Male thread										
	Bore size (mm)	WF	LF	A	B	LX	a'	wf	LF	A	B
ø12	13.5	19.5	40.3	22	10	10.5	13.5	19.5	50.8	22	10
ø16	13.5	19.5	40.3	22	10	12	13.5	19.5	52.3	22	10
ø20	14.5	20.5	51.2	29.5	17.5	14	14.5	20.5	65.2	29.5	17.5
ø25	15	22.5	54.7	32.5	17.5	17.5	15	22.5	72.2	32.5	17.5

- Rod side flange (FA) with switch  
SSD2-YL-12 to 25 -FA

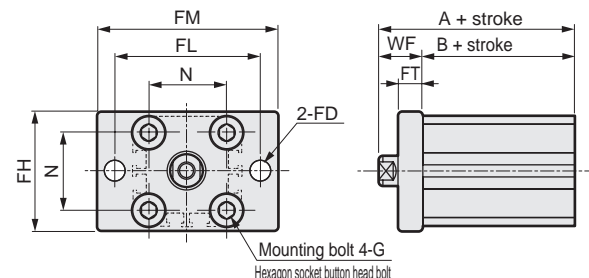

Rod end male thread




Code	Common dimensions						
	Bore size (mm)	FD	FH	FL	FM	FT	N
ø12	4.5	25	45	55	5.5	15.5	M4x12
ø16	4.5	30	45	55	5.5	20	M4x12
ø20	6.6	39	48	60	8	25.5	M6x16
ø25	6.6	42	52	64	8	28	M6x16


  

Code	Female thread				Male thread		
	Bore size (mm)	WF	A	B	a'	wf	A
ø12	13.5	35.5	22	10.5	13.5	46	22
ø16	13.5	35.5	22	12	13.5	47.5	22
ø20	14.5	44	29.5	14	14.5	58	29.5
ø25	15	47.5	32.5	17.5	15	65	32.5

- Clevis bracket (CB) with switch  
SSD2-YL-12 to 25 -CB

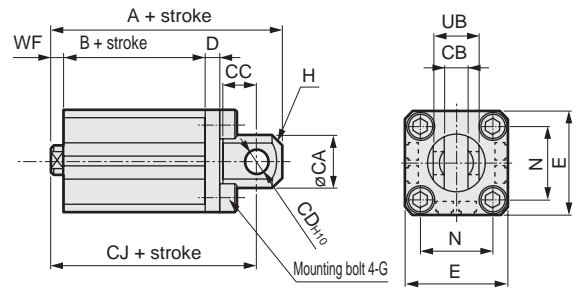

Rod end male thread




Code	Common dimensions									
	Bore size (mm)	CA	CB	CC	CD	D	E	G	H	N
ø12	12	5.2 <sup>+0.2</sup> <sub>0</sub>	7	5	4	25	M4x12	C1.5	15.5	10 <sup>+0.1</sup> <sub>-0.1</sub>
ø16	15	6.6 <sup>+0.3</sup> <sub>0</sub>	8	5	5	29	M4x12	C2	20	12 <sup>+0.1</sup> <sub>-0.1</sub>
ø20	20	8.2 <sup>+0.2</sup> <sub>0</sub>	12	8	5	36	M6x16	C4	25.5	16 <sup>+0.1</sup> <sub>-0.1</sub>
ø25	24	10.2 <sup>+0.2</sup> <sub>0</sub>	14	10	5	40	M6x16	C5	28	20 <sup>+0.1</sup> <sub>-0.1</sub>


  

Code	Female thread					Male thread				
	Bore size (mm)	WF	With switch			a'	wf	With switch		
			A	B	CJ			A	B	CJ
ø12	3.5	45.5	22	39.5	10.5	3.5	56	22	39.5	
ø16	3.5	46.5	22	40.5	12	3.5	58.5	22	40.5	
ø20	4.5	61	29.5	52	14	4.5	75	29.5	52	
ø25	5	67.5	32.5	57.5	17.5	5	85	32.5	57.5	

- Head side flange (FB) with switch  
SSD2-YL-12 to 25 -FB

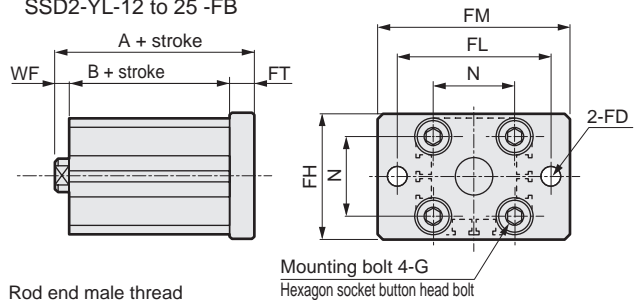

Rod end male thread



Code	Common dimensions						
	Bore size (mm)	FD	FH	FL	FM	FT	N
ø12	4.5	25	45	55	5.5	15.5	M4x12
ø16	4.5	30	45	55	5.5	20	M4x12
ø20	6.6	39	48	60	8	25.5	M6x16
ø25	6.6	42	52	64	8	28	M6x16

Code	Female thread				Male thread			
	Bore size (mm)	WF	With switch		a'	wf	With switch	
			A	B			A	B
ø12	3.5	31	22	10.5	3.5	41.5	22	
ø16	3.5	31	22	12	3.5	43	22	
ø20	4.5	42	29.5	14	4.5	46	29.5	
ø25	5	45.5	32.5	17.5	5	63	32.5	

- SCP\*3
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS2
- CKV2
- CAV2/COVP/N2
- SSD2**
- SSG
- SSD
- CAT
- MDC2
- MVC
- SMG
- MSD/MSDG
- FC\*
- STK
- SRL3
- SRG3
- SRM3
- SRT3
- MRL2
- MRG2
- SM-25
- ShkAbs
- FJ
- FK
- Spd Contr
- Ending



# SSD2-Y Series




## Dimensions





● SSD2-Y-12 to 25 (without switch)

● Rod end male thread

ø12/ø16

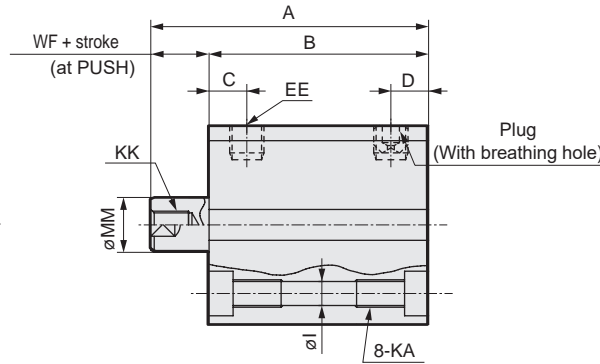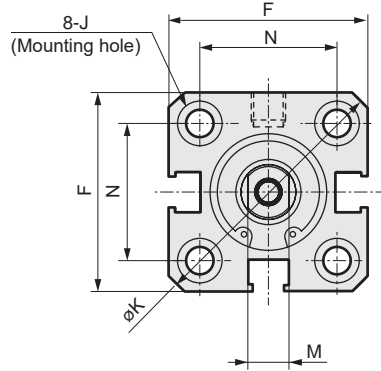

ø20/ø25

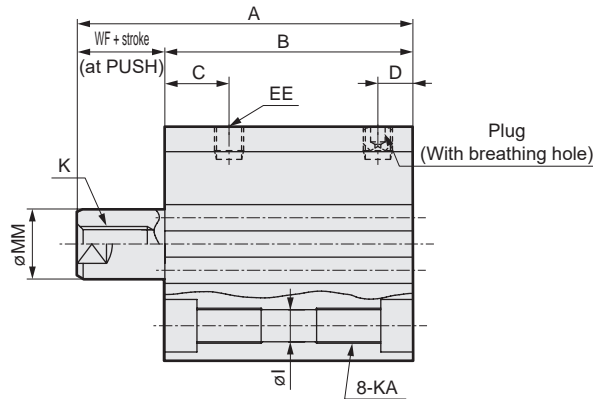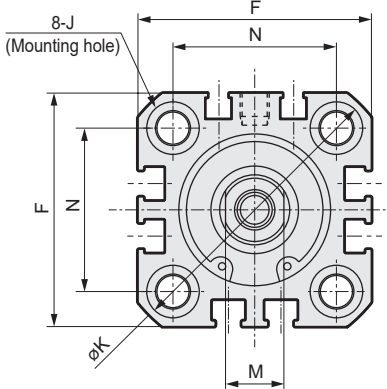

Code		No switch															
Bore size (mm)		A	B	C	D	EE	F	I	J	K	KA	KK	M	MM	N	WF	
ø12	Stroke	5	30.5	22	5.5	5.5	M5	25	3.5	6.5 spot face depth 3.5	32	M4 depth 7	M3 depth 6	5	6	15.5	3.5
		10	40.5	27													3.5
ø16	Stroke	5	30.5	22	5.5	5.5	M5	29	3.5	6.5 spot face depth 3.5	38	M4 depth 7	M4 depth 8	6	8	20	3.5
		10	40.5	27													3.5
ø20	Stroke	5	34	24.5	8	5.5	M5	36	5.5	9 spot face depth 5.5	47	M6 depth 11	M5 depth 7	8	10	25.5	4.5
		10	44	29.5													4.5
ø25	Stroke	5	37.5	27.5	11	6	M5	40	5.5	9 spot face depth 5.5	51	M6 depth 11	M6 depth 12	10	12	28	5
		10	47.5	32.5													5

● Dimensions of rod end male thread part


Code	a'	c'	H	kk'	M	MM	T	wf
ø12	10.5	9	8	M5	5	6	3.2	3.5
ø16	12	10	10	M6	6	8	3.6	3.5
ø20	14	12	13	M8	8	10	5	4.5
ø25	17.5	15	17	M10x1.25	10	12	6	5

\*1: For dimensions of individual accessories, refer to pages 1046 to 1049.


### Dimensions with mounting bracket



- Axial foot (LB) without switch  
SSD2-Y-12 to 25 -LB

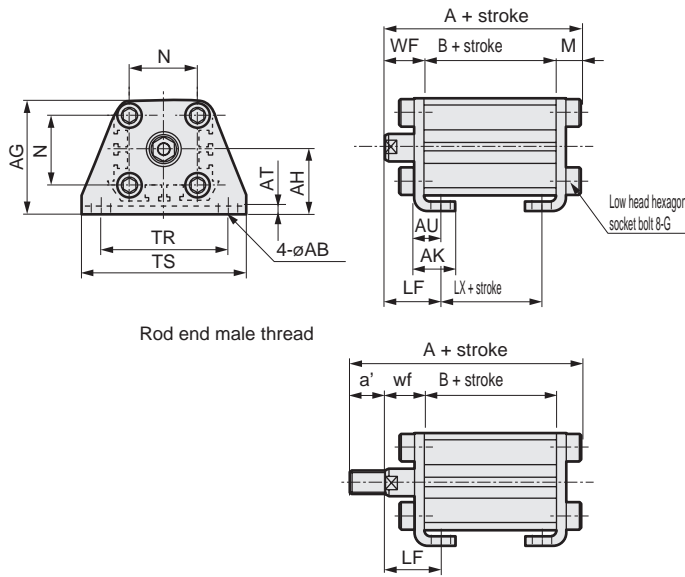

- Clevis bracket (CB) without switch  
SSD2-Y-12 to 25 -CB

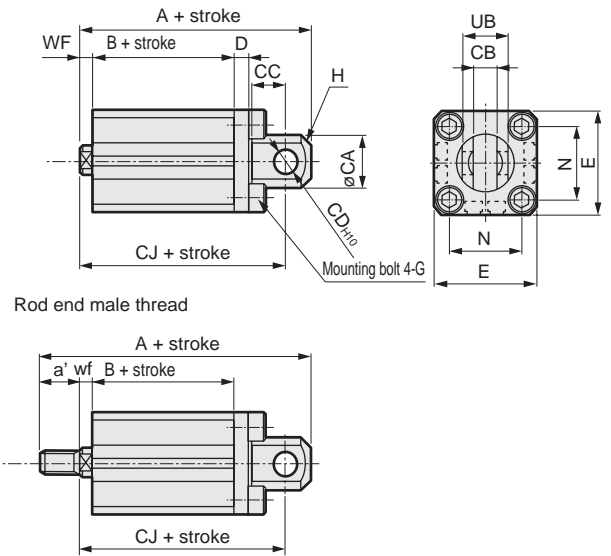


Code	Common dimensions										Female thread		
Bore size (mm)	AB	AG	AH	AK	AT	AU	G	N	TR	TS	M		
ø12	5	29.5	17	12.5	2	8	M4x10	15.5	34	44	4.8		
ø16	5	33.5	19	13	2	8	M4x10	20	38	48	4.8		
ø20	7	42	24	15	3.2	9.2	M6x16	25.5	48	62	7.2		
ø25	7	46	26	16.5	3.2	10.7	M6x16	28	52	66	7.2		

Code	Male thread										
Bore size (mm)	WF	LF	A	B	LX	a'	wf	LF	A	B	LX
ø12	13.5	19.5	35.3	17	5	10.5	13.5	19.5	45.8	17	5
ø16	13.5	19.5	35.3	17	5	12	13.5	19.5	47.3	17	5
ø20	14.5	20.5	41.2	19.5	7.5	14	14.5	20.5	55.2	19.5	7.5
ø25	15	22.5	44.7	22.5	7.5	17.5	15	22.5	62.2	22.5	7.5

Note: ø20: LB cannot be selected for 5 mm stroke.

- Rod side flange (FA) without switch  
SSD2-Y-12 to 25 -FA

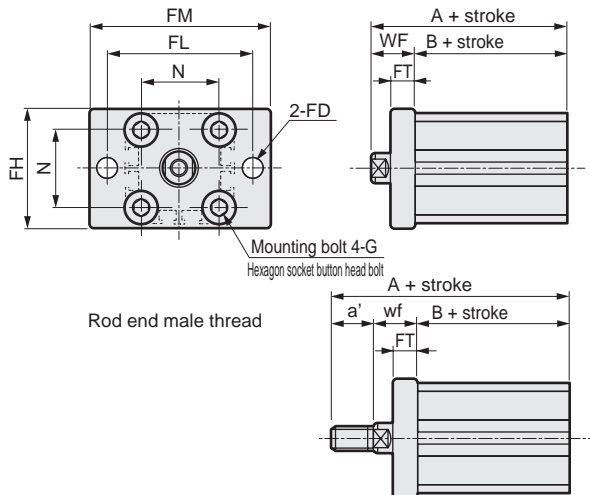


Code	Common dimensions						
Bore size (mm)	FD	FH	FL	FM	FT	N	G
ø12	4.5	25	45	55	5.5	15.5	M4x12
ø16	4.5	30	45	55	5.5	20	M4x12
ø20	6.6	39	48	60	8	25.5	M6x16
ø25	6.6	42	52	64	8	28	M6x16

Code	Female thread				Male thread		
Bore size (mm)	WF	A	B	a'	wf	A	B
ø12	13.5	30.5	17	10.5	13.5	41	17
ø16	13.5	30.5	17	12	13.5	42.5	17
ø20	14.5	34	19.5	14	14.5	48	19.5
ø25	15	37.5	22.5	17.5	15	55	22.5

- Head side flange (FB) without switch  
SSD2-Y-12 to 25 -FB

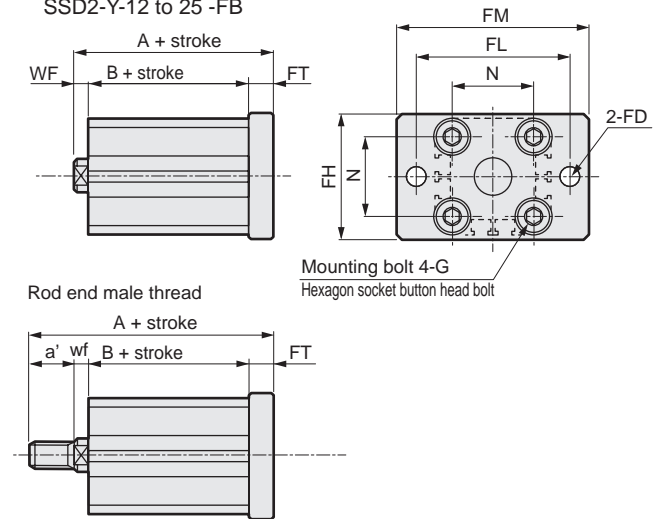

Code	Common dimensions						
Bore size (mm)	FD	FH	FL	FM	FT	N	G
ø12	4.5	25	45	55	5.5	15.5	M4x12
ø16	4.5	30	45	55	5.5	20	M4x12
ø20	6.6	39	48	60	8	25.5	M6x16
ø25	6.6	42	52	64	8	28	M6x16

Code	Female thread				Male thread		
Bore size (mm)	WF	No switch		a'	wf	No switch	
		A	B			A	B
ø12	3.5	26	17	10.5	3.5	36.5	17
ø16	3.5	26	17	12	3.5	38	17
ø20	4.5	32	19.5	14	4.5	46	19.5
ø25	5	35.5	22.5	17.5	5	53	22.5

- SCP\*3
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS2
- CKV2
- CAV2/COVP/N2
- SSD2**
- SSG
- SSD
- CAT
- MDC2
- MVC
- SMG
- MSD/MSDG
- FC\*
- STK
- SRL3
- SRG3
- SRM3
- SRT3
- MRL2
- MRG2
- SM-25
- ShkAbs
- FJ
- FK
- Spd Contr
- Ending


# SSD2-Y Series

## Dimensions




### ● SSD2-YL-32 to 50 (with switch)

### ● Rod end male thread

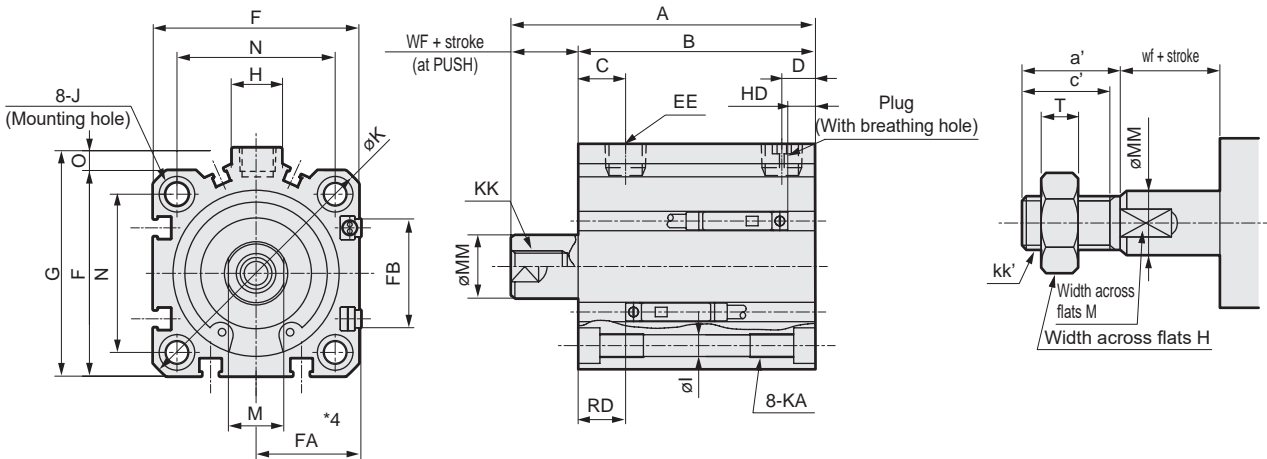

### ● SSD2-Y-32 to 50 (without switch)

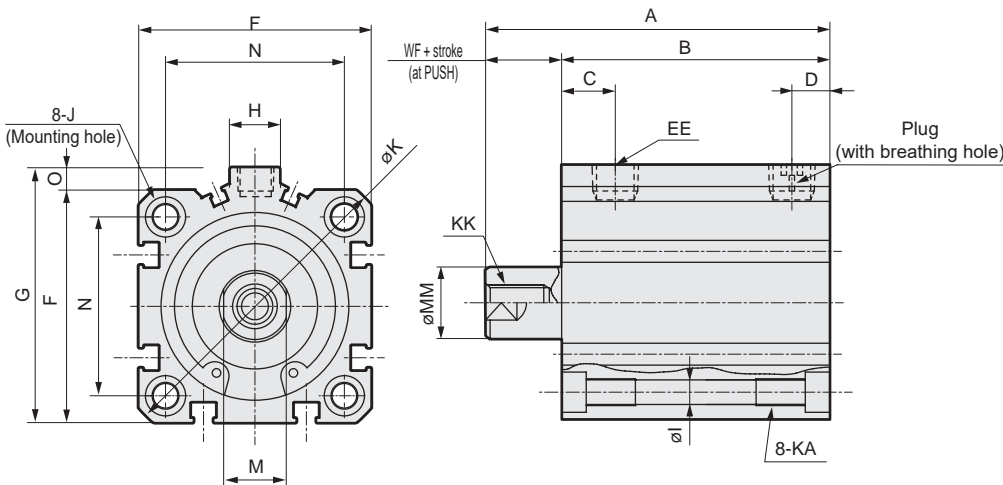

Code		No switch		Common dimensions with switch																				
Bore size (mm)		A	B	A	B	C <sup>*6</sup>	D <sup>*6</sup>	EE <sup>*5</sup>	F	FA <sup>*3</sup>	FB	G	H	I	J	K	KA	KK	M	MM	N	O	WF	
ø32	Stroke	5	40	28	50	38	8	8	Rc1/8	45	23	20.5	49.5	12.5	5.5	9 spot face depth 5.5	60	M6 Depth 11	M8 Depth 13	14	16	34	4.5	7
		10	50	33	60	43	(10)	(5.5)			(26.5)													
ø40	Stroke	5	46.5	34.5	56.5	44.5	12	8.5	Rc1/8	52	26.5	27.5	57	15	5.5	9 spot face depth 5.5	69	M6 Depth 11	M8 Depth 13	14	16	40	5	7
		10	56.5	39.5	66.5	49.5	(11.5)	(18)			(30)													
ø50	Stroke	10	58.5	40.5	68.5	50.5	10.5	10.5	Rc1/4	64	32.5	28.5	71	18	6.9	11 spot face depth 6.5	86	M8 Depth 13	M10 Depth 15	17	20	50	7	8
		20	78.5	50.5	88.5	60.5					(36)													
Switch dimensions		Reed T0H/T0V, T5H/T5V					Proximity T2H/T2V, T3H/T3V					Proximity T2WH/T2WV, T3WH/T3WV												
Bore size (mm)		HD <sup>*1</sup>		RD <sup>*1</sup>			HD <sup>*1</sup>		RD <sup>*1</sup>			HD		RD										
ø32		4		9.5			4		9.5			6		11.5										
ø40		7		12			7		12			8.5		13.5										
ø50		7.5		12.5			7.5		12.5			9		14										

\*1 : HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.

\*2: Refer to page 1044 for HD, RD and protruding dimensions of the 2-color LED, off-delay, AC magnetic field proof, T1\* and T8\* switches.

\*3 : Dimensions in ( ) of FA are for the L-shaped lead wire.

\*4: For dimensions of individual accessories, refer to pages 1046 to 1049.

\*5 : The ø32 bore size with a 5 mm stroke and without a switch has a port size of M5.\*6 : Dimensions in ( ) of codes C and D are when the value is for a 5 mm stroke without switch.


### ● Rod end male thread

Code	a'	c'	H	kk'	M	MM	T	wf
ø32	23.5	20.5	22	M14x1.5	14	16	8	5
ø40	23.5	20.5	22	M14x1.5	14	16	8	5
ø50	28.5	26	27	M18x1.5	17	20	11	5

### Dimensions with mounting bracket



- Axial foot (LB)  
SSD2-Y(L)-32 to 50 -LB

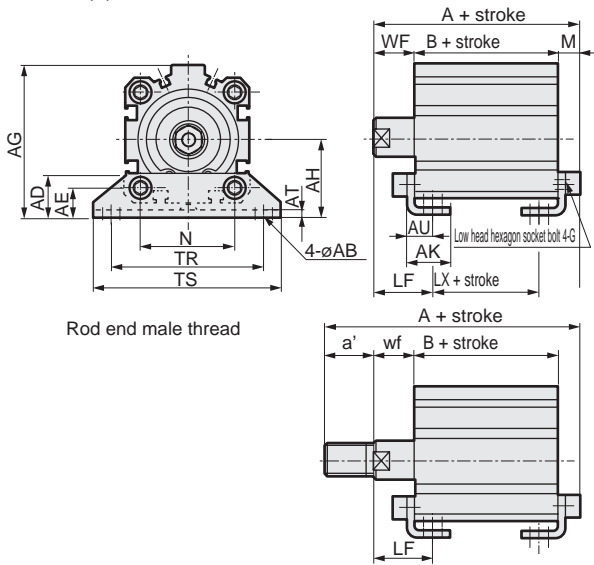

Code	Common dimensions										Female thread		
	Bore size (mm)	AB	AD	AE	AG	AH	AK	AT	AU	G	N	TR	
ø32	7	18.5	13	57	30	17	3.2	11.2	M6x16	34	57		
ø40	7	18	13	64	33	18.2	3.2	11.2	M6x16	40	64		
ø50	9	22	14	78	39	22.7	3.2	14.7	M8x20	50	79		


Code	Bore size (mm)	TS	M	WF	LF	No switch			With switch		
						A	B	LX	A	B	LX
ø32	71	7.2	17	25	47.2(57.2)	23(33)	7(17)	57.2	33	17	
ø40	78	7.2	17	25	53.7(63.7)	29.5(39.5)	13.5(23.5)	63.7	39.5	23.5	
ø50	95	8.2	18	29.5	56.7(66.7)	30.5(40.5)	7.5(17.5)	66.7	40.5	17.5	

Code	Bore size (mm)	Male thread			No switch			With switch		
		a'	wf	LF	A	B	LX	A	B	LX
ø32	23.5	15	23	68.7(78.7)	23(33)	7(17)	78.7	33	17	
ø40	23.5	15	23	75.2(85.2)	29.5(39.5)	13.5(23.5)	85.2	39.5	23.5	
ø50	28.5	15	26.5	82.2(92.2)	30.5(40.5)	7.5(17.5)	92.2	40.5	17.5	

\* Dimensions in ( ) are for strokes of more than 50 mm.

- Rod side flange (FA)  
SSD2-Y(L)-32 to 50 -FA

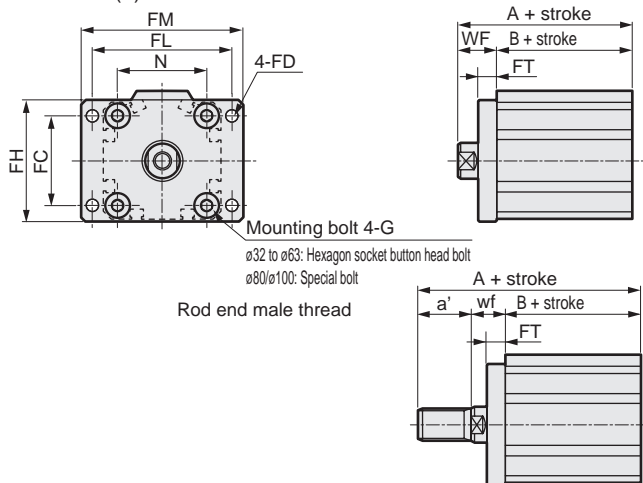

Code	Common dimensions							
	Bore size (mm)	FC	FD	FH	FL	FM	FT	N
ø32	34	5.5	48	56	65	8	34	M6x16
ø40	40	5.5	54	62	72	8	40	M6x16
ø50	50	6.6	67	76	89	9	50	M8x20


Code	Bore size (mm)	WF	No switch		With switch	
			A	B	A	B
ø32	17	17	40(50)	23(33)	50	33
ø40	17	17	46.5(56.5)	29.5(39.5)	56.5	39.5
ø50	18	18	48.5(58.5)	30.5(40.5)	58.5	40.5

Code	Bore size (mm)	Male thread			No switch			With switch		
		a'	wf	LF	A	B	LX	A	B	LX
ø32	23.5	15	23	61.5(71.5)	23(33)	7(17)	71.5	33	17	
ø40	23.5	15	23	68(78)	29.5(39.5)	13.5(23.5)	78	39.5	23.5	
ø50	28.5	15	26.5	74(84)	30.5(40.5)	7.5(17.5)	84	40.5	17.5	

\* Dimensions in ( ) are for strokes of more than 50 mm.

- Clevis bracket (CB)  
SSD2-Y(L)-32 to 50 -CB

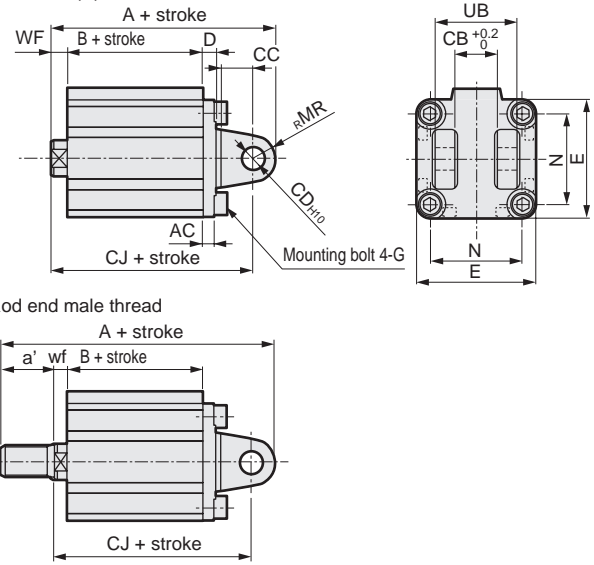

Code	Common dimensions										
	Bore size (mm)	AC	CB	CC	CD	D	E	G	MR	N	UB
ø32	4.5	18.2	14	10	5	45	M6x16	10	34	36	
ø40	5	18.2	14	10	6	52	M6x16	10	40	36	
ø50	6	22.2	20	14	7	64	M8x20	14	50	44	


  

Code	Bore size (mm)	WF	No switch			With switch		
			A	B	CJ	A	B	CJ
ø32	7	60	23	50	70	33	60	
ø40	7	68.5	29.5	58.5	78.5	39.5	68.5	
ø50	8	80.5	30.5	66.5	90.5	40.5	76.5	

Code	Bore size (mm)	Male thread			No switch			With switch		
		a'	wf	LF	A	B	CJ	A	B	CJ
ø32	23.5	5	23	81.5	23	48	91.5	33	58	
ø40	23.5	5	23	90	29.5	56.5	100	39.5	66.5	
ø50	28.5	5	26.5	106	30.5	63.5	116	40.5	73.5	

- Head side flange (FB)  
SSD2-Y(L)-32 to 50 -FB

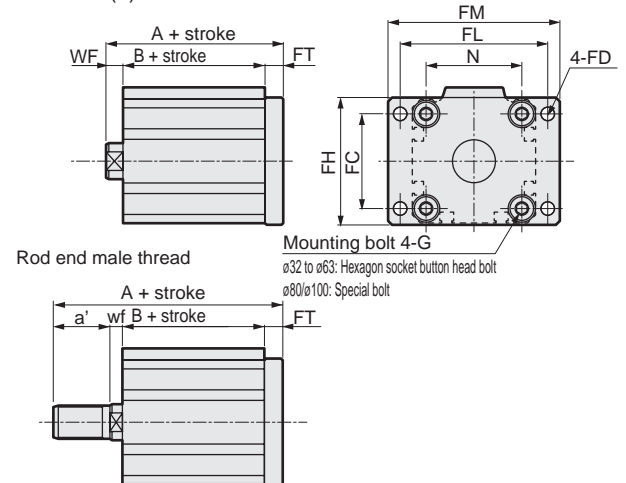

Code	Common dimensions							
	Bore size (mm)	FC	FD	FH	FL	FM	FT	N
ø32	34	5.5	48	56	65	8	34	M6x16
ø40	40	5.5	54	62	72	8	40	M6x16
ø50	50	6.6	67	76	89	9	50	M8x20


Code	Bore size (mm)	WF	No switch		With switch	
			A	B	A	B
ø32	7	7	38	23	48	33
ø40	7	7	44.5	29.5	54.5	39.5
ø50	8	8	47.5	30.5	57.5	40.5

Code	Bore size (mm)	Male thread			No switch			With switch		
		a'	wf	LF	A	B	LX	A	B	LX
ø32	23.5	5	23	59.5	23	48	69.5	33	58	
ø40	23.5	5	23	66	29.5	56.5	76	39.5	66.5	
ø50	28.5	5	26.5	73	30.5	63.5	83	40.5	73.5	

\* Dimensions in ( ) are for strokes of more than 50 mm.

- SCP\*3
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS2
- CKV2
- CAV2/COVP/N2
- SSD2**
- SSG
- SSD
- CAT
- MDC2
- MVC
- SMG
- MSD/MSDG
- FC\*
- STK
- SRL3
- SRG3
- SRM3
- SRT3
- MRL2
- MRG2
- SM-25
- ShkAbs
- FJ
- FK
- Spd Contr
- Ending



Compact cylinder double acting/heat resistant

# SSD2-T1 Series

● Bore size:  $\phi 12/\phi 16/\phi 20/\phi 25/\phi 32/\phi 40/\phi 50/\phi 63/\phi 80/\phi 100$

JIS symbol



## Specifications

Item	SSD2-T1										
Bore size mm	$\phi 12$	$\phi 16$	$\phi 20$	$\phi 25$	$\phi 32$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$	
Actuation	Double acting										
Working fluid	Compressed air										
Max. working pressure MPa	1.0 ( $\approx 150$ psi, 10 bar)										
Min. working pressure MPa	0.1 ( $\approx 15$ psi, 1 bar)						0.05 ( $\approx 7.3$ psi, 0.5 bar)				
Proof pressure MPa	1.6 ( $\approx 230$ psi, 16 bar)										
Ambient temperature $^{\circ}\text{C}$	5 ( $41^{\circ}\text{F}$ ) to 150 ( $302^{\circ}\text{F}$ )										
Port size	M5				Rc1/8 *1		Rc1/4		Rc3/8		
Stroke tolerance mm	$^{+1.0}$ <sub>0</sub>										
Working piston speed mm/s	50 to 500						50 to 300				
Cushion	None										
Lubrication	Not available										
Allowable absorbed energy J	0.004	0.01	0.016	0.021	0.025	0.092	0.1	0.12	0.27	0.56	

\*1: The  $\phi 32$  bore size with a 5 mm stroke has a port size of M5.

## Stroke


Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\phi 12$	5/10/15/20	30	1
$\phi 16$	25/30		
$\phi 20$	5/10/15/20/25	50	
$\phi 25$	30/35/40/45/50		
$\phi 32$	5/10/15/20/25/30/	100	
$\phi 40$	35/40/45/50/75/100		
$\phi 50$	10/15/20/25		
$\phi 63$	30/35/40/45/50		
$\phi 80$	75/100		
$\phi 100$			

\*: Refer to pages 763 and 765 for the min. stroke with mounting bracket LB.

## Custom stroke

● SSD2-T1 Series

Item	Standard products	
	Standard stroke body with spacer	
Model No.	Refer to How to order.	
Description	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.	
Stroke range	Bore size	Stroke range
	12/16	1 to 29
	20 to 25	1 to 49
	32 to 100	1 to 99
Example of model No.	Model No.: SSD2-T32-38 A +2 mm spacer is added to the SSD2-T32-40 standard cylinder to create 38 mm stroke. B + stroke is 63 mm.	

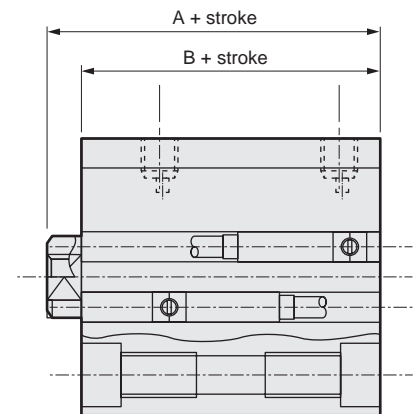


## Cylinder weight table (the weight of the switches is when there are 2 cylinder switches.)

(Unit: g)

Stroke (mm)	5	10	15	20	25	30	35	40	45	50	75	100
<b>Bore size (mm)</b>												
$\phi 12$	36	44	53	61	70	72	-	-	-	-	-	-
$\phi 16$	48	59	69	80	91	102	-	-	-	-	-	-
$\phi 20$	63	75	88	101	113	126	139	152	165	203	-	-
$\phi 25$	87	102	118	134	150	165	181	197	213	228	-	-
$\phi 32$	122	144	166	188	209	231	253	275	297	318	494	604
$\phi 40$	183	210	236	263	290	316	342	369	395	472	646	776
$\phi 50$	-	341	383	425	467	510	552	594	636	678	1025	1235
$\phi 63$	-	507	562	617	672	727	782	838	893	948	1438	1713
$\phi 80$	-	928	1015	1101	1188	1274	1361	1448	1535	1621	2401	2833
$\phi 100$	-	1433	1547	1660	1774	1888	2002	2115	2229	2343	3406	3973

### How to order

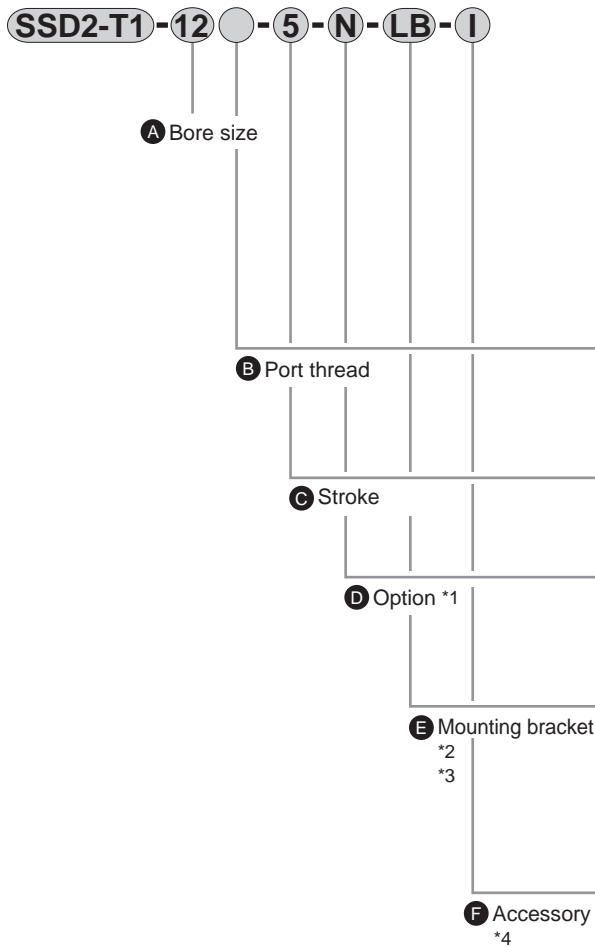

Code	Description
<b>A Bore size (mm)</b>	
12	ø12
16	ø16
20	ø20
25	ø25
32	ø32
40	ø40
50	ø50
63	ø63
80	ø80
100	ø100
<b>B Port thread</b>	
Blank	Rc thread
NN	NPT thread (ø32 and over) (made-to-order product)
GN	G thread (ø32 and over) (made-to-order product)
<b>C Stroke (mm)</b>	
Refer to the stroke table below.	
<b>D Option</b>	
Blank	Rod end female thread
N	Rod end male thread
M	Piston rod material (stainless steel)
<b>E Mounting bracket</b>	
Blank	Without mounting bracket
LB	Axial foot
CB	Clevis bracket (pin and snap ring included)
FA	Rod side flange
FB	Head side flange
<b>F Accessory (available when rod end male thread "N" is selected)</b>	
I	Rod eye
Y	Rod clevis (pin and snap ring included)

### ⚠ Precautions for model No. selection

- \*1 : Piston rod of ø12 to ø25 is stainless steel as standard. C-snap ring is stainless steel instead of steel. The rod end male thread nut is stainless steel.
- \*2 : The mounting bracket is included at shipment.
- \*3 : The projection dimension of piston rod WF when LB or FA is selected is different from that of the standard. Refer to the dimensions on pages 761, 763, 765 and 766. The number of the specified protruding dimension will be added at the end of the model No. printed on the metal plate on the body.
- \*4 : "I" and "Y" cannot be selected together.
- \*5 : Refer to pages 750 and 751 for combinations of variations/options.

### [Example of model No.]

#### SSD2-T1-12-5-N

Model: Compact cylinder, heat resistant

- A** Bore size : ø12 mm
- B** Port thread : Rc thread
- C** Stroke : 5mm
- D** Option : Rod end male thread

### [Stroke table]

Stroke (mm)	Applicable bore size									
	ø12	ø16	ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100
5	●	●	●	●	●	●				
10	●	●	●	●	●	●	●	●	●	●
15	●	●	●	●	●	●	●	●	●	●
20	●	●	●	●	●	●	●	●	●	●
25	●	●	●	●	●	●	●	●	●	●
30	●	●	●	●	●	●	●	●	●	●
35			●	●	●	●	●	●	●	●
40			●	●	●	●	●	●	●	●
45			●	●	●	●	●	●	●	●
50			●	●	●	●	●	●	●	●
75					●	●	●	●	●	●
100					●	●	●	●	●	●
Min. stroke (mm)	1									
Max. stroke (mm)	30		50		100					
Custom stroke *1	In 1 mm increments									

- \*1: The total length when using a custom stroke is the same as that when using the next longer standard stroke.
- \*2: Refer to pages 763 and 765 for the min. stroke with mounting bracket LB.

### How to order mounting bracket


Bore size (mm)	ø12	ø16	ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100
Mounting bracket										
Foot (LB)	SSD2-LB-12	SSD2-LB-16	SSD2-LB-20	SSD2-LB-25	SSD2-LB-32	SSD2-LB-40	SSD2-LB-50	SSD2-LB-63	SSD2-LB-80	SSD2-LB-100
Flange (FA/FB)	SSD2-FA-12	SSD2-FA-16	SSD2-FA-20	SSD2-FA-25	SSD2-FA-32	SSD2-FA-40	SSD2-FA-50	SSD2-FA-63	SSD2-FA-80	SSD2-FA-100
Clevis bracket (CB)	SSD2-CB-12	SSD2-CB-16	SSD2-CB-20	SSD2-CB-25	SSD2-CB-32	SSD2-CB-40	SSD2-CB-50	SSD2-CB-63	SSD2-CB-80	SSD2-CB-100

\*1: The foot mounting bracket is provided as 2 pcs./set.


# SSD2-T1 Series

## Internal structure and parts list


● SSD2-T1-12 to 25

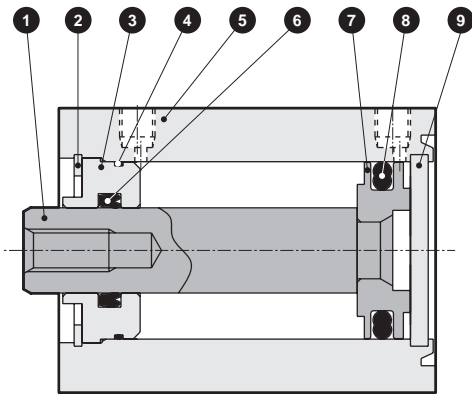

● SSD2-T1-32 to 50

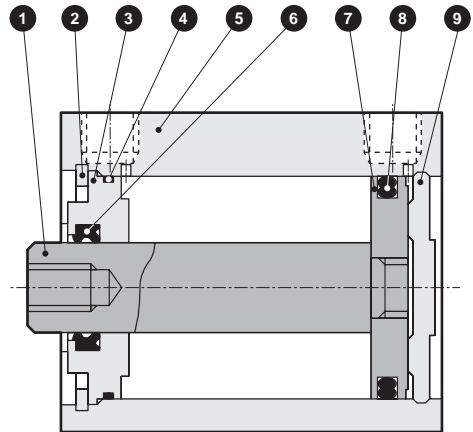

● SSD2-T1-63 to 100

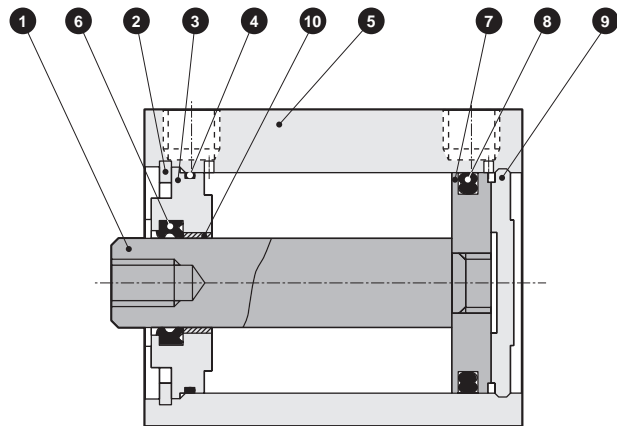

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	ø12 to ø25: Stainless steel ø32 to ø100: Steel	ø16 to ø100: Industrial chrome plating	7	Piston	Aluminum alloy	Chromate
2	C-snap ring	Steel	Zinc phosphate	8	Piston packing	Fluoro rubber	
3	Rod metal	ø12 to ø50: Special aluminum ø63 to ø100: Aluminum alloy	ø12 to ø50: Alumite ø63 to ø100: Chromate	9	Cover	ø12 to ø25: Stainless steel ø32 to ø100: Aluminum alloy	ø32 to ø100: Alumite
4	Rod metal gasket	Fluoro rubber		10	Bush	Oiles drymet	
5	Body	Aluminum alloy	Hard alumite				
6	Rod packing	Fluoro rubber					

## Repair parts list

Bore size (mm)	Kit No.	Repair parts No.
ø12	SSD2-T-12K	4 6 8
ø16	SSD2-T-16K	
ø20	SSD2-T-20K	
ø25	SSD2-T-25K	
ø32	SSD2-T-32K	
ø40	SSD2-T-40K	
ø50	SSD2-T-50K	
ø63	SSD2-T-63K	
ø80	SSD2-T-80K	
ø100	SSD2-T-100K	

## Dimensions

Same as double acting/single rod. Refer to pages 760 to 766.

---

# MEMO

---

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

**SSG**

**SSD**

**CAT**

**MDC2**

**MVC**

**SMG**

MSD/  
MSDG

**FC\***

**STK**

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs


FJ

FK

Spd  
Contr

Ending






Compact cylinder double acting/with heat resistant cylinder switch

# SSD2-T1L Series

- Bore size:  $\varnothing 16/\varnothing 20/\varnothing 25/\varnothing 32/\varnothing 40$   
 $\varnothing 50/\varnothing 63$

JIS symbol



## Specifications

1 MPa  $\approx$  145.0 psi, 1 MPa = 10 bar

Item	SSD2-T1L							
Bore size mm	$\varnothing 16$	$\varnothing 20$	$\varnothing 25$	$\varnothing 32$	$\varnothing 40$	$\varnothing 50$	$\varnothing 63$	
Actuation	Double acting							
Working fluid	Compressed air							
Max. working pressure MPa	1.0 ( $\approx$ 150 psi, 10 bar)							
Min. working pressure MPa	0.1 ( $\approx$ 15 psi, 1 bar)						0.05	
Proof pressure MPa	1.6 ( $\approx$ 230 psi, 16 bar)							
Ambient temperature $^{\circ}\text{C}$	5 (41 $^{\circ}\text{F}$ ) to 150 (302 $^{\circ}\text{F}$ ) (*1)							
Port size	M5			Rc1/8		Rc1/4		
Stroke tolerance mm	$^{+1.0}$ $_0$							
Working piston speed mm/s	50 to 500						50 to 300	
Cushion	None							
Lubrication (*2)	-							

\*1: At an ambient temperature of 150 $^{\circ}\text{C}$ , external leakage will occur gradually after approximately 500,000 uses.

\*2: Periodically apply additional heat-resistant grease.

## Stroke


Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)	
			With 1 switch	With 2 switches
$\varnothing 16$	10/15/20/25/30	30	10	20
$\varnothing 20$	15/20/25/30/	50	15	25
$\varnothing 25$	35/40/45/50			
$\varnothing 32$	15/20/25/30/35/ 40/45/50/70/100	100	15	20
$\varnothing 40$				
$\varnothing 50$				
$\varnothing 63$				

Note: The custom stroke is available in 1 mm increments. (Less than 7 mm is not available.) However, the total length is the same as that of the next longer standard stroke.

## Custom stroke

### ● SSD2-T1L Series

Item	Standard products	
	Standard stroke body with spacer	
Model No.	Refer to How to order.	
Description	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.	
Stroke range	Bore size	Stroke range
	12/16	1 to 29
	20 to 25	1 to 49
	32 to 63	1 to 99
Example of model No.	Model No.: SSD2-T1L-32-38 A +2 mm spacer is added to the SSD2-T1L-32-40 standard cylinder to create 38 mm stroke. B + stroke is 73 mm.	

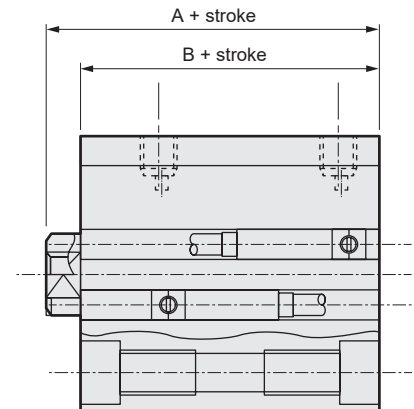

### Cylinder switch specifications

Item	2-wire reed	
	E0H, E0V	
Applications	For relay, programmable controller	
Load voltage	12/24 VDC	110 VAC
Load current	5 to 50 mA	7 to 20 mA
Internal voltage drop	3.0 V or less	
Leakage current	0mA	
Indicator	LED (Lit when ON) (Note)	
Lead wire	Heat-resistant fluorine-insulated sheathed wire 1 m (0.5SQ (100/0.08) annealed copper wire x 2C)	
Insulation resistance	100 MΩ and over with 500 VDC megger	
Withstand voltage	No failure after 1 minute of 1,000 VAC application.	
Max. shock resistance	294 m/s <sup>2</sup>	
Ambient temperature	-10 to 150°C	
Degree of protection	IEC standards IP67, JIS C0920 (water-tight)	
Weight	g 40	

Note: Indicator uses LED. Visibility will gradually decrease with continuous use under high temperatures.  
As the LED lamp circuit is separated from the switch output circuit, the switch output works normally even if the LED lamp turns OFF.

### Cylinder weight table (the weight of the switches is when there are 2 cylinder switches.) (Unit: g)

Stroke (mm)	5		10		15		20		25		30		35		40		45		50		75		100	
	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch
ø16	71	127	82	127	92	137	103	148	114	159	125	170	-	-	-	-	-	-	-	-	-	-	-	-
ø20	63	118	75	150	88	163	101	176	113	188	126	201	139	214	152	227	165	240	203	278	-	-	-	-
ø25	87	178	102	193	118	209	134	225	150	241	165	256	181	272	197	288	213	304	228	319	-	-	-	-
ø32	122	236	144	258	166	280	188	302	209	323	231	345	253	367	275	389	297	411	318	432	494	542	604	652
ø40	183	326	210	353	236	379	263	406	290	433	316	459	342	485	369	512	395	538	472	565	646	695	776	825
ø50	-	-	341	535	383	577	425	619	467	661	510	704	552	746	594	788	636	830	678	872	1025	1082	1235	1292
ø63	-	-	507	786	562	841	617	896	672	951	727	1006	782	1061	838	1117	893	1172	948	1227	1438	1502	1713	1777

### Theoretical thrust table (Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa											
		0.05	0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø16	Push	-	20.1	30.2	40.2	60.3	80.4	1.01x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.61x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.01x10 <sup>2</sup>
	Pull	-	15.1	22.6	30.2	45.2	60.3	75.4	90.5	1.06x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.36x10 <sup>2</sup>	1.51x10 <sup>2</sup>
ø20	Push	-	31.4	47.1	62.8	94.2	1.26x10 <sup>2</sup>	1.57x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.20x10 <sup>2</sup>	2.51x10 <sup>2</sup>	2.83x10 <sup>2</sup>	3.14x10 <sup>2</sup>
	Pull	-	23.6	35.3	47.1	70.7	94.2	1.18x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.65x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.12x10 <sup>2</sup>	2.36x10 <sup>2</sup>
ø25	Push	-	49.1	73.6	98.2	1.47x10 <sup>2</sup>	1.96x10 <sup>2</sup>	2.45x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.44x10 <sup>2</sup>	3.93x10 <sup>2</sup>	4.42x10 <sup>2</sup>	4.91x10 <sup>2</sup>
	Pull	-	37.8	56.7	75.6	1.13x10 <sup>2</sup>	1.51x10 <sup>2</sup>	1.89x10 <sup>2</sup>	2.27x10 <sup>2</sup>	2.64x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.40x10 <sup>2</sup>	3.78x10 <sup>2</sup>
ø32	Push	-	80.4	1.21x10 <sup>2</sup>	1.61x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.22x10 <sup>2</sup>	4.02x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.63x10 <sup>2</sup>	6.43x10 <sup>2</sup>	7.24x10 <sup>2</sup>	8.04x10 <sup>2</sup>
	Pull	-	60.3	90.5	1.21x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.62x10 <sup>2</sup>	4.22x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.43x10 <sup>2</sup>	6.03x10 <sup>2</sup>
ø40	Push	-	1.26x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.51x10 <sup>2</sup>	3.77x10 <sup>2</sup>	5.03x10 <sup>2</sup>	6.28x10 <sup>2</sup>	7.54x10 <sup>2</sup>	8.80x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.13x10 <sup>3</sup>	1.26x10 <sup>3</sup>
	Pull	-	1.06x10 <sup>2</sup>	1.58x10 <sup>2</sup>	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>
ø50	Push	-	1.96x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.93x10 <sup>2</sup>	5.89x10 <sup>2</sup>	7.85x10 <sup>2</sup>	9.82x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.37x10 <sup>3</sup>	1.57x10 <sup>3</sup>	1.77x10 <sup>3</sup>	1.96x10 <sup>3</sup>
	Pull	-	1.65x10 <sup>2</sup>	2.47x10 <sup>2</sup>	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>
ø63	Push	1.56x10 <sup>2</sup>	3.12x10 <sup>2</sup>	4.68x10 <sup>2</sup>	6.23x10 <sup>2</sup>	9.35x10 <sup>2</sup>	1.25x10 <sup>3</sup>	1.56x10 <sup>3</sup>	1.87x10 <sup>3</sup>	2.18x10 <sup>3</sup>	2.49x10 <sup>3</sup>	2.81x10 <sup>3</sup>	3.12x10 <sup>3</sup>
	Pull	1.40x10 <sup>2</sup>	2.80x10 <sup>2</sup>	4.20x10 <sup>2</sup>	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>	2.24x10 <sup>3</sup>	2.52x10 <sup>3</sup>	2.80x10 <sup>3</sup>

# SSD2-T1L Series

## How to order

**SSD2-T1L-16-10-ET0H-D-N-LB-I**

Double acting/heat resistant with compact heat resistant switch

**A** Bore size

**B** Port thread

**C** Stroke

**D** Switch model No.

**E** Switch quantity

**F** Option \*1

**G** Mounting bracket

\*2

\*3

**H** Accessory

\*4

Code	Description			
<b>A Bore size (mm)</b>				
16	ø16			
20	ø20			
25	ø25			
32	ø32			
40	ø40			
50	ø50			
63	ø63			
<b>B Port thread</b>				
Blank	Rc thread			
NN	NPT thread (ø32 and over) (made-to-order product)			
GN	G thread (ø32 and over) (made-to-order product)			
<b>C Stroke (mm)</b>				
Refer to the stroke table on the following page.				
<b>D Switch model No.</b>				
ET0H	Reed	AC/DC	2-wire	Axial lead wire
ET0V				L-shaped lead wire
<b>E Switch quantity</b>				
R	1 on rod side			
H	1 on head side			
D	2			
<b>F Option</b>				
Blank	Rod end female thread			
N	Rod end male thread			
M	Piston rod material (stainless steel)			
<b>G Mounting bracket</b>				
Blank	Without mounting bracket			
LB	Axial foot			
CB	Clevis bracket (pin and snap ring included)			
FA	Rod side flange			
FB	Head side flange			
<b>H Accessory (available when rod end male thread "N" is selected)</b>				
I	Rod eye			
Y	Rod clevis (pin and snap ring included)			

### ⚠ Precautions for model No. selection

\*1 : Piston rod of ø12 to ø25 is stainless steel as standard. C-snap ring is stainless steel instead of steel. The rod end male thread nut is stainless steel.

\*2 : The mounting bracket is included at shipment.

\*3 : The projection dimension of piston rod WF when LB or FA is selected is different from that of the standard. Refer to the dimensions on pages 830 and 831. The number of the specified protruding dimension will be added at the end of the model No. printed on the metal plate on the body.

\*4 : "I" and "Y" cannot be selected together.

\*5 : Refer to pages 750 and 751 for combinations of variations/options.

\*6 : Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.

### [Example of model No.]

**SSD2-T1L-16-10-ET0H-D-N**

Model: Compact cylinder with heat resistant cylinder switch

- A** Bore size : ø16 mm
- B** Port thread : Rc thread
- C** Stroke : 10mm
- D** Switch model No. : Reed switch ET0H, lead wire length 1 m
- E** Switch quantity : 2 pcs. included
- F** Option : Rod end male thread

### [Stroke table]

Stroke (mm)	Applicable bore size						
	ø16	ø20	ø25	ø32	ø40	ø50	ø63
Standard stroke	10	●					
	15	●	●	●	●	●	●
	20	●	●	●	●	●	●
	25	●	●	●	●	●	●
	30	●	●	●	●	●	●
	35		●	●	●	●	●
	40		●	●	●	●	●
	45		●	●	●	●	●
	50		●	●	●	●	●
	70				●	●	●
	100				●	●	●
Min. stroke (mm)	10(20)	15(25)	15(20)	15(20)			
Max. stroke (mm)	30	50		100			
Custom stroke *2	In 1 mm increments						

\*1: The value in ( ) is for types with two switches.

Refer to page 824 for the min. stroke with switch.

\*2: The total length is the same as that of the next longer standard stroke.

### How to order switch

SW - ETOH

Switch model No.  
(Item ② on page 826)

### How to order mounting bracket

Bore size (mm)	ø16	ø20	ø25	ø32	ø40	ø50	ø63
Mounting bracket							
Foot (LB)	SSD2-LB-16	SSD2-LB-20	SSD2-LB-25	SSD2-LB-32	SSD2-LB-40	SSD2-LB-50	SSD2-LB-63
Flange (FA/FB)	SSD2-FA-16	SSD2-FA-20	SSD2-FA-25	SSD2-FA-32	SSD2-FA-40	SSD2-FA-50	SSD2-FA-63
Clevis bracket (CB)	SSD2-CB-16	SSD2-CB-20	SSD2-CB-25	SSD2-CB-32	SSD2-CB-40	SSD2-CB-50	SSD2-CB-63

\*1: The foot mounting bracket is provided as 2 pcs./set.

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr



Ending

# SSD2-T1L Series


## Internal structure and parts list

● SSD2-T1L-16 to 25

● SSD2-T1L-32 to 50

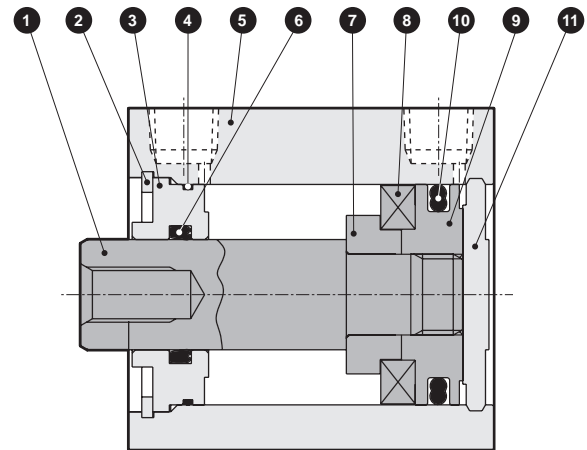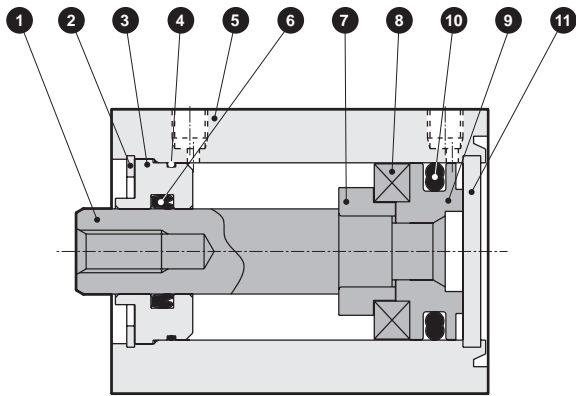

● SSD2-T1L-63

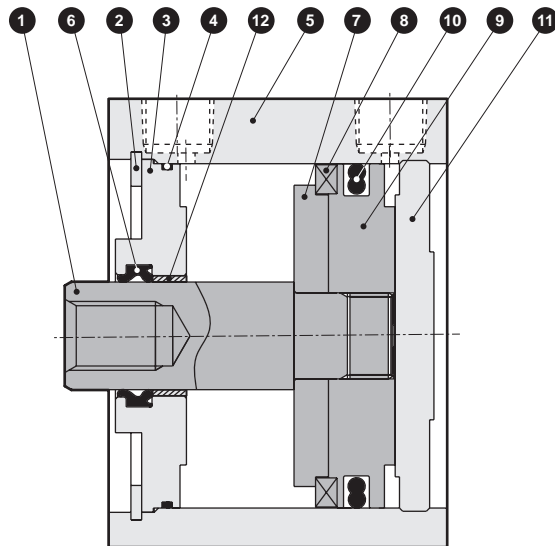

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	ø16 to ø25: Stainless steel ø32 to ø63: Steel	Industrial chrome plating	7	Spacer	Aluminum alloy	ø32: Chromate
2	C-snap ring	Steel	Zinc phosphate	8	Magnet	Special alloy	
3	Rod metal	ø16 to ø50: Special aluminum ø63: Aluminum alloy	ø16 to ø50: Alumite ø63: Chromate	9	Piston	ø16 to ø32: Aluminum alloy ø40 to ø63: Stainless steel	ø32: Chromate
4	Rod metal gasket	Fluoro rubber		10	Piston packing	Fluoro rubber	
5	Body	Aluminum alloy	Hard alumite	11	Cover	ø16 to ø25: Stainless steel ø32 to ø63: Aluminum alloy	ø32 to ø100: Alumite
6	Rod packing	Fluoro rubber		12	Bush	Oiles drymet	

Fluorine grease is used.

## Repair parts list

Bore size (mm)	Kit No.	Repair parts No.
ø16	SSD2-T-16K	
ø20	SSD2-T-20K	
ø25	SSD2-T-25K	
ø32	SSD2-T-32K	4 6 10
ø40	SSD2-T-40K	
ø50	SSD2-T-50K	
ø63	SSD2-T-63K	


# SSD2-T1L Series

Double acting/with heat resistant cylinder switch

## Dimensions

● SSD2-T1L-16 to 63

● Rod end male thread

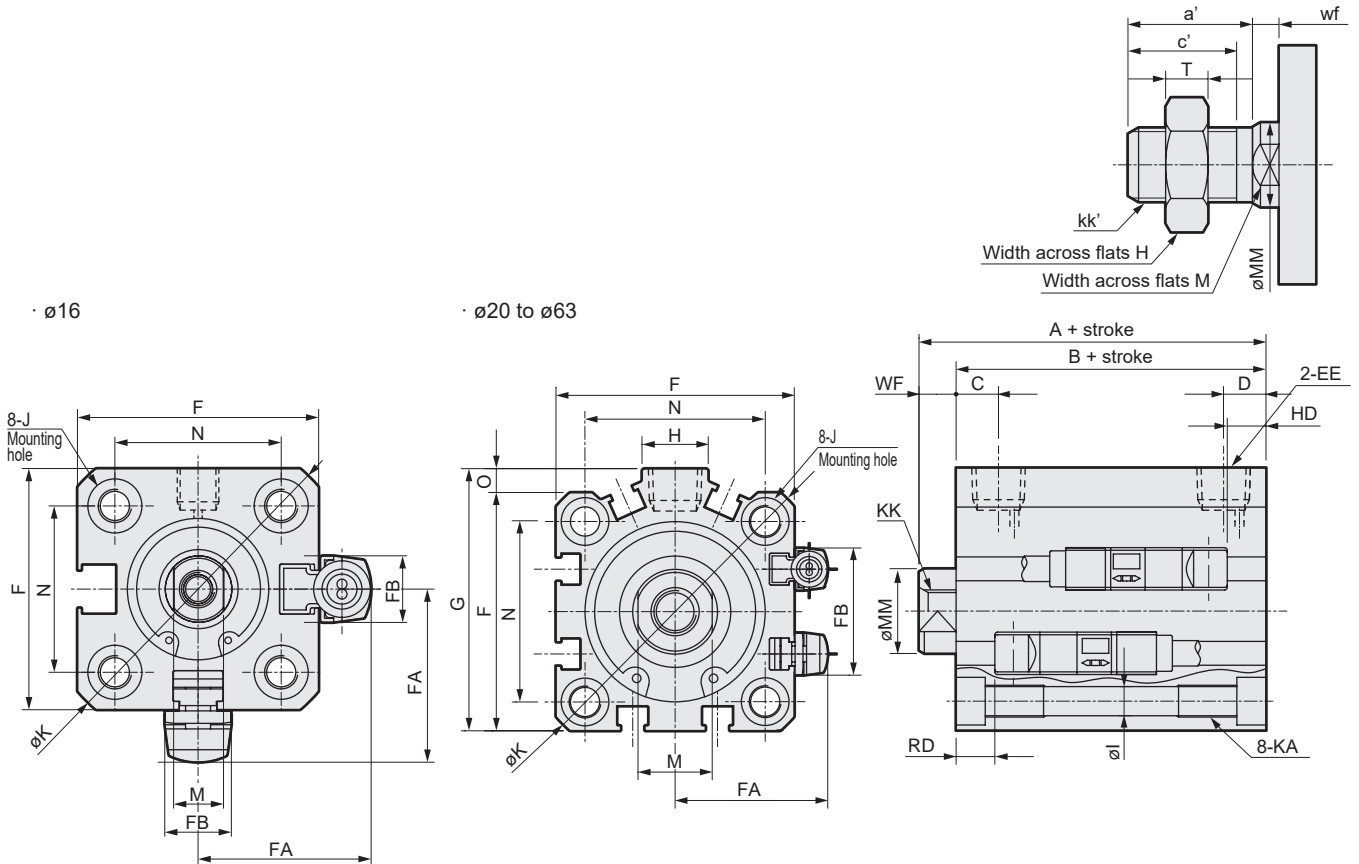

Code	Common dimensions with switch																			
Bore size (mm)	A <sup>*1</sup>	B <sup>*1</sup>	C	D	EE	F	FA	FB	G	H	I	J	K	KA	KK	M	MM	N	O	WF
ø16	35.5	32	5.5	5.5	M5	29	21	8	-	-	3.5	6.5 spot face depth 3.5	38	M4 depth 7	M4 depth 8	6	8	20	-	3.5
ø20	34	29.5	8	5.5	M5	36	24.5	16	-	-	5.5	9 spot face depth 5.5	47	M6 depth 11	M5 depth 7	8	10	25.5	-	4.5
ø25	37.5	32.5	11	6	M5	40	26.5	17	-	-	5.5	9 spot face depth 5.5	51	M6 depth 11	M6 depth 12	10	12	28	-	5
ø32	40	33	8	8	Rc1/8	45	29	24	49.5	12.5	5.5	9 spot face depth 5.5	60	M6 depth 11	M8 depth 13	14	16	34	4.5	7
ø40	46.5	39.5	12	8.5	Rc1/8	52	32.5	31	57	15	5.5	9 spot face depth 5.5	69	M6 depth 11	M8 depth 13	14	16	40	5	7
ø50	48.5	40.5	10.5	10.5	Rc1/4	64	38.5	32	71	18	6.9	11 spot face depth 6.5	86	M8 depth 13	M10 depth 15	17	20	50	7	8
ø63	54	46	13	11	Rc1/4	77	45	32	84	23	8.7	14 spot face depth 9	103	M10 depth 25	M10 depth 15	17	20	60	7	8

Switch dimensions		Reed ET0H/ET0V	
Bore size (mm)	HD	RD	
ø16	0.5	0	
ø20	0	0	
ø25	0	0.5	
ø32	0.5	2	
ø40	1.5	7	
ø50	1.5	6	
ø63	5.5	5.5	

\*1 : To calculate A+ stroke or B+ stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value. (Example)  
If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

\*2: For dimensions of individual accessories, refer to pages 1046 to 1049.

● Rod end male thread


Code	a'	c'	H	kk'	M	MM	T	wf
Bore size (mm)								
ø16	12	10	10	M6	6	8	3.6	3.5
ø20	14	12	13	M8	8	10	5	4.5
ø25	17.5	15	17	M10x1.25	10	12	6	5
ø32	23.5	20.5	22	M14x1.5	14	16	8	5
ø40	23.5	20.5	22	M14x1.5	14	16	8	5
ø50	28.5	26	27	M18x1.5	17	20	11	5
ø63	28.5	26	27	M18x1.5	17	20	11	5

- SCP\*3
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS2
- CKV2
- CAV2/COVP/N2
- SSD2**
- SSG
- SSD
- CAT
- MDC2
- MVC
- SMG
- MSD/MSDG
- FC\*
- STK
- SRL3
- SRG3
- SRM3
- SRT3
- MRL2
- MRG2
- SM-25
- ShkAbs
- FJ
- FK
- Spd Contr
- Ending


# SSD2-T1L Series

## Dimensions with mounting bracket


- Axial foot (LB) with switch  
SSD2-T1L-16 to 25 -LB

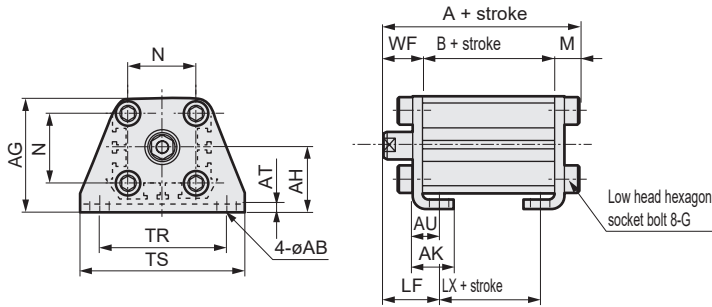


Rod end male thread



- Clevis bracket (CB) with switch  
SSD2-T1L-16 to 25 -CB

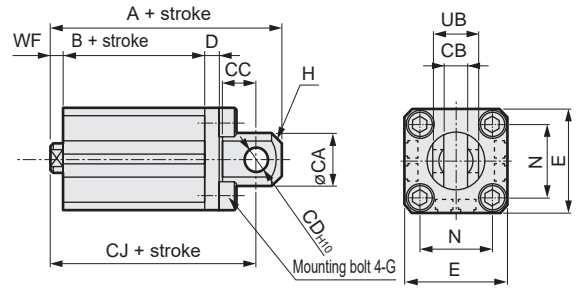

Rod end male thread



Code	Common dimensions										Female thread		
	AB	AG	AH	AK	AT	AU	G	N	TR	TS	M		
ø16	5	33.5	19	13	2	8	M4x10	20	38	48	4.8		
ø20	7	42	24	15	3.2	9.2	M6x16	25.5	48	62	7.2		
ø25	7	46	26	16.5	3.2	10.7	M6x16	28	52	66	7.2		


Code	Male thread										
	WF	LF	A	B	LX	a'	wf	LF	A	B	LX
ø16	13.5	19.5	50.3	32	20	12	13.5	19.5	62.3	32	20
ø20	14.5	20.5	51.2	29.5	17.5	14	14.5	20.5	65.2	29.5	17.5
ø25	15	22.5	54.7	32.5	17.5	17.5	15	22.5	72.2	32.5	17.5

Code	Common dimensions									
	CA	CB	CC	CD	D	E	G	H	N	UB
ø16	15	6.6 <sup>+0.3</sup>	8	5	5	29	M4x12	C2	20	12 <sup>-0.1</sup>
ø20	20	8.2 <sup>+0.2</sup>	12	8	5	36	M6x16	C4	25.5	16 <sup>-0.1</sup>
ø25	24	10.2 <sup>+0.2</sup>	14	10	5	40	M6x16	C5	28	20 <sup>-0.1</sup>


  

Code	Female thread					Male thread				
	WF	A	B	CJ	a'	wf	A	B	CJ	
ø16	3.5	56.5	32	50.5	12	3.5	68.5	32	50.5	
ø20	4.5	61	29.5	52	14	4.5	75	29.5	52	
ø25	5	67.5	32.5	57.5	17.5	5	85	32.5	57.5	


- Rod side flange (FA) with switch  
SSD2-T1L-16 to 25 -FA

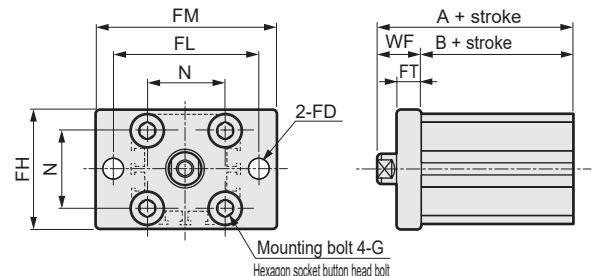


Rod end male thread



- Head side flange (FB) with switch  
SSD2-T1L-16 to 25 -FB

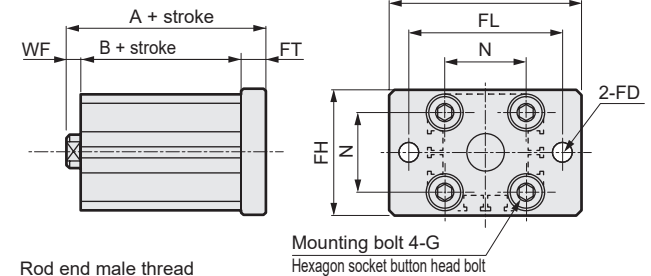

Rod end male thread



Code	Common dimensions						
	FD	FH	FL	FM	FT	N	G
ø16	4.5	30	45	55	5.5	20	M4x12
ø20	6.6	39	48	60	8	25.5	M6x16
ø25	6.6	42	52	64	8	28	M6x16

Code	Female thread				Male thread			
	WF	A	B	a'	wf	A	B	
ø16	13.5	45.5	32	12	13.5	57.5	32	
ø20	14.5	44	29.5	14	14.5	58	29.5	
ø25	15	47.5	32.5	17.5	15	65	32.5	

Code	Common dimensions						
	FD	FH	FL	FM	FT	N	G
ø16	4.5	30	45	55	5.5	20	M4x12
ø20	6.6	39	48	60	8	25.5	M6x16
ø25	6.6	42	52	64	8	28	M6x16


Code	Female thread				Male thread			
	WF	A	B	a'	wf	A	B	
ø16	3.5	41	32	12	3.5	53	32	
ø20	4.5	42	29.5	14	4.5	56	29.5	
ø25	5	45.5	32.5	17.5	5	63	32.5	

# SSD2-T1L Series

Double acting/with heat resistant cylinder switch

## Dimensions with mounting bracket

- Axial foot (LB)  
SSD2-T1L -32 to 63 -LB

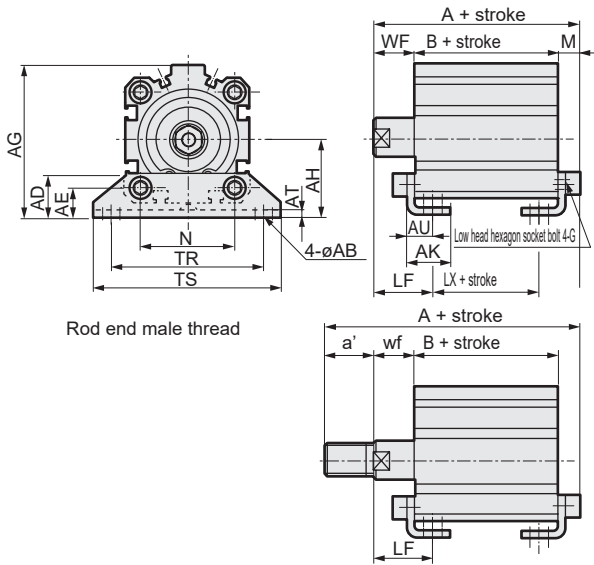


Code	Common dimensions											Female thread			
	Bore size (mm)	AB	AD	AE	AG	AH	AK	AT	AU	G	N	TR	TS		
ø32	7	18.5	13	57	30	17	3.2	11.2	M6x16	34	57	71			
ø40	7	18	13	64	33	18.2	3.2	11.2	M6x16	40	64	78			
ø50	9	22	14	78	39	22.7	3.2	14.7	M8x20	50	79	95			
ø63	11	26	16	91.5	46	25.2	3.2	16.2	M10x25	60	95	113			

Code	Male thread											
	Bore size (mm)	M	WF	LF	A	B	LX	a'	wf	LF	A	B
ø32	7.2	17	25	57.2	33	17	23.5	15	23	78.7	33	17
ø40	7.2	17	25	63.7	39.5	23.5	23.5	15	23	85.2	39.5	23.5
ø50	8.2	18	29.5	66.7	40.5	17.5	28.5	15	26.5	92.2	40.5	17.5
ø63	9.2	18	31	73.2	46	20	28.5	15	28	98.7	46	20

\* Dimensions in ( ) are for strokes of more than 50 mm.

- Rod side flange (FA)  
SSD2-T1L -32 to 50 -FA

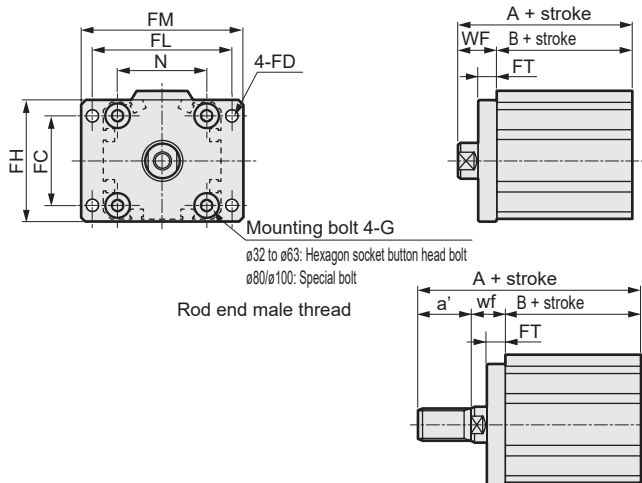


Code	Common dimensions							
	Bore size (mm)	FC	FD	FH	FL	FM	FT	N
ø32	34	5.5	48	56	65	8	34	M6x16
ø40	40	5.5	54	62	72	8	40	M6x16
ø50	50	6.6	67	76	89	9	50	M8x20
ø63	60	9	80	92	108	9	60	M10x25

Code	Female thread				Male thread			
	Bore size (mm)	WF	A	B	a'	wf	A	B
ø32	17	50	33	23.5	15	71.5	33	
ø40	17	56.5	39.5	23.5	15	78	39.5	
ø50	18	58.5	40.5	28.5	15	84	40.5	
ø63	18	64	46	28.5	15	89.5	46	

\* Dimensions in ( ) are for strokes of more than 50 mm.

- Clevis bracket (CB)  
SSD2-T1L -32 to 63 -CB

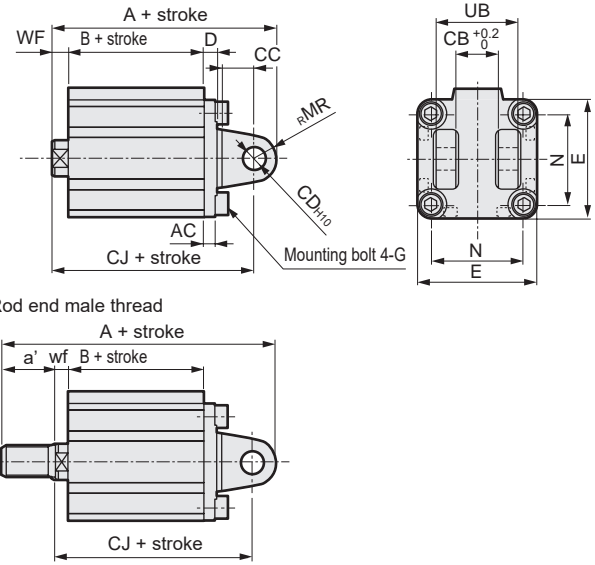


Code	Common dimensions									
	Bore size (mm)	AC	CB	CC	CD	D	E	G	MR	N
ø32	4.5	18.2	14	10	5	45	M6x16	10	34	36
ø40	5	18.2	14	10	6	52	M6x16	10	40	36
ø50	6	22.2	20	14	7	64	M8x20	14	50	44
ø63	7	22.2	20	14	8	77	M10x25	14	60	44

Code	Female thread					Male thread				
	Bore size (mm)	WF	A	B	CJ	a'	wf	A	B	CJ
ø32	7	70	33	60	23.5	5	91.5	33	58	
ø40	7	78.5	39.5	68.5	23.5	5	100	39.5	66.5	
ø50	8	90.5	40.5	76.5	28.5	5	116	40.5	73.5	
ø63	8	98	46	84	28.5	5	123.5	46	81	

- Head side flange (FB)  
SSD2-T1L -32 to 50 -FB

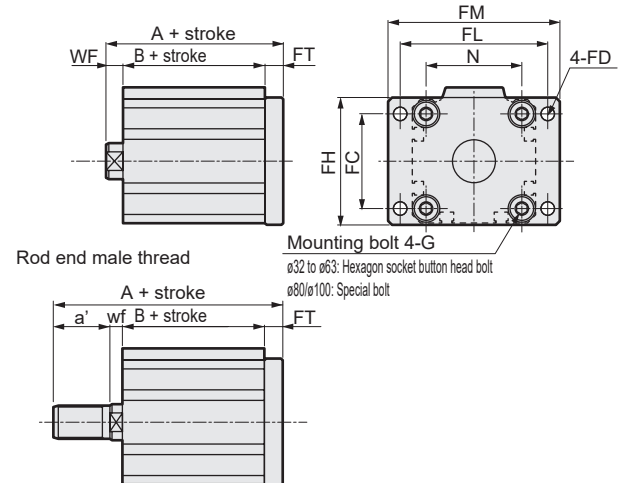

Code	Common dimensions							
	Bore size (mm)	FC	FD	FH	FL	FM	FT	N
ø32	34	5.5	48	56	65	8	34	M6x16
ø40	40	5.5	54	62	72	8	40	M6x16
ø50	50	6.6	67	76	89	9	50	M8x20
ø63	60	9	80	92	108	9	60	M10x25


  

Code	Female thread				Male thread			
	Bore size (mm)	WF	A	B	a'	wf	A	B
ø32	7	48	33	23.5	5	69.5	33	
ø40	7	54.5	39.5	23.5	5	76	39.5	
ø50	8	57.5	40.5	28.5	5	83	40.5	
ø63	8	63	46	28.5	5	88.5	46	

\* Dimensions in ( ) are for strokes of more than 50 mm.

- SCP\*3
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS2
- CKV2
- CAV2/COVP/N2
- SSD2**
- SSG
- SSD
- CAT
- MDC2
- MVC
- SMG
- MSD/MSDG
- FC\*
- STK
- SRL3
- SRG3
- SRM3
- SRT3
- MRL2
- MRG2
- SM-25
- ShkAbs
- FJ
- FK
- Spd Contr
- Ending





Compact cylinder high load/rubber-air cushioned

# SSD2-K-\*C Series

● Bore size:  $\phi 20/\phi 25/\phi 32/\phi 40/\phi 50/\phi 63/\phi 80/\phi 100$

JIS symbol



## Specifications

Item	SSD-K-*C SSD-KL-*C (with switch)							
	$\phi 20$	$\phi 25$	$\phi 32$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$
Bore size mm	$\phi 20$	$\phi 25$	$\phi 32$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$
Actuation	Double acting							
Working fluid	Compressed air							
Max. working pressure MPa	1.0 ( $\approx 150$ psi, 10 bar)							
Min. working pressure MPa	0.25 ( $\approx 36$ psi, 2.5 bar)			0.2 ( $\approx 29$ psi, 2 bar)				
Proof pressure MPa	1.6 ( $\approx 230$ psi, 16 bar)							
Ambient temperature $^{\circ}\text{C}$	-10 (14 $^{\circ}\text{F}$ ) to 60 (140 $^{\circ}\text{F}$ ) (no freezing)							
Port size	Rc1/8			Rc1/4			Rc3/8	
Stroke tolerance mm	$^{+2.0}_0$							
Working piston speed mm/s	50 to 500				50 to 300			
Cushion	Rubber-air cushion							
Lubrication	Not required (use turbine oil ISO VG32 if necessary for lubrication)							
Allowable absorbed energy J	0.16	0.16	0.40	0.63	0.98	1.56	2.51	3.92

## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\phi 20$	5/10/15/20/25/30/35/40/45/50	50	5
$\phi 25$			
$\phi 32$	5/10/15/20/25/30/35/40/45/50/75/100	100	10
$\phi 40$			
$\phi 50$			
$\phi 63$	10/15/20/25/30/35/40/45/50/75/100		
$\phi 80$			
$\phi 100$			

## Min. stroke with switch (2 switches)

Bore size (mm)	T0H/V / T5H/V	T2H/V / T3H/V
$\phi 20$	5	5
$\phi 25$		
$\phi 32$		
$\phi 40$		10
$\phi 50$		
$\phi 63$		
$\phi 80$		
$\phi 100$		

\*1: The custom stroke is available in 1 mm increments. However, the total length is the same as that of the next longer standard stroke.

\*2: Refer to page 789 for the min. stroke with mounting bracket LB.


\*1: Less than 10 mm with the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch is not available.

## Custom stroke

### ● SSD2-K-\*C Series

Item	Standard products	
	Standard stroke body with spacer	
Model No.	Refer to How to order.	
Description	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.	
Stroke range	Bore size	Stroke range
	20 to 25	1 to 49
	32 to 100	1 to 99
Example of model No.	Model No.: SSD2-K-32C-38 A +2 mm spacer is added to the SSD2-K-32C-40 standard cylinder to create 38 mm stroke. B + stroke is 73 mm.	


## Rubber-air cushion mechanism

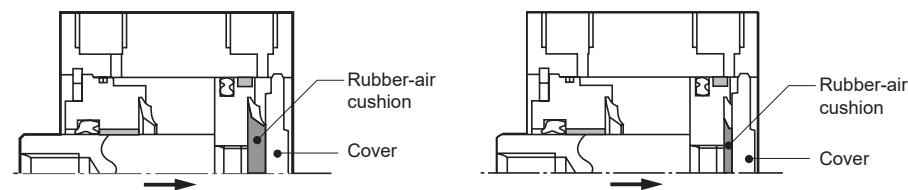


### When pulled

An airtight space is created in the  $\blacksquare$  area when the piston operates and the rubber-air cushion and cover make contact. Air in the airtight area is further compressed, absorbing energy as the piston operates.


At the end of the stroke, energy generated by compression distortion of the rubber cushion is also added.

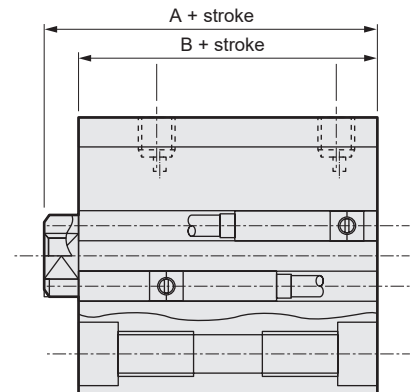

Data of the reduction of collision noise level (an example case)



Data of the reduction of collision acceleration level (an example case)



--- Cylinder with rubber cushion  
— Cylinder with rubber-air cushion

### Switch specifications (F-switch)

● 1-color/2-color LED

Item	2-wire proximity		3-wire proximity		2-wire proximity		3-wire proximity		
	F2S		F3S		F2H/F2V	F2YH/ F2YV	F3H/F3V	F3PH/F3PV (made to order)	F3YH/F3YV
Applications	Dedicated for programmable controller		For programmable controller, relay		Dedicated for programmable controller		For programmable controller, relay		
Output method	-		NPN output		-		NPN output	PNP output	NPN output
Power supply voltage	-		10 to 28 VDC		-		10 to 28 VDC	4.5 to 28 VDC	10 to 28 VDC
Load voltage	10 to 30 VDC		30 VDC or less		10 to 30 VDC	24 VDC ±10%	30 VDC or less		
Load current	5 to 20 mA		50 mA or less		5 to 20 mA		50 mA or less		
Indicator	LED (Lit when ON)				Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Yellow LED (Lit when ON)		Red/green LED (Lit when ON)
Leakage current	1 mA or less		10 µA or less		1 mA or less		10 µA or less		
Weight	g		1 m:10 3 m:29						

### Switch specifications (T-switch)

● 1-color/2-color LED/for AC magnetic field proof

Item	2-wire proximity		2-wire proximity				3-wire proximity				2-wire reed				2-wire proximity	
	T1H/T1V	T2H/T2V/ T2JH/T2JV	T2YH/ T2YV	T2WH/ T2WV	T3H/T3V	T3PH/ T3PV	T3YH/ T3YV	T3WH/ T3WV	T0H/T0V	T5H/T5V	T8H/T8V		T2YD(*4) T2YDT			
Applications	For programmable controller, relay, compact solenoid valve	Dedicated for programmable controller				For programmable controller, relay				For programmable controller, relay	For programmable controller, relay, IC circuit (no indicator lamp), serial connection		For programmable controller, relay	For programmable controller		
Output method	-				NPN output	PNP output	NPN output	NPN output	-							
Pwr. supp. V.	-				10 to 28 VDC				-							
Load voltage	85 to 265 VAC	10 to 30 VDC	24 VDC ±10%		30 VDC or less				12/24 VDC	100/110 VAC	5/12/24 VDC	100/110 VAC	12/24 VDC	110 VAC	220 VAC	24 VDC ±10%
Load current	5 to 100 mA	5 to 20 mA (*3)			100 mA or less		50 mA or less		5 to 50 mA	7 to 20 mA	50 mA or less	20 mA or less	5 to 50 mA	7 to 20 mA	7 to 10 mA	5 to 20 mA
Indicator	LED (Lit when ON)	LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	No indicator lamp		LED (Lit when ON)	Red/green LED (Lit when ON)			
Leakage current	≤1 mA at 100 VAC, ≤2 mA at 200 VAC	1 mA or less			10 µA or less				0 mA				1 mA or less			
Weight g	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:18	3 m:49	5 m:80	1 m:33 3 m:87 5 m:142	1 m:61 3 m:166 5 m:272			

\*1: Refer to Ending Page 1 for detailed switch specifications and dimensions.

\*2: Switches other than the above models, such as switches with connectors, are also available. Refer to Ending Page 1.

\*3: The max. load current is 20 mA at 25°C. The current is lower than 20 mA if the operating ambient temperature around the switch is higher than 25°C. (5 to 10 mA at 60°C)

\*4: Switch for AC magnetic field (T2YD/T2YDT) cannot be used in DC magnetic field.

\*5: The F-switch uses a bend-resistant lead wire.

### Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa								
		0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø20	Push	-	94.2	1.26x10 <sup>2</sup>	1.57x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.20x10 <sup>2</sup>	2.51x10 <sup>2</sup>	2.83x10 <sup>2</sup>	3.14x10 <sup>2</sup>
	Pull	-	70.7	94.2	1.18x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.65x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.12x10 <sup>2</sup>	2.36x10 <sup>2</sup>
ø25	Push	-	1.47x10 <sup>2</sup>	1.96x10 <sup>2</sup>	2.45x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.44x10 <sup>2</sup>	3.93x10 <sup>2</sup>	4.42x10 <sup>2</sup>	4.91x10 <sup>2</sup>
	Pull	-	1.13x10 <sup>2</sup>	1.51x10 <sup>2</sup>	1.89x10 <sup>2</sup>	2.27x10 <sup>2</sup>	2.64x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.40x10 <sup>2</sup>	3.78x10 <sup>2</sup>
ø32	Push	1.61x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.22x10 <sup>2</sup>	4.02x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.63x10 <sup>2</sup>	6.43x10 <sup>2</sup>	7.24x10 <sup>2</sup>	8.04x10 <sup>2</sup>
	Pull	1.21x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.62x10 <sup>2</sup>	4.22x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.43x10 <sup>2</sup>	6.03x10 <sup>2</sup>
ø40	Push	2.51x10 <sup>2</sup>	3.77x10 <sup>2</sup>	5.03x10 <sup>2</sup>	6.28x10 <sup>2</sup>	7.54x10 <sup>2</sup>	8.80x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.13x10 <sup>3</sup>	1.26x10 <sup>3</sup>
	Pull	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>
ø50	Push	3.93x10 <sup>2</sup>	5.89x10 <sup>2</sup>	7.85x10 <sup>2</sup>	9.82x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.37x10 <sup>3</sup>	1.57x10 <sup>3</sup>	1.77x10 <sup>3</sup>	1.96x10 <sup>3</sup>
	Pull	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>
ø63	Push	6.23x10 <sup>2</sup>	9.35x10 <sup>2</sup>	1.25x10 <sup>3</sup>	1.56x10 <sup>3</sup>	1.87x10 <sup>3</sup>	2.18x10 <sup>3</sup>	2.49x10 <sup>3</sup>	2.81x10 <sup>3</sup>	3.12x10 <sup>3</sup>
	Pull	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>	2.24x10 <sup>3</sup>	2.52x10 <sup>3</sup>	2.80x10 <sup>3</sup>
ø80	Push	1.01x10 <sup>3</sup>	1.51x10 <sup>3</sup>	2.01x10 <sup>3</sup>	2.51x10 <sup>3</sup>	3.02x10 <sup>3</sup>	3.52x10 <sup>3</sup>	4.02x10 <sup>3</sup>	4.52x10 <sup>3</sup>	5.03x10 <sup>3</sup>
	Pull	9.07x10 <sup>2</sup>	1.36x10 <sup>3</sup>	1.81x10 <sup>3</sup>	2.27x10 <sup>3</sup>	2.72x10 <sup>3</sup>	3.17x10 <sup>3</sup>	3.63x10 <sup>3</sup>	4.08x10 <sup>3</sup>	4.54x10 <sup>3</sup>
ø100	Push	1.57x10 <sup>3</sup>	2.36x10 <sup>3</sup>	3.14x10 <sup>3</sup>	3.93x10 <sup>3</sup>	4.71x10 <sup>3</sup>	5.50x10 <sup>3</sup>	6.28x10 <sup>3</sup>	7.07x10 <sup>3</sup>	7.85x10 <sup>3</sup>
	Pull	1.43x10 <sup>3</sup>	2.14x10 <sup>3</sup>	2.86x10 <sup>3</sup>	3.57x10 <sup>3</sup>	4.29x10 <sup>3</sup>	5.00x10 <sup>3</sup>	5.72x10 <sup>3</sup>	6.43x10 <sup>3</sup>	7.15x10 <sup>3</sup>

# SSD2-K-\*C Series


## How to order

No switch (without magnet for switch)

SSD2-K-40-C-10-N-LB-I

With switch (built-in magnet for switch)

SSD2-KL-40-C-10-T0H-R-N-LB-I

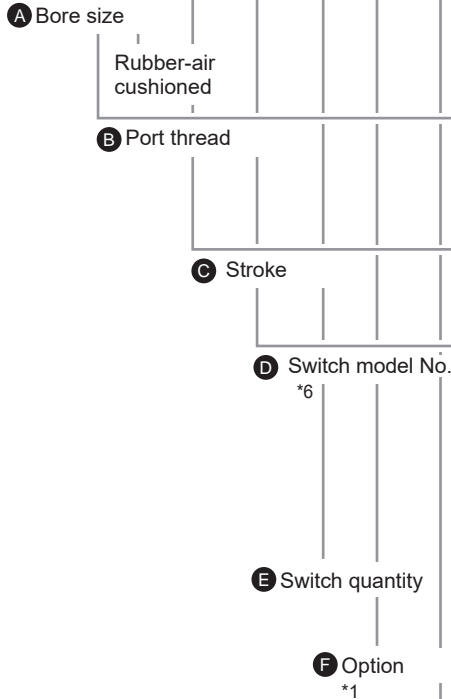

## Precautions for model No. selection

- \*1: Piston rod of  $\phi 20$  and  $\phi 25$  is stainless steel as standard. C-snap ring is stainless steel instead of steel. The rod end male thread nut is stainless steel.
- \*2: Mounting The bracket is attached at shipment.
- \*3: The projection dimension of piston rod WF when LB or FA is selected is different from that of the standard. Refer to the dimensions on pages 761, 763, 765 and 766. The number of the specified protruding dimension will be added at the end of the model No. printed on the metal plate on the body.
- \*4: "I" and "Y" cannot be selected together.
- \*5: Refer to pages 750 and 751 for combinations of variations/options.
- \*6: Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.
- \*7: F-switch cannot be selected.

[Example of model No.]

**SSD2-KL-32C-10-T0H-R-N**

Model: Compact cylinder, rubber-air cushioned

- A Bore size :  $\phi 32$  mm
- B Port thread : Rc thread
- C Stroke : 10 mm
- D Switch Model No. : Reed switch T0H, lead wire length 1 m
- E Switch quantity : 1 on rod side
- F Option : Rod end male thread

G Mounting bracket \*2 \*3

## How to order switch

SW-T0H

(Item D above)

H Accessory\*4

Code	Description
<b>A Bore size (mm)</b>	
20	$\phi 20$
25	$\phi 25$
32	$\phi 32$
40	$\phi 40$
50	$\phi 50$
63	$\phi 63$
80	$\phi 80$
100	$\phi 100$

<b>B Port thread</b>	
Blank	Rc thread
N	NPT thread ( $\phi 32$ and over) (made to order)
G	G thread ( $\phi 32$ and over) (made to order)

**C Stroke (mm)**  
Refer to the stroke table on the following page.

<b>D Switch model No.</b>		Indicator	Lead wire	Bore size										
Lead wire Straight type	Lead wire L-shaped			20	25	32	40	50	63	80	100			
-	F2S*	1-color LED	2-wire	●	●									
-	F3S*		3-wire	●	●									
F2H*	F2V*		2-wire	●	●									
F3H*	F3V*		3-wire	●	●									
F3PH*	F3PV*		1-color LED (PNP output) (made to order)	3-wire	●	●								
F2YH*	F2YV*		2-color LED	2-wire	●	●								
F3YH*	F3YV*	3-wire		●	●									
T0H*	T0V*	1-color LED		2-wire	●	●	●	●	●	●	●	●	●	
T5H*	T5V*	No indicator lamp	2-wire	●	●	●	●	●	●	●	●	●		
T8H*	T8V*	1-color LED	2-wire	●	●	●	●	●	●	●	●	●		
T1H*	T1V*	1-color LED	2-wire	●	●	●	●	●	●	●	●	●		
T2H*	T2V*		3-wire	●	●	●	●	●	●	●	●	●		
T3H*	T3V*		2-wire	●	●	●	●	●	●	●	●	●		
T3PH*	T3PV*	1-color LED (PNP output)	3-wire	●	●	●	●	●	●	●	●	●		
T2WH*	T2WV*	2-color LED	2-wire	●	●	●	●	●	●	●	●	●		
T2YH*	T2YV*		3-wire	●	●	●	●	●	●	●	●	●		
T3WH*	T3WV*		2-wire	●	●	●	●	●	●	●	●	●		
T3YH*	T3YV*	3-wire	●	●	●	●	●	●	●	●	●			
T2YD*	-	2-color LED for AC magnetic field	2-wire	●	●	●	●	●	●	●	●	●		
T2YDT*	-	1-color LED off-delay	2-wire	●	●	●	●	●	●	●	●	●		

<b>* Lead wire length</b>	
Blank	1 m (standard)
3	3 m (option)
5	5 m (option) *7

<b>E Switch quantity</b>	
R	1 on rod side
H	1 on head side
D	2

<b>F Option</b>	
Blank	Rod end female thread
N	Rod end male thread
M	Piston rod material (stainless steel)

<b>G Mounting bracket</b>	
Blank	Without mounting bracket
LB	Axial foot type
CB	Clevis bracket (pin and snap ring attached)
FA	Rod side flange
FB	Head side flange

<b>H Accessory (available when rod end male thread "N" is selected)</b>	
I	Rod eye
Y	Rod clevis (pin and snap ring attached)

### [Stroke table]

Stroke (mm)	Applicable bore size								
	ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100	
Standard stroke	5	●	●	●	●				
	10	●	●	●	●	●	●	●	●
	15	●	●	●	●	●	●	●	●
	20	●	●	●	●	●	●	●	●
	25	●	●	●	●	●	●	●	●
	30	●	●	●	●	●	●	●	●
	35	●	●	●	●	●	●	●	●
	40	●	●	●	●	●	●	●	●
	45	●	●	●	●	●	●	●	●
	50	●	●	●	●	●	●	●	●
	75			●	●	●	●	●	●
	100			●	●	●	●	●	●
Min. stroke (mm) *1	5				10				
Max. stroke (mm)	50			100					
Custom stroke *2	In 1 mm increments								

\*1: Less than 10 mm with the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch is not available. Refer to page 832 for the number of installed switches and the min. stroke.

\*2: The total length when using a custom stroke is the same as that when using the next longer standard stroke.

\*3: Refer to page 789 for the min. stroke with mounting bracket LB.

### How to order mounting bracket

Bore size (mm)	ø20	ø25	ø32	ø40	ø50	ø63	ø80
<b>Mounting bracket</b>							
Foot (LB)	SSD2-LB-20	SSD2-LB-25	SSD2-LB-32	SSD2-LB-40	SSD2-LB-50	SSD2-LB-63	SSD2-LB-80
Flange (FA/FB)	SSD2-FA-20	SSD2-FA-25	SSD2-FA-32	SSD2-FA-40	SSD2-FA-50	SSD2-FA-63	SSD2-FA-80
Clevis bracket (CB)	SSD2-CB-20	SSD2-CB-25	SSD2-CB-32	SSD2-CB-40	SSD2-CB-50	SSD2-CB-63	SSD2-CB-80
<b>Bore size (mm)</b>	<b>ø100</b>						
<b>Mounting bracket</b>							
Foot (LB)	SSD2-LB-100						
Flange (FA/FB)	SSD2-FA-100						
Clevis bracket (CB)	SSD2-CB-100						

\*1: The foot mounting bracket is provided as 2 pcs./set.

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr



Ending

# SSD2-K-\*C Series

## Internal structure and parts list



● SSD2-KL-20C, 25C  
(double acting/single rod high load/rubber-air cushioned/with switch)

● SSD2-KL-32C to 100C  
(double acting/single rod high load/rubber-air cushioned/with switch)

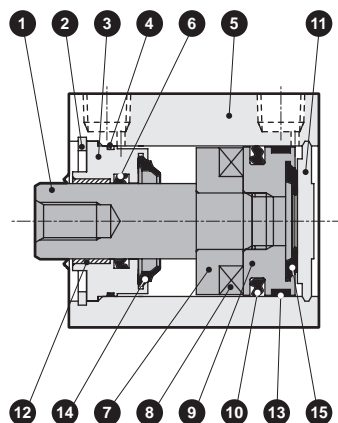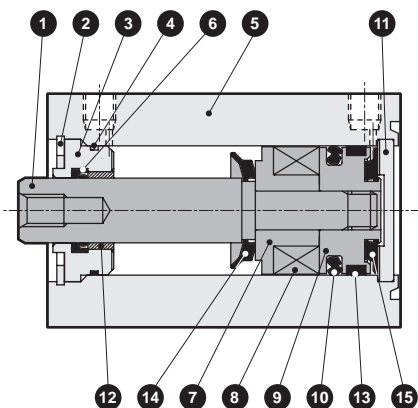

● SSD2-K-20C, 25C  
(double acting/single rod high load/rubber-air cushioned)

● SSD2-K-32C to 100C  
(double acting/single rod high load/rubber-air cushioned)

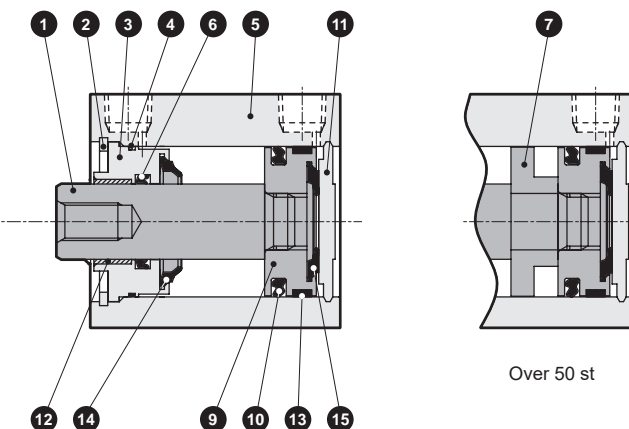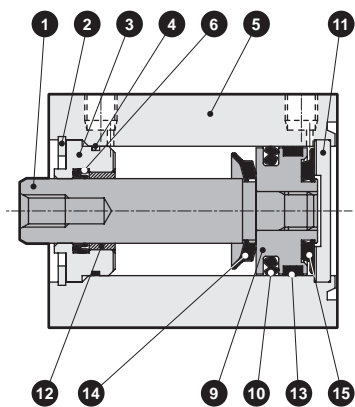

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	ø20 to ø25: Stainless steel ø32 to ø100: steel	Industrial chrome plating	8	Magnet	Plastic	
2	C-snap ring	Steel	Zinc phosphate	9	Piston	Aluminum alloy	Chromate
3	Rod metal	ø20 to ø50: Special aluminum ø63 to ø100: Aluminum alloy	ø20 to ø50: Alumite ø63 to ø100: Chromate	10	Piston packing	Nitrile rubber	
4	Rod metal gasket	Nitrile rubber		11	Cover	ø20 to ø25: Stainless steel ø32 to ø100: Aluminum alloy	ø32 to ø100: Alumite
5	Body	Aluminum alloy	Hard alumite	12	Bush	Oiles drymet	
6	Rod packing	Nitrile rubber		13	Wear ring	Polyacetal resin	
7	Spacer	Aluminum alloy	Chromate	14	Rubber air cushion (R)	Special rubber	
				15	Rubber air cushion (H)	Special rubber	

## Repair parts list



Bore size (mm)	Kit No.	Repair parts No.
ø20	SSD2-K-20CK	4 6 10 13 14 15
ø25	SSD2-K-25CK	
ø32	SSD2-K-32CK	
ø40	SSD2-K-40CK	
ø50	SSD2-K-50CK	
ø63	SSD2-K-63CK	
ø80	SSD2-K-80CK	
ø100	SSD2-K-100CK	

## Dimensions

Same as SSD2-K Series (double acting/high load). Refer to pages 782 to 790.

## Technical data









### [Comparison of collision noise level]

Standard rubber cushion :   
 Rubber-air cushion : 

Values are comparison samples obtained under the conditions below.  
 As the values vary with base rigidity, etc., they are not guaranteed.

(Test conditions)

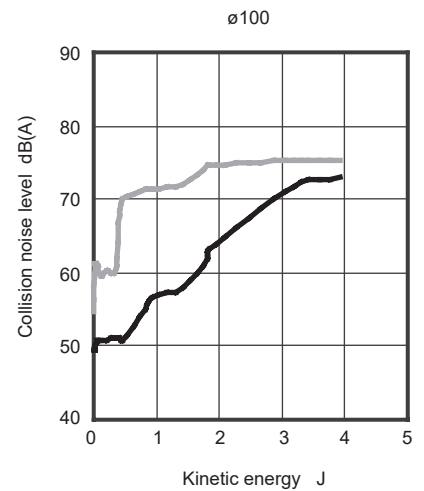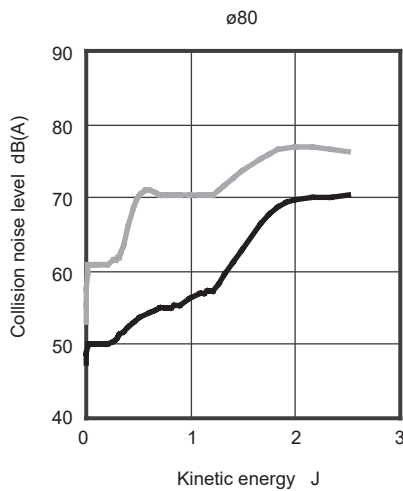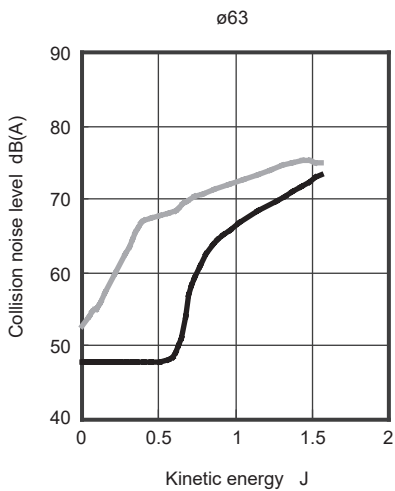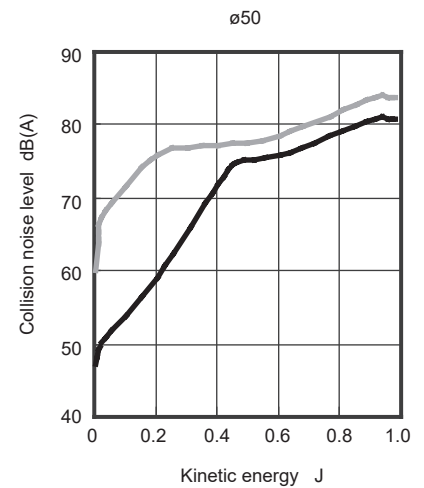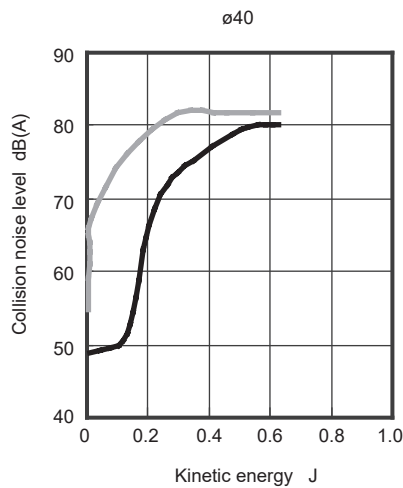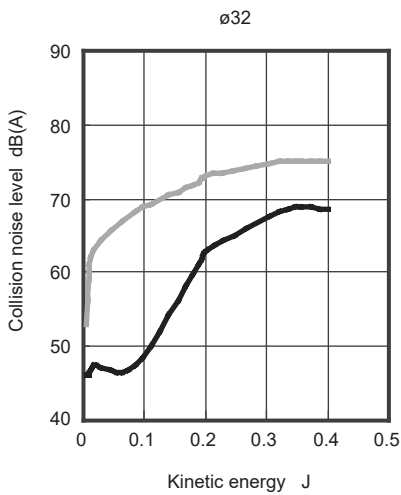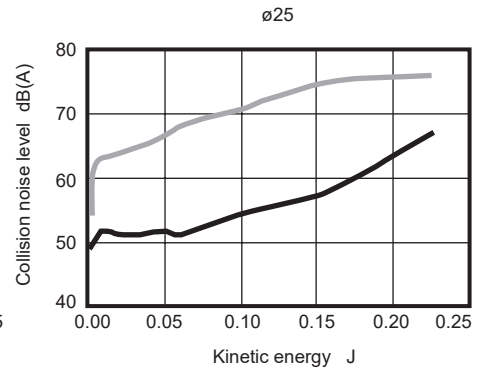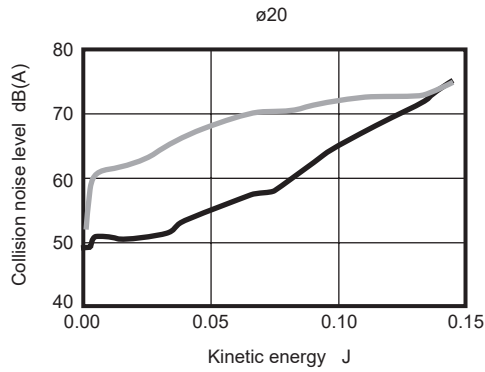

Cylinder : SSD2  
 Mounting direction of cylinder : Vertical with rod upward  
 Cylinder supply pressure : 0.5 MPa  
 Measurement position of sound level meter : 1 m from sample











SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending




## Technical data

### [Comparison of collision acceleration]

Standard rubber cushion :   
 Rubber-air cushion : 

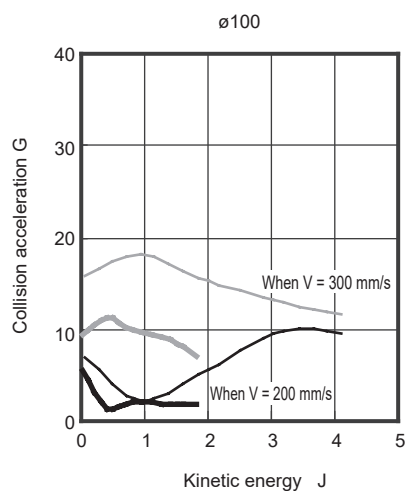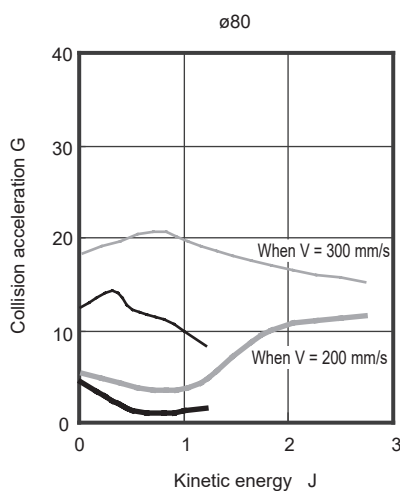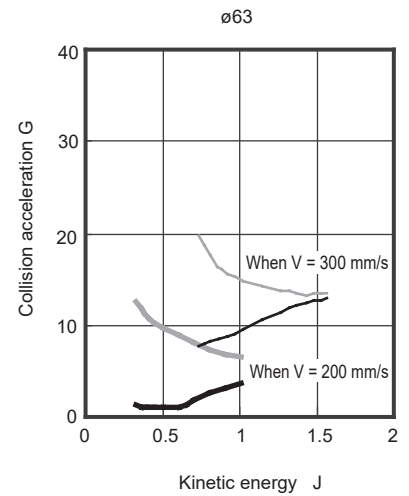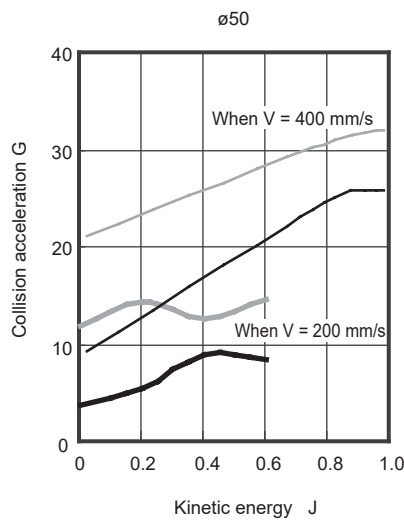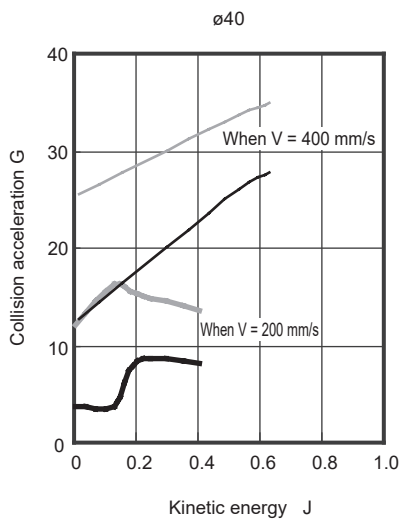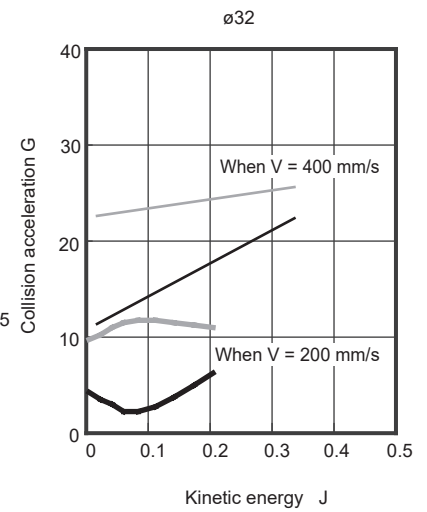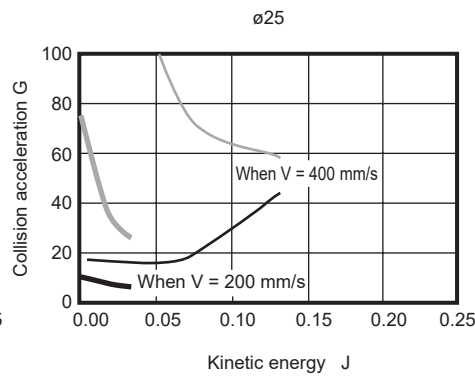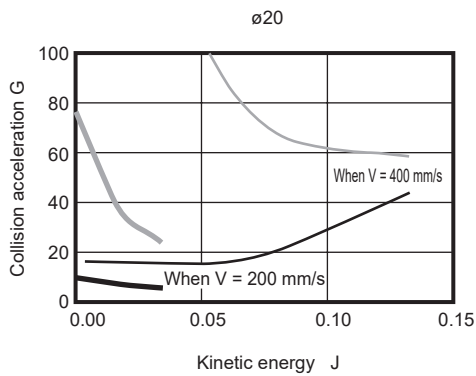


## [Allowable energy value]

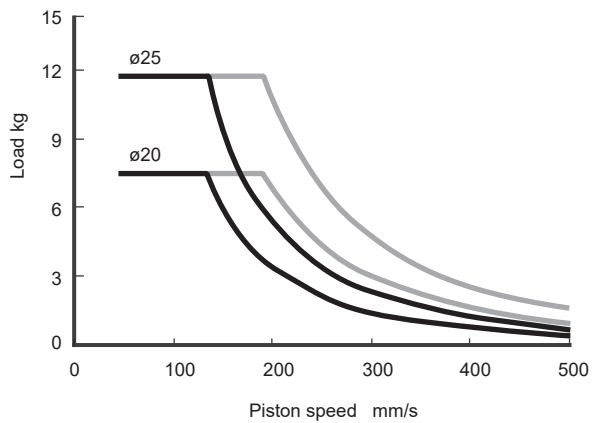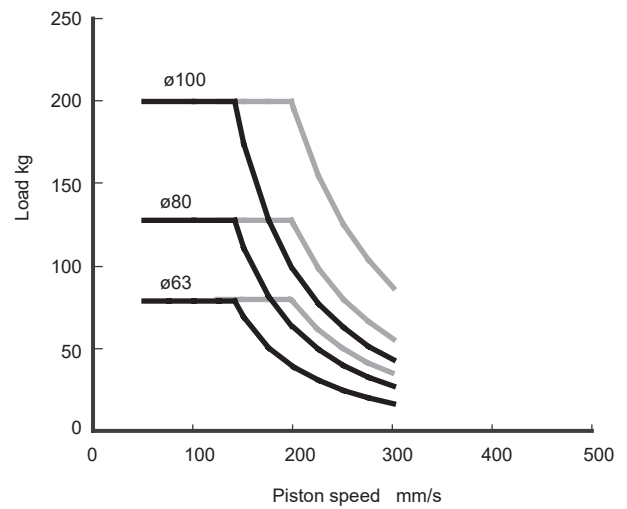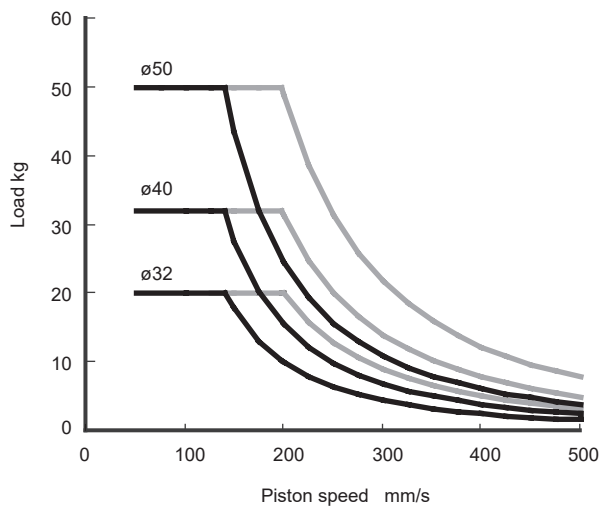

Usable in the range below and to the left of the curve. Although it can also be used in the range marked with in the figure, we recommend use within the range marked with a solid line to maximize the noise reduction effect.

SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/ COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/ MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending






Compact cylinder double acting/with position locking

# SSD2-Q Series

● Bore size:  $\phi 20/\phi 25/\phi 32/\phi 40/\phi 50/\phi 63/\phi 80/\phi 100$

JIS symbol



## Specifications

Item	SSD2-Q							
	SSD2-QL (with switch)							
Bore size mm	$\phi 20$	$\phi 25$	$\phi 32$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$
Actuation	Double acting/position locking							
Working fluid	Compressed air							
Max. working pressure MPa	1.0 ( $\approx 150$ psi, 10 bar)							
Min. working pressure MPa	0.15 ( $\approx 22$ psi, 1.5 bar)							
Proof pressure MPa	1.6 ( $\approx 230$ psi, 16 bar)							
Ambient temperature $^{\circ}\text{C}$	-10 ( $14^{\circ}\text{F}$ ) to 60 ( $140^{\circ}\text{F}$ ) (no freezing)							
Port size	M5		Rc1/8		Rc1/4		Rc3/8	
Stroke tolerance mm	$^{+2.5}$ $_0$							
Working piston speed mm/s	50 to 500				50 to 300			
Cushion	Rubber cushion							
Lubrication	Not required (use turbine oil class 1 ISO VG32 if necessary for lubrication)							
Position locking mechanism	Rod side or head side							
Holding force N	Max. thrust x 0.7							
Allowable absorbed energy J	0.16	0.16	0.40	0.63	0.98	1.56	2.51	3.92

## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\phi 20$	10/15/20/25/50/75/100	100	10
$\phi 25$			
$\phi 32$			
$\phi 40$			
$\phi 50$			
$\phi 63$	25/50/75/100	100	25
$\phi 80$			
$\phi 100$			

⚠ Be sure to read the Safety precautions for the position locking on pages 1058 to 1063 before use.

## Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa									
		0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
$\phi 20$	Push	47.1	62.8	94.2	$1.26 \times 10^2$	$1.57 \times 10^2$	$1.88 \times 10^2$	$2.20 \times 10^2$	$2.51 \times 10^2$	$2.83 \times 10^2$	$3.14 \times 10^2$
	Pull	35.3	47.1	70.7	94.2	$1.18 \times 10^2$	$1.41 \times 10^2$	$1.65 \times 10^2$	$1.88 \times 10^2$	$2.12 \times 10^2$	$2.36 \times 10^2$
$\phi 25$	Push	73.6	98.2	$1.47 \times 10^2$	$1.96 \times 10^2$	$2.45 \times 10^2$	$2.95 \times 10^2$	$3.44 \times 10^2$	$3.93 \times 10^2$	$4.42 \times 10^2$	$4.91 \times 10^2$
	Pull	56.7	75.6	$1.13 \times 10^2$	$1.51 \times 10^2$	$1.89 \times 10^2$	$2.27 \times 10^2$	$2.64 \times 10^2$	$3.02 \times 10^2$	$3.40 \times 10^2$	$3.78 \times 10^2$
$\phi 32$	Push	$1.21 \times 10^2$	$1.61 \times 10^2$	$2.41 \times 10^2$	$3.22 \times 10^2$	$4.02 \times 10^2$	$4.83 \times 10^2$	$5.63 \times 10^2$	$6.43 \times 10^2$	$7.24 \times 10^2$	$8.04 \times 10^2$
	Pull	90.5	$1.21 \times 10^2$	$1.81 \times 10^2$	$2.41 \times 10^2$	$3.02 \times 10^2$	$3.62 \times 10^2$	$4.22 \times 10^2$	$4.83 \times 10^2$	$5.43 \times 10^2$	$6.03 \times 10^2$
$\phi 40$	Push	$1.88 \times 10^2$	$2.51 \times 10^2$	$3.77 \times 10^2$	$5.03 \times 10^2$	$6.28 \times 10^2$	$7.54 \times 10^2$	$8.80 \times 10^2$	$1.01 \times 10^3$	$1.13 \times 10^3$	$1.26 \times 10^3$
	Pull	$1.58 \times 10^2$	$2.11 \times 10^2$	$3.17 \times 10^2$	$4.22 \times 10^2$	$5.28 \times 10^2$	$6.33 \times 10^2$	$7.39 \times 10^2$	$8.44 \times 10^2$	$9.50 \times 10^2$	$1.06 \times 10^3$
$\phi 50$	Push	$2.95 \times 10^2$	$3.93 \times 10^2$	$5.89 \times 10^2$	$7.85 \times 10^2$	$9.82 \times 10^2$	$1.18 \times 10^3$	$1.37 \times 10^3$	$1.57 \times 10^3$	$1.77 \times 10^3$	$1.96 \times 10^3$
	Pull	$2.47 \times 10^2$	$3.30 \times 10^2$	$4.95 \times 10^2$	$6.60 \times 10^2$	$8.25 \times 10^2$	$9.90 \times 10^2$	$1.15 \times 10^3$	$1.32 \times 10^3$	$1.48 \times 10^3$	$1.65 \times 10^3$
$\phi 63$	Push	$4.68 \times 10^2$	$6.23 \times 10^2$	$9.35 \times 10^2$	$1.25 \times 10^3$	$1.56 \times 10^3$	$1.87 \times 10^3$	$2.18 \times 10^3$	$2.49 \times 10^3$	$2.81 \times 10^3$	$3.12 \times 10^3$
	Pull	$4.20 \times 10^2$	$5.61 \times 10^2$	$8.41 \times 10^2$	$1.12 \times 10^3$	$1.40 \times 10^3$	$1.68 \times 10^3$	$1.96 \times 10^3$	$2.24 \times 10^3$	$2.52 \times 10^3$	$2.80 \times 10^3$
$\phi 80$	Push	$7.54 \times 10^2$	$1.01 \times 10^3$	$1.51 \times 10^3$	$2.01 \times 10^3$	$2.51 \times 10^3$	$3.02 \times 10^3$	$3.52 \times 10^3$	$4.02 \times 10^3$	$4.52 \times 10^3$	$5.03 \times 10^3$
	Pull	$6.80 \times 10^2$	$9.07 \times 10^2$	$1.36 \times 10^3$	$1.81 \times 10^3$	$2.27 \times 10^3$	$2.72 \times 10^3$	$3.17 \times 10^3$	$3.63 \times 10^3$	$4.08 \times 10^3$	$4.54 \times 10^3$
$\phi 100$	Push	$1.18 \times 10^3$	$1.57 \times 10^3$	$2.36 \times 10^3$	$3.14 \times 10^3$	$3.93 \times 10^3$	$4.71 \times 10^3$	$5.50 \times 10^3$	$6.28 \times 10^3$	$7.07 \times 10^3$	$7.85 \times 10^3$
	Pull	$1.07 \times 10^3$	$1.43 \times 10^3$	$2.14 \times 10^3$	$2.86 \times 10^3$	$3.57 \times 10^3$	$4.29 \times 10^3$	$5.00 \times 10^3$	$5.72 \times 10^3$	$6.43 \times 10^3$	$7.15 \times 10^3$

## Switch specifications (F-switch)

● 1-color/2-color LED

Item	2-wire proximity		3-wire proximity		2-wire proximity		3-wire proximity		
	F2S		F3S		F2H/F2V	F2YH/ F2YV	F3H/F3V	F3PH/F3PV (made to order)	F3YH/F3YV
Applications	Dedicated for programmable controller		For programmable controller, relay		Dedicated for programmable controller		For programmable controller, relay		
Output method	-		NPN output		-		NPN output	PNP output	NPN output
Power supply voltage	-		10 to 28 VDC		-		10 to 28 VDC	4.5 to 28 VDC	10 to 28 VDC
Load voltage	10 to 30 VDC		30 VDC or less		10 to 30 VDC		30 VDC or less		
Load current	5 to 20 mA		50 mA or less		5 to 20 mA		50 mA or less		
Indicator	LED (Lit when ON)				Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Yellow LED (Lit when ON)		Red/green LED (Lit when ON)
Leakage current	1 mA or less		10 µA or less		1 mA or less		10 µA or less		
Weight	g				1 m:10 3 m:29				

## Switch specifications (T-switch)

● 1-color/2-color LED/for AC magnetic field proof

Item	2-wire proximity		2-wire proximity				3-wire proximity				2-wire reed				2-wire proximity	
	T1H/T1V	T2H/T2V/ T2JH/T2JV	T2YH/ T2YV	T2WH/ T2WV	T3H/T3V	T3PH/ T3PV	T3YH/ T3YV	T3WH/ T3WV	T0H/T0V	T5H/T5V		T8H/T8V		T2YD(*4) T2YDT		
Applications	For programmable controller, relay, compact solenoid valve	Dedicated for programmable controller				For programmable controller, relay				For programmable controller, relay	For programmable controller, relay, IC circuit (no indicator lamp), serial connection		For programmable controller, relay		For programmable controller	
Output method	-	-				NPN output	PNP output	NPN output	NPN output	-						
Pwr. supp. V.	-		-				10 to 28 VDC				-					
Load voltage	85 to 265 VAC	10 to 30 VDC	24 VDC ±10%		30 VDC or less				12/24 VDC	100/110 VAC	5/12/24 VDC	100/110 VAC	12/24 VDC	110 VAC	220 VAC	24 VDC ±10%
Load current	5 to 100 mA	5 to 20 mA (*3)		100 mA or less		50 mA or less		5 to 50 mA	7 to 20 mA	50 mA or less	20 mA or less	5 to 50 mA	7 to 20 mA	7 to 10 mA	5 to 20 mA	
Indicator	LED (Lit when ON)	LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	No indicator lamp		LED (Lit when ON)		Red/green LED (Lit when ON)		
Leakage current	≤ 1 mA at 100 VAC, ≤ 2 mA at 200 VAC	1 mA or less		10 µA or less				0 mA				1 mA or less				
Weight g	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80		1 m:18 3 m:49 5 m:80			1 m:33 3 m:87 5 m:142	1 m:61 3 m:166 5 m:272			

\*1: Refer to Ending Page 1 for detailed switch specifications and dimensions.

\*2: Switches other than the above models, such as switches with connectors, are also available. Refer to Ending Page 1.

\*3: The max. load current is 20 mA at 25°C. The current is lower than 20 mA if the operating ambient temperature around the switch is higher than 25°C. (5 to 10 mA at 60°C)

\*4: Switch for AC magnetic field (T2YD/T2YDT) cannot be used in DC magnetic field.

\*5: The F-switch uses a bend-resistant lead wire.

## Cylinder weight table (the weight of the switches is when there are 2 cylinder switches.)

● With rod side position locking

(Unit: g)

Stroke (mm)	10		15		20		25		50		75		100	
	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch
ø20	201	242	213	254	226	267	238	279	330	370	392	433	455	495
ø25	274	315	290	331	306	347	322	363	439	480	519	560	599	640
ø32	430	474	451	495	473	517	494	538	602	646	709	753	817	861
ø40	632	681	658	708	685	734	711	761	844	893	976	1026	1109	1158
ø50	1096	1147	1138	1189	1180	1231	1222	1273	1432	1483	1642	1693	1852	1903
ø63	1609	1663	1664	1718	1719	1773	1774	1828	2049	2103	2324	2378	2599	2653
ø80	-	-	-	-	-	-	3822	3882	4255	4315	4904	4964	5336	5396
ø100	-	-	-	-	-	-	5769	5835	6339	6405	7194	7260	7764	7830

● With head side position locking

(Unit: g)

Stroke (mm)	10		15		20		25		50		75		100	
	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch
ø20	217	258	230	270	242	283	255	295	330	370	392	433	455	495
ø25	295	336	311	352	327	368	343	384	439	480	519	560	599	640
ø32	462	506	484	528	505	549	527	571	634	678	742	786	849	893
ø40	688	737	714	763	741	790	767	816	900	949	1032	1081	1165	1214
ø50	1180	1231	1222	1273	1264	1315	1306	1357	1516	1567	1726	1777	1936	1987
ø63	1675	1729	1730	1784	1785	1839	1840	1894	2115	2169	2390	2444	2665	2719
ø80	-	-	-	-	-	-	3952	4012	4385	4445	4904	4964	5336	5396
ø100	-	-	-	-	-	-	5940	6006	6510	6576	7194	7260	7764	7830

# SSD2-Q Series


## How to order

● No switch (without magnet for switch)

SSD2-Q - 20 - 10 - R - NMO - LB - I

● With switch (built-in magnet for switch)

SSD2-QL - 20 - 10 - R - T0H - R - NMO - LB - I

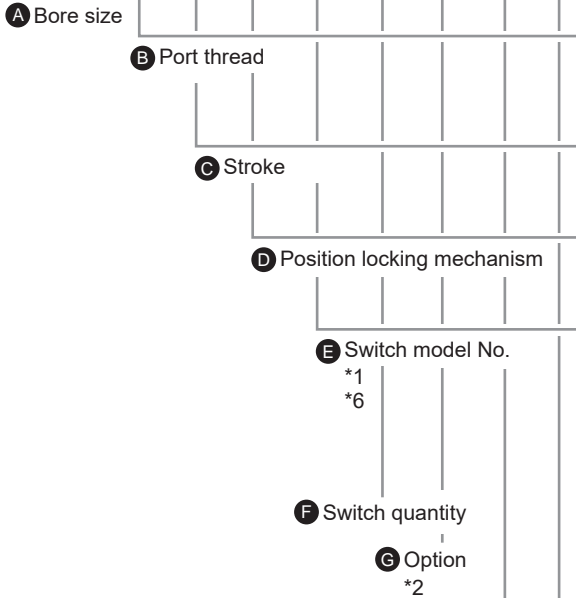

## ⚠ Precautions for model No. selection

- \*1 : The F-switch can only be mounted on the piping port surface of bore sizes  $\phi 20$  and  $\phi 25$ .
- \*2 : Only non-locking manual override unless "M0" or "M1" of G option is selected. A release bolt is not included.
- \*3 : The mounting bracket is included at shipment.
- \*4 : The projection dimension of piston rod WF when LB or FA is selected is different from that of the standard. Refer to the dimensions on pages 847, 848, 850 and 851. The number of the specified protruding dimension will be added at the end of the model No. printed on the metal plate on the body.
- \*5 : "I" and "Y" cannot be selected together.
- \*6 : Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.
- \*7 : Refer to pages 750 and 751 for combinations of variations/options.
- \*8 : F-switch cannot be selected.

## [Example of model No.]

### SSD2-QL-20-10-R-T0H-R-N-LB-I

Model: Compact cylinder, position locking

- A Bore size :  $\phi 20$  mm
- B Port thread : Rc thread
- C Stroke : 10mm
- D Position locking mechanism : With rod side position locking
- E Switch model No. : Reed switch T0H, lead wire 1 m
- F Switch quantity : 1 on rod side
- G Option : Rod end male thread
- H Mounting bracket : Axial foot
- I Accessory : Rod eye

H Mounting bracket  
\*3  
\*4

I Accessory  
\*5

## How to order switch

SW - T0H

Switch model No. (Item E above)

CKD

Code	Description
<b>A Bore size (mm)</b>	
20	$\phi 20$
25	$\phi 25$
32	$\phi 32$
40	$\phi 40$
50	$\phi 50$
63	$\phi 63$
80	$\phi 80$
100	$\phi 100$

<b>B Port thread</b>	
Blank	Rc thread
NN	NPT thread ( $\phi 32$ and over) (made-to-order product)
GN	G thread ( $\phi 32$ and over) (made-to-order product)

<b>C Stroke (mm)</b>	
Refer to the stroke table on the following page.	

<b>D Position locking mechanism</b>	
R	With rod side position locking
H	With head side position locking

<b>E Switch model No.</b>																
Lead wire	Lead wire	Contact	Voltage		Indicator	Lead wire	Bore size									
			AC	DC			20	25	32	40	50	63	80	100		
Straight	F2S*	Proximity	●	●	1-color LED	2-wire	●	●								
	F3S*					3-wire	●	●								
F2H*	F2V*	2-wire	●	●												
F3H*	F3V*	3-wire	●	●												
F3PH*	F3PV*	Proximity	●	●	1-color LED (PNP output) (custom)	3-wire	●	●								
F2YH*	F2YV*					2-wire	●	●								
F3YH*	F3YV*	3-wire	●	●												
T0H*	T0V*	Reed	●	●	1-color LED	2-wire	●	●	●	●	●	●	●	●	●	●
T5H*	T5V*						●	●	●	●	●	●	●	●	●	●
T8H*	T8V*	Reed	●	●	1-color LED	2-wire	●	●	●	●	●	●	●	●	●	●
T1H*	T1V*						●	●	●	●	●	●	●	●	●	●
T2H*	T2V*	Proximity	●	●	1-color LED	2-wire	●	●	●	●	●	●	●	●	●	●
T3H*	T3V*						●	●	●	●	●	●	●	●	●	●
T3PH*	T3PV*	Proximity	●	●	1-color LED (PNP output)	3-wire	●	●	●	●	●	●	●	●	●	●
T2WH*	T2WV*					2-wire	●	●	●	●	●	●	●	●	●	●
T2YH*	T2YV*	Proximity	●	●	2-color LED	2-wire	●	●	●	●	●	●	●	●	●	●
T3WH*	T3WV*					3-wire	●	●	●	●	●	●	●	●	●	●
T3YH*	T3YV*	Proximity	●	●	2-color LED	2-wire	●	●	●	●	●	●	●	●	●	●
T2YD*	-					2-wire	●	●	●	●	●	●	●	●	●	●
T2JD*	-	Proximity	●	●	for AC magnetic field	2-wire	●	●	●	●	●	●	●	●	●	●
T2JH*	T2JV*					2-wire	●	●	●	●	●	●	●	●	●	●

<b>* Lead wire length</b>	
Blank	1 m (standard)
3	3 m (option)
5	5 m (option)

<b>F Switch quantity</b>	
R	1 on rod side
H	1 on head side
D	2

<b>G Option</b>	
Blank	Rod end female thread
N	Rod end male thread
M0	Non-locking manual override (with release bolt)
M1	Locking manual override
P4	Specifications for rechargeable battery (made to order)
P40	

<b>H Mounting bracket</b>	
Blank	Without mounting bracket
LB	Axial foot
CB	Clevis bracket (pin and snap ring included)
FA	Rod side flange
FB	Head side flange

<b>I Accessory (available when rod end male thread "N" is selected)</b>	
I	Rod eye
Y	Rod clevis (pin and snap ring included)

### [Stroke table]

Stroke (mm)		Applicable bore size							
		ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100
Standard stroke	10	●	●	●	●	●	●		
	15	●	●	●	●	●	●		
	20	●	●	●	●	●	●		
	25	●	●	●	●	●	●	●	●
	50	●	●	●	●	●	●	●	●
	75	●	●	●	●	●	●	●	●
	100	●	●	●	●	●	●	●	●
Min. stroke (mm)		10						25	
Max. stroke (mm)		100							


### How to order mounting bracket

Bore size (mm)	ø20	ø25	ø32	ø40	ø50	ø63	ø80
<b>Mounting bracket</b>							
Foot (LB)	SSD2-LB-20	SSD2-LB-25	SSD2-LB-32	SSD2-LB-40	SSD2-LB-50	SSD2-LB-63	SSD2-LB-80
Flange (FA/FB)	SSD2-FA-20	SSD2-FA-25	SSD2-FA-32	SSD2-FA-40	SSD2-FA-50	SSD2-FA-63	SSD2-FA-80
Clevis bracket (CB)	SSD2-CB-20	SSD2-CB-25	SSD2-CB-32	SSD2-CB-40	SSD2-CB-50	SSD2-CB-63	SSD2-CB-80
<b>Bore size (mm)</b>	<b>ø100</b>						
<b>Mounting bracket</b>							
Foot (LB)	SSD2-LB-100						
Flange (FA/FB)	SSD2-FA-100						
Clevis bracket (CB)	SSD2-CB-100						

\*1: The foot mounting bracket is provided as 2 pcs./set.


### [Explanation of manual override]

● Non-locking manual override (option code: M0)

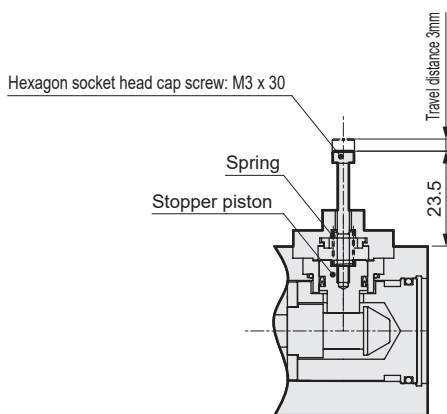

By screwing the hexagon socket head cap screw (M3 x 30) into the stopper piston and pulling the bolt with force of 20 N or more, the stopper piston moves and the lock is released. (Perform when horizontally installed with no load or when the opposite side port is pressurized)  
When you release the bolt, the stopper piston is returned to the original position and engaged in the groove, and the piston is locked.

● Locking manual override (option code: M1)

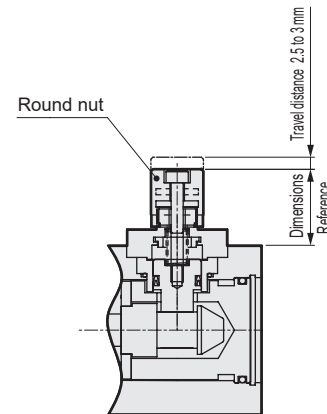

By rotating the round nut leftward (counterclockwise), the stopper piston moves and the lock is released. Locking the round nut by rotating it to the right (clockwise) causes the stopper piston to return. When it fits into the lock groove, the piston is locked. Screw in the round nut fully, since the cylinder may be damaged if the stopper piston is not securely locked in the groove.


SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/ COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/ MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending

# SSD2-Q Series


## Internal structure and parts list (ø20 to ø50)

SCP\*3  
CMK2  
CMA2  
SCM  
SCG  
SCA2  
SCS2  
CKV2  
CAV2/  
COVPIN2  
SSD2  
SSG  
SSD  
CAT  
MDC2  
MVC  
SMG  
MSD/  
MSDG  
FC\*  
STK


● SSD2-QL-20 to 50-R  
(double acting/single rod/with switch/rod side position locking)

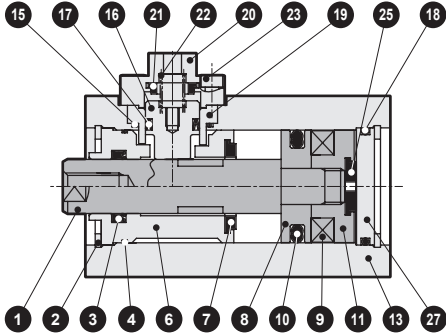


● SSD2-QL-20 to 50-H  
(double acting/single rod/with switch/head side position locking)

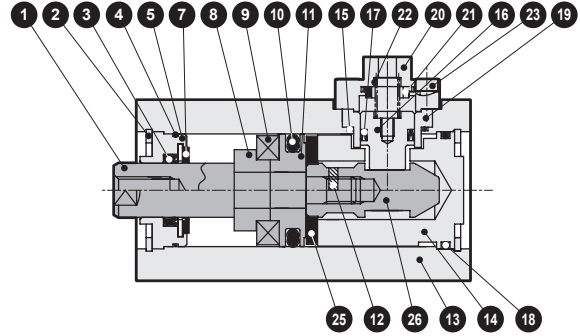

● SSD2-Q-20 to 50-R  
(double acting/single rod/rod side position locking)

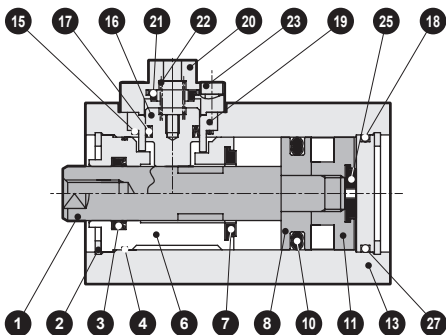




● SSD2-Q-20 to 50-H  
(double acting/single rod/head side position locking)

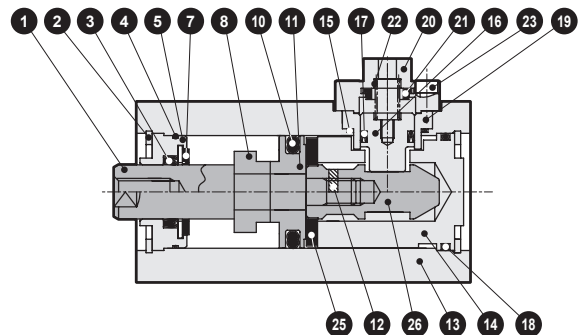

● ø20, ø25: 50 stroke and over

● ø20, ø25: 50 stroke and over

● Locking manual override



### Parts list

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	ø20 to ø25: Stainless steel ø32 to ø50: Steel	Industrial chrome plating	16	Stopper piston	Steel	Nitriding
2	C-snap ring	Steel	Zinc phosphate	17	Stopper packing	Nitrile rubber	
3	Rod packing	Nitrile rubber		18	O-ring	Nitrile rubber	
4	Rod metal gasket	Nitrile rubber		19	Stopper housing	ø20 to ø30, ø50: Aluminum alloy ø40: Alloy steel	Alumite Chromate
5	Rod metal	Special aluminum	Alumite	20	Stopper cover	Aluminum alloy	Chromate
6	Rod cover	Aluminum alloy	Alumite	21	Cushion rubber	Urethane rubber	
7	Cushion rubber (R)	Urethane rubber		22	Coil spring	Piano wire	Electrodeposition
8	Spacer	Aluminum alloy	ø20 to ø32: Chromate	23	Hexagon socket head cap screw	Steel	
9	Magnet	Plastic		24	Wear ring	Polyacetal resin (only for ø20 and ø25 with 50 mm stroke and over)	
10	Piston packing	Nitrile rubber		25	Cushion rubber (H)	Urethane rubber	
11	Piston	Aluminum alloy	Chromate	26	Sleeve	Steel	Nitriding
12	Spring pin	Steel	Black finish	27	Cover	Aluminum alloy	Chromate
13	Body	Aluminum alloy	Hard alumite	28	Round nut	Aluminum alloy	
14	Head cover	Aluminum alloy	Chromate	29	Hexagon socket head cap screw	Steel	
15	O-ring	Nitrile rubber					


### Repair parts list

Bore size (mm)	Kit No.	Repair parts No.
ø20	SSD2-Q-R-20K	
ø25	SSD2-Q-R-25K	
ø32	SSD2-Q-R-32K	3 4 7 10 15
ø40	SSD2-Q-R-40K	17 18 21 24 25
ø50	SSD2-Q-R-50K	


\*1: 24 is included only with ø20 and ø25.

### Internal structure and parts list (ø63 to ø100)

● SSD2-QL-63 to 100-R  
(double acting/single rod/with switch/rod side position locking)

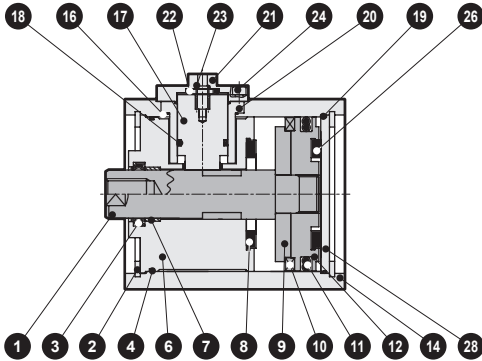


● SSD2-Q-63 to 100-R  
(double acting/single rod/rod side position locking)

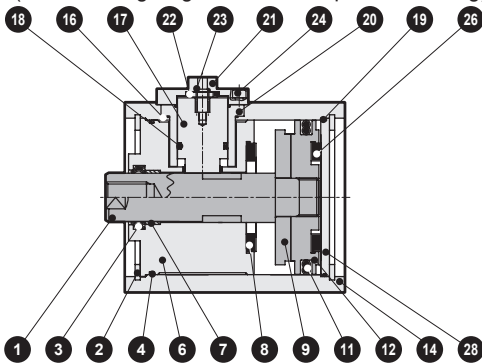


● ø80, ø100: 75 stroke and over




● SSD2-QL-63 to 100-H  
(double acting/single rod/with switch/head side position locking)

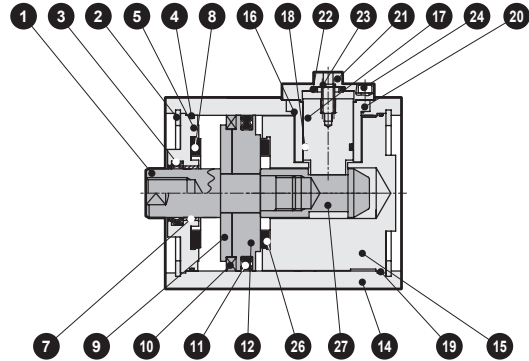


● SSD2-Q-63 to 100-H  
(double acting/single rod/head side position locking)

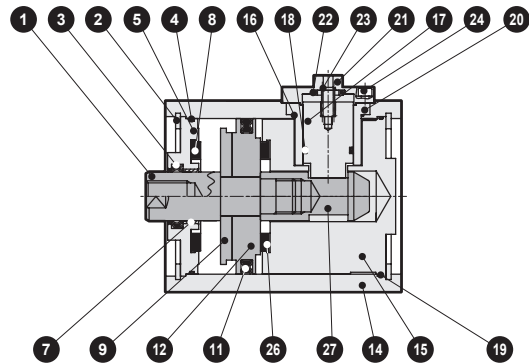

● ø80, ø100: 75 stroke and over



● Locking manual override



### Parts list

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	Steel	Industrial chrome plating	17	Stopper piston	Steel	Nitriding
2	C-snap ring	Steel	Zinc phosphate	18	Stopper packing	Nitrile rubber	
3	Rod packing	Nitrile rubber		19	O-ring	Nitrile rubber	
4	Rod metal gasket	Nitrile rubber		20	Stopper housing	ø80: Aluminum alloy ø63, ø100: Alloy steel	Alumite Chromate
5	Rod metal	Special aluminum	Alumite	21	Stopper cover	Aluminum alloy	Chromate
6	Rod cover	Aluminum alloy	Alumite	22	Cushion rubber	Urethane rubber	
7	Bush	Oiles drymet		23	Coil spring	Piano wire	Electrodeposition
8	Cushion rubber (R)	Urethane rubber		24	Hexagon socket head cap screw	Steel	
9	Spacer	Aluminum alloy		25	Wear ring	Polyacetal resin (only for ø80 and ø100 with 75 mm stroke and over)	
10	Magnet	Plastic		26	Cushion rubber (H)	Urethane rubber	
11	Piston packing	Nitrile rubber		27	Sleeve	Steel	Nitriding
12	Piston	Aluminum alloy	Chromate	28	Cover	Aluminum alloy	Chromate
13	Spring pin	Steel	Black finish	29	Round nut	Aluminum alloy	
14	Body	Aluminum alloy	Hard alumite	30	Hexagon socket head cap screw	Steel	
15	Head cover	Aluminum alloy	Chromate				
16	O-ring	Nitrile rubber					

### Repair parts list

Bore size (mm)	Kit No.	Repair parts No.
ø63	SSD2-Q-H-63K	3 4 8 11 16
ø80	SSD2-Q-H-80K	3 4 8 11 16
ø100	SSD2-Q-H-100K	18 19 22 25 26

\*1: 25 is included only with ø80 and ø100.

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/

COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/

MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd

Contr

Ending

# SSD2-Q Series




## Dimensions (ø20, ø25)

### ● SSD2-Q(L)-20 to 25-R


### ● Rod end male thread

\* The dimensions are common for types with and without switches.

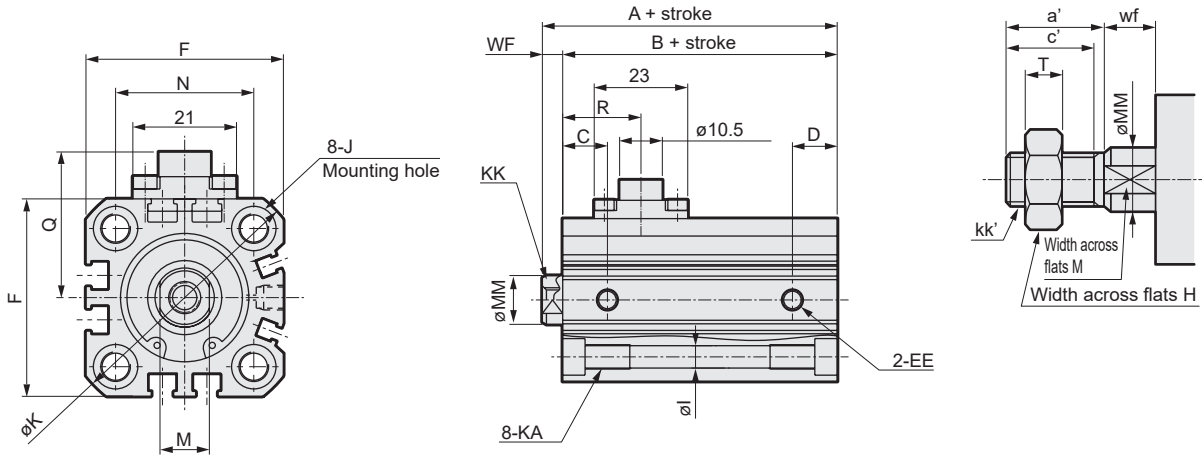

### ● SSD2-Q(L)-20 to 25-H

\* The dimensions are common for types with and without switches.

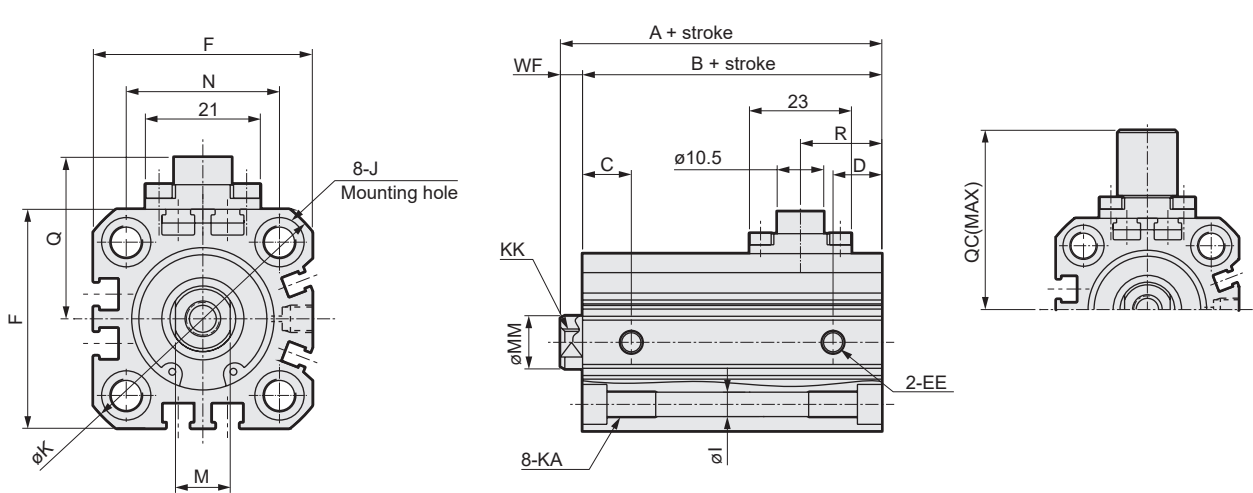

### ● Precautions regarding the switch mounting groove

\*1: Only F-switch is available for the ø20 or ø25 piping port surface.

Code	Common dimensions												
	EE	F	I	J	K	KA	KK	M	MM	N	WF <sup>*1</sup>	Q	QC
ø20	M5	36	5.5	9 spot face depth 5.5	47	M6 depth 11	M5 depth 7	8	10	25.5	4.5(14.5)	28.5	40
ø25	M5	40	5.5	9 spot face depth 5.5	51	M6 depth 11	M6 depth 12	10	12	28	5(15)	29.5	41
Code	With rod side position locking mechanism						With head side position locking mechanism						
	A <sup>*1</sup>	B <sup>*1</sup>	C	D	R	A <sup>*1</sup>	B <sup>*1</sup>	C	D	R			
ø20	59(80.5)	54.5(66)	9.5	8	18.6	65.5(80.5)	61(66)	9.5	8	17.3			
ø25	62.5(84)	57.5(69)	12	8.5	19.3	69(84)	64(69)	12	8.5	18.4			

### ● Rod end male thread

Code	a'	c'	H	kk'	M	MM	T	wf <sup>*1</sup>
ø20	14	12	13	M8	8	10	5	4.5(14.5)
ø25	17.5	15	17	M10x1.25	10	12	6	5(15)

\*1: Dimensions in ( ) are for strokes of more than 25 mm.


\*2: Refer to pages 852 and 853 for switch mounting position.

\*3: For dimensions of individual accessories, refer to pages 1046 to 1049.

### Dimensions with mounting bracket



- Axial foot (LB)  
SSD2-Q(L)-20, 25 -LB

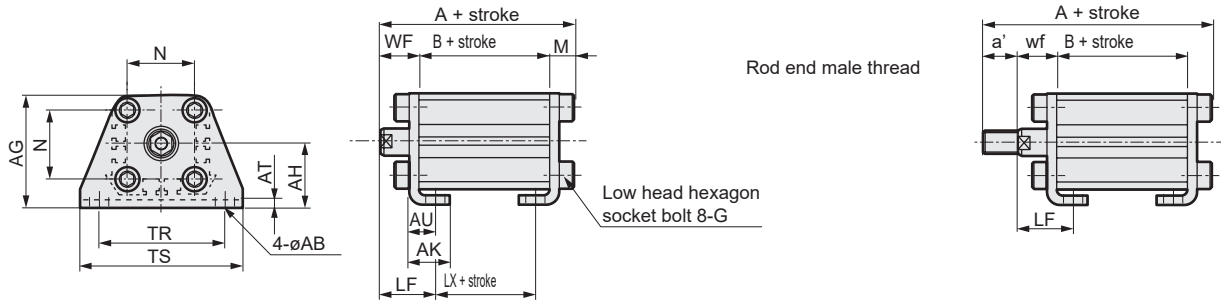

Code	Common dimensions						Female thread					SSD2-Q-R (female thread)					
Bore size (mm)	AB	AG	AH	AK	AT	AU	G	N	TR	TS	M	WF	LF	Without/with switch			
														A	B	LX	
ø20	7	42	24	15	3.2	9.2	M6x16	25.5	48	62	7.2	14.5	20.5	76.2(87.7)	54.5(66)	42.5(54)	
ø25	7	46	26	16.5	3.2	10.7	M6x16	28	52	66	7.2	15	22.5	79.7(91.2)	57.5(69)	42.5(54)	


Code	SSD2-Q-R (male thread)						SSD2-Q-H (female thread)					
Bore size (mm)	a'	wf	LF	Without/with switch			WF	LF	Without/with switch			
				A	B	LX			A	B	LX	
ø20	14	14.5	20.5	90.2(101.7)	54.5(66)	42.5(54)	14.5	20.5	82.7(87.7)	61(66)	49(54)	
ø25	17.5	15	22.5	97.2(108.7)	57.5(69)	42.5(54)	15	22.5	86.2(91.2)	64(69)	49(54)	

Code	SSD2-Q-H (male thread)					
Bore size (mm)	a'	wf	LF	Without/with switch		
				A	B	LX
ø20	14	14.5	20.5	96.7(101.7)	61(66)	49(54)
ø25	17.5	15	22.5	103.7(108.7)	64(69)	49(54)

\* Dimensions in ( ) are for ø20 and ø25 with more than 25 mm stroke and ø80 and ø100 with more than 50 mm stroke.

- Clevis bracket (CB)  
SSD2-Q(L)-20, 25 -CB

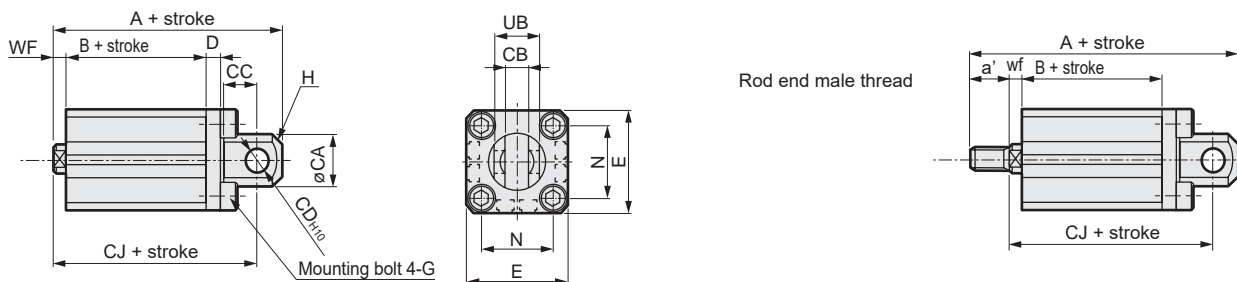

Code	Common dimensions										SSD2-Q-R (female thread)			
Bore size (mm)	CA	CB	CC	CD	D	E	G	H	N	UB	WF	A	B	CJ
	ø20	20	8.2 <sup>+0.2</sup>	12	8	5	36	M6x16	C4	25.5	16 <sup>-0.1</sup> <sub>-0.3</sub>	4.5(14.5)	86(107.5)	54.5(66)
ø25	24	10.2 <sup>+0.2</sup>	14	10	5	40	M6x16	C5	28	20 <sup>-0.1</sup> <sub>-0.3</sub>	5(15)	92.5(114)	57.5(69)	82.5(104)

Code	SSD2-Q-R (male thread)						SSD2-Q-H (female thread)			
Bore size (mm)	a'	wf	A	B	CJ	WF	A	B	CJ	
	ø20	14	4.5(14.5)	100(121.5)	54.5(66)	77(98.5)	4.5(14.5)	92.5(107.5)	61(66)	83.5(98.5)
ø25	17.5	5(15)	110(131.5)	57.5(69)	82.5(104)	5(15)	99(114)	64(69)	89(104)	

Code	SSD2-Q-H (male thread)					
Bore size (mm)	a'	wf	A	B	CJ	
	ø20	14	4.5(14.5)	106.5(121.5)	61(66)	83.5(98.5)
ø25	17.5	5(15)	116.5(131.5)	64(69)	89(104)	

\*1: Dimensions in ( ) are for more than 25 mm stroke.

SCP\*3  
CMK2  
CMA2  
SCM  
SCG  
SCA2  
SCS2  
CKV2  
CAV2/  
COVP/N2  
SSD2  
SSG  
SSD  
CAT  
MDC2  
MVC  
SMG  
MSD/  
MSDG  
FC\*  
STK  
SRL3  
SRG3  
SRM3  
SRT3  
MRL2  
MRG2  
SM-25  
ShkAbs  
FJ  
FK  
Spd  
Contr  
Ending




# SSD2-Q Series

## Dimensions with mounting bracket



- Rod side flange (FA)  
SSD2-Q(L)-20, 25 -FA

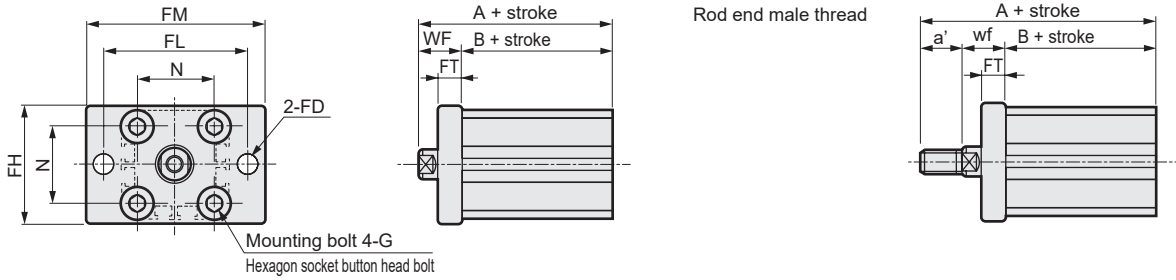


Code	Common dimensions							SSD2-Q-R (female thread)			SSD2-Q-R (male thread)				
	FD	FH	FL	FM	FT	N	G	WF	Without/with switch		a'	wf	Without/with switch		
Bore size (mm)									A	B			A	B	
SSD2	ø20	6.6	39	48	60	8	25.5	M6x16	14.5	69(80.5)	54.5(66)	14	14.5	83(94.5)	54.5(66)
	ø25	6.6	42	52	64	8	28	M6x16	15	72.5(84)	57.5(69)	17.5	15	90(101.5)	57.5(69)

Code	SSD2-Q-H (female thread)			SSD2-Q-H (male thread)				
	WF	Without/with switch		a'	wf	Without/with switch		
Bore size (mm)		A	B			A	B	
SSD	ø20	14.5	75.5(80.5)	61(66)	14	14.5	89.5(94.5)	61(66)
	ø25	15	79(84)	64(69)	17.5	15	96.5(101.5)	64(69)

\* Dimensions in ( ) are for ø20 and ø25 with more than 25 mm stroke and ø80 and ø100 with more than 50 mm stroke.

- Head side flange (FB)  
SSD2-Q(L)-20, 25 -FB

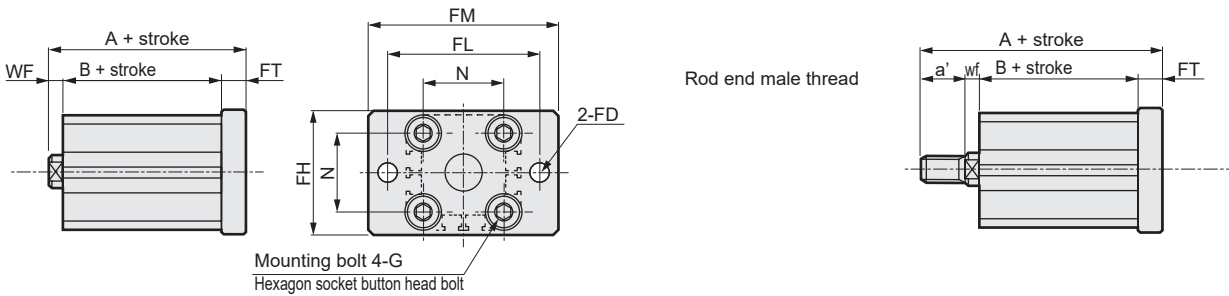

Code	Common dimensions							SSD2-Q-R (female thread)			SSD2-Q-R (male thread)				
	FD	FH	FL	FM	FT	N	G	WF	A	B	a'	wf	A	B	
Bore size (mm)															
SM-25	ø20	6.6	39	48	60	8	25.5	M6x16	4.5(14.5)	67(88.5)	54.5(66)	46	19.5(14.5)	71(92.5)	54.5(66)
	ø25	6.6	42	52	64	8	28	M6x16	5(15)	70.5(92)	57.5(69)	53	22.5(15)	88(109.5)	57.5(69)

Code	SSD2-Q-H (female thread)			SSD2-Q-H (male thread)				
	WF	A	B	a'	wf	A	B	
Bore size (mm)								
FJ	ø20	4.5(14.5)	73.5(88.5)	61(66)	46	19.5(14.5)	77.5(92.5)	61(66)
	ø25	5(15)	77(92)	64(69)	53	22.5(15)	94.5(109.5)	64(69)



\*1: Dimensions in ( ) are for more than 25 mm stroke.

### Dimensions (ø32 to ø100)




#### ● SSD2-Q(L)-32 to 100-R

\* The dimensions are common for types with and without switches.


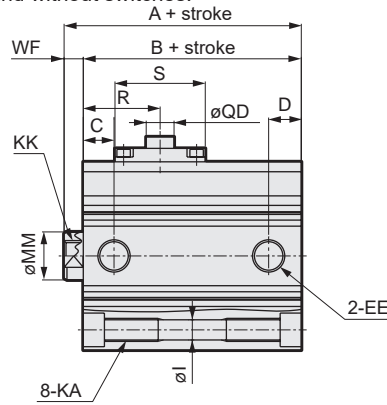
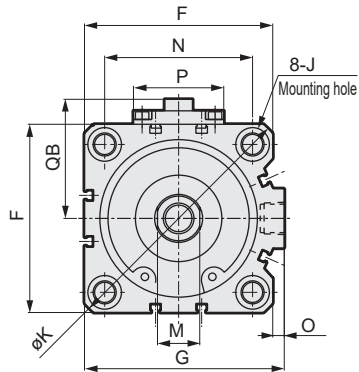


#### ● Rod end male thread



#### ● SSD2-Q(L)-32 to 100-H

\* The dimensions are common for types with and without switches.

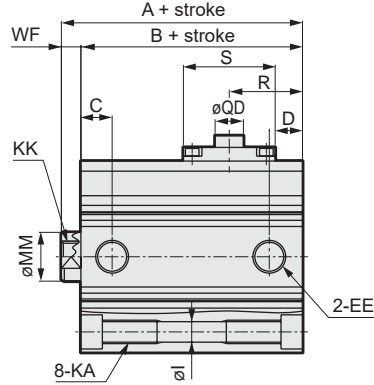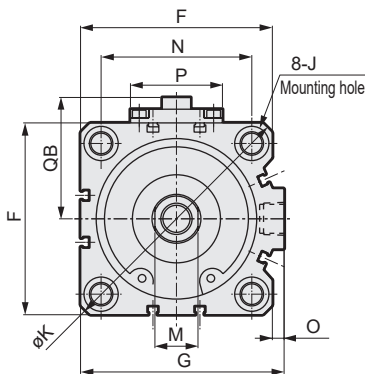

Code	Common dimensions										
Bore size (mm)	EE	F	G	I	J	K	KA	KK	M	MM	N
ø32	Rc1/8	45	49.5	5.5	9 spot face depth 5.5	60	M6 depth 11	M8 depth 13	14	16	34
ø40	Rc1/8	52	57	5.5	9 spot face depth 5.5	69	M6 depth 11	M8 depth 13	14	16	40
ø50	Rc1/4	64	71	6.9	11 spot face depth 6.5	86	M8 depth 13	M10 depth 15	17	20	50
ø63	Rc1/4	77	84	8.7	14 spot face depth 9	103	M10 depth 25	M10 depth 15	17	20	60
ø80	Rc3/8	98	104	10.5	17.5 spot face depth 11	132	M12 depth 28	M16 depth 21	22	25	77
ø100	Rc3/8	117	123.5	10.5	17.5 spot face depth 11	156	M12 depth 28	M20 depth 27	27	30	94

Code	Common dimensions							
Bore size (mm)	O	P	S	QB	QC	QD	QE	WF <sup>*1</sup>
ø32	4.5	22	30.5	33.5	46.3	10.5	13	7
ø40	5	22	30.5	37	49.8	10.5	13	7
ø50	7	40.5	23	44	56.3	10.5	13	8
ø63	7	40.5	23	50.5	62.8	10.5	13	8
ø80	6	47	47	62	77.5	14.5	24	10(20)
ø100	6.5	47	47	71.5	87	14.5	24	12(22)

Code	With rod side position locking mechanism					With head side position locking mechanism				
Bore size (mm)	A <sup>*1</sup>	B <sup>*1</sup>	C	D	R	A <sup>*1</sup>	B <sup>*1</sup>	C	D	R
ø32	65	58	11	9	19.2	72.5	65.5	11	9	20.9
ø40	71.5	64.5	14	11	21.7	82	75	14	14	23.9
ø50	73.5	65.5	15	12.5	24.7	83.5	75.5	15	12.5	29.8
ø63	79	71	19	16	26.2	85	77	15	16	25.5
ø80	113.5(136)	103.5(116)	18	17	40	121(136)	111(116)	18	17	37.5
ø100	125(147.5)	113(125.5)	23	21	44.5	132.5(147.5)	120.5(125.5)	23	21	40

#### ● Rod end male thread

Code	a'	c'	H	kk'	M	MM	T	wf <sup>*1</sup>
Bore size (mm)								
ø32	23.5	20.5	22	M14x1.5	14	16	8	5
ø40	23.5	20.5	22	M14x1.5	14	16	8	5
ø50	28.5	26	27	M18x1.5	17	20	11	5
ø63	28.5	26	27	M18x1.5	17	20	11	5
ø80	35.5	32.5	32	M22x1.5	22	25	13	8(18)
ø100	35.5	32.5	41	M26x1.5	27	30	16	8(18)

\*1 : Dimensions in ( ) are for strokes of more than 50 mm.

\*2: Refer to pages 852 and 853 for switch mounting position.

\*3: For dimensions of individual accessories, refer to pages 1046 to 1049.


SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/ COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/ MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending

# SSD2-Q Series

## Dimensions with mounting bracket



- Axial foot (LB)  
SSD2-Q(L)-32 to 100 -LB

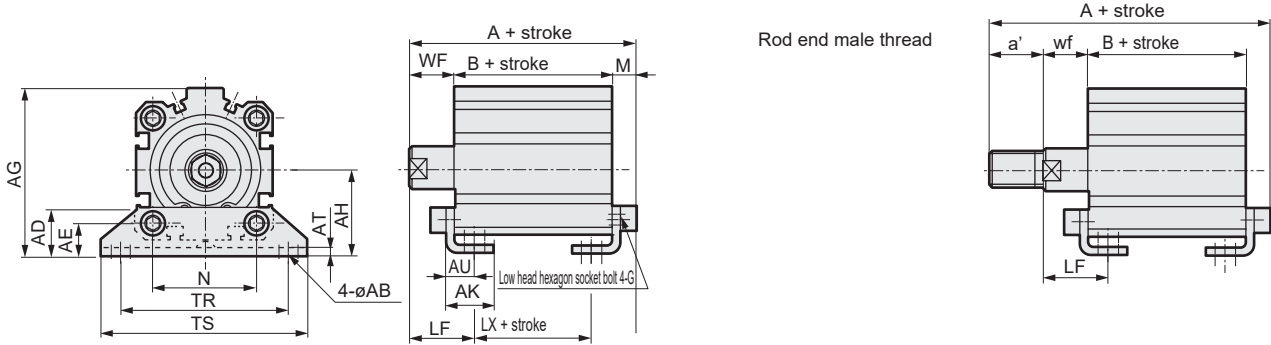


Code	Common dimensions						Female thread						SSD2-Q-R (female thread)						
	Bore size (mm)	AB	AD	AE	AG	AH	AK	AT	AU	G	N	TR	TS	M	WF	LF	Without/with switch		
																	A	B	LX
SSD2	ø32	7	18.5	13	57	30	17	3.2	11.2	M6x16	34	57	71	7.2	17	25	82.2	58	42
	ø40	7	18	13	64	33	18.2	3.2	11.2	M6x16	40	64	78	7.2	17	25	88.7	64.5	48.5
	ø50	9	22	14	78	39	22.7	3.2	14.7	M8x20	50	79	95	8.2	18	29.5	91.7	65.5	42.5
	ø63	11	26	16	91.5	46	25.2	3.2	16.2	M10x25	60	95	113	9.2	18	31	98.2	71	45
	ø80	13	31.5	20.5	114	59	30.5	4.5	19.5	M12x40	77	118	140	11.5	20	35	135(147.5)	103.5(116)	73.5(86)
	ø100	13	35	24	136	71	35.5	6	23	M12x40	94	137	162	13	22	39	148(160.5)	113(125.5)	79(91.5)

Code	SSD2-Q-R (male thread)			SSD2-Q-H (female thread)			SSD2-Q-H (male thread)											
	Bore size (mm)	a'	wf	Without/with switch			WF	LF	Without/with switch			a'	wf	LF	Without/with switch			
			A	B	LX			A	B	LX				A	B	LX		
CAT	ø32	23.5	15	23	103.7	58	42	17	25	89.7	65.5	49.5	23.5	15	23	111.2	65.5	49.5
	ø40	23.5	15	23	110.2	64.5	48.5	17	25	99.2	75	59	23.5	15	23	120.7	75	59
	ø50	28.5	15	26.5	117.2	65.5	42.5	18	29.5	101.7	75.5	52.5	28.5	15	26.5	127.2	75.5	52.5
	ø63	28.5	15	28	123.7	71	45	18	31	104.2	77	51	28.5	15	28	129.7	77	51
	ø80	35.5	18	33	168.5(181)	103.5(116)	73.5(86)	20	35	142.5(147.5)	111(116)	81(86)	35.5	18	33	176(181)	111(116)	81(86)
	ø100	35.5	18	35	179.5(192)	113(125.5)	79(91.5)	22	39	155.5(160.5)	120.5(125.5)	86.5(91.5)	35.5	18	35	187(192)	120.5(125.5)	86.5(91.5)

\* Dimensions in ( ) are for ø20 and ø25 with more than 25 mm stroke and ø80 and ø100 with more than 50 mm stroke.

- Clevis bracket (CB)  
SSD2-Q(L)-32 to 100 -CB

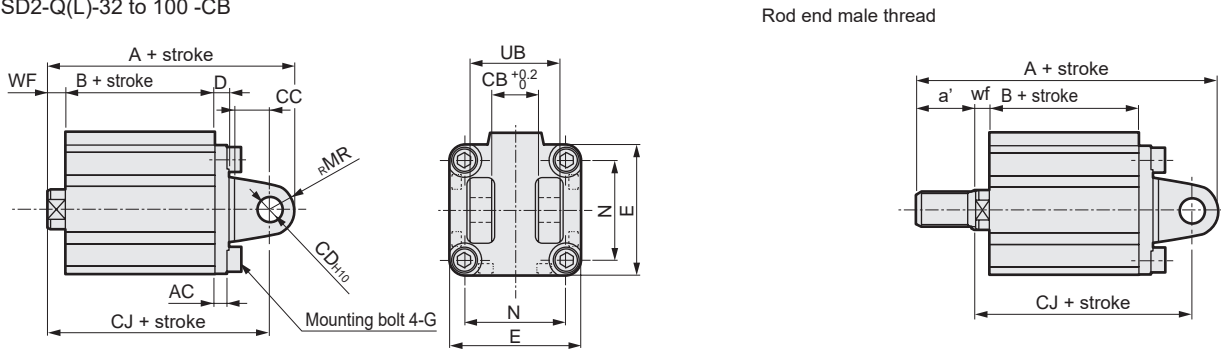

Code	Common dimensions											SSD2-Q-R (female thread)			
	Bore size (mm)	AC	CB	CC	CD	D	E	G	MR	N	UB	WF	A	B	CJ
MRL2	ø32	4.5	18.2	14	10	5	45	M6x16	10	34	36	7	95	58	85
	ø40	5	18.2	14	10	6	52	M6x16	10	40	36	7	103.5	64.5	93.5
	ø50	6	22.2	20	14	7	64	M8x20	14	50	44	8	115.5	65.5	101.5
	ø63	7	22.2	20	14	8	77	M10x25	14	60	44	8	123	71	109
	ø80	9	28.2	27	18	10	98	M12x40	18	77	56	10(20)	169.5(192)	103.5(116)	151.5(174)
	ø100	12	32.2	31	22	13	117	M12x40	22	94	64	12(22)	192(214.5)	113(125.5)	170(192.5)


Code	SSD2-Q-R (male thread)			SSD2-Q-H (female thread)			SSD2-Q-H (male thread)								
	Bore size (mm)	a'	wf	A	B	CJ	WF	A	B	CJ	a'	wf	A	B	CJ
FJ	ø32	23.5	5	116.5	58	83	7	102.5	65.5	92.5	23.5	5	124	65.5	90.5
	ø40	23.5	5	125	64.5	91.5	7	114	75	104	23.5	5	135.5	74.5	102
	ø50	28.5	5	141	65.5	98.5	8	125.5	75.5	111.5	28.5	5	151	71.5	108.5
	ø63	28.5	5	148.5	71	106	8	129	77	115	28.5	5	154.5	77	112
	ø80	35.5	8(18)	203(225.5)	103.5(116)	149.5(172)	10(20)	177(192)	111(116)	159(174)	35.5	8(18)	210.5(225.5)	111(116)	157(172)
	ø100	35.5	8(18)	223.5(246)	113(125.5)	166(188.5)	12(22)	199.5(214.5)	120.5(125.5)	177.5(192.5)	35.5	8(18)	231(246)	120.5(125.5)	173.5(188.5)

\*1: Dimensions in ( ) are for ø80 and ø100 are for more than 50 mm stroke.


### Dimensions with mounting bracket




- Rod side flange (FA)  
SSD2-Q(L)-32 to 100 -FA



Mounting bolt 4-G  
 ø32 to ø63: Hexagon socket button head bolt  
 ø80/ø100: Special bolt



Rod end male thread




Code	Common dimensions								SSD2-Q-R (female thread)				SSD2-Q-R (male thread)			
	Bore size (mm)	FC	FD	FH	FL	FM	FT	N	G	WF	Without/with switch		a'	wf	Without/with switch	
											A	B			A	B
ø32	34	5.5	48	56	65	8	34	M6x16	17	75	58	23.5	15	96.5	58	
ø40	40	5.5	54	62	72	8	40	M6x16	17	81.5	64.5	23.5	15	103	64.5	
ø50	50	6.6	67	76	89	9	50	M8x20	18	83.5	65.5	28.5	15	109	65.5	
ø63	60	9	80	92	108	9	60	M10x25	18	89	71	28.5	15	114.5	71	
ø80	77	11	99	116	134	11	77	M12x40	20	123.5(136)	103.5(116)	35.5	18	157(169.5)	103.5(116)	
ø100	94	11	117	136	154	11	94	M12x40	22	135(147.5)	113(125.5)	35.5	18	166.5(179)	113(125.5)	


Code	SSD2-Q-H (female thread)				SSD2-Q-H (male thread)			
	Bore size (mm)	WF	Without/with switch		a'	wf	Without/with switch	
			A	B			A	B
ø32	17	82.5	65.5	23.5	15	104	65.5	
ø40	17	92	75	23.5	15	113.5	75	
ø50	18	93.5	75.5	28.5	15	119	75.5	
ø63	18	95	77	28.5	15	120.5	77	
ø80	20	131(136)	111(116)	35.5	18	164.5(169.5)	111(116)	
ø100	22	142.5(147.5)	120.5(125.5)	35.5	18	174(179)	120.5(125.5)	

\* Dimensions in ( ) are for ø20 and ø25 with more than 25 mm stroke and ø80 and ø100 with more than 50 mm stroke.


- Head side flange (FB)  
SSD2-Q(L)-32 to 100 -FB



Mounting bolt 4-G  
 ø32 to ø63: Hexagon socket button head bolt  
 ø80/ø100: Special bolt



Rod end male thread



Code	Common dimensions								SSD2-Q-R (female thread)			SSD2-Q-R (male thread)				
	Bore size (mm)	FC	FD	FH	FL	FM	FT	N	G	WF	A	B	a'	wf	A	B
ø40	40	5.5	54	62	72	8	40	M6x16	7	79.5	64.5	66	29.5	101	64.5	
ø50	50	6.6	67	76	89	9	50	M8x20	8	82.5	65.5	73	30.5	108	65.5	
ø63	60	9	80	92	108	9	60	M10x25	8	88	71	78.5	36	113.5	71	
ø80	77	11	99	116	134	11	77	M12x40	10(20)	124.5(147)	103.5(116)	98	43.5(18)	158(180.5)	103.5(116)	
ø100	94	11	117	136	154	11	94	M12x40	12(22)	136(158.5)	113(125.5)	107.5	53(18)	167.5(190)	113(125.5)	

Code	SSD2-Q-H (female thread)				SSD2-Q-H (male thread)			
	Bore size (mm)	WF	A	B	a'	wf	A	B
ø40	7	90	75	66	29.5	111.5	74.5	
ø50	8	92.5	75.5	73	30.5	118	71.5	
ø63	8	94	77	78.5	36	119.5	77	
ø80	10(20)	132(147)	111(116)	98	43.5(18)	165.5(180.5)	111(116)	
ø100	12(22)	143.5(158.5)	120.5(125.5)	107.5	53(18)	175(190)	120.5(125.5)	

\*1: Dimensions in ( ) of ø80 and ø100 are for more than 50 mm stroke.

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/COVP/N2

SSD2

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK


Spd Contr

Ending


# SSD2-Q Series

Dimensions (with the 1-color LED, 2-color LED, off-delay, strong magnetic field proof, T1\* or T8\* switch)

● SSD2-QL-20 to 25-R (with switch/rod side position locking)

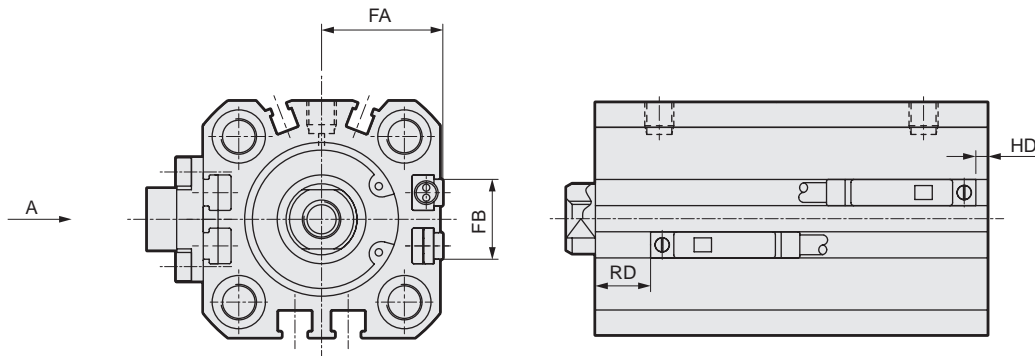

● SSD2-QL-32 to 100-R (with switch/rod side position locking)

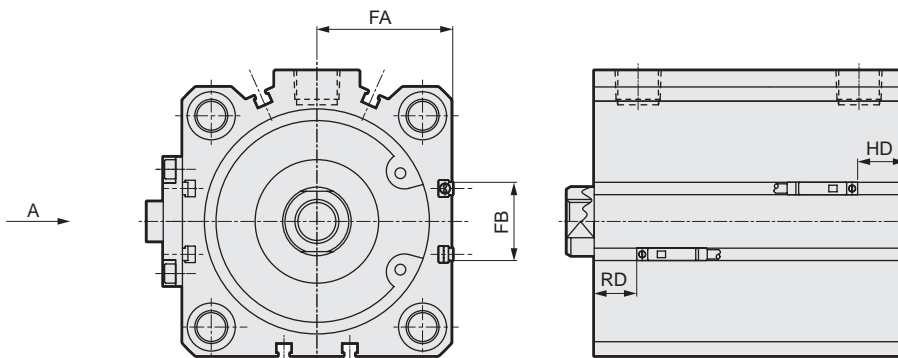

Code	Common dimensions		T0H/T0V, T5H/T5V		T2H/T2V, T3H/T3V		T2WH/T2WV, T3WH/T3WV		F2H/F2V, F3H/F3V, F2YH/F2YV, F3YH/F3YV			F2S/F3S							
	FA	FB	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD					
SRG3	ø20	18.5	12.5	4	32	37	4	32	37	6	33.5	38.5	8.5	36	41	7.5	35	40	
	ø25	20.5	13.5	6.5	33.5	38.5	6.5	33.5	38.5	8.5	35	40	11	37.5	42.5	10	36.5	41.5	
SRM3	ø32	23	20.5	5.5	34		5.5	34		7.5	36								
	ø40	26.5	27.5	8	38		8	38		10	39.5								
SRT3	ø50	32.5	28.5	6.5	41		6.5	41		8.5	42.5								
	ø63	39	28.5	10.5	42		10.5	42		12.5	44								
MRL2	ø80	49.5	28.5	19	24	66	73.5	19	24	66	73.5	21	26	68	75.5				
	ø100	59	28.5	24.5	29.5	70	77.5	24.5	29.5	70	77.5	26.5	31.5	72	79.5				
MRG2	Code	T2YH/T2YV, T3YH/T3YV, T2JH/T2JV				T2YD, T2YDT, T1H/T1V				T8H/T8V <sup>*1</sup>									
	Bore size (mm)	FA	FB	HD	RD	FA	FB	HD	RD	FA	FB	HD	RD	FA	FB	HD	RD		
SM-25	ø20	24.3	16	3	30	35	29.3	16	3	30	35	24.3	16	0	25.5	30.5			
	ø25	26.3	17	5.5	32	37	31.3	17	5.5	32	37	26.3	17	0.5	27	32			
ShkAbs	ø32	28.8	24	4	32.5		33.8	24	4	32.5		28.8	24	0	28				
	ø40	32.3	31	7	36.5		37.3	31	7	36.5		32.3	31	2	31.5				
FJ	ø50	38.3	32	5.5	39.5		43.3	32	5.5	39.5		38.3	32	0.5	34.5				
	ø63	44.8	32	9	40.5		49.8	32	9	40.5		44.8	32	4	35.5				
FK	ø80	55.3	32	17.5	22.5	64.5	72	60.3	32	17.5	22.5	64.5	72	55.3	32	12.5	17.5	60	67.5
Spd Contr	ø100	64.8	32	23	28	68.5	76	69.8	32	23	28	68.5	76	64.8	32	18	23	64	71.5


\*1: T8 switch cannot be mounted on side A (the side with position locking mechanism).

\*2: Only F-switch is available for the ø20 or ø25 piping port surface.


\*3: In fields with two values, the left value is for 25 mm stroke or less and the right for more than 25 mm stroke in ø20 and ø25, and the left for 50 mm stroke or less and the right for more than 50 mm stroke in ø80 and ø100.

Dimensions (with the 1-color LED, 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch)

● SSD2-QL-20 to 25-H (with switch/head side position locking)

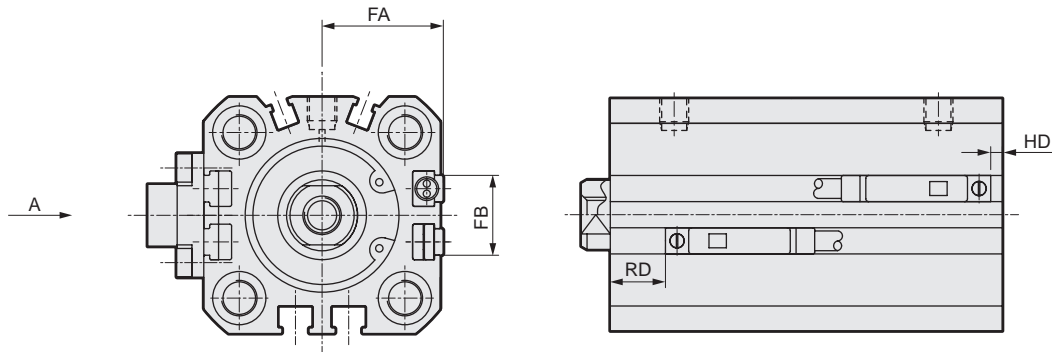

● SSD2-QL-32 to 100-H (with switch/head side position locking)

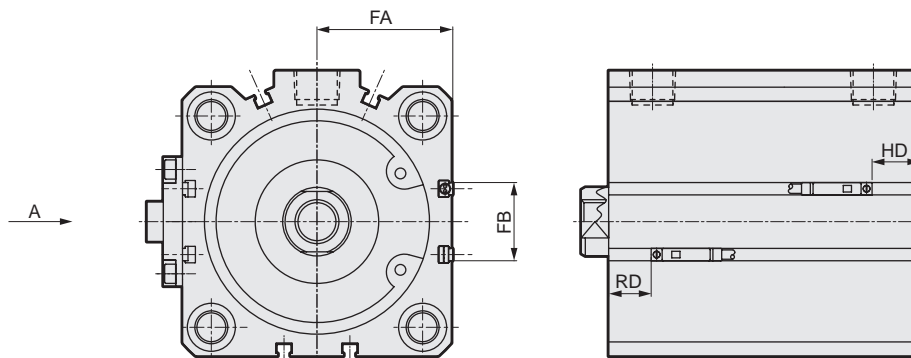

Code	Common dimensions		T0H/T0V, T5H/T5V			T2H/T2V, T3H/T3V			T2WH/T2WV, T3WH/T3WV			F2H/F2V, F3H/F3V, F2YH/F2YV, F3YH/F3YV			F2S/F3S		
	FA	FB	HD	RD	RD	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD		
ø20	18.5	12.5	34	8.5	13.5	34	8.5	13.5	35.5	10.5	15.5	38	13	18	37	12	17
ø25	20.5	13.5	35.5	10	15	35.5	10	15	37.5	12	17	40	14	19	39	13	18
ø32	23	20.5	38	9		38	9		40	11							
ø40	26.5	27.5	46	10.5		46	10.5		48	12							
ø50	32.5	28.5	46	11		46	11		48	12.5							
ø63	39	28.5	46.5	12		46.5	12		48.5	14							
ø80	49.5	28.5	78	14.5	19.5	78	14.5	19.5	80	16	21						
ø100	59	28.5	84.5	28	33	84.5	28	33	86.5	29.5	34.5						
Code	T2YH/T2YV, T3YH/T3YV, T2JH/T2JV					T2YD, T2YDT, T1H/T1V					T8H/T8V *1						
	FA	FB	HD	RD	RD	FA	FB	HD	RD	RD	FA	FB	HD	RD	RD		
ø20	24.3	16	32.5	7.5	12.5	29.3	16	32.5	7.5	12.5	24.3	16	27.5	2.5	7.5		
ø25	26.3	17	34	8.5	13.5	31.3	17	34	8.5	13.5	26.3	17	29.5	3.5	8.5		
ø32	28.8	24	36.5	7.5		33.8	24	36.5	7.5		28.8	24	32	2.5			
ø40	32.3	31	44.5	9		37.3	31	44.5	9		32.3	31	40	4			
ø50	38.3	32	45	9		43.3	32	45	9		38.3	32	40	4.5			
ø63	44.8	32	45	10.5		49.8	32	45	10.5		44.8	32	40	5.5			
ø80	55.3	32	76.5	13	18	60.3	32	76.5	13	18	55.3	32	72	8	13		
ø100	64.8	32	83	26	31	69.8	32	83	26	31	64.8	32	78	21	26		

\*1: T8 switch cannot be mounted on side A (the side with position locking mechanism).

\*2: Only F-switch is available for the ø20 or ø25 piping port surface.

\*3: In fields with two values, the left value is for 25 mm stroke or less and the right for more than 25 mm stroke in ø20 and ø25, and the left for 50 mm stroke or less and the right for more than 50 mm stroke in ø80 and ø100.

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

SSD2

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25


ShkAbs

FJ

FK

Spd  
Contr

Ending



Compact cylinder double acting/fine speed

# SSD2-F/SSD2-KF Series

● Bore size:  $\phi 12/\phi 16/\phi 20/\phi 25/\phi 32/\phi 40/\phi 50/\phi 63/\phi 80/\phi 100$

JIS symbol



## Specifications

1 MPa = 10 bar

Item	SSD2-F SSD2-LF (with switch)										SSD2-KF SSD2-KLF (with switch)												
	$\phi 12$	$\phi 16$	$\phi 20$	$\phi 25$	$\phi 32$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$	$\phi 12$	$\phi 16$	$\phi 20$	$\phi 25$	$\phi 32$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$			
Bore size mm																							
Actuation	Double acting																						
Working fluid	Compressed air																						
Max. working pressure MPa	1.0 ( $\approx 150$ psi, 10 bar)																						
Min. working pressure MPa	0.1 ( $\approx 15$ psi, 1 bar)					0.05 ( $\approx 7.3$ psi)					0.1 ( $\approx 15$ psi, 1 bar)					0.05 ( $\approx 7.3$ psi)							
Proof pressure MPa	1.6 ( $\approx 230$ psi, 16 bar)																						
Ambient temperature $^{\circ}\text{C}$	5 (41 $^{\circ}\text{F}$ ) to 60 (140 $^{\circ}\text{F}$ )																						
Port size	M5				Rc1/8 *1			Rc1/4			Rc3/8			M5				Rc1/8		Rc1/4		Rc3/8	
Stroke tolerance mm	$+1.0$ 0										$+2.0$ 0												
Working piston speed mm/s	1 to 200																						
Cushion	None										Rubber cushion												
Lubrication	Not available																						
Allowable absorbed energy J	0.004	0.01	0.016	0.021	0.025	0.092	0.1	0.12	0.27	0.56	0.04	0.09	0.16	0.16	0.40	0.63	0.98	1.56	2.51	3.92			

\*1: The  $\phi 32$  bore size with a 5 mm stroke and without a switch has a port size of M5.

## Stroke

## Min. stroke with switch (2 switches)

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)	Bore size (mm)	T0H/V / T5H/V	T2H/V / T3H/V
$\phi 12$	5/10/15/20	30	1	$\phi 12$	10(5)	5
$\phi 16$	25/30			$\phi 16$		
$\phi 20$	5/10/15/20/25	50		$\phi 20$		
$\phi 25$	30/35/40/45/50			$\phi 25$		
$\phi 32$	5/10/15/20/25/30/	100		$\phi 32$		
$\phi 40$	35/40/45/50/75/100			$\phi 40$		
$\phi 50$	10/15/20/25			$\phi 50$		
$\phi 63$	30/35/40/45/50			$\phi 63$		
$\phi 80$	75/100			$\phi 80$		
$\phi 100$				$\phi 100$		

\*1: When using the type with switch, refer to the table of the min. stroke with switch.

\*2: Refer to pages 763 and 765 (F and LF) or page 789 (KF) for the min. stroke with mounting bracket LB.


\*1: Less than 10 mm with the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch is not available.

\*2: Values in ( ) are for the type with 1 on rod side.

## Custom stroke

### ● SSD2-F Series

Item	Standard products	
	Standard stroke body with spacer	
Model No.	Refer to How to order.	
Description	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.	
Stroke range	Bore size	Stroke range
	12/16	1 to 29
	20 to 25	1 to 49
	32 to 100	1 to 99
Example of model No.	Model No.: SSD2-F-32-38 A +2 mm spacer is added to the SSD2-F-32-40 standard cylinder to create 38 mm stroke. B + stroke is 63 mm.	

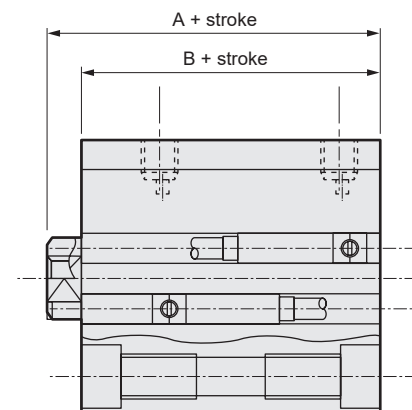

### Switch specifications (F-switch)

● 1-color/2-color LED

Item	2-wire proximity		3-wire proximity		2-wire proximity		3-wire proximity		
	F2S		F3S		F2H/F2V	F2YH/ F2YV	F3H/F3V	F3PH/F3PV (made to order)	F3YH/F3YV
Applications	Dedicated for programmable controller		For programmable controller, relay		Dedicated for programmable controller		For programmable controller, relay		
Output method	-		NPN output		-		NPN output	PNP output	NPN output
Power supply voltage	-		10 to 28 VDC		-		10 to 28 VDC	4.5 to 28 VDC	10 to 28 VDC
Load voltage	10 to 30 VDC		30 VDC or less		10 to 30 VDC	24 VDC ±10%	30 VDC or less		
Load current	5 to 20 mA		50 mA or less		5 to 20 mA		50 mA or less		
Indicator	LED (Lit when ON)				Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Yellow LED (Lit when ON)		Red/green LED (Lit when ON)
Leakage current	1 mA or less		10 µA or less		1 mA or less		10 µA or less		
Weight	g				1 m:10	3 m:29			

### Switch specifications (T-switch)

● 1-color/2-color LED/for AC magnetic field proof

Item	2-wire proximity		2-wire proximity		3-wire proximity				2-wire reed			2-wire proximity				
	T1H/T1V	T2H/T2V/ T2JH/T2JV	T2YH/ T2YV	T2WH/ T2WV	T3H/T3V	T3PH/ T3PV	T3YH/ T3YV	T3WH/ T3WV	T0H/T0V	T5H/T5V	T8H/T8V		T2YD(*4) T2YDT			
Applications	For programmable controller, relay, compact solenoid valve	Dedicated for programmable controller			For programmable controller, relay				For programmable controller, relay	For programmable controller, relay, IC circuit (no indicator lamp), serial connection	For programmable controller, relay		For programmable controller			
Output method	-			NPN output	PNP output	NPN output	NPN output	-								
Pwr. supp. V.	-			10 to 28 VDC				-								
Load voltage	85 to 265 VAC	10 to 30 VDC	24 VDC ±10%		30 VDC or less				12/24 VDC	100/110 VAC	5/12/24 VDC	100/110 VAC	12/24 VDC	110 VAC	220 VAC	24 VDC ±10%
Load current	5 to 100 mA	5 to 20 mA (*3)			100 mA or less	50 mA or less			5 to 50 mA	7 to 20 mA	50 mA or less	20 mA or less	5 to 50 mA	7 to 20 mA	7 to 10 mA	5 to 20 mA
Indicator	LED (Lit when ON)	LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	No indicator lamp	LED (Lit when ON)		Red/green LED (Lit when ON)			
Leakage current	≤ 1 mA at 100 VAC, ≤ 2 mA at 200 VAC	1 mA or less			10 µA or less				0 mA					1 mA or less		
Weight	g	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:18	3 m:49	5 m:80	1 m:33 3 m:87 5 m:142	1 m:61 3 m:166 5 m:272			

\*1: Refer to Ending Page 1 for detailed switch specifications and dimensions.

\*2: Switches other than the above models, such as switches with connectors, are also available. Refer to Ending Page 1.

\*3: The max. load current is 20 mA at 25°C. The current is lower than 20 mA if the operating ambient temperature around the switch is higher than 25°C.  
(5 to 10 mA at 60°C)

\*4: Switch for AC magnetic field (T2YD/T2YDT) cannot be used in DC magnetic field.

\*5: The F-switch uses a bend-resistant lead wire.

### Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa											
		0.05	0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø12	Push	-	11.3	17.0	22.6	33.9	45.2	56.5	67.9	79.2	90.5	1.02x10 <sup>2</sup>	1.13x10 <sup>2</sup>
	Pull	-	8.48	12.7	17.0	25.4	33.9	42.4	50.9	59.4	67.9	76.3	84.8
ø16	Push	-	20.1	30.2	40.2	60.3	80.4	1.01x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.61x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.01x10 <sup>2</sup>
	Pull	-	15.1	22.6	30.2	45.2	60.3	75.4	90.5	1.06x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.36x10 <sup>2</sup>	1.51x10 <sup>2</sup>
ø20	Push	-	31.4	47.1	62.8	94.2	1.26x10 <sup>2</sup>	1.57x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.20x10 <sup>2</sup>	2.51x10 <sup>2</sup>	2.83x10 <sup>2</sup>	3.14x10 <sup>2</sup>
	Pull	-	23.6	35.3	47.1	70.7	94.2	1.18x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.65x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.12x10 <sup>2</sup>	2.36x10 <sup>2</sup>
ø25	Push	-	49.1	73.6	98.2	1.47x10 <sup>2</sup>	1.96x10 <sup>2</sup>	2.45x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.44x10 <sup>2</sup>	3.93x10 <sup>2</sup>	4.42x10 <sup>2</sup>	4.91x10 <sup>2</sup>
	Pull	-	37.8	56.7	75.6	1.13x10 <sup>2</sup>	1.51x10 <sup>2</sup>	1.89x10 <sup>2</sup>	2.27x10 <sup>2</sup>	2.64x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.40x10 <sup>2</sup>	3.78x10 <sup>2</sup>
ø32	Push	-	80.4	1.21x10 <sup>2</sup>	1.61x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.22x10 <sup>2</sup>	4.02x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.63x10 <sup>2</sup>	6.43x10 <sup>2</sup>	7.24x10 <sup>2</sup>	8.04x10 <sup>2</sup>
	Pull	-	60.3	90.5	1.21x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.62x10 <sup>2</sup>	4.22x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.43x10 <sup>2</sup>	6.03x10 <sup>2</sup>
ø40	Push	-	1.26x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.51x10 <sup>2</sup>	3.77x10 <sup>2</sup>	5.03x10 <sup>2</sup>	6.28x10 <sup>2</sup>	7.54x10 <sup>2</sup>	8.80x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.13x10 <sup>3</sup>	1.26x10 <sup>3</sup>
	Pull	-	1.06x10 <sup>2</sup>	1.58x10 <sup>2</sup>	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>
ø50	Push	-	1.96x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.93x10 <sup>2</sup>	5.89x10 <sup>2</sup>	7.85x10 <sup>2</sup>	9.82x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.37x10 <sup>3</sup>	1.57x10 <sup>3</sup>	1.77x10 <sup>3</sup>	1.96x10 <sup>3</sup>
	Pull	-	1.65x10 <sup>2</sup>	2.47x10 <sup>2</sup>	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>
ø63	Push	1.56x10 <sup>2</sup>	3.12x10 <sup>2</sup>	4.68x10 <sup>2</sup>	6.23x10 <sup>2</sup>	9.35x10 <sup>2</sup>	1.25x10 <sup>3</sup>	1.56x10 <sup>3</sup>	1.87x10 <sup>3</sup>	2.18x10 <sup>3</sup>	2.49x10 <sup>3</sup>	2.81x10 <sup>3</sup>	3.12x10 <sup>3</sup>
	Pull	1.40x10 <sup>2</sup>	2.80x10 <sup>2</sup>	4.20x10 <sup>2</sup>	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>	2.24x10 <sup>3</sup>	2.52x10 <sup>3</sup>	2.80x10 <sup>3</sup>
ø80	Push	2.51x10 <sup>2</sup>	5.03x10 <sup>2</sup>	7.54x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.51x10 <sup>3</sup>	2.01x10 <sup>3</sup>	2.51x10 <sup>3</sup>	3.02x10 <sup>3</sup>	3.52x10 <sup>3</sup>	4.02x10 <sup>3</sup>	4.52x10 <sup>3</sup>	5.03x10 <sup>3</sup>
	Pull	2.27x10 <sup>2</sup>	4.54x10 <sup>2</sup>	6.80x10 <sup>2</sup>	9.07x10 <sup>2</sup>	1.36x10 <sup>3</sup>	1.81x10 <sup>3</sup>	2.27x10 <sup>3</sup>	2.72x10 <sup>3</sup>	3.17x10 <sup>3</sup>	3.63x10 <sup>3</sup>	4.08x10 <sup>3</sup>	4.54x10 <sup>3</sup>
ø100	Push	3.93x10 <sup>2</sup>	7.85x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.57x10 <sup>3</sup>	2.36x10 <sup>3</sup>	3.14x10 <sup>3</sup>	3.93x10 <sup>3</sup>	4.71x10 <sup>3</sup>	5.50x10 <sup>3</sup>	6.28x10 <sup>3</sup>	7.07x10 <sup>3</sup>	7.85x10 <sup>3</sup>
	Pull	3.57x10 <sup>2</sup>	7.15x10 <sup>2</sup>	1.07x10 <sup>3</sup>	1.43x10 <sup>3</sup>	2.14x10 <sup>3</sup>	2.86x10 <sup>3</sup>	3.57x10 <sup>3</sup>	4.29x10 <sup>3</sup>	5.00x10 <sup>3</sup>	5.72x10 <sup>3</sup>	6.43x10 <sup>3</sup>	7.15x10 <sup>3</sup>

### Dimensions

Same as SSD2 Series (double acting/single rod) and SSD2-K Series (double acting/high load).  
Refer to pages 760 to 766 and 782 to 790.



# SSD2-F/SSD2-KF Series

## How to order

No switch (without magnet for switch)

**SSD2-F** - **12** - **5** - **N** - **LB** - **I**

With switch (built-in magnet for switch)

**SSD2-LF** - **12** - **10** - **T0H** - **R** - **N** - **LB** - **I**

**A** Model No.

**B** Bore size

**C** Port thread

**D** Stroke

**E** Switch model No.

- \*1
- \*2
- \*3
- \*8
- \*10

**F** Switch quantity

**G** Option  
\*4

## ⚠ Precautions for model No. selection

- \*1 : The T2YD\* switch cannot be mounted on the  $\phi 12$  and  $\phi 16$  bore sizes.
- \*2 : The T8\* switch cannot be mounted on the  $\phi 12$  to  $\phi 32$  bore sizes.
- \*3 : The F-switch can only be mounted on the piping port surface of bore sizes  $\phi 20$  and  $\phi 25$ .
- \*4 : Piston rod of  $\phi 12$  to  $\phi 25$  is stainless steel as standard. C-snap ring is stainless steel instead of steel. The rod end male thread nut is stainless steel.
- \*5 : The mounting bracket is included at shipment.
- \*6 : The projection dimension of piston rod WF when LB or FA is selected is different from that of the standard. Refer to the dimensions on pages 761, 763, 765 and 766. The number of the specified protruding dimension will be added at the end of the model No. printed on the metal plate on the body.
- \*7 : "I" and "Y" cannot be selected together.
- \*8 : The F-switch with L lead wire on  $\phi 20$  models cannot be selected on strokes of 15 mm or under.
- \*9 : Refer to pages 750 and 751 for combinations of variations/options.
- \*10 : Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.
- \*11 : F-switch cannot be selected.

[Example of model No.]

**SSD2-LF-12-10-T0H-R-N-LB-I**

Model: Compact cylinder, fine speed

- B** Bore size :  $\phi 12$  mm
- C** Port thread : Rc thread
- D** Stroke : 10mm
- E** Switch model No. : Reed switch T0H, lead wire length 1 m
- F** Switch quantity : 1 on rod side
- G** Option : Rod end male thread
- H** Mounting bracket : Axial foot
- I** Accessory : Rod eye

**H** Mounting bracket  
\*5  
\*6

**I** Accessory  
\*7

Code	Description																			
<b>A Model No.</b>																				
SSD2-F	Double acting/single rod																			
SSD2-LF	Double acting/single rod/with switch																			
SSD2-KF	Double acting/high load																			
SSD2-KLF	Double acting/high load/with switch																			
<b>B Bore size (mm)</b>																				
12	$\phi 12$																			
16	$\phi 16$																			
20	$\phi 20$																			
25	$\phi 25$																			
32	$\phi 32$																			
40	$\phi 40$																			
50	$\phi 50$																			
63	$\phi 63$																			
80	$\phi 80$																			
100	$\phi 100$																			
<b>C Port thread</b>																				
Blank	Rc thread																			
NN	NPT thread ( $\phi 32$ and over) (made-to-order product)																			
GN	G thread ( $\phi 32$ and over) (made-to-order product)																			
<b>D Stroke (mm)</b>																				
Refer to the stroke table on the following page.																				
<b>E Switch model No.</b>																				
Lead wire	Lead wire	Contact	Voltage		Indicator	Lead wire	Bore size													
			AC	DC			12	16	20	25	32	40	50	63	80	100				
-	F2S*	Proximity	●	●	1-color LED	2-wire			●	●										
-	F3S*		●	●		3-wire			●	●										
F2H*	F2V*		●	●		2-wire			●	●										
F3H*	F3V*	Proximity	●	●	1-color LED (PNP output) (custom)	3-wire			●	●										
F3PH*	F3PV*		●	●		2-wire			●	●										
F2YH*	F2YV*		●	●		3-wire			●	●										
F3YH*	F3YV*	Reed	●	●	2-color LED	2-wire			●	●										
T0H*	T0V*		●	●		1-color LED	2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●
T5H*	T5V*		●	●		No indicator lamp	2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●
T8H*	T8V*	Proximity	●	●	1-color LED	2-wire			●	●										
T1H*	T1V*		●	●		3-wire			●	●										
T2H*	T2V*		●	●		2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●
T3H*	T3V*	Proximity	●	●	1-color LED (PNP output)	3-wire			●	●										
T3PH*	T3PV*		●	●		2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●
T2WH*	T2WV*		●	●		3-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●
T2YH*	T2YV*	Reed	●	●	2-color LED	2-wire			●	●										
T3WH*	T3WV*		●	●		3-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●
T3YH*	T3YV*		●	●		2-wire			●	●										
T2YD*	-	Proximity	●	●	2-color LED for AC magnetic field	2-wire			●	●										
T2YD*	-		●	●		2-wire			●	●										
T2JH*	T2JV*		●	●		2-wire			●	●										
<b>* Lead wire length</b>																				
Blank	1 m (standard)																			
3	3 m (option)																			
5	5 m (option)																			
*11																				
<b>F Switch quantity</b>																				
R	1 on rod side																			
H	1 on head side																			
D	2																			
<b>G Option</b>																				
Blank	Rod end female thread																			
N	Rod end male thread																			
M *4	Piston rod material (stainless steel)																			
<b>H Mounting bracket</b>																				
Blank	Without mounting bracket																			
LB	Axial foot																			
CB	Clevis bracket (pin and snap ring included)																			
FA	Rod side flange																			
FB	Head side flange																			
<b>I Accessory (available when rod end male thread "N" is selected)</b>																				
I	Rod eye																			
Y	Rod clevis (pin and snap ring included)																			

### [Stroke table]

#### ● SSD2-F/SSD2-KF

Stroke (mm)	Applicable bore size										
	12	16	20	25	32	40	50	63	80	100	
Standard stroke	5	●	●	●	●	●	●				
	10	●	●	●	●	●	●	●	●	●	●
	15	●	●	●	●	●	●	●	●	●	●
	20	●	●	●	●	●	●	●	●	●	●
	25	●	●	●	●	●	●	●	●	●	●
	30	●	●	●	●	●	●	●	●	●	●
	35			●	●	●	●	●	●	●	●
	40			●	●	●	●	●	●	●	●
	45			●	●	●	●	●	●	●	●
	50			●	●	●	●	●	●	●	●
	75					●	●	●	●	●	●
	100					●	●	●	●	●	●
Min. stroke (mm) *1	1										
Max. stroke (mm)	30		50			100					
Custom stroke *2	In 1 mm increments										

\*1: Less than 5 mm for 1-color LED switch and less than 10 mm for the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch are not available.

Refer to page 854 for the min. stroke with switch.

\*2: The total length when using a custom stroke is the same as that when using the next longer standard stroke.

\*3: Refer to pages 763 and 765 (F and LF) or page 789 (KF) for the min. stroke with mounting bracket LB.

### How to order switch



Switch model No.  
(Item ⑤ on page 856)

### How to order mounting bracket

Bore size (mm)	ø12	ø16	ø20	ø25	ø32	ø40	ø50
<b>Mounting bracket</b>							
Foot (LB)	SSD2-LB-12	SSD2-LB-16	SSD2-LB-20	SSD2-LB-25	SSD2-LB-32	SSD2-LB-40	SSD2-LB-50
Flange (FA/FB)	SSD2-FA-12	SSD2-FA-16	SSD2-FA-20	SSD2-FA-25	SSD2-FA-32	SSD2-FA-40	SSD2-FA-50
Clevis bracket (CB)	SSD2-CB-12	SSD2-CB-16	SSD2-CB-20	SSD2-CB-25	SSD2-CB-32	SSD2-CB-40	SSD2-CB-50
<b>Bore size (mm)</b>	<b>ø63</b>	<b>ø80</b>	<b>ø100</b>				
<b>Mounting bracket</b>							
Foot (LB)	SSD2-LB-63	SSD2-LB-80	SSD2-LB-100				
Flange (FA/FB)	SSD2-FA-63	SSD2-FA-80	SSD2-FA-100				
Clevis bracket (CB)	SSD2-CB-63	SSD2-CB-80	SSD2-CB-100				

\*1: The foot mounting bracket is provided as 2 pcs./set.

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25


ShkAbs

FJ

FK

Spd  
Contr

Ending



Compact cylinder double acting/low speed

# SSD2-O Series

● Bore size:  $\phi 12/\phi 16/\phi 20/\phi 25/\phi 32/\phi 40/\phi 50/\phi 63/\phi 80/\phi 100$

JIS symbol



## Specifications

Item	SSD2-O SSD2-OL (with switch)											
	mm		$\phi 12$	$\phi 16$	$\phi 20$	$\phi 25$	$\phi 32$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$
Bore size												
Actuation	Double acting											
Working fluid	Compressed air											
Max. working pressure	1.0 ( $\approx 150$ psi, 10 bar)											
Min. working pressure	0.1 ( $\approx 15$ psi, 1 bar) / 0.05 ( $\approx 7.3$ psi, 0.5 bar)											
Proof pressure	1.6 ( $\approx 230$ psi, 16 bar)											
Ambient temperature	$-10$ ( $14^{\circ}\text{F}$ ) to $60$ ( $140^{\circ}\text{F}$ ) (no freezing)											
Port size	M5				Rc1/8 *1			Rc1/4		Rc3/8		
Stroke tolerance	$\begin{matrix} +1.0 \\ 0 \end{matrix}$											
Working piston speed	10 to 200											
Cushion	None											
Lubrication	Not available											
Allowable absorbed energy	J	0.004	0.01	0.016	0.021	0.025	0.092	0.1	0.12	0.27	0.56	

\*1: The  $\phi 32$  bore size with a 5 mm stroke and without a switch has a port size of M5.

## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\phi 12$	5/10/15/20	30	1
$\phi 16$	25/30		
$\phi 20$	5/10/15/20/25	50	
$\phi 25$	30/35/40/45/50		
$\phi 32$	5/10/15/20/25/30/35/40/45/50/75/100	100	
$\phi 40$			
$\phi 50$	10/15/20/25		
$\phi 63$	30/35/40/45/50		
$\phi 80$	75/100		
$\phi 100$			

\*1: When using the type with switch, refer to the table of the min. stroke with switch.

\*2: Refer to pages 763 and 765 for the min. stroke with mounting bracket LB.

## Min. stroke with switch (2 switches)

Bore size (mm)	T0H/V / T5H/V	T2H/V / T3H/V
$\phi 12$	10(5)	5
$\phi 16$		
$\phi 20$		
$\phi 25$		
$\phi 32$		
$\phi 40$		
$\phi 50$		
$\phi 63$		
$\phi 80$		
$\phi 100$		


\*1: Less than 10 mm with the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch is not available.

\*2: Values in ( ) are for the type with 1 on rod side.

## Custom stroke

### ● SSD2-O Series

Item	Standard products	
	Standard stroke body with spacer	
Model No.	Refer to How to order.	
Description	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.	
Stroke range	Bore size	Stroke range
	12/16	1 to 29
	20 to 25	1 to 49
	32 to 100	1 to 99
Example of model No.	Model No.: SSD2-O-32-38 A +2 mm spacer is added to the SSD2-O-32-40 standard cylinder to create 38 mm stroke. B + stroke is 63mm.	

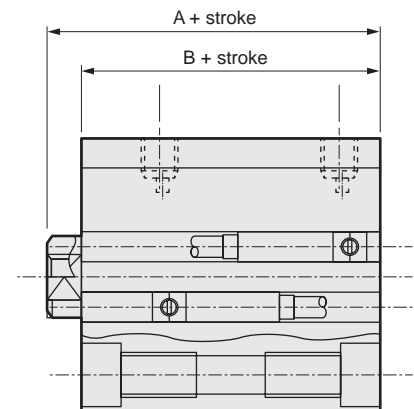

### Switch specifications (F-switch)

● 1-color/2-color LED

Item	2-wire proximity		3-wire proximity		2-wire proximity		3-wire proximity		
	F2S		F3S		F2H/F2V	F2YH/F2YV	F3H/F3V	F3PH/F3PV (made to order)	F3YH/F3YV
Applications	Dedicated for programmable controller		For programmable controller, relay		Dedicated for programmable controller		For programmable controller, relay		
Output method	-		NPN output		-		NPN output	PNP output	NPN output
Power supply voltage	-		10 to 28 VDC		-		10 to 28 VDC	4.5 to 28 VDC	10 to 28 VDC
Load voltage	10 to 30 VDC		30 VDC or less		10 to 30 VDC	24 VDC ±10%	30 VDC or less		
Load current	5 to 20 mA		50 mA or less		5 to 20 mA		50 mA or less		
Indicator	LED (Lit when ON)				Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Yellow LED (Lit when ON)		Red/green LED (Lit when ON)
Leakage current	1 mA or less		10 μA or less		1 mA or less		10 μA or less		
Weight g					1 m:10	3 m:29			

### Switch specifications (T-switch)

● 1-color/2-color LED/for AC magnetic field proof

Item	2-wire proximity		2-wire proximity		3-wire proximity				2-wire reed			2-wire proximity						
	T1H/T1V	T2H/T2V T2JH/T2JV	T2YH/ T2YV	T2WH/ T2WV	T3H/T3V	T3PH/ T3PV	T3YH/ T3YV	T3WH/ T3WV	T0H/T0V	T5H/T5V	T8H/T8V		T2YD (*4) T2YDT					
Applications	For programmable controller, relay, compact solenoid valve		Dedicated for programmable controller		For programmable controller, relay				For programmable controller, relay	For programmable controller, relay, IC circuit (no indicator lamp), serial connection			For programmable controller					
Output method	-		-		NPN output	PNP output	NPN output	NPN output	-									
Pwr. supp. V.	-		-		10 to 28 VDC				-									
Load voltage	85 to 265 VAC		10 to 30 VDC		24 VDC ±10%		30 VDC or less				12/24 VDC	100/110 VAC	5/12/24 VDC	100/110 VAC	12/24 VDC	110 VAC	220 VAC	24 VDC ±10%
Load current	5 to 100 mA		5 to 20 mA (*3)		100 mA or less		50 mA or less		5 to 50 mA	7 to 20 mA	50 mA or less		20 mA or less	5 to 50 mA	7 to 20 mA	7 to 10 mA	5 to 20 mA	
Indicator	LED (Lit when ON)	LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)		No indicator lamp		LED (Lit when ON)		Red/green LED (Lit when ON)			
Leakage current	≤ 1 mA at 100 VAC, ≤ 2 mA at 200 VAC		1 mA or less		10 μA or less				0 mA					1 mA or less				
Weight g	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80			1 m:33 3 m:87 5 m:142		1 m:61 3 m:166 5 m:272				

\*1: Refer to Ending Page 1 for detailed switch specifications and dimensions.

\*2: Switches other than the above models, such as switches with connectors, are also available. Refer to Ending Page 1.

\*3: The max. load current is 20 mA at 25°C. The current is lower than 20 mA if the operating ambient temperature around the switch is higher than 25°C. (5 to 10 mA at 60°C)

\*4: Switch for AC magnetic field (T2YD/T2YDT) cannot be used in DC magnetic field.

\*5: The F-switch uses a bend-resistant lead wire.

### Cylinder weight table (the weight of the switches is when there are 2 cylinder switches.)

(Unit: g)

Stroke (mm)	5		10		15		20		25		30		35		40		45		50		75		100	
	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch
ø12	36	86	44	86	53	95	61	103	70	112	72	114	-	-	-	-	-	-	-	-	-	-	-	-
ø16	48	104	59	104	69	114	80	125	91	136	102	147	-	-	-	-	-	-	-	-	-	-	-	-
ø20	63	118	75	150	88	163	101	176	113	188	126	201	139	214	152	227	165	240	203	278	-	-	-	-
ø25	87	178	102	193	118	209	134	225	150	241	165	256	181	272	197	288	213	304	228	319	-	-	-	-
ø32	122	236	144	258	166	280	188	302	209	323	231	345	253	367	275	389	297	411	318	432	494	542	604	652
ø40	183	326	210	353	236	379	263	406	290	433	316	459	342	485	369	512	395	538	472	565	646	695	776	825
ø50	-	-	341	535	383	577	425	619	467	661	510	704	552	746	594	788	636	830	678	872	1025	1082	1235	1292
ø63	-	-	507	786	562	841	617	896	672	951	727	1006	782	1061	838	1117	893	1172	948	1227	1438	1502	1713	1777
ø80	-	-	928	1341	1015	1428	1101	1514	1188	1601	1274	1687	1361	1774	1448	1861	1535	1948	1621	2034	2401	2467	2833	2899
ø100	-	-	1433	2000	1547	2114	1660	2227	1774	2341	1888	2455	2002	2569	2115	2682	2229	2796	2343	2910	3406	3478	3973	4045

### Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa											
		0.05	0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø12	Push	-	11.3	17.0	22.6	33.9	45.2	56.5	67.9	79.2	90.5	1.02x10 <sup>2</sup>	1.13x10 <sup>2</sup>
	Pull	-	8.48	12.7	17.0	25.4	33.9	42.4	50.9	59.4	67.9	76.3	84.8
ø16	Push	-	20.1	30.2	40.2	60.3	80.4	1.01x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.61x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.01x10 <sup>2</sup>
	Pull	-	15.1	22.6	30.2	45.2	60.3	75.4	90.5	1.06x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.36x10 <sup>2</sup>	1.51x10 <sup>2</sup>
ø20	Push	-	31.4	47.1	62.8	94.2	1.26x10 <sup>2</sup>	1.57x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.20x10 <sup>2</sup>	2.51x10 <sup>2</sup>	2.83x10 <sup>2</sup>	3.14x10 <sup>2</sup>
	Pull	-	23.6	35.3	47.1	70.7	94.2	1.18x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.65x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.12x10 <sup>2</sup>	2.36x10 <sup>2</sup>
ø25	Push	-	49.1	73.6	98.2	1.47x10 <sup>2</sup>	1.96x10 <sup>2</sup>	2.45x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.44x10 <sup>2</sup>	3.93x10 <sup>2</sup>	4.42x10 <sup>2</sup>	4.91x10 <sup>2</sup>
	Pull	-	37.8	56.7	75.6	1.13x10 <sup>2</sup>	1.51x10 <sup>2</sup>	1.89x10 <sup>2</sup>	2.27x10 <sup>2</sup>	2.64x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.40x10 <sup>2</sup>	3.78x10 <sup>2</sup>
ø32	Push	-	80.4	1.21x10 <sup>2</sup>	1.61x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.22x10 <sup>2</sup>	4.02x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.63x10 <sup>2</sup>	6.43x10 <sup>2</sup>	7.24x10 <sup>2</sup>	8.04x10 <sup>2</sup>
	Pull	-	60.3	90.5	1.21x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.62x10 <sup>2</sup>	4.22x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.43x10 <sup>2</sup>	6.03x10 <sup>2</sup>
ø40	Push	-	1.26x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.51x10 <sup>2</sup>	3.77x10 <sup>2</sup>	5.03x10 <sup>2</sup>	6.28x10 <sup>2</sup>	7.54x10 <sup>2</sup>	8.80x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.13x10 <sup>3</sup>	1.26x10 <sup>3</sup>
	Pull	-	1.06x10 <sup>2</sup>	1.58x10 <sup>2</sup>	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>
ø50	Push	-	1.96x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.93x10 <sup>2</sup>	5.89x10 <sup>2</sup>	7.85x10 <sup>2</sup>	9.82x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.37x10 <sup>3</sup>	1.57x10 <sup>3</sup>	1.77x10 <sup>3</sup>	1.96x10 <sup>3</sup>
	Pull	-	1.65x10 <sup>2</sup>	2.47x10 <sup>2</sup>	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>
ø63	Push	1.56x10 <sup>2</sup>	3.12x10 <sup>2</sup>	4.68x10 <sup>2</sup>	6.23x10 <sup>2</sup>	9.35x10 <sup>2</sup>	1.25x10 <sup>3</sup>	1.56x10 <sup>3</sup>	1.87x10 <sup>3</sup>	2.18x10 <sup>3</sup>	2.49x10 <sup>3</sup>	2.81x10 <sup>3</sup>	3.12x10 <sup>3</sup>
	Pull	1.40x10 <sup>2</sup>	2.80x10 <sup>2</sup>	4.20x10 <sup>2</sup>	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>	2.24x10 <sup>3</sup>	2.52x10 <sup>3</sup>	2.80x10 <sup>3</sup>
ø80	Push	2.51x10 <sup>2</sup>	5.03x10 <sup>2</sup>	7.54x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.51x10 <sup>3</sup>	2.01x10 <sup>3</sup>	2.51x10 <sup>3</sup>	3.02x10 <sup>3</sup>	3.52x10 <sup>3</sup>	4.02x10 <sup>3</sup>	4.52x10 <sup>3</sup>	5.03x10 <sup>3</sup>
	Pull	2.27x10 <sup>2</sup>	4.54x10 <sup>2</sup>	6.80x10 <sup>2</sup>	9.07x10 <sup>2</sup>	1.36x10 <sup>3</sup>	1.81x10 <sup>3</sup>	2.27x10 <sup>3</sup>	2.72x10 <sup>3</sup>	3.17x10 <sup>3</sup>	3.63x10 <sup>3</sup>	4.08x10 <sup>3</sup>	4.54x10 <sup>3</sup>
ø100	Push	3.93x10 <sup>2</sup>	7.85x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.57x10 <sup>3</sup>	2.36x10 <sup>3</sup>	3.14x10 <sup>3</sup>	3.93x10 <sup>3</sup>	4.71x10 <sup>3</sup>	5.50x10 <sup>3</sup>	6.28x10 <sup>3</sup>	7.07x10 <sup>3</sup>	7.85x10 <sup>3</sup>
	Pull	3.57x10 <sup>2</sup>	7.15x10 <sup>2</sup>	1.07x10 <sup>3</sup>	1.43x10 <sup>3</sup>	2.14x10 <sup>3</sup>	2.86x10 <sup>3</sup>	3.57x10 <sup>3</sup>	4.29x10 <sup>3</sup>	5.00x10 <sup>3</sup>	5.72x10 <sup>3</sup>	6.43x10 <sup>3</sup>	7.15x10 <sup>3</sup>

SCP\*3  
 CMK2  
 CMA2  
 SCM  
 SCG  
 SCA2  
 SCS2  
 CKV2  
 CAV2/  
 COVP/N2  
 SSD2  
 SSG  
 SSD  
 CAT  
 MDC2  
 MVC  
 SMG  
 MSD/  
 MSDG  
 FC\*  
 STK  
 SRL3  
 SRG3  
 SRM3  
 SRT3  
 MRL2  
 MRG2  
 SM-25  
 ShkAbs  
 FJ  
 FK  
 Spd  
 Contr  
 Ending

# SSD2-O Series

## How to order

No switch (without magnet for switch)

**SSD2-O** - **12** - **5** - **N** - **LB** - **I**

With switch (built-in magnet for switch)

**SSD2-OL** - **12** - **10** - **T0H** - **R** - **N** - **LB** - **I**

**A** Model No.

**B** Bore size

**C** Port thread

**D** Stroke

**E** Switch model No.

\*1

\*2

\*3

\*8

\*10

**F** Switch quantity

**G** Option

\*4

## ⚠ Precautions for model No. selection

\*1 : The T2YD\* switch cannot be mounted on the ø12 and ø16 bore sizes.

\*2 : The T8\* switch cannot be mounted on the ø12 to ø32 bore sizes.

\*3 : The F-switch can only be mounted on the piping port surface of bore sizes ø20 and ø25.

\*4 : Piston rod of ø12 to ø25 is stainless steel as standard. C-snap ring is stainless steel instead of steel.

The rod end male thread nut is stainless steel.

\*5 : The mounting bracket is included at shipment.

\*6 : The projection dimension of piston rod WF when LB or FA is selected is different from that of the standard.

Refer to the dimensions on pages 761, 763, 765 and 766. The number of the specified protruding dimension will be added at the end of the model No. printed on the metal plate on the body.

\*7 : "I" and "Y" cannot be selected together.

\*8 : The F-switch with L lead wire on ø20 models cannot be selected on strokes of 15 mm or under.

\*9 : Refer to pages 750 and 751 for combinations of variations/options.

\*10 : Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.

\*11 : F-switch cannot be selected.

## [Example of model No.]

### SSD2-OL-12-10-T0H-R-N-LB-I

Model: Compact cylinder double acting/low speed

**B** Bore size : ø12 mm

**C** Port thread : Rc thread

**D** Stroke : 10mm

**E** Switch model No. : Reed switch T0H, lead wire length 1 m

**F** Switch quantity : 1 on rod side

**G** Option : Rod end male thread

**H** Mounting bracket : Axial foot

**I** Accessory : Rod eye

**H** Mounting bracket

\*5

\*6

**I** Accessory

\*7

Code	Description															
<b>A Model No.</b>																
SSD2-O	Double acting/single rod															
SSD2-OL	Double acting/single rod/with switch															
<b>B Bore size (mm)</b>																
12	ø12															
16	ø16															
20	ø20															
25	ø25															
32	ø32															
40	ø40															
50	ø50															
63	ø63															
80	ø80															
100	ø100															
<b>C Port thread</b>																
Blank	Rc thread															
NN	NPT thread (ø32 and over) (made-to-order product)															
GN	G thread (ø32 and over) (made-to-order product)															
<b>D Stroke (mm)</b>																
Refer to the stroke table on the following page.																
<b>E Switch model No.</b>																
Lead wire	Lead wire	Contact	Voltage	Indicator	Lead wire	Bore size										
Straight	L-shaped		AC	DC		12	16	20	25	32	40	50	63	80	100	
-	F2S*	Proximity	●	●	1-color LED	2-wire		●	●							
-	F3S*		●	●		3-wire			●	●						
F2H*	F2V*		●	●		2-wire			●	●						
F3H*	F3V*		●	●		3-wire			●	●						
F3PH*	F3PV*		●	●		1-color LED (PNP output) (custom)	3-wire			●	●					
F2YH*	F2YV*		●	●		2-color LED	2-wire			●	●					
F3YH*	F3YV*	●	●	3-wire				●	●							
T0H*	T0V*	Reed	●	●	1-color LED	2-wire	●	●	●	●	●	●	●	●	●	
T5H*	T5V*		●	●	No indicator lamp	2-wire	●	●	●	●	●	●	●	●	●	
T8H*	T8V*		●	●	1-color LED	2-wire					●	●	●	●	●	
T1H*	T1V*	Proximity	●	●	1-color LED	2-wire		●	●	●	●	●	●	●	●	
T2H*	T2V*		●	●		3-wire	●	●	●	●	●	●	●	●	●	●
T3H*	T3V*		●	●		1-color LED (PNP output)	3-wire	●	●	●	●	●	●	●	●	●
T3PH*	T3PV*		●	●		2-wire	●	●	●	●	●	●	●	●	●	●
T2WH*	T2WV*		●	●		3-wire	●	●	●	●	●	●	●	●	●	●
T2YH*	T2YV*		●	●		2-color LED	2-wire			●	●	●	●	●	●	●
T3WH*	T3WV*	Proximity	●	●	2-color LED	3-wire	●	●	●	●	●	●	●	●	●	
T3YH*	T3YV*		●	●		2-wire			●	●	●	●	●	●	●	
T2YD*	-		●	●		2-color LED	2-wire			●	●	●	●	●	●	●
T2YDT*	-	●	●	for AC magnetic field	2-wire			●	●	●	●	●	●	●	●	
T2JH*	T2JV*	●	●	1-color LED off-delay	2-wire			●	●	●	●	●	●	●	●	
<b>* Lead wire length</b>																
Blank	1 m (standard)															
3	3 m (option)															
5	5 m (option)															
<b>F Switch quantity</b>																
R	1 on rod side															
H	1 on head side															
D	2															
<b>G Option</b>																
Blank	Rod end female thread															
N	Rod end male thread															
M *4	Piston rod material (stainless steel)															
<b>H Mounting bracket</b>																
Blank	Without mounting bracket															
LB	Axial foot															
CB	Clevis bracket (pin and snap ring included)															
FA	Rod side flange															
FB	Head side flange															
<b>I Accessory (available when rod end male thread "N" is selected)</b>																
I	Rod eye															
Y	Rod clevis (pin and snap ring included)															

### [Stroke table]

Stroke (mm)	Applicable bore size										
	12	16	20	25	32	40	50	63	80	100	
Standard stroke	5	●	●	●	●	●	●				
	10	●	●	●	●	●	●	●	●	●	●
	15	●	●	●	●	●	●	●	●	●	●
	20	●	●	●	●	●	●	●	●	●	●
	25	●	●	●	●	●	●	●	●	●	●
	30	●	●	●	●	●	●	●	●	●	●
	35			●	●	●	●	●	●	●	●
	40			●	●	●	●	●	●	●	●
	45			●	●	●	●	●	●	●	●
	50			●	●	●	●	●	●	●	●
	75					●	●	●	●	●	●
	100					●	●	●	●	●	●
Min. stroke (mm) *1	1										
Max. stroke (mm)	30		50			100					
Custom stroke *2	In 1 mm increments										

\*1: Less than 5 mm for 1-color LED switch and less than 10 mm for the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch are not available.

Refer to page 858 for the min. stroke with switch.

\*2: The total length when using a custom stroke is the same as that when using the next longer standard stroke.

\*3: Refer to pages 763 and 765 for the min. stroke with mounting bracket LB.

### How to order switch



Switch model No.  
(Item ㊦ on page 860)

### How to order mounting bracket

Bore size (mm)	ø12	ø16	ø20	ø25	ø32	ø40	ø50
<b>Mounting bracket</b>							
Foot (LB)	SSD2-LB-12	SSD2-LB-16	SSD2-LB-20	SSD2-LB-25	SSD2-LB-32	SSD2-LB-40	SSD2-LB-50
Flange (FA/FB)	SSD2-FA-12	SSD2-FA-16	SSD2-FA-20	SSD2-FA-25	SSD2-FA-32	SSD2-FA-40	SSD2-FA-50
Clevis bracket (CB)	SSD2-CB-12	SSD2-CB-16	SSD2-CB-20	SSD2-CB-25	SSD2-CB-32	SSD2-CB-40	SSD2-CB-50
<b>Bore size (mm)</b>							
<b>Mounting bracket</b>	ø63	ø80	ø100				
Foot (LB)	SSD2-LB-63	SSD2-LB-80	SSD2-LB-100				
Flange (FA/FB)	SSD2-FA-63	SSD2-FA-80	SSD2-FA-100				
Clevis bracket (CB)	SSD2-CB-63	SSD2-CB-80	SSD2-CB-100				

\*1: The foot mounting bracket is provided as 2 pcs./set.

### Dimensions


Same as SSD2 Series (double acting/single rod). Refer to pages 760 to 766.

SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/ COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/ MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending


# SSD2-O Series

## Internal structure and parts list (ø12 to 50)


● SSD2-O-L-12 to 25 (double acting/with switch)

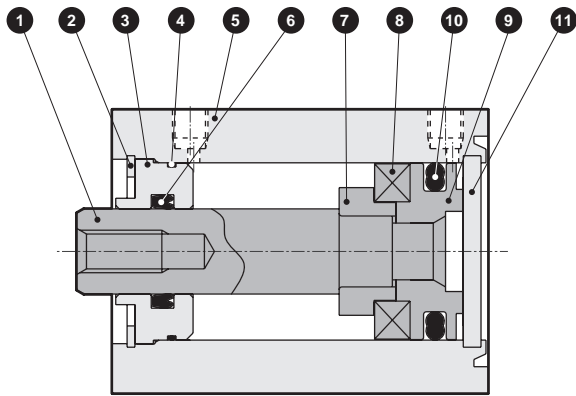


● SSD2-O-L-32 to 50 (double acting/with switch)

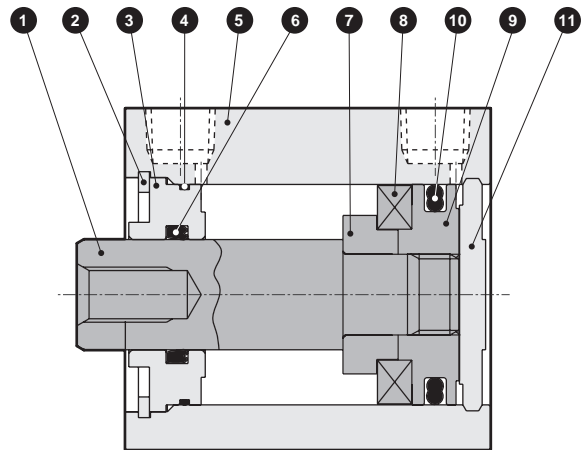

● SSD2-O-12 to 25 (double acting)

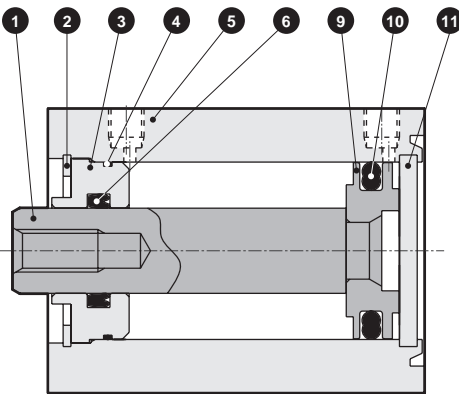

● SSD2-O-32 to 50 (double acting)

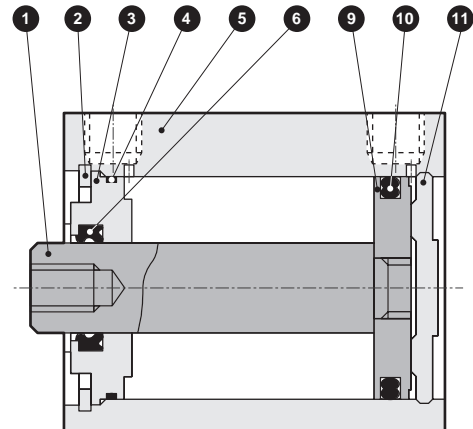


No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	ø12 to ø25: Stainless steel ø32 to ø50: Steel	ø16 to ø50: Industrial chrome plating	7	Spacer	Aluminum alloy	ø12 to ø32: Chromate
2	C-snap ring	Steel	Zinc phosphate	8	Magnet	Plastic	
3	Rod metal	Special aluminum	Alumite	9	Piston	Aluminum alloy	Chromate
4	Rod metal gasket	Nitrile rubber		10	Piston packing	Nitrile rubber	
5	Body	Aluminum alloy	Hard alumite	11	Cover	ø12 to ø25: Stainless steel ø32 to ø50: Aluminum alloy	ø32 to ø50: Alumite
6	Rod packing	Nitrile rubber					

### Repair parts list


Bore size (mm)	Kit No.	Repair parts No.
ø12	SSD2-O-12K	4 6 10
ø16	SSD2-O-16K	
ø20	SSD2-O-20K	
ø25	SSD2-O-25K	
ø32	SSD2-O-32K	
ø40	SSD2-O-40K	
ø50	SSD2-O-50K	

### Internal structure and parts list (ø63 to ø100)

- SSD2-O-L-63 to 100 (double acting/with switch)

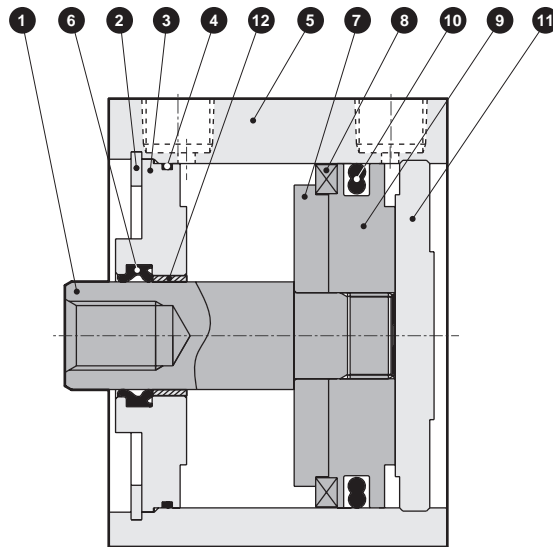

- SSD2-O-63 to 100 (double acting)

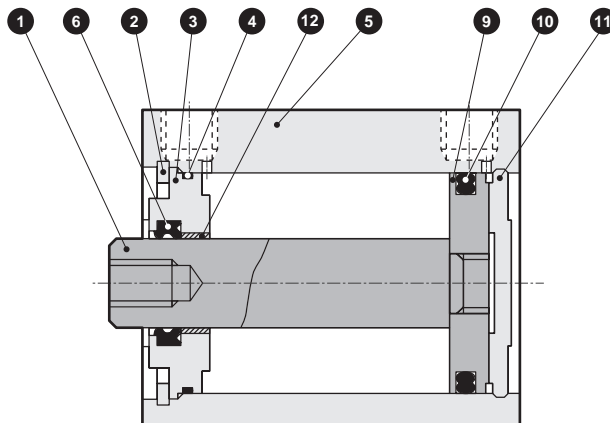

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	Steel	Industrial chrome plating	7	Spacer	Aluminum alloy	
2	C-snap ring	Steel	Zinc phosphate	8	Magnet	Plastic	
3	Rod metal	Aluminum alloy	Chromate	9	Piston	Aluminum alloy	Chromate
4	Rod metal gasket	Nitrile rubber		10	Piston packing	Nitrile rubber	
5	Body	Aluminum alloy	Hard alumite	11	Cover	Aluminum alloy	Alumite
6	Rod packing	Nitrile rubber		12	Bush	Oiles drymet	*1

\*1: Material is steel for copper and PTFE free specifications.

### Repair parts list

Bore size (mm)	Kit No.	Repair parts No.
ø63	SSD2-O-63K	4 6 10
ø80	SSD2-O-80K	
ø100	SSD2-O-100K	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs


FJ

FK

Spd  
Contr

Ending






Compact cylinder double acting/high load/low friction

# SSD2-KU Series

- Bore size:  $\phi 20/\phi 25/\phi 32/\phi 40$   
 $\phi 50/\phi 63/\phi 80/\phi 100$



## Specifications

Item	SSD2-KU SSD2-KUL (with switch)										
	mm		$\phi 20$	$\phi 25$	$\phi 32$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$	
Bore size	mm		$\phi 20$	$\phi 25$	$\phi 32$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$	
Actuation	Double acting										
Working fluid	Compressed air										
Max. working pressure	0.7 ( $\approx 100$ psi, 7 bar)										
Min. working pressure	0.03 ( $\approx 4.4$ psi, 0.3 bar)										
Proof pressure	1.0 ( $\approx 150$ psi, 10 bar)										
Ambient temperature	5 (41°F) to 60 (140°F)										
Port size	M5			Rc1/8			Rc1/4		Rc3/8		
Stroke tolerance	mm		+2.0							0	
Working piston speed	mm/s		10 to 500				10 to 300				
Cushion	Rubber cushion										
Lubrication	Not available										
Allowable absorbed energy	J	0.16	0.16	0.40	0.63	0.98	1.56	2.51	3.92		
Internal leakage	$\ell/\text{min}$	5						8			

## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\phi 20$	5/10/15/20/25	50	5
$\phi 25$	30/35/40/45/50		
$\phi 32$	5/10/15/20/25/30/	100	
$\phi 40$	35/40/45/50/75/100		
$\phi 50$	10/15/20/25		
$\phi 63$	30/35/40/45/50		
$\phi 80$	75/100		

## Min. stroke with switch (1 or 2 switches)

Bore size (mm)	T0H/V / T5H/V	T2H/V / T3H/V
$\phi 20$	5	5
$\phi 25$		
$\phi 32$		
$\phi 40$		
$\phi 50$		
$\phi 63$		
$\phi 80$		
$\phi 100$		


\*1: When using the type with switch, refer to the table of the min. stroke with switch.  
\*2: Refer to page 789 for the min. stroke with mounting bracket LB.

\*1: Less than 10 mm with the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch is not available.

## Custom stroke

### ● SSD2-KU Series

Item	Standard products	
	Standard stroke body with spacer	
Model No.	Refer to How to order.	
Description	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.	
Stroke range	Bore size	Stroke range
	20 to 25	1 to 49
	32 to 100	1 to 99
Example of model No.	Model No.: SSD2-KU-32-41 A +4 mm spacer is added to the SSD2-KU-32-45 standard cylinder to create 41 mm stroke. B + stroke is 78mm.	

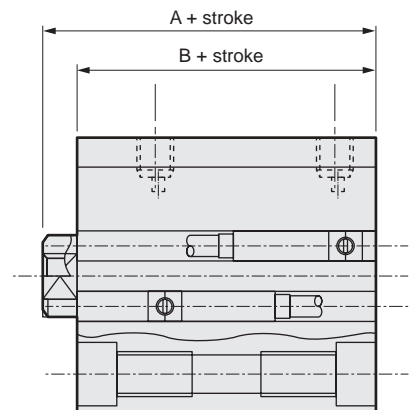

### Switch specifications (F-switch)

● 1-color/2-color LED

Item	2-wire proximity		3-wire proximity		2-wire proximity		3-wire proximity		
	F2S		F3S		F2H/F2V	F2YH/F2YV	F3H/F3V	F3PH/F3PV (made to order)	F3YH/F3YV
Applications	Dedicated for programmable controller		For programmable controller, relay		Dedicated for programmable controller		For programmable controller, relay		
Output method	-		NPN output		-		NPN output	PNP output	NPN output
Power supply voltage	-		10 to 28 VDC		-		10 to 28 VDC	4.5 to 28 VDC	10 to 28 VDC
Load voltage	10 to 30 VDC		30 VDC or less		10 to 30 VDC	24 VDC ±10%	30 VDC or less		
Load current	5 to 20 mA		50 mA or less		5 to 20 mA		50 mA or less		
Indicator	LED (Lit when ON)				Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Yellow LED (Lit when ON)		Red/green LED (Lit when ON)
Leakage current	1 mA or less		10 µA or less		1 mA or less		10 µA or less		
Weight	g		1 m:10 3 m:29						

### Switch specifications (T-switch)

● 1-color/2-color LED/for AC magnetic field proof

Item	2-wire proximity		2-wire proximity		3-wire proximity				2-wire reed				2-wire proximity		
	T1H/T1V	T2H/T2V T2JH/T2JV	T2YH/ T2YV	T2WH/ T2WV	T3H/T3V	T3PH/ T3PV	T3YH/ T3YV	T3WH/ T3WV	T0H/T0V	T5H/T5V	T8H/T8V		T2YD(*4) T2YDT		
Applications	For programmable controller, relay, compact solenoid valve	Dedicated for programmable controller		For programmable controller, relay				For programmable controller, relay	For programmable controller, relay, IC circuit (no indicator lamp), serial connection	For programmable controller, relay		For programmable controller			
Output method	-		-		NPN output	PNP output	NPN output	NPN output	-				-		
Pwr. supp. V.	-		-		10 to 28 VDC				-				-		
Load voltage	85 to 265 VAC	10 to 30 VDC	24 VDC ±10%	30 VDC or less				12/24 VDC	100/110 VAC	5/12/24 VDC	100/110 VAC	12/24 VDC	110 VAC	220 VAC	24 VDC ±10%
Load current	5 to 100 mA	5 to 20 mA (*3)		100 mA or less		50 mA or less		5 to 50 mA	7 to 20 mA	50 mA or less	20 mA or less	5 to 50 mA	7 to 20 mA	7 to 10 mA	5 to 20 mA
Indicator	LED (Lit when ON)	LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	No indicator lamp	LED (Lit when ON)		Red/green LED (Lit when ON)		
Leakage current	≤1 mA at 100 VAC, ≤2 mA at 200 VAC	1 mA or less		10 µA or less				0 mA				1 mA or less			
Weight g	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80			1 m:33 3 m:87 5 m:142		1 m:61 3 m:166 5 m:272		

\*1: Refer to Ending Page 1 for detailed switch specifications and dimensions.

\*2: Switches other than the above models, such as switches with connectors, are also available. Refer to Ending Page 1.

\*3: The max. load current is 20 mA at 25°C. The current is lower than 20 mA if the operating ambient temperature around the switch is higher than 25°C. (5 to 10 mA at 60°C)

\*4: Switch for AC magnetic field (T2YD/T2YDT) cannot be used in DC magnetic field.

\*5: The F-switch uses a bend-resistant lead wire.

### Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa								
		0.03	0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7
ø20	Push	9.42	31.4	47.1	62.8	94.2	1.26x10 <sup>2</sup>	1.57x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.20x10 <sup>2</sup>
	Pull	7.07	23.6	35.3	47.1	70.7	94.2	1.18x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.65x10 <sup>2</sup>
ø25	Push	14.7	49.1	73.6	98.2	1.47x10 <sup>2</sup>	1.96x10 <sup>2</sup>	2.45x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.44x10 <sup>2</sup>
	Pull	11.3	37.8	56.7	75.6	1.13x10 <sup>2</sup>	1.51x10 <sup>2</sup>	1.89x10 <sup>2</sup>	2.27x10 <sup>2</sup>	2.64x10 <sup>2</sup>
ø32	Push	24.1	80.4	1.21x10 <sup>2</sup>	1.61x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.22x10 <sup>2</sup>	4.02x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.63x10 <sup>2</sup>
	Pull	18.1	60.3	90.5	1.21x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.62x10 <sup>2</sup>	4.22x10 <sup>2</sup>
ø40	Push	37.7	1.26x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.51x10 <sup>2</sup>	3.77x10 <sup>2</sup>	5.03x10 <sup>2</sup>	6.28x10 <sup>2</sup>	7.54x10 <sup>2</sup>	8.80x10 <sup>2</sup>
	Pull	31.7	1.06x10 <sup>2</sup>	1.58x10 <sup>2</sup>	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>
ø50	Push	58.9	1.96x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.93x10 <sup>2</sup>	5.89x10 <sup>2</sup>	7.85x10 <sup>2</sup>	9.82x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.37x10 <sup>3</sup>
	Pull	49.5	1.65x10 <sup>2</sup>	2.47x10 <sup>2</sup>	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>
ø63	Push	93.5	3.12x10 <sup>2</sup>	4.68x10 <sup>2</sup>	6.23x10 <sup>2</sup>	9.35x10 <sup>2</sup>	1.25x10 <sup>3</sup>	1.56x10 <sup>3</sup>	1.87x10 <sup>3</sup>	2.18x10 <sup>3</sup>
	Pull	84.0	2.80x10 <sup>2</sup>	4.20x10 <sup>2</sup>	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>
ø80	Push	1.51x10 <sup>2</sup>	5.03x10 <sup>2</sup>	7.54x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.51x10 <sup>3</sup>	2.01x10 <sup>3</sup>	2.51x10 <sup>3</sup>	3.02x10 <sup>3</sup>	3.52x10 <sup>3</sup>
	Pull	1.36x10 <sup>2</sup>	4.54x10 <sup>2</sup>	6.80x10 <sup>2</sup>	9.07x10 <sup>2</sup>	1.36x10 <sup>3</sup>	1.81x10 <sup>3</sup>	2.27x10 <sup>3</sup>	2.72x10 <sup>3</sup>	3.17x10 <sup>3</sup>
ø100	Push	2.36x10 <sup>2</sup>	7.85x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.57x10 <sup>3</sup>	2.36x10 <sup>3</sup>	3.14x10 <sup>3</sup>	3.93x10 <sup>3</sup>	4.71x10 <sup>3</sup>	5.50x10 <sup>3</sup>
	Pull	2.14x10 <sup>2</sup>	7.15x10 <sup>2</sup>	1.07x10 <sup>3</sup>	1.43x10 <sup>3</sup>	2.14x10 <sup>3</sup>	2.86x10 <sup>3</sup>	3.57x10 <sup>3</sup>	4.29x10 <sup>3</sup>	5.00x10 <sup>3</sup>

# SSD2-KU Series

## How to order

No switch (without magnet for switch)

SSD2-KU-20-10-N-LB-I

With switch (built-in magnet for switch)

SSD2-KUL-20-10-T0H-R-N-LB-I

A Bore size

B Port thread

C Stroke

D Switch model No.

\*1

\*6

\*8

E Switch quantity

F Option

\*2

G Mounting bracket

\*3

\*4

## Precautions for model No. selection

\*1 : The F-switch can only be mounted on the piping port surface of bore sizes  $\phi 20$  and  $\phi 25$ .

\*2 : Piston rod of  $\phi 20$  and  $\phi 25$  is stainless steel as standard. C-snap ring is stainless steel instead of steel. The rod end male thread nut is stainless steel.

\*3 : The mounting bracket is included at shipment.

\*4 : The projection dimension of piston rod WF when LB or FA is selected is different from that of the standard. Refer to the dimensions on pages 783, 785, 787, 789 and 790. The number of the specified protruding dimension will be added at the end of the model No. printed on the metal plate on the body.

\*5 : "I" and "Y" cannot be selected together.

\*6 : The F-switch with L lead wire on  $\phi 20$  models cannot be selected on strokes 10 mm or under.

\*7 : Refer to pages 750 and 751 for combinations of variations/options.

\*8 : Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.

\*9 : F-switch cannot be selected.

[Example of model No.]

**SSD2-KUL-20-10-T0H-R-N**

Model: Compact cylinder, high load/low friction

A Bore size :  $\phi 20$  mm

B Port thread : Rc thread

C Stroke : 10mm

D Switch model No. : Reed T0H switch  
- Lead wire 1 m

E Switch quantity : 1 on rod side

F Option : Rod end male thread

H Accessory

\*5

Code	Description
<b>A Bore size (mm)</b>	
20	$\phi 20$
25	$\phi 25$
32	$\phi 32$
40	$\phi 40$
50	$\phi 50$
63	$\phi 63$
80	$\phi 80$
100	$\phi 100$

<b>B Port thread</b>	
Blank	Rc thread
NN	NPT thread ( $\phi 32$ and over) (made-to-order product)
GN	G thread ( $\phi 32$ and over) (made-to-order product)

<b>C Stroke (mm)</b>	
Refer to the stroke table on the following page.	

<b>D Switch model No.</b>		Lead wire		Contact	Voltage		Indicator	Lead wire	Bore size										
Straight	L-shaped	AC	DC		20	25			32	40	50	63	80	100					
-	F2S*	Proximity	●	1-color LED	2-wire	●	●												
-	F3S*				3-wire	●	●												
F2H*	F2V*				2-wire	●	●												
F3H*	F3V*				3-wire	●	●												
F3PH*	F3PV*				3-wire	●	1-color LED (PNP output) (custom)	●	●										
F2YH*	F2YV*				2-wire	●	2-color LED	●	●										
F3YH*	F3YV*	3-wire	●	2-color LED	●	●													
T0H*	T0V*	Reed	●	1-color LED	2-wire	●	●	●	●	●	●	●	●	●	●	●	●		
T5H*	T5V*			No indicator lamp	2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	
T8H*	T8V*			1-color LED	2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	
T1H*	T1V*	Proximity	●	1-color LED	2-wire	●	●	●	●	●	●	●	●	●	●	●	●		
T2H*	T2V*			2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
T3H*	T3V*			3-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●	
T3PH*	T3PV*			3-wire	●	1-color LED (PNP output)	●	●	●	●	●	●	●	●	●	●	●	●	
T2WH*	T2WV*			2-wire	●	2-color LED	●	●	●	●	●	●	●	●	●	●	●	●	
T2YH*	T2YV*			3-wire	●	2-color LED	●	●	●	●	●	●	●	●	●	●	●	●	
T3YH*	T3YV*	3-wire	●	2-color LED	●	●	●	●	●	●	●	●	●	●	●	●			
T2YD*	-	Proximity	●	2-color LED	2-wire	●	●	●	●	●	●	●	●	●	●	●	●		
T2YDT*	-			for AC magnetic field	2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	
T2JH*	T2JV*	Proximity	●	1-color LED off-delay	2-wire	●	●	●	●	●	●	●	●	●	●	●	●		

<b>* Lead wire length</b>	
Blank	1 m (standard)
3	3 m (option)
5	5 m (option)

<b>E Switch quantity</b>	
R	1 on rod side
H	1 on head side
D	2

<b>F Option</b>	
Blank	Rod end female thread
N	Rod end male thread
M *2	Piston rod material (stainless steel)

<b>G Mounting bracket</b>	
Blank	Without mounting bracket
LB	Axial foot
CB	Clevis bracket (pin and snap ring included)
FA	Rod side flange
FB	Head side flange

<b>H Accessory (available when rod end male thread "N" is selected)</b>	
I	Rod eye
Y	Rod clevis (pin and snap ring included)

### [Stroke table]

Stroke (mm)	Applicable bore size								
	ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100	
Standard stroke	5	●	●	●	●				
	10	●	●	●	●	●	●	●	●
	15	●	●	●	●	●	●	●	●
	20	●	●	●	●	●	●	●	●
	25	●	●	●	●	●	●	●	●
	30	●	●	●	●	●	●	●	●
	35	●	●	●	●	●	●	●	●
	40	●	●	●	●	●	●	●	●
	45	●	●	●	●	●	●	●	●
	50	●	●	●	●	●	●	●	●
	75			●	●	●	●	●	●
	100			●	●	●	●	●	●
Min. stroke (mm)	5								
Max. stroke (mm)	50			100					
Custom stroke *2	In 1 mm increments								

\*1: Less than 10 mm with the 2-color LED, off-delay, strong magnetic field proof, T1\* or T8\* switch is not available.

Refer to page 864 for the min. stroke with switch.

\*2: The total length is the same as that of the next longer standard stroke.

\*3: Refer to page 789 for the min. stroke with mounting bracket LB.

### How to order mounting bracket

Bore size (mm)	ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100
Mounting bracket								
Foot (LB)	SSD2-LB-20	SSD2-LB-25	SSD2-LB-32	SSD2-LB-40	SSD2-LB-50	SSD2-LB-63	SSD2-LB-80	SSD2-LB-100
Flange (FA/FB)	SSD2-FA-20	SSD2-FA-25	SSD2-FA-32	SSD2-FA-40	SSD2-FA-50	SSD2-FA-63	SSD2-FA-80	SSD2-FA-100
Clevis bracket (CB)	SSD2-CB-20	SSD2-CB-25	SSD2-CB-32	SSD2-CB-40	SSD2-CB-50	SSD2-CB-63	SSD2-CB-80	SSD2-CB-100

\*1: The foot mounting bracket is provided as 2 pcs./set.

### Dimensions

Same as SSD2-K Series (double acting/high load). Refer to pages 782 to 790.

### Technical data

Refer to SCM-U Series on page 306 for technical data regarding sliding resistance values. SSD2-KU Series shows a similar trend to the data of "SCM-U Series".

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25


ShkAbs

FJ

FK

Spd  
Contr

Ending




Compact cylinder double acting/double rod

# SSD2-D Series

● Bore size:  $\varnothing 12/\varnothing 16/\varnothing 20/\varnothing 25/\varnothing 32/\varnothing 40/\varnothing 50/\varnothing 63/\varnothing 80/\varnothing 100$

JIS symbol



## Specifications

Item	SSD2-D SSD2-DL (with switch)											
	mm		$\varnothing 12$	$\varnothing 16$	$\varnothing 20$	$\varnothing 25$	$\varnothing 32$	$\varnothing 40$	$\varnothing 50$	$\varnothing 63$	$\varnothing 80$	$\varnothing 100$
Bore size	mm		$\varnothing 12$	$\varnothing 16$	$\varnothing 20$	$\varnothing 25$	$\varnothing 32$	$\varnothing 40$	$\varnothing 50$	$\varnothing 63$	$\varnothing 80$	$\varnothing 100$
Actuation	Double acting											
Working fluid	Compressed air											
Max. working pressure	1.0 ( $\approx 150$ psi, 10 bar)											
Min. working pressure	0.15 ( $\approx 22$ psi, 1.5 bar)											
Proof pressure	1.6 ( $\approx 230$ psi, 16 bar)											
Ambient temperature	$-10$ ( $14^{\circ}\text{F}$ ) to $60$ ( $140^{\circ}\text{F}$ ) (no freezing)											
Port size	M5											
Stroke	With rubber cushion	Rc1/8 *1										
tolerance	mm	Rc1/4										
Working piston speed	mm/s											
Cushion	With or without cushion can be selected											
Lubrication	Not required (use turbine oil class 1 ISO VG32 if necessary for lubrication)											
Allowable absorbed energy	With rubber cushion	0.03	0.05	0.10	0.16	0.16	0.44	0.75	0.78	2.51	3.92	
	J	Without cushion	0.004	0.01	0.016	0.021	0.025	0.092	0.1	0.12	0.27	0.56

\*1: The  $\varnothing 32$  bore size with a 5 mm stroke and without a switch has a port size of M5.

## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\varnothing 12$	5/10/15/20	30	5
$\varnothing 16$	25/30		
$\varnothing 20$	5/10/15/20/25		
$\varnothing 25$	30/35/40/45/50	50	
$\varnothing 32$	5/10/15/20/25/30/		
$\varnothing 40$	35/40/45/50/75/100		
$\varnothing 50$	10/15/20/25	100	10
$\varnothing 63$			
$\varnothing 80$			
$\varnothing 100$	75/100		

\*: Refer to page 881 for the min. stroke with mounting bracket LB.

## Min. stroke with switch (1 or 2 switches)

Bore size (mm)	T0H/V / T5H/V	T2H/V / T3H/V
$\varnothing 12$	5	5
$\varnothing 16$		
$\varnothing 20$		
$\varnothing 25$		
$\varnothing 32$		
$\varnothing 40$		
$\varnothing 50$		
$\varnothing 63$		
$\varnothing 80$		
$\varnothing 100$		

Note: Less than 10 mm with the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch is not available.

### Switch specifications (F-switch)

● 1-color/2-color LED

Item	2-wire proximity		3-wire proximity		2-wire proximity		3-wire proximity		
	F2S		F3S		F2H/F2V	F2YH/F2YV	F3H/F3V	F3PH/F3PV (made to order)	F3YH/F3YV
Applications	Dedicated for programmable controller		For programmable controller, relay		Dedicated for programmable controller		For programmable controller, relay		
Output method	-		NPN output		-		NPN output	PNP output	NPN output
Power supply voltage	-		10 to 28 VDC		-		10 to 28 VDC	4.5 to 28 VDC	10 to 28 VDC
Load voltage	10 to 30 VDC		30 VDC or less		10 to 30 VDC	24 VDC ±10%	30 VDC or less		
Load current	5 to 20 mA		50 mA or less		5 to 20 mA		50 mA or less		
Indicator	LED (Lit when ON)				Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Yellow LED (Lit when ON)		Red/green LED (Lit when ON)
Leakage current	1 mA or less		10 μA or less		1 mA or less		10 μA or less		
Weight	g				1 m:10 3 m:29				

### Switch specifications (T-switch)

● 1-color/2-color LED/for AC magnetic field proof

Item	2-wire proximity		2-wire proximity				3-wire proximity				2-wire reed				2-wire proximity		
	T1H/T1V	T2H/T2V	T2YH/T2YV	T2WH/T2WV	T3H/T3V	T3PH/T3PV	T3YH/T3YV	T3WH/T3WV	T0H/T0V	T5H/T5V	T8H/T8V		T2YD(*4) T2YDT				
Applications	For programmable controller, relay, compact solenoid valve	Dedicated for programmable controller				For programmable controller, relay				For programmable controller, relay	For programmable controller, relay, IC circuit (no indicator lamp), serial connection		For programmable controller, relay	For programmable controller			
Output method	-		NPN output				-				-						
Pwr. supp. V.	-		10 to 28 VDC				-				-						
Load voltage	85 to 265 VAC	10 to 30 VDC	24 VDC ±10%		30 VDC or less				12/24 VDC	100/110 VAC	5/12/24 VDC	100/110 VAC	12/24 VDC	110 VAC	220 VAC	24 VDC ±10%	
Load current	5 to 100 mA	5 to 20 mA (*3)				100 mA or less		50 mA or less		5 to 50 mA	7 to 20 mA	50 mA or less	20 mA or less	5 to 50 mA	7 to 20 mA	7 to 10 mA	5 to 20 mA
Indicator	LED (Lit when ON)	LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)		No indicator lamp		LED (Lit when ON)		Red/green LED (Lit when ON)		
Leakage current	≤1 mA at 100 VAC, ≤2 mA at 200 VAC	1 mA or less				10 μA or less				0 mA				1 mA or less			
Weight g	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80			1 m:33 3 m:87 5 m:142		1 m:61 3 m:166 5 m:272			

\*1: Refer to Ending Page 1 for detailed switch specifications and dimensions.

\*2: Switches other than the above models, such as switches with connectors, are also available. Refer to Ending Page 1.

\*3: The max. load current is 20 mA at 25°C. The current is lower than 20 mA if the operating ambient temperature around the switch is higher than 25°C. (5 to 10 mA at 60°C)

\*4: Switch for AC magnetic field (T2YD/T2YDT) cannot be used in DC magnetic field.

\*5: The F-switch uses a bend-resistant lead wire.

### Cylinder weight table (the weight of the switches is when there are 2 cylinder switches.)

(Unit: g)

Stroke (mm)	5		10		15		20		25		30		35		40		45		50		75		100	
	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch
ø12	52	105	60	105	69	115	77	124	86	134	95	147	-	-	-	-	-	-	-	-	-	-	-	-
ø16	74	133	85	133	95	144	106	156	117	168	128	177	-	-	-	-	-	-	-	-	-	-	-	-
ø20	131	187	143	222	161	238	179	254	196	269	214	285	232	301	249	316	267	332	284	347	-	-	-	-
ø25	147	238	162	253	178	269	194	285	210	301	226	316	242	332	257	348	275	364	288	379	-	-	-	-
ø32	184	299	230	344	275	390	322	436	366	481	413	527	459	573	469	612	485	628	522	665	776	785	1004	1012
ø40	283	426	310	453	336	479	363	506	390	533	416	569	443	601	507	617	553	663	601	707	1317	1333	1475	1490
ø50	-	-	508	702	558	751	608	803	658	851	708	901	758	950	808	1001	835	1033	911	1105	2007	2025	2252	2270
ø63	-	-	902	1266	977	1341	1052	1416	1127	1491	1202	1566	1278	1642	1353	1717	1428	1792	1503	1867	2218	2242	2593	2617
ø80	-	-	1608	1538	1725	1916	1841	2294	1958	2411	2074	2527	2191	2649	2308	2771	2425	2888	2541	3004	3560	3587	4143	4169
ø100	-	-	2483	3105	2652	3254	2820	3402	2989	3586	3158	3770	3327	3934	3495	4097	3664	4261	3833	4425	5213	5245	6033	6065

### Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa										
		0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø12	Push/Pull	-	12.7	17.0	25.4	33.9	42.4	50.9	59.4	67.9	76.3	84.8
ø16	Push/Pull	-	22.6	30.2	45.2	60.3	75.4	90.5	1.06x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.36x10 <sup>2</sup>	1.51x10 <sup>2</sup>
ø20	Push/Pull	-	35.3	47.1	70.7	94.2	1.18x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.65x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.12x10 <sup>2</sup>	2.36x10 <sup>2</sup>
ø25	Push/Pull	-	56.7	75.6	1.13x10 <sup>2</sup>	1.51x10 <sup>2</sup>	1.89x10 <sup>2</sup>	2.27x10 <sup>2</sup>	2.64x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.40x10 <sup>2</sup>	3.78x10 <sup>2</sup>
ø32	Push/Pull	-	90.5	1.21x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.62x10 <sup>2</sup>	4.22x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.43x10 <sup>2</sup>	6.03x10 <sup>2</sup>
ø40	Push/Pull	-	1.58x10 <sup>2</sup>	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>
ø50	Push/Pull	-	2.47x10 <sup>2</sup>	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>
ø63	Push/Pull	2.80x10 <sup>2</sup>	4.20x10 <sup>2</sup>	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>	2.24x10 <sup>3</sup>	2.52x10 <sup>3</sup>	2.80x10 <sup>3</sup>
ø80	Push/Pull	4.54x10 <sup>2</sup>	6.80x10 <sup>2</sup>	9.07x10 <sup>2</sup>	1.36x10 <sup>3</sup>	1.81x10 <sup>3</sup>	2.27x10 <sup>3</sup>	2.72x10 <sup>3</sup>	3.17x10 <sup>3</sup>	3.63x10 <sup>3</sup>	4.08x10 <sup>3</sup>	4.54x10 <sup>3</sup>
ø100	Push/Pull	7.15x10 <sup>2</sup>	1.07x10 <sup>3</sup>	1.43x10 <sup>3</sup>	2.14x10 <sup>3</sup>	2.86x10 <sup>3</sup>	3.57x10 <sup>3</sup>	4.29x10 <sup>3</sup>	5.00x10 <sup>3</sup>	5.72x10 <sup>3</sup>	6.43x10 <sup>3</sup>	7.15x10 <sup>3</sup>

# SSD2-D Series

## How to order

No switch (without magnet for switch)

SSD2-D - 12 - 5 - N - LB - I

With switch (built-in magnet for switch)

SSD2-DL - 12 - 10 - T0H - R - N - LB - I

A Model No.

B Bore size

C Port thread

D Cushion

E Stroke

F Switch model No.

\*1, \*2

\*3, \*8

\*9

G Switch quantity

H Option \*4

## Precautions for model No. selection

\*1 : The T2YD\* switch cannot be mounted on the  $\phi 12$  and  $\phi 16$  bore sizes.

\*2 : The T8\* switch cannot be mounted on  $\phi 12$  and  $\phi 16$ .

\*3 : The F-switch can only be mounted on the piping port surface of bore sizes  $\phi 20$  and  $\phi 25$ .

\*4 : Piston rod of  $\phi 12$  to  $\phi 25$  is stainless steel as standard. C-snap ring is stainless steel instead of steel. The rod end male thread nut is stainless steel.

\*5 : The mounting bracket is included at shipment.

\*6 : The projection dimension of piston rod WF when LB or FA is selected is different from that of the standard. Refer to the dimensions on pages 877, 879 and 881. The number of the specified protruding dimension will be added at the end of the model No. printed on the metal plate on the body.

\*7 : "I" and "Y" cannot be selected together.

\*8 : The F-switch with L type lead wire on  $\phi 20$  models cannot be selected on strokes of 15 mm or under.

\*9 : Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.

\*10: Refer to pages 750 and 751 for combinations of variations/options.

\*11 : F-switch cannot be selected.

[Example of model No.]

SSD2-DL-12-5-T0H-R-N-LB-I

Model: Compact cylinder double acting/double rod

B Bore size :  $\phi 12$  mm

C Port thread : Rc thread

D Cushion : No cushion

E Stroke : 5mm

F Switch model No. : Reed T0H switch/  
Lead wire length 1 m

G Switch quantity : 1 on rod side

H Option : Rod end male thread

I Mounting bracket : Axial foot

J Accessory : Rod eye

## How to order switch

SW - T0H

Switch model No. (Item F above)

I Mounting bracket  
\*5  
\*6

J Accessory  
\*7

Code	Description															
<b>A Model No.</b>																
SSD2-D	Double acting/double rod															
SSD2-DL	Double acting/double rod/with switch															
<b>B Bore size (mm)</b>																
12	$\phi 12$															
16	$\phi 16$															
20	$\phi 20$															
25	$\phi 25$															
32	$\phi 32$															
40	$\phi 40$															
50	$\phi 50$															
63	$\phi 63$															
80	$\phi 80$															
100	$\phi 100$															
<b>C Port thread</b>																
Blank	Rc thread															
NN	NPT thread ( $\phi 32$ and over) (made-to-order product)															
GN	G thread ( $\phi 32$ and over) (made-to-order product)															
<b>D Cushion</b>																
Blank	Without cushion															
D	With rubber cushion															
<b>E Stroke (mm)</b>																
Refer to the stroke table on the following page.																
<b>F Switch model No.</b>																
Lead wire Straight	Lead wire L-shaped	Contact	Voltage AC DC	Indicator	Lead wire	Bore size										
-	F2S*	Proximity	●	1-color LED	2-wire	12	16	20	25	32	40	50	63	80	100	
-	F3S*				3-wire											
F2H*	F2V*				2-wire											
F3H*	F3V*				3-wire											
F3PH*	F3PV*				3-wire	●	1-color LED (PNP output) (custom)									
F2YH*	F2YV*				2-wire	●	2-color LED									
F3YH*	F3YV*	3-wire	●	2-color LED												
T0H*	T0V*	Reed	●	1-color LED	2-wire											
T5H*	T5V*		●	No indicator lamp												
T8H*	T8V*		●	1-color LED												
T1H*	T1V*	Proximity	●	1-color LED	2-wire											
T2H*	T2V*		●		1-color LED											
T3H*	T3V*		●		1-color LED											
T3PH*	T3PV*		●		1-color LED (PNP output)	3-wire										
T2WH*	T2WV*		●		2-color LED	2-wire										
T2YH*	T2YV*		●	2-wire												
T3WH*	T3WV*		●	3-wire												
T3YH*	T3YV*		●	3-wire												
T2YD*	-		●	2-color LED		2-wire										
T2YDT*	-		●	AC magnetic field												
T2JH*	T2JV*	●	1-color LED off-delay	2-wire												
<b>* Lead wire length</b>																
Blank	1 m (standard)															
3	3 m (option)															
5	5 m (option)															
<b>G Switch quantity</b>																
R	1 on rod side															
H	1 on head side															
D	2															
<b>H Option</b>																
	Bore size (mm)	12	16	20	25	32	40	50	63	80	100					
Blank	Rod end female thread	●	●	●	●	●	●	●	●	●	●	●	●	●		
N	Rod end male thread	●	●	●	●	●	●	●	●	●	●	●	●	●		
P6	Copper and PTFE free specifications	Supported as standard										●	●	●		
M *4	Piston rod material (stainless steel)	●	●	●	●	●	●	●	●	●	●	●	●	●		
P4	Specifications for rechargeable battery (made to order)	●	●	●	●	●	●	●	●	●	●	●	●	●		
P40		●	●	●	●	●	●	●	●	●	●	●	●	●		
<b>I Mounting bracket</b>																
Blank	Without mounting bracket															
LB	Axial foot															
FA	Rod side flange															
<b>J Accessory (available when rod end male thread "N" is selected)</b>																
I	Rod eye															
Y	Rod clevis (pin and snap ring included)															

### [Stroke table]

Stroke (mm)	Applicable bore size										
	12	16	20	25	32	40	50	63	80	100	
Standard stroke	5	●	●	●	●	●	●				
	10	●	●	●	●	●	●	●	●	●	●
	15	●	●	●	●	●	●	●	●	●	●
	20	●	●	●	●	●	●	●	●	●	●
	25	●	●	●	●	●	●	●	●	●	●
	30	●	●	●	●	●	●	●	●	●	●
	35			●	●	●	●	●	●	●	●
	40			●	●	●	●	●	●	●	●
	45			●	●	●	●	●	●	●	●
	50			●	●	●	●	●	●	●	●
	75					●	●	●	●	●	●
	100					●	●	●	●	●	●
Min. stroke (mm) *1	1										
Max. stroke (mm)	30		50			100					
Custom stroke *2	-			In 5 mm increments							

\*1: Less than 5 mm for 1-color LED switch and less than 10 mm for the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch are not available. Refer to page 868 for the min. stroke with switch.

\*2: Available only for more than 50 mm stroke.

### How to order mounting brackets

Bore size (mm)	ø12	ø16	ø20	ø25	ø32	ø40	ø50
<b>Mounting bracket</b>							
Foot (LB)	SSD2-LB-12	SSD2-LB-16	SSD2-LB-20	SSD2-LB-25	SSD2-LB-32	SSD2-LB-40	SSD2-LB-50
Flange (FA)	SSD2-FA-12	SSD2-FA-16	SSD2-FA-20	SSD2-FA-25	SSD2-FA-32	SSD2-FA-40	SSD2-FA-50
Bore size (mm)	ø63	ø80	ø100				
<b>Mounting bracket</b>							
Foot (LB)	SSD2-LB-63	SSD2-LB-80	SSD2-LB-100				
Flange (FA)	SSD2-FA-63	SSD2-FA-80	SSD2-FA-100				

\*1: The foot mounting bracket is provided as 2 pcs./set.


SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/ COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/ MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending




# SSD2-D Series

## SCP\*3 Internal structure and parts list (ø12 to 50) (no cushion)

● SSD2-DL-12 to 50 (double acting/double rod/with switch)

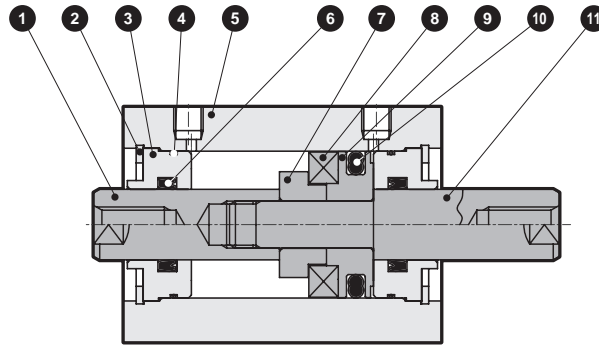

● SSD2-D-12 to 50 (double acting/double rod)

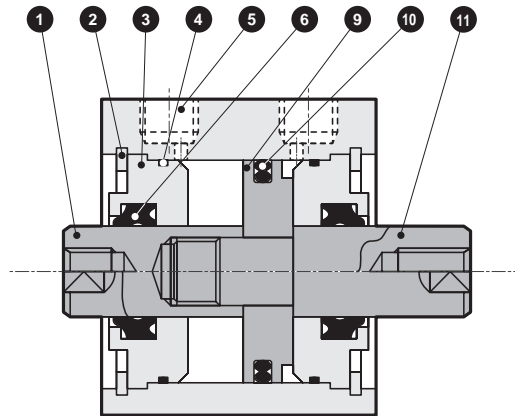


No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod <sup>Ⓐ</sup>	ø12 to ø25: Stainless steel ø32 to ø50: Steel	ø16 to ø50: Industrial chrome plating	7	Spacer	ø12, ø20, ø32, ø40: Aluminum alloy ø16, ø25, ø50: Special resin	ø12, 20, 32, 40: Chromate
2	C-snap ring	Steel	Zinc phosphate	8	Magnet	Plastic	
3	Rod metal	Special aluminum	Alumite	9	Piston	Aluminum alloy	Chromate
4	Rod metal gasket	Nitrile rubber		10	Piston packing	Nitrile rubber	
5	Body	Aluminum alloy	Hard alumite	11	Piston rod <sup>Ⓑ</sup>	ø12 to ø25: Stainless steel ø32 to ø50: Steel	ø16 to ø50: Industrial chrome plating
6	Rod packing	Nitrile rubber					

### Repair parts list


Bore size (mm)	Kit No.	Repair parts No.
ø12	SSD2-D-12K	<span style="border: 1px solid black; border-radius: 50%; padding: 2px;">4</span> <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">6</span> <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">10</span>
ø16	SSD2-D-16K	
ø20	SSD2-D-20K	
ø25	SSD2-D-25K	
ø32	SSD2-D-32K	
ø40	SSD2-D-40K	
ø50	SSD2-D-50K	

### Internal structure and parts list (ø63 to 100) (no cushion)

● SSD2-DL-63 to 100 (double acting/double rod/with switch)

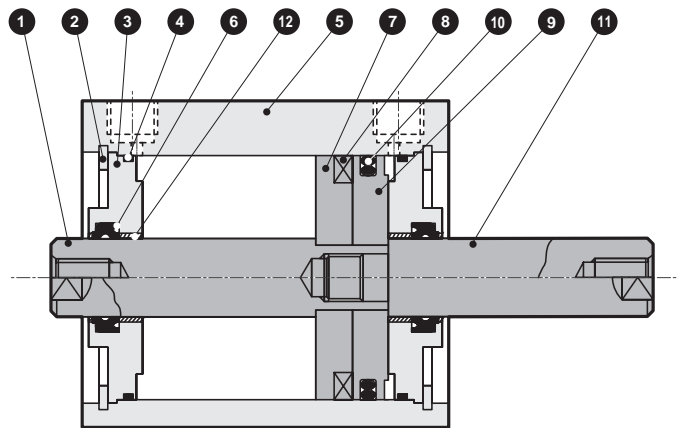

● SSD2-D-63 to 100 (double acting/double rod)

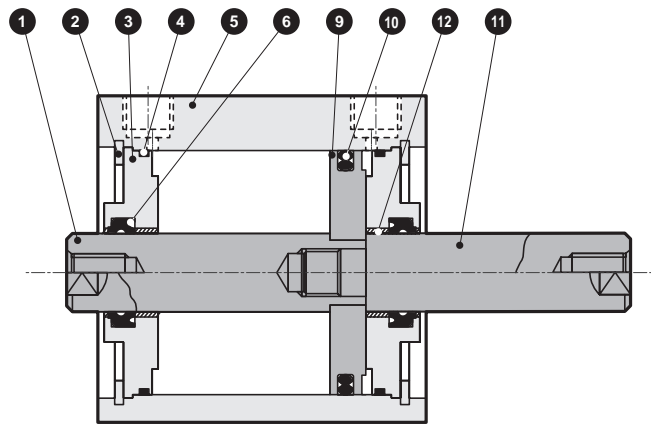

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod <sup>Ⓐ</sup>	Steel	Industrial chrome plating	7	Spacer	Aluminum alloy	Chromate
2	C-snap ring	Steel	Zinc phosphate	8	Magnet	Plastic	
3	Rod metal	Aluminum alloy	Alumite	9	Piston	Aluminum alloy	Chromate
4	Rod metal gasket	Nitrile rubber		10	Piston packing	Nitrile rubber	
5	Body	Aluminum alloy	Hard alumite	11	Piston rod <sup>Ⓑ</sup>	Steel	Industrial chrome plating
6	Rod packing	Nitrile rubber		12	Bush	Oiles drymet	*1

\*1: Material is steel for copper and PTFE free specifications.

### Repair parts list

Bore size (mm)	Kit No.	Repair parts No.
ø63	SSD2-D-63K	4 6 10
ø80	SSD2-D-80K	
ø100	SSD2-D-100K	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr


Ending

# SSD2-D Series


SCP\*3  
CMK2  
CMA2  
SCM  
SCG  
SCA2  
SCS2  
CKV2  
CAV2/  
COVPIN2  
**SSD2**  
SSG  
SSD  
CAT  
MDC2  
MVC  
SMG  
MSD/  
MSDG  
FC\*  
STK  
SRL3  
SRG3  
SRM3  
SRT3  
MRL2  
MRG2  
SM-25  
ShkAbs  
FJ  
FK  
Spd  
Contr  
Ending

## Internal structure and parts list (ø12 to 50) (with rubber cushion)

● SSD2-DL-12D to 50D (double acting/double rod/with switch)

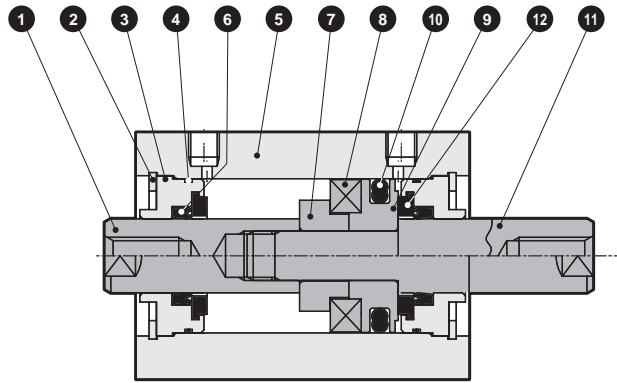

● SSD2-D-12D to 50D (double acting/double rod)

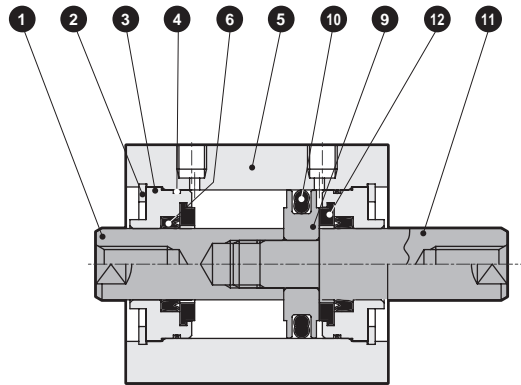


No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod <sup>Ⓐ</sup>	ø12 to ø25: Stainless steel ø32 to ø50: Steel	ø16 to ø50: Industrial chrome plating	8	Magnet	Plastic	
2	C-snap ring	Steel	Zinc phosphate	9	Piston	Aluminum alloy	Chromate
3	Rod metal	Special aluminum	Alumite	10	Piston packing	Nitrile rubber	
4	Rod metal gasket	Nitrile rubber		11	Piston rod <sup>Ⓑ</sup>	ø12 to ø25: Stainless steel ø32 to ø50: Steel	ø16 to ø50: Industrial chrome plating
5	Body	Aluminum alloy	Hard alumite	12	Cushion rubber	Urethane rubber	
6	Rod packing	Nitrile rubber					
7	Spacer	ø12, ø20, ø32, ø40: Aluminum alloy ø16, ø25, ø50: Special resin	ø12, 20, 32, 40: Chromate				

### Repair parts list


Bore size (mm)	Kit No.	Repair parts No.
ø12	SSD2-D-12DK	
ø16	SSD2-D-16DK	
ø20	SSD2-D-20DK	
ø25	SSD2-D-25DK	
ø32	SSD2-D-32DK	
ø40	SSD2-D-40DK	
ø50	SSD2-D-50DK	

### Internal structure and parts list (ø63 to 100) (with rubber cushion)

● SSD2-DL-63D to 100D (double acting/double rod/with switch)

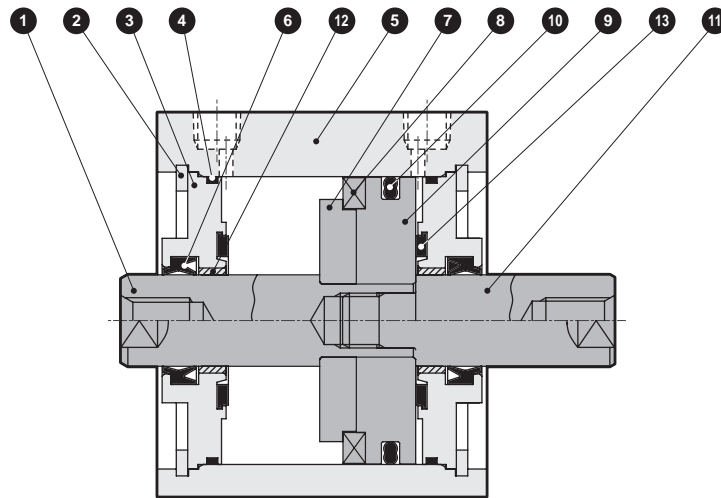

● SSD2-D-63D to 100D (double acting/double rod)

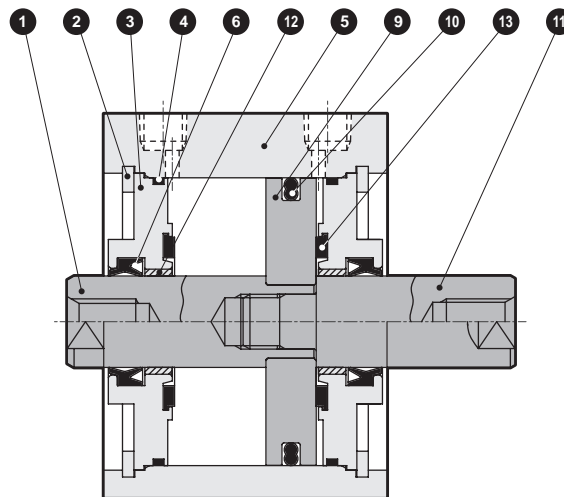

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod <sup>Ⓐ</sup>	Steel	Industrial chrome plating	8	Magnet	Plastic	
2	C-snap ring	Steel	Zinc phosphate	9	Piston	Aluminum alloy	Chromate
3	Rod metal	Aluminum alloy	Alumite	10	Piston packing	Nitrile rubber	
4	Rod metal gasket	Nitrile rubber		11	Piston rod <sup>Ⓑ</sup>	Steel	Industrial chrome plating
5	Body	Aluminum alloy	Hard alumite	12	Bush	Oiles drymet	*1
6	Rod packing	Nitrile rubber		13	Cushion rubber	Urethane rubber	
7	Spacer	Aluminum alloy	Chromate				

\*1: Material is steel for copper and PTFE free specifications.

### Repair parts list

Bore size (mm)	Kit No.	Repair parts No.
ø63	SSD2-D-63DK	
ø80	SSD2-D-80DK	4 6 10 13
ø100	SSD2-D-100DK	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending






# SSD2-D Series

## Dimensions



● SSD2-DL-12 to 25 (with switch)

● Rod end male thread

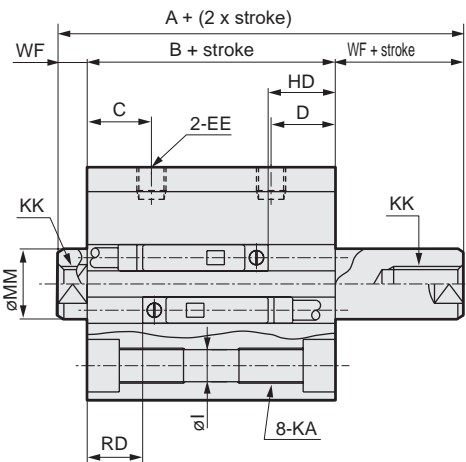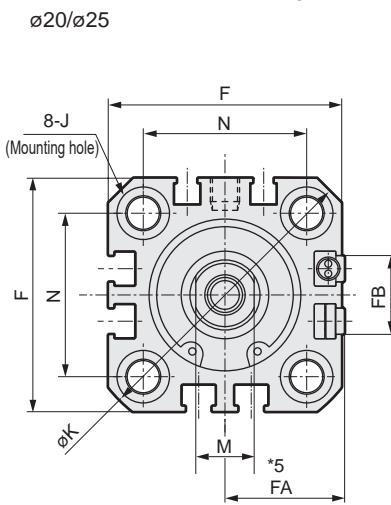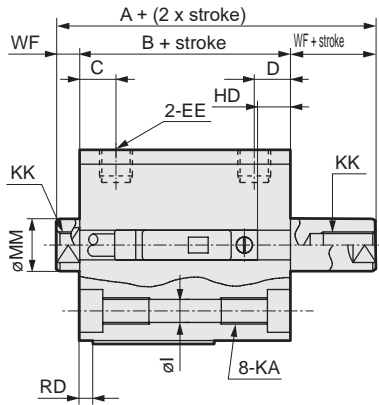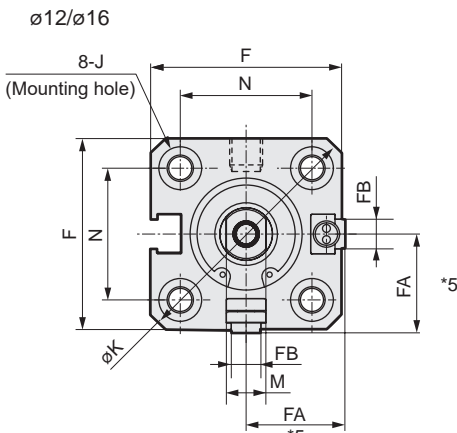

Note: The positions for the left and right widths across flats are unspecified.

Code	Common dimensions with switch																	
	A	B	C	D	EE	F	FA <sup>*5</sup>	FB	I	J	K	KA	KK	M	MM	N	WF	
Reed T0H/T0V, T5H/T5V <sup>*6</sup>	Reed		Proximity T2H/T2V, T3H/T3V <sup>*6</sup>		Proximity T2WH/T2WV, T3WH/T3WV <sup>*6</sup>		Proximity F2H/F2V, F3H/F3V, F2YH/F2YV, F3YH/F3YV		Proximity F2S/F3S									
Switch dimensions																		
Bore size (mm)	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD
ø12	5.5	3	5.5	3	7.5	4.5	/		/		/		/		/		/	
ø16	5	2	5	2	6.5	3.5	/		/		/		/		/		/	
ø20	10	7.5	10	7.5	11.5	9.5	14	12	13	11	/		/		/		/	
ø25	11.5	9.5	11.5	9.5	11.5	11	15	13	14	12	/		/		/		/	

\*1 : Only F-switch is available for the ø20 or ø25 piping port surface.

\*2 : HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.

\*3 : Refer to page 1044 for HD, RD and protruding dimensions of the 2-color LED, off-delay, AC magnetic field proof, T1\* and T8\* switches.

\*4 : Dimensions in ( ) of FA are for the L-shaped lead wire.

\*5 : For dimensions of individual accessories, refer to pages 1046 to 1049.

\*6 : The RD side can be identified with a mark on the port surface of the body.


● Dimensions of rod end male thread part

Code	a'	c'	H	kk'	M	MM	T	wf
Bore size (mm)								
ø12	10.5	9	8	M5	5	6	3.2	3.5
ø16	12	10	10	M6	6	8	3.6	3.5
ø20	14	12	13	M8	8	10	5	4.5
ø25	17.5	15	17	M10x1.25	10	12	6	5

### Dimensions with mounting bracket




- Axial foot (LB) with switch  
SSD2-DL-12 to 25 -LB

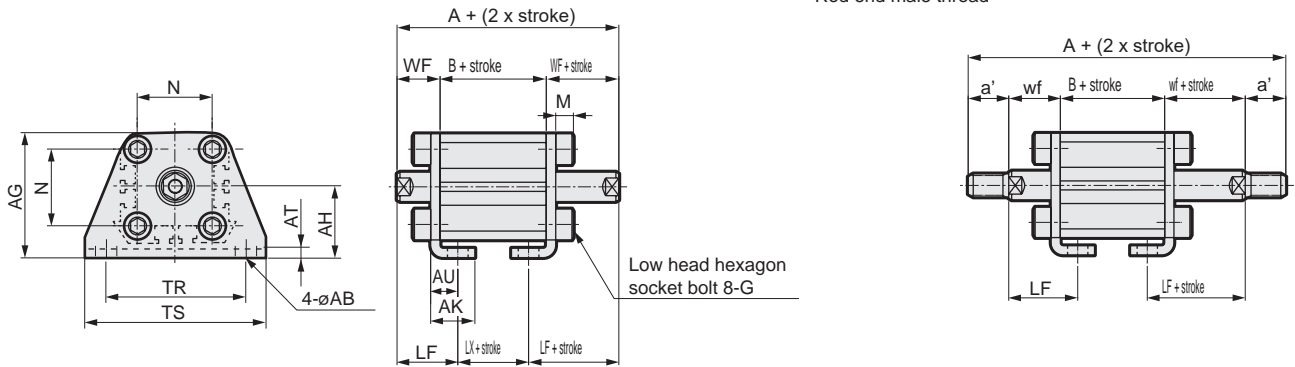

Code	Common dimensions										
Bore size (mm)	AB	AG	AH	AK	AT	AU	G	N	TR	TS	M
ø12	5	29.5	17	12.5	2	8	M4x10	15.5	34	44	4.8
ø16	5	33.5	19	13	2	8	M4x10	20	38	48	4.8
ø20	7	42	24	15	3.2	9.2	M6x16	25.5	48	62	7.2
ø25	7	46	26	16.5	3.2	10.7	M6x16	28	52	66	7.2
Code	Female thread					Male thread					
Bore size (mm)	WF	LF	A	B	LX	a'	wf	LF	A	B	LX
ø12	13.5	19.5	54	27	15	10.5	13.5	19.5	75	27	15
ø16	13.5	19.5	54	27	15	12	13.5	19.5	78	27	15
ø20	14.5	20.5	65	36	24	14	14.5	20.5	93	36	24
ø25	15	22.5	69	39	24	17.5	15	22.5	104	39	24

- Rod side flange (FA) with switch  
SSD2-DL-12 to 25 -FA

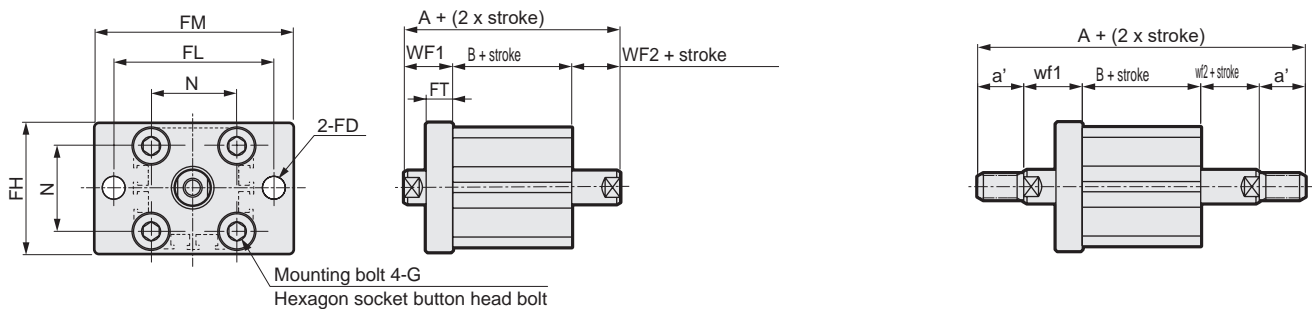

Code	Common dimensions							Female thread				Male thread				
Bore size (mm)	FD	FH	FL	FM	FT	N	G	WF1	WF2	A	B	a'	wf1	wf2	A	B
ø12	4.5	25	45	55	5.5	15.5	M4x12	13.5	3.5	44	27	11	13.5	3.5	65	27
ø16	4.5	30	45	55	5.5	20	M4x12	13.5	3.5	44	27	12	13.5	3.5	68	27
ø20	6.6	39	48	60	8	25.5	M6x16	14.5	4.5	55	36	14	14.5	4.5	83	36
ø25	6.6	42	52	64	8	28	M6x16	15	5	59	39	18	15	5	94	39

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

SSD2

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending

# SSD2-D Series




## Dimensions





### ● SSD2-D-12 to 25 (without switch)

### ● Rod end male thread

ø12/ø16

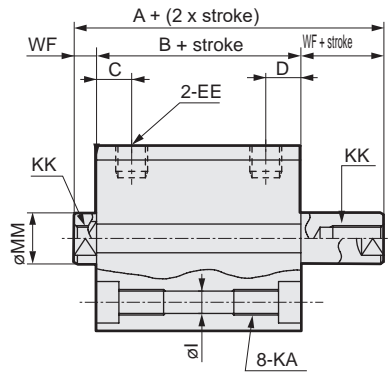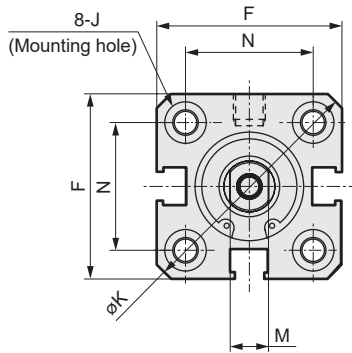

ø20/ø25

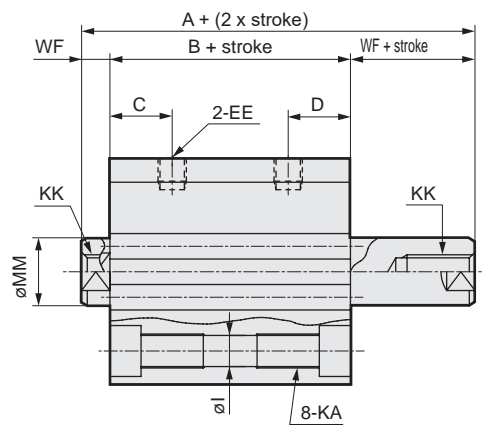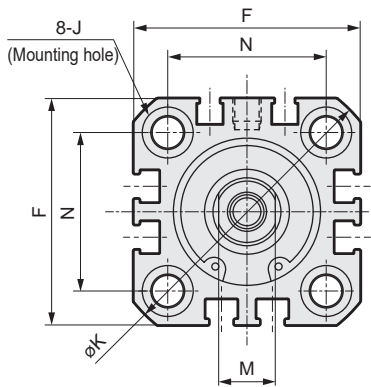

Note: The positions for the left and right widths across flats are unspecified.

Code	Dimensions without switch and common dimensions															
	Bore size (mm)	A	B	C	D	EE	F	I	J	K	KA	KK	M	MM	N	WF
SRL3	ø12	29	22	5.5	5.5	M5	25	3.5	6.5 spot face depth 3.5	32	M4 depth 7	M3 depth 6	5	6	15.5	3.5
	ø16	29	22	5.5	5.5	M5	29	3.5	6.5 spot face depth 3.5	38	M4 depth 7	M4 depth 8	6	8	20	3.5
SRG3	ø20	35	26	8	8	M5	36	5.5	9 spot face depth 5.5	47	M6 depth 11	M5 depth 7	8	10	25.5	4.5
	ø25	39	29	11	11	M5	40	5.5	9 spot face depth 5.5	51	M6 depth 11	M6 depth 12	10	12	28	5

### ● Dimensions of rod end male thread part


Code	a'	c'	H	kk'	M	MM	T	wf
SRT3								
MRL2	ø12	10.5	9	8	M5	5	3.2	3.5
	ø16	12	10	10	M6	6	3.6	3.5
MRG2	ø20	14	12	13	M8	8	5	4.5
	ø25	17.5	15	17	M10x1.25	10	6	5

\*1: For dimensions of individual accessories, refer to pages 1046 to 1049.

### Dimensions with mounting bracket



- Axial foot (LB) without switch  
SSD2-D-12 to 25 -LB

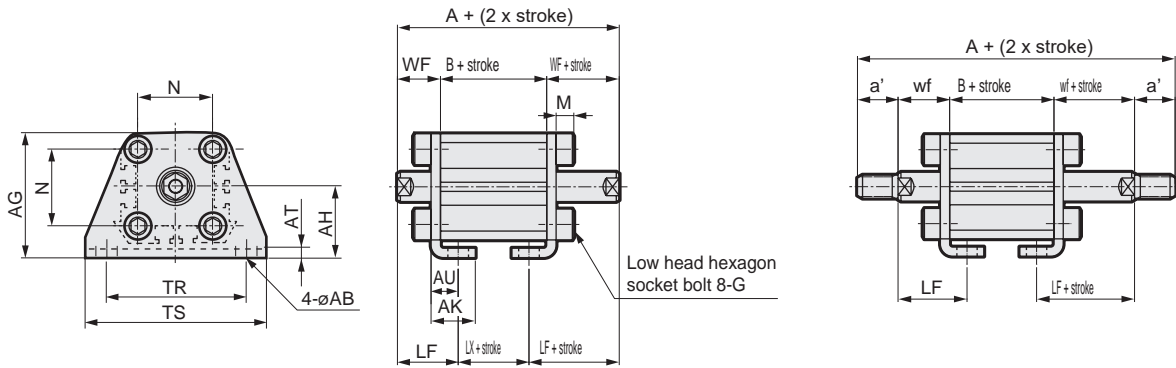


Code		Common dimensions										
Bore size (mm)	AB	AG	AH	AK	AT	AU	G	N	TR	TS	M	
ø12	5	29.5	17	12.5	2	8	M4x10	15.5	34	44	4.8	
ø16	5	33.5	19	13	2	8	M4x10	20	38	48	4.8	
ø20	7	42	24	15	3.2	9.2	M6x16	25.5	48	62	7.2	
ø25	7	46	26	16.5	3.2	10.7	M6x16	28	52	66	7.2	

Code		Female thread					Male thread				
Bore size (mm)	WF	LF	A	B	LX	a'	wf	LF	A	B	LX
ø12	13.5	19.5	49	22	10	10.5	13.5	19.5	70	22	10
ø16	13.5	19.5	49	22	10	12	13.5	19.5	73	22	10
ø20	14.5	20.5	55	26	14	14	14.5	20.5	83	26	14
ø25	15	22.5	59	29	14	17.5	15	22.5	94	29	14

- Rod side flange (FA) without switch  
SSD2-D-12 to 25 -FA

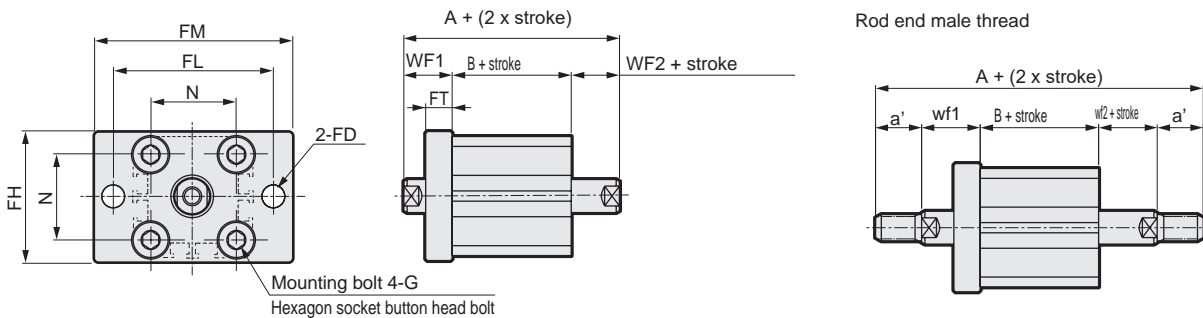

Code		Common dimensions						Female thread				Male thread				
Bore size (mm)	FD	FH	FL	FM	FT	N	G	WF1	WF2	A	B	a'	wf1	wf2	A	B
ø12	4.5	25	45	55	5.5	15.5	M4x12	13.5	3.5	39	22	11	13.5	3.5	60	22
ø16	4.5	30	45	55	5.5	20	M4x12	13.5	3.5	39	22	12	13.5	3.5	63	22
ø20	6.6	39	48	60	8	25.5	M6x16	14.5	4.5	45	26	14	14.5	4.5	73	26
ø25	6.6	42	52	64	8	28	M6x16	15	5	49	29	18	15	5	84	29

SCP\*3  
CMK2  
CMA2  
SCM  
SCG  
SCA2  
SCS2  
CKV2  
CAV2/  
COVP/N2  
SSD2  
SSG  
SSD  
CAT  
MDC2  
MVC  
SMG  
MSD/  
MSDG  
FC\*  
STK  
SRL3  
SRG3  
SRM3  
SRT3  
MRL2  
MRG2  
SM-25  
ShkAbs  
FJ  
FK  
Spd  
Contr  
Ending





# SSD2-D Series


## Dimensions





### ● SSD2-DL-32 to 100 (with switch)

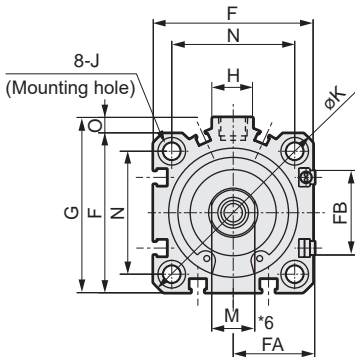

### ● Rod end male thread



### ● SSD2-D-32 to 100 (without switch)

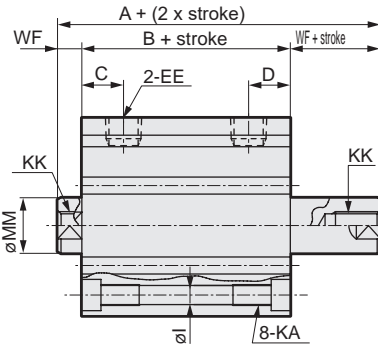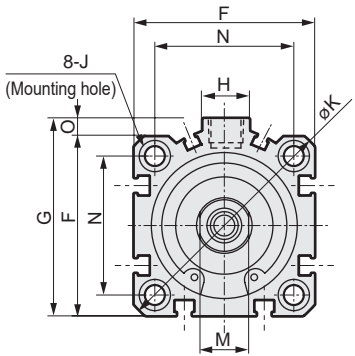

Note: The positions for the left and right widths across flats are unspecified.

Code	No switch		Common dimensions with switch														
	A <sup>*2, *8</sup>	B <sup>*3, *8</sup>	A <sup>*2</sup>	B <sup>*3</sup>	C <sup>*10</sup>	D <sup>*10</sup>	EE <sup>*9</sup>	F	FA <sup>*6</sup>	FB	G	H	I	J	K	KA	KK
ø32	44.5(54.5)	30.5(40.5)	54.5	40.5	8(10)	8(5.5)	Rc1/8	45	23(26.5)	20.5	49.5	12.5	5.5	9 spot face depth 5.5	60	M6 depth 11	M8 depth 13
ø40	54(64)	40(50)	64	50	12(11.4)	12(7.8)	Rc1/8	52	26.5(30)	27.5	57	15	5.5	9 spot face depth 5.5	69	M6 depth 11	M8 depth 13
ø50	56.5(66.5)	40.5(50.5)	66.5	50.5	10.5	10.5	Rc1/4	64	32.5(36)	28.5	71	18	6.9	11 spot face depth 6.5	86	M8 depth 13	M10 depth 15
ø63	58(68)	42(52)	68	52	13	13	Rc1/4	77	39(42.5)	28.5	84	23	8.7	14 spot face depth 9	103	M10 depth 25	M10 depth 15
ø80	71(81)	51(61)	81	61	16	16	Rc3/8	98	49.5(53)	28.5	104	31	10.5	17.5 spot face depth 11	132	M12 depth 28	M16 depth 21
ø100	84.5(94.5)	60.5(70.5)	94.5	70.5	23	23	Rc3/8	117	59(62.5)	28.5	123.5	38	10.5	17.5 spot face depth 11	156	M12 depth 28	M20 depth 27

Code	Common dimensions with switch						Switch dimensions						
	M	MM	N	O	WF	HD <sup>*4</sup>	RD <sup>*4</sup>	Reed T0H/T0V, T5H/T5V		Proximity T2H/T2V, T3H/T3V		Proximity T2WH/T2WV, T3WH/T3WV	
Bore size (mm)	M	MM	N	O	WF	HD <sup>*4</sup>	RD <sup>*4</sup>	HD <sup>*4</sup>	RD <sup>*4</sup>	HD	RD	HD	RD
ø32	14	16	34	4.5	7	11	9	11	9	12.5	10.5		
ø40	14	16	40	5	7	16.5	12	16.5	12	18	13.5		
ø50	17	20	50	7	8	16.5	12.5	16.5	12.5	18	14		
ø63	17	20	60	7	8	18	13	18	13	19.5	14.5		
ø80	22	25	77	6	10	23	15.5	23	15.5	24.5	17		
ø100	27	30	94	6.5	12	28.5	19.5	28.5	19.5	30	21		

\*1 : Custom stroke is available only for more than 50 mm strokes.

\*2 : To calculate A + (2 x stroke) when using a custom stroke, apply "A + next longer standard stroke + custom stroke".

(Example) If the custom stroke is 70 mm, apply "A + standard stroke 75 mm + custom stroke 70 mm".

\*3 : To calculate B + stroke when using custom stroke, apply the next longer standard stroke instead of the custom stroke.

(Example) If the custom stroke is 70 mm, apply the standard stroke 75 mm.

\*4 : HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.

\*5 : Refer to page 1044 for HD, RD and protruding dimensions of the 2-color LED, off-delay, AC magnetic field proof, T1\* and T8\* switches.

\*6 : Dimensions in ( ) of FA are for the L-shaped lead wire.

\*7 : For dimensions of individual accessories, refer to pages 1046 to 1049.

\*8 : Dimensions in ( ) of codes A and B are for strokes of more than 50 mm.

\*9 : The ø32 bore size with a 5 mm stroke and without a switch has a port size of M5.\*10 : Dimensions in ( ) of codes C and D are when the value is for a 5 mm stroke without switch.

\*11 : The RD side can be identified with a mark on the port surface of the body.



### ● Dimensions of rod end male thread part

Code	a'	c'	H	kk'	M	MM	T	wf
ø32	23.5	20.5	22	M14x1.5	14	16	8	5
ø40	23.5	20.5	22	M14x1.5	14	16	8	5
ø50	28.5	26	27	M18x1.5	17	20	11	5
ø63	28.5	26	27	M18x1.5	17	20	11	5
ø80	35.5	32.5	32	M22x1.5	22	25	13	8
ø100	35.5	32.5	41	M26x1.5	27	30	16	8


### Dimensions with mounting bracket



- Axial foot (LB)  
SSD2-D(L)-32 to 100 -LB

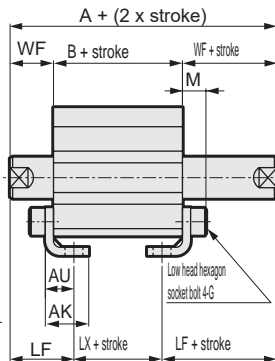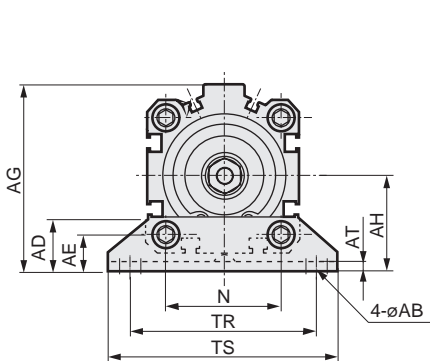

Rod end male thread





Code	Common dimensions												
Bore size (mm)	AB	AD	AE	AG	AH	AK	AT	AU	G	N	TR	TS	M
ø32	7	18.5	13	57	30	17	3.2	11.2	M6x16	34	57	71	7.2
ø40	7	18	13	64	33	18.2	3.2	11.2	M6x16	40	64	78	7.2
ø50	9	22	14	78	39	22.7	3.2	14.7	M8x20	50	79	95	8.2
ø63	11	26	16	91.5	46	25.2	3.2	16.2	M10x25	60	95	113	9.2
ø80	13	31.5	20.5	114	59	30.5	4.5	19.5	M12x40	77	118	140	11.5
ø100	13	35	24	136	71	35.5	6	23	M12x40	94	137	162	13


Code	Female thread									Male thread								
	WF	LF	No switch			With switch			a'	wf	LF	No switch			With switch			
			A	B	LX	A	B	LX				A	B	LX	A	B	LX	
ø32	17	25	64.5(74.5)	30.5(40.5)	14.5(24.5)	74.5	40.5	24.5	23.5	15	23	107.5(117.5)	30.5(40.5)	14.5(24.5)	117.5	40.5	24.5	
ø40	17	25	74(84)	40(50)	24(34)	84	50	34	23.5	15	23	117(127)	40(50)	24(34)	127	50	34	
ø50	18	29.5	76.5(86.5)	40.5(50.5)	17.5(27.5)	86.5	50.5	27.5	28.5	15	26.5	127.5(137.5)	40.5(50.5)	17.5(27.5)	137.5	50.5	27.5	
ø63	18	31	78(88)	42(52)	16(26)	88	52	26	28.5	15	28	129(139)	42(52)	16(26)	139	52	26	
ø80	20	35	91(101)	51(61)	21(31)	101	61	31	35.5	18	33	158(168)	51(61)	21(31)	168	61	31	
ø100	22	39	104.5(114.5)	60.5(70.5)	26.5(36.5)	115	70.5	36.5	35.5	18	35	167.5(177.5)	60.5(70.5)	26.5(36.5)	177.5	70.5	36.5	

\* Dimensions in ( ) are for strokes of more than 50 mm.  
Note: ø80: LB cannot be selected when B + stroke is 72 or less.

- Rod side flange (FA)  
SSD2-D(L)-32 to 100 -FA



Rod end male thread




Mounting bolt 4-G  
ø32 to ø63: Hexagon socket button head bolt  
ø80/ø100: Special bolt

Code	Common dimensions								Female thread						Male thread						
Bore size (mm)	FC	FD	FH	FL	FM	FT	N	G	WF1	WF2	No switch		With switch		a'	wf1	wf2	No switch		With switch	
											A	B	A	B				A	B	A	B
ø32	34	5.5	48	56	65	8	34	M6x16	17	7	54.5(64.5)	30.5(40.5)	64.5	40.5	24	15	5	97.5(107.5)	30.5(40.5)	107.5	40.5
ø40	40	5.5	54	62	72	8	40	M6x16	17	7	64(74)	40(50)	74	50	24	15	5	107(117)	40(50)	117	50
ø50	50	6.6	67	76	89	9	50	M8x20	18	8	66.5(76.5)	40.5(50.5)	76.5	50.5	29	15	5	117.5(127.5)	40.5(50.5)	127.5	50.5
ø63	60	9	80	92	108	9	60	M10x25	18	8	68(78)	42(52)	78	52	29	15	5	119(129)	42(52)	129	52
ø80	77	11	99	116	134	11	77	M12x40	20	10	81(91)	51(61)	91	61	36	18	8	148(158)	51(61)	158	61
ø100	94	11	117	136	154	11	94	M12x40	22	12	94.5(104.5)	60.5(70.5)	104.5	70.5	36	18	8	157.5(167.5)	60.5(70.5)	167.5	70.5

\* Dimensions in ( ) are for strokes of more than 50 mm.

- SCP\*3
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS2
- CKV2
- CAV2/COVP/N2
- SSD2
- SSG
- SSD
- CAT
- MDC2
- MVC
- SMG
- MSD/MSDG
- FC\*
- STK
- SRL3
- SRG3
- SRM3
- SRT3
- MRL2
- MRG2
- SM-25
- ShkAbs
- FJ
- FK
- Spd Contr
- Ending



Compact cylinder double acting/double rod (large bore size)

# SSD2-D Series

● Bore size:  $\phi 125/\phi 140/\phi 160/\phi 180/\phi 200$

JIS symbol



## Specifications

Item	SSD2-D SSD2-DL (with switch)					
	$\phi 125$	$\phi 140$	$\phi 160$	$\phi 180$	$\phi 200$	
Bore size mm	$\phi 125$	$\phi 140$	$\phi 160$	$\phi 180$	$\phi 200$	
Actuation	Double acting/double rod					
Working fluid	Compressed air					
Max. working pressure MPa	1.0 ( $\approx 150$ psi, 10 bar)			0.7 ( $\approx 100$ psi, 7 bar)		
Min. working pressure MPa	0.05 ( $\approx 7.3$ psi, 0.5 bar)					
Proof pressure MPa	1.6 ( $\approx 230$ psi, 16 bar)			1.05 ( $\approx 150$ psi, 10.5 bar)		
Ambient temperature $^{\circ}\text{C}$	-10 ( $14^{\circ}\text{F}$ ) to 60 ( $140^{\circ}\text{F}$ ) (no freezing)					
Port size	Rc3/8			Rc1/2		
Stroke tolerance mm	+2.0 0					
Working piston speed mm/s	50 to 300			20 to 300		
Cushion	With rubber cushion (standard)					
Lubrication	Not required (use turbine oil ISO VG32 if necessary for lubrication)					
Allowable absorbed energy J	6.52	6.52	7.78	12.4		

## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\phi 125$	10, 20, 30, 40, 50 75, 100, 125, 150 175, 200, 250, 300	300	10
$\phi 140$			
$\phi 160$			
$\phi 180$			
$\phi 200$			

\*1: Total length dimension with custom stroke is handled as custom stroke dedicated length.

\*2: When using the type with switch, refer to the table below.

## Number of installed switches and min. stroke (mm)

Switch quantity	1	2	3	4	5
Switch model No.	T*	T*	T*	T*	T*
Bore size (mm)					
$\phi 125$	10	10	40	55	70
$\phi 140$	10	10	40	55	70
$\phi 160$	10	10	40	55	70
$\phi 180$	10	10	40	55	70
$\phi 200$	10	10	40	55	70

### Switch specifications

● 1-color/2-color LED/for AC magnetic field proof

Item	2-wire proximity		2-wire proximity				3-wire proximity				2-wire reed						2-wire proximity									
	T1H/ T1V	T2H/T2V/ T2JH/T2JV	T2YH/ T2YV	T2WH/ T2WV	T3H/ T3V	T3PH/ T3PV	T3YH/ T3YV	T3WH/ T3WV	T0H/T0V	T5H/T5V		T8H/T8V				T2YD(*4) T2YDT										
Applications	For programmable controller, relay, compact solenoid valve		Dedicated for programmable controller				For programmable controller, relay				For programmable controller, relay		For programmable controller, relay, IC circuit (no indicator lamp), serial connection				For programmable controller									
Output method	-		-				NPN output		PNP output		NPN output		-				-									
Pwr. supp. V.	-		-				10 to 28 VDC				-						-									
Load voltage	85 to 265 VAC		10 to 30 VDC		24 VDC ±10%		30 VDC or less				12/24 VDC		100/110 VAC		5/12/24 VDC		100/110 VAC		12/24 VDC		110 VAC		220 VAC		24 VDC ±10%	
Load current	5 to 100 mA		5 to 20 mA (*3)				100 mA or less		50 mA or less		5 to 50 mA		7 to 20 mA		50 mA or less		20 mA or less		5 to 50 mA		7 to 20 mA		7 to 10 mA		5 to 20 mA	
Indicator	LED (Lit when ON)		LED (Lit when ON)		Red/green LED (Lit when ON)		Red/green LED (Lit when ON)		LED (Lit when ON)		Yellow LED (Lit when ON)		Red/green LED (Lit when ON)		Red/green LED (Lit when ON)		LED (Lit when ON)		No indicator lamp		LED (Lit when ON)				Red/green LED (Lit when ON)	
Leakage current	≤ 1 mA at 100 VAC ≤ 2 mA at 200 VAC		1 mA or less				10 µA or less				0 mA						1 mA or less									
Weight g	1 m:33 3 m:87 5 m:142		1 m:18 3 m:49 5 m:80		1 m:33 3 m:87 5 m:142		1 m:18 3 m:49 5 m:80		1 m:18 3 m:49 5 m:80		1 m:33 3 m:87 5 m:142		1 m:18 3 m:49 5 m:80		1 m:18 3 m:49 5 m:80		1 m:18 3 m:49 5 m:80				1 m:33 3 m:87 5 m:142		1 m:61 3 m:166 5 m:272			

\*1: Refer to Ending Page 1 for detailed switch specifications and dimensions.

\*2: Switches other than the above models, such as switches with connectors, are also available. Refer to Ending Page 1.

\*3: The max. load current is 20 mA at 25°C. The current is lower than 20 mA if the operating ambient temperature around the switch is higher than 25°C. (5 to 10 mA at 60°C)

\*4: Switch for AC magnetic field (T2YD/T2YDT) cannot be used in DC magnetic field.

\*5: The F-switch uses a bend-resistant lead wire.

### Cylinder weight table (the weight of the switches is when there are 2 cylinder switches.)

(Unit: kg)

Stroke (mm)	10		20		30		40		50		75		100	
	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch
ø125	4.64	4.74	4.98	5.08	5.32	5.42	5.66	5.76	6.00	6.10	6.85	6.95	7.70	7.80
ø140	6.62	6.73	7.00	7.11	7.38	7.49	7.77	7.88	8.15	8.26	9.00	9.11	10.07	10.18
ø160	9.10	9.22	9.58	9.70	10.06	10.18	10.54	10.66	11.02	11.14	12.22	12.34	13.41	13.53
ø180	13.12	13.27	13.62	13.77	14.12	14.27	14.62	14.77	15.12	15.27	16.36	16.51	17.61	17.76
ø200	16.09	16.27	16.65	16.83	17.21	17.39	17.77	17.95	18.33	18.51	19.73	19.91	21.13	21.31

Stroke (mm)	125		150		175		200		250		300	
	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch
ø125	8.55	8.65	9.40	9.50	10.25	10.35	11.10	11.20	12.80	12.90	14.50	14.60
ø140	11.02	11.13	11.87	11.98	12.72	12.83	13.57	13.68	15.27	15.38	16.97	17.08
ø160	14.61	14.73	15.81	15.93	17.01	17.13	18.21	18.33	20.61	20.73	23.01	23.13
ø180	18.85	19.00	20.10	20.25	21.35	21.50	22.59	22.74	25.09	25.24	27.58	27.73
ø200	22.53	22.71	23.93	24.11	25.32	25.50	26.72	26.90	29.52	29.70	32.32	32.50

### Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa										
		0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø125	Push/Pull	1.13x10 <sup>3</sup>	1.70x10 <sup>3</sup>	2.26x10 <sup>3</sup>	3.39x10 <sup>3</sup>	4.52x10 <sup>3</sup>	5.65x10 <sup>3</sup>	6.79x10 <sup>3</sup>	7.92x10 <sup>3</sup>	9.05x10 <sup>3</sup>	1.02x10 <sup>4</sup>	1.13x10 <sup>4</sup>
ø140	Push/Pull	1.44x10 <sup>3</sup>	2.16x10 <sup>3</sup>	2.89x10 <sup>3</sup>	4.33x10 <sup>3</sup>	5.77x10 <sup>3</sup>	7.22x10 <sup>3</sup>	8.66x10 <sup>3</sup>	1.01x10 <sup>4</sup>	1.15x10 <sup>4</sup>	1.30x10 <sup>4</sup>	1.44x10 <sup>4</sup>
ø160	Push/Pull	1.88x10 <sup>3</sup>	2.83x10 <sup>3</sup>	3.77x10 <sup>3</sup>	5.65x10 <sup>3</sup>	7.54x10 <sup>3</sup>	9.42x10 <sup>3</sup>	1.13x10 <sup>4</sup>	1.32x10 <sup>4</sup>	-	-	-
ø180	Push/Pull	2.39x10 <sup>3</sup>	3.58x10 <sup>3</sup>	4.77x10 <sup>3</sup>	7.16x10 <sup>3</sup>	9.54x10 <sup>3</sup>	1.19x10 <sup>4</sup>	1.43x10 <sup>4</sup>	1.67x10 <sup>4</sup>	-	-	-
ø200	Push/Pull	3.02x10 <sup>3</sup>	4.52x10 <sup>3</sup>	6.03x10 <sup>3</sup>	9.05x10 <sup>3</sup>	1.21x10 <sup>4</sup>	1.51x10 <sup>4</sup>	1.81x10 <sup>4</sup>	2.11x10 <sup>4</sup>	-	-	-

# SSD2-D (Large bore size) Series

SCP\*3  
CMK2  
CMA2  
SCM  
SCG  
SCA2  
SCS2  
CKV2  
CAV2/  
COVPIN2  
SSD2  
SSG  
SSD  
CAT  
MDC2  
MVC  
SMG  
MSD/  
MSDG  
FC\*  
STK  
SRL3  
SRG3  
SRM3  
SRT3  
MRL2  
MRG2  
SM-25  
ShkAbs  
FJ  
FK  
Spd  
Contr  
Ending

## How to order

No switch (without magnet for switch)

**SSD2-D** - (125) - (50) - (N)

With switch (built-in magnet for switch)

**SSD2-DL** - (125) - (50) - (T0H) - (R) - (N)

**A** Bore size

**B** Port thread

**C** Stroke

**D** Switch model No.

\*1

**E** Switch quantity

**F** Option

## ⚠ Precautions for model No. selection

\*1: Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.

[Example of model No.]

**SSD2-DL-125-50-T0H-R-N**

Model: Compact cylinder double acting/double rod

**A** Bore size : 125 mm

**B** Port thread : Rc thread

**C** Stroke : 50 mm

**D** Switch model No. : Reed T0H switch  
- Lead wire length 1 m

**E** Switch quantity : 1 on rod side

**F** Option : Rod end male thread

## How to order switch

**SW** - **T0H**

Switch model No.  
(Item **D** above)

Code	Description
<b>A Bore size (mm)</b>	
125	ø125
140	ø140
160	ø160
180	ø180
200	ø200

<b>B Port thread</b>	
Blank	Rc thread
NN	NPT thread (ø125 to ø160) (made-to-order product)
GN	G thread (ø125 to ø160) (made-to-order product)

<b>C Stroke (mm)</b>
Refer to the stroke table on the following page.

<b>D Switch model No.</b>						
Lead wire Straight	Lead wire L-shaped	Contact	Voltage		Indicator	Lead Line
			AC	DC		
T0H*	T0V*	Reed	●	●	1-color LED	2-wire
T5H*	T5V*		●	●	No indicator lamp	
T8H*	T8V*		●	●	1-color LED	
T1H*	T1V*	Proximity	●	□	1-color LED	2-wire
T2H*	T2V*		□	●		
T3H*	T3V*		□	●	1-color LED	3-wire
T3PH*	T3PV*		□	●		
T2WH*	T2WV*		□	●	2-color LED	2-wire
T2YH*	T2YV*		□	●		
T3WH*	T3WV*	□	●	2-wire		
T3YH*	T3YV*	□	●		3-wire	
T2JH*	T2JV*	□	●	1-color LED off-delay		2-wire
T2YD*	-	□	●	2-color LED AC magnetic field	2-wire	
T2YDT*	-	□	●			

<b>* Lead wire length</b>	
Blank	1 m (standard)
3	3 m (option)
5	5 m (option)

<b>E Switch quantity</b>	
R	1 on rod side
H	1 on head side
D	2

<b>F Option</b>	
Blank	Rod end female thread
N	Rod end male thread
P4	Specifications for rechargeable battery (made to order)
P40	

[Stroke table]

Stroke (mm)	Applicable bore size					
	ø125	ø140	ø160	ø180	ø200	
Standard stroke	10	●	●	●	●	●
	20	●	●	●	●	●
	30	●	●	●	●	●
	40	●	●	●	●	●
	50	●	●	●	●	●
	75	●	●	●	●	●
	100	●	●	●	●	●
	125	●	●	●	●	●
	150	●	●	●	●	●
	175	●	●	●	●	●
	200	●	●	●	●	●
	250	●	●	●	●	●
	300	●	●	●	●	●
Min. stroke (mm) *1	10					
Max. stroke (mm)	300					
Custom stroke *2	In 1 mm increments					

\*1: Refer to page 882 for the number of installed switches and the min. stroke.

\*2: Total length dimension with custom stroke is handled as custom stroke dedicated length.

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr


Ending

# SSD2-D (Large bore size) Series


SCP\*3  
CMK2  
CMA2  
SCM  
SCG  
SCA2  
SCS2  
CKV2  
CAV2/  
COVPIN2  
**SSD2**  
SSG  
SSD  
CAT  
MDC2  
MVC  
SMG  
MSD/  
MSDG  
FC\*  
STK  
SRL3  
SRG3  
SRM3  
SRT3  
MRL2  
MRG2  
SM-25  
ShkAbs  
FJ  
FK  
Spd  
Contr  
Ending

## Internal structure and parts list (ø125 to 160)

● SSD2-DL-125 to 160 (double acting/double rod/with switch)

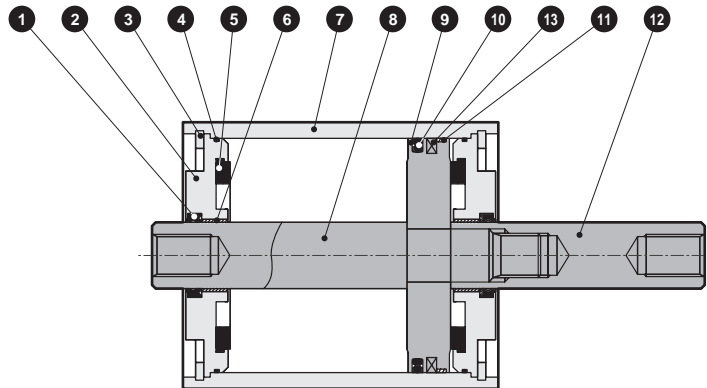

● SSD2-D-125 to 160 (double acting/double rod/without switch)

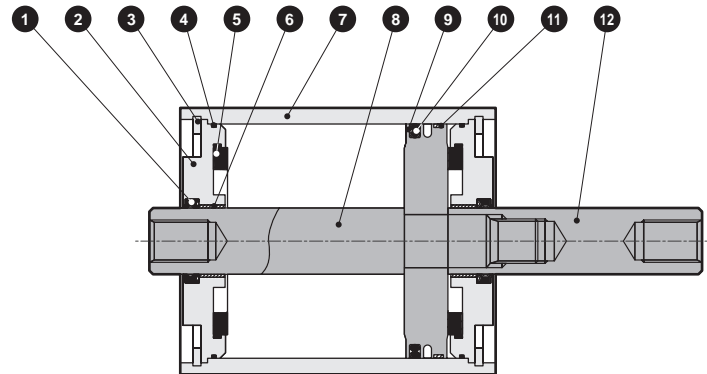

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Rod packing	Nitrile rubber		8	Piston rod <sup>Ⓐ</sup>	Steel	Industrial chrome plating
2	Rod metal	Aluminum die-casting	Chromate	9	Piston	Aluminum die-casting	
3	C-snap ring	Steel	Zinc phosphate	10	Piston packing	Nitrile rubber	
4	Metal gasket	Nitrile rubber		11	Wear ring	Polyacetal resin	
5	Cushion rubber	Urethane rubber		12	Piston rod <sup>Ⓑ</sup>	Steel	Industrial chrome plating
6	Bush	Oiles drymet		13	Magnet	Rubber	With switch only
7	Body	Aluminum alloy	Hard alumite				

## Repair parts list

Bore size (mm)	Kit No.	Repair parts No.
ø125	SSD2-D-125K	1 4 5 10 11
ø140	SSD2-D-140K	
ø160	SSD2-D-160K	


\*1: Specify the kit No. when placing an order.

# SSD2-D (Large bore size) Series


## Internal structure and parts list

### Internal structure and parts list (ø180, ø200)

- SSD2-DL-180, 200 (double acting/double rod/with switch)

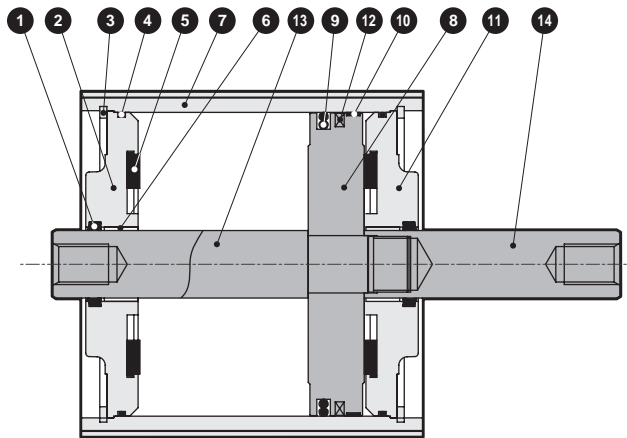

- SSD2-D-180, 200 (double acting/double rod/without switch)

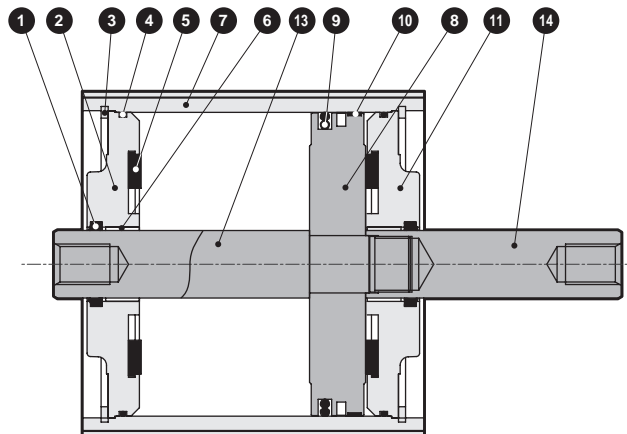

### Parts list

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Rod packing	Nitrile rubber		8	Piston	Aluminum alloy	
2	Rod metal	Cast iron	Paint	9	Piston packing	Nitrile rubber	
3	C-snap ring	Steel	Zinc phosphate	10	Wear ring	Polyacetal resin	
4	Gasket	Nitrile rubber		11	Cover	Cast iron	Paint
5	Cushion rubber	Urethane rubber		12	Magnet	Rubber	With switch only
6	Bush	Oiles drymet		13	Piston rod A	Steel	Industrial chrome plating
7	Body	Aluminum alloy	Hard alumite	14	Piston rod B	Steel	Industrial chrome plating

### Repair parts list

Bore size (mm)	Kit No.	Repair parts No.
ø180	SSD2-D-180K	1 4 5 9 10
ø200	SSD2-D-200K	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending




# SSD2-D (Large bore size) Series

Dimensions (ø125 to ø160)



● SSD2-D(L)-125 to 160 (double acting/single rod)

● Rod end male thread

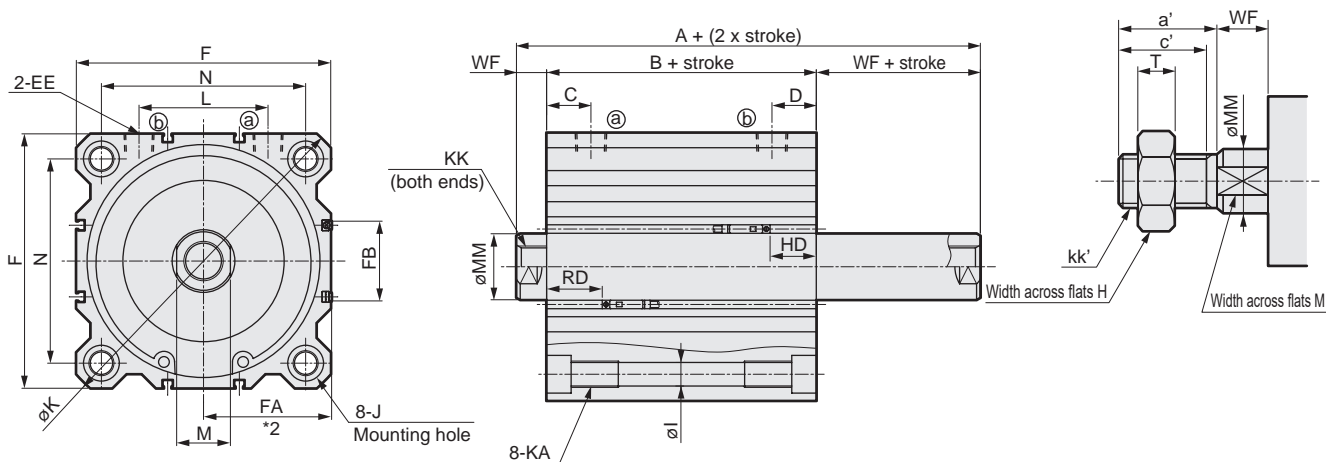

Note: The positions for the left and right widths across flats are unspecified.

Code	Common dimensions with switch															
Bore size (mm)	A	B	C	D	EE	F	I	J	K	KA	KK (*1)	L	M	MM	N	WF
ø125	115	83	29	29	Rc3/8	142	12.5	20 spot face depth 13	190	M14 depth 25	M22 x 2.5 depth 30 (22.5)	72	30	35	114	16
ø140	115	83	27.5	27.5	Rc3/8	158	12.5	20 spot face depth 13	210	M14 depth 25	M22 x 2.5 depth 30 (22.5)	80	30	35	128	16
ø160	125	91	30	30	Rc3/8	178	14.7	23 spot face depth 15.2	238	M16 depth 28	M24 x 3 depth 33 (24)	90	36	40	144	17

Code	T0H/V, T2H/V, T3H/V, T5/V				T2YH/V, T3YH/V, T2JH/V				T1H/V, T2YD			
Bore size (mm)	HD	RD	FA <sup>*2</sup>	FB	HD	RD	FA <sup>*2</sup>	FB	HD	RD	FA <sup>*2</sup>	FB
ø125	30	35	71.5(75)	44.5	28.5	33.5	77(80)	48	28.5	33.5	82.5(85.5)	48
ø140	31.5	33.5	79.5(83)	44.5	30	32	85(88)	48	30	32	90.5(93.5)	48
ø160	34	39	89.5(93)	48.5	32.5	37.5	95(98)	52	32.5	37.5	100.5(103.5)	52

Code	T2WH/V, T3WH/V				T8H/V			
Bore size (mm)	HD	RD	FA <sup>*2</sup>	FB	HD	RD	FA <sup>*2</sup>	FB
ø125	31.5	36.5	71.5(75)	44.5	24	29	77(80)	48
ø140	33	35	79.5(83)	44.5	25.5	27.5	85(88)	48
ø160	35.5	40.5	89.5(93)	48.5	28	33	95(98)	52

\*1: Values in ( ) for KK dimensions indicate effective thread length on one side with 10 mm stroke.

\*2: Dimensions in ( ) of FA are for the L-shaped lead wire.

\*3: The RD side can be identified by a mark on the port surface of the body.

Dimensions of rod end male thread


Code	a'	c'	H	kk'	M	MM	T	wf
ø125	45	42	46	M30x1.5	30	35	18	13
ø140	45	42	46	M30x1.5	30	35	18	13
ø160	50	47	55	M36x1.5	36	40	21	14

### Dimensions (ø180 to ø200)



● SSD2-D(L)-180, 200 (double acting/double rod)

● Rod end male thread

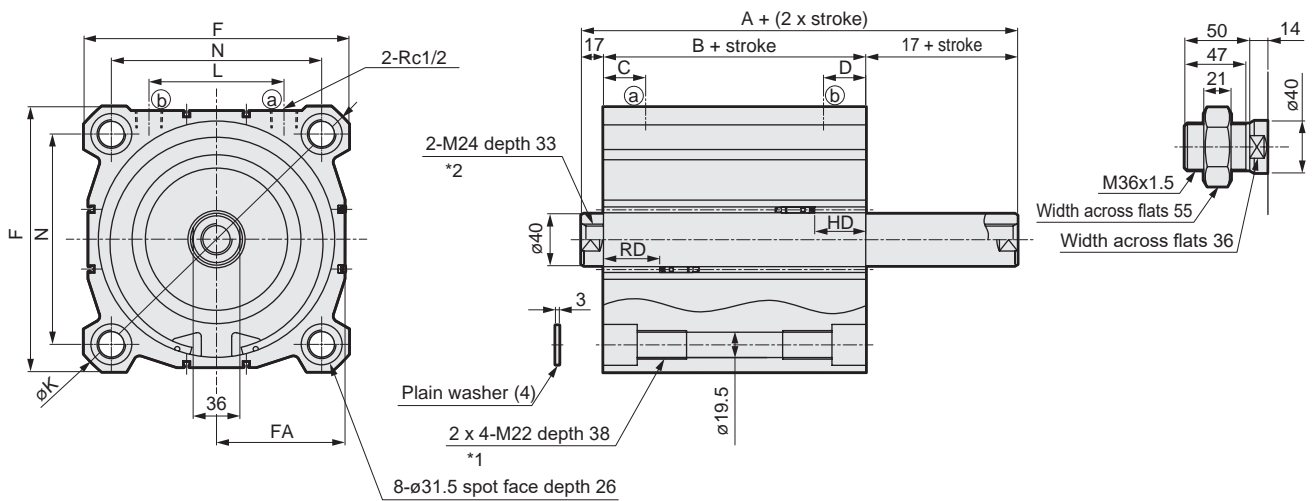

\*1: 2x4-M22 through hole for 20 mm or less stroke.

\*2: 2-M24 depth 27 (ø180) and 2-M24 depth 29 (ø200) for 10 mm stroke.

\*3: The positions for the left and right widths across flats are unspecified.

Code	A	B	C	D	F	K	L	N
Bore size (mm)								
ø180	136	102	32.5	32.5	204	270	104	162
ø200	143	109	33.5	33.5	226	300	110	182

Code	T0H/V, T2H/V, T3H/V, T5H/V			T2YH/V, T3YH/V, T2JH/V			T1H/V, T2YD		
Bore size (mm)	HD	RD	FA	HD	RD	FA	HD	RD	FA
ø180	39.5	43.5	99(102.5)	38.5	42.5	104.5(107.5)	38.5	42.5	110(113)
ø200	44.5	45.5	109.5(113)	43.5	44.5	115(118)	43.5	44.5	120.5(123.5)

Code	T2WH/V, T3WH/V			T8H/V		
Bore size (mm)	HD	RD	FA	HD	RD	FA
ø180	41.5	45.5	99(102.5)	33.5	37.5	104.5(107.5)
ø200	46.5	47.5	109.5(113)	38.5	39.5	115(118)

\*1: Dimensions in ( ) of FA are for the L-shaped lead wire.

\*2: The RD side can be identified by a mark on the port surface of the body.

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25


ShkAbs

FJ

FK

Spd Contr

Ending




Compact cylinder double acting/back to back

# SSD2-B Series

● Bore size:  $\phi 12/\phi 16/\phi 20/\phi 25/\phi 32/\phi 40/\phi 50/\phi 63/\phi 80/\phi 100$

JIS symbol



## Specifications

Item	SSD2-B SSD2-BL (with switch)										
	Bore size	mm	$\phi 12$	$\phi 16$	$\phi 20$	$\phi 25$	$\phi 32$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$
Actuation	Double acting/back to back										
Working fluid	Compressed air										
Max. working pressure MPa	1.0 ( $\approx 150$ psi, 10 bar)										
Min. working pressure MPa	0.1 ( $\approx 15$ psi, 1 bar)      0.05 ( $\approx 7.3$ psi, 0.5 bar)										
Proof pressure MPa	1.6 ( $\approx 230$ psi, 16 bar)										
Ambient temperature $^{\circ}\text{C}$	-10 (14 $^{\circ}\text{F}$ ) to 60 (140 $^{\circ}\text{F}$ ) (no freezing)										
Port size	M5      Rc1/8 *1      Rc1/4      Rc3/8										
Stroke tolerance mm	$S_1 = \begin{matrix} +1.0 \\ 0 \end{matrix}$ $S_2 = \begin{matrix} +1.0 \\ 0 \end{matrix}$										
Working piston speed mm/s	50 to 500      50 to 300										
Cushion	None										
Lubrication	Not required (use turbine oil class 1 ISO VG32 if necessary for lubrication)										
Allowable absorbed energy J	0.004	0.01	0.016	0.021	0.025	0.092	0.1	0.12	0.27	0.56	

\*1: The  $\phi 32$  bore size with a 5 mm stroke and without a switch has a port size of M5.

## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\phi 12$	5/10/15/20	30	1
$\phi 16$	25/30		
$\phi 20$	5/10/15/20/25	50	
$\phi 25$	30/35/40/45/50		
$\phi 32$	5/10/15/20/25/30/	100	
$\phi 40$	35/40/45/50/75/100		
$\phi 50$	10/15/20/25		
$\phi 63$	30/35/40/45/50		
$\phi 80$	75/100		
$\phi 100$			

\*1: When using the type with switch, refer to the table of the min. stroke with switch.

## Min. stroke with switch (2 switches)

Bore size (mm)	T0H/V / T5H/V	T2H/V / T3H/V
$\phi 12$	10(5)	5
$\phi 16$		
$\phi 20$	5	
$\phi 25$		
$\phi 32$		
$\phi 40$		
$\phi 50$		
$\phi 63$		
$\phi 80$		
$\phi 100$		


\*1: Less than 10 mm with the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch is not available.

\*2: Values in ( ) are for the type with 1 on rod side.

### Custom stroke

#### ● SSD2-B Series

Item	Standard products	
	Standard stroke body with spacer	
Model No.	Refer to How to order.	
Description	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.	
Stroke range	Bore size	Stroke range
	12/16	1 to 29
	20 to 25	1 to 49
	32 to 100	1 to 99
Example of model No.	Model No.: SSD2-B-32-38-50 A +2 mm spacer is added to the SSD2-B-32-40 standard cylinder to create 38 mm stroke. B + S <sub>1</sub> dimension is 63 mm.	

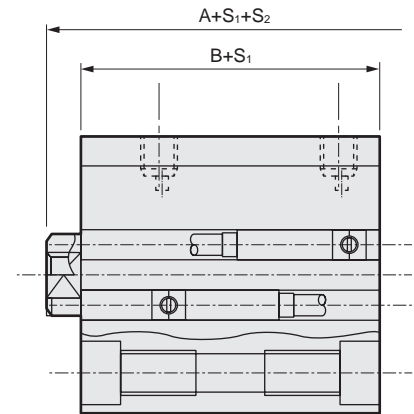

### Switch specifications (F-switch)

#### ● 1-color/2-color LED

Item	2-wire proximity	3-wire proximity	2-wire proximity		3-wire proximity		
	F2S	F3S	F2H/F2V	F2YH/ F2YV	F3H/F3V	F3PH/F3PV (made to order)	F3YH/ F3YV
Applications	Dedicated for programmable controller	For programmable controller, relay	Dedicated for programmable controller		For programmable controller, relay		
Output method	-	NPN output	-		NPN output	PNP output	NPN output
Power supply voltage	-	10 to 28 VDC	-		10 to 28 VDC	4.5 to 28 VDC	10 to 28 VDC
Load voltage	10 to 30 VDC	30 VDC or less	10 to 30 VDC	24 VDC ±10%	30 VDC or less		
Load current	5 to 20 mA	50 mA or less	5 to 20 mA		50 mA or less		
Indicator	LED (Lit when ON)		Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Yellow LED (Lit when ON)		Red/green LED (Lit when ON)
Leakage current	1 mA or less	10 µA or less	1 mA or less		10 µA or less		
Weight	g		1 m:10 3 m:29				

### Switch specifications (T-switch)

#### ● 1-color/2-color LED/for AC magnetic field proof

Item	2-wire proximity	2-wire proximity				3-wire proximity				2-wire reed			2-wire proximity			
	T1H/T1V	T2H/T2V/ T2JH/T2JV	T2YH/ T2YV	T2WH/ T2WV	T3H/ T3V	T3PH/ T3PV	T3YH/ T3YV	T3WH/ T3WV	T0H/T0V	T5H/T5V	T8H/T8V		T2YD(*4) T2YDT			
Applications	For programmable controller, relay, compact solenoid valve	Dedicated for programmable controller				For programmable controller, relay				For programmable controller, relay	For programmable controller, relay, IC circuit (no indicator lamp), serial connection	For programmable controller, relay		Dedicated for programmable controller		
Output method	-	-				NPN output	PNP output	NPN output	NPN output	-			-			
Pwr. supp. V.	-	-				10 to 28 VDC				-			-			
Load voltage	85 to 265 VAC	10 to 30 VDC	24 VDC ±10%		30 VDC or less				12/24 VDC	100/110 VAC	5/12/24 VDC	100/110 VAC	12/24 VDC	110 VAC	220 VAC	24 VDC ±10%
Load current	5 to 100 mA	5 to 20 mA (*3)		100 mA or less		50 mA or less		5 to 50 mA	7 to 20 mA	50 mA or less	20 mA or less	5 to 50 mA	7 to 20 mA	7 to 10 mA	5 to 20 mA	
Indicator	LED (Lit when ON)	LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	No indicator lamp	LED (Lit when ON)		Red/green LED (Lit when ON)			
Leakage current	≤ 1 mA at 100 VAC, ≤ 2 mA at 200 VAC	1 mA or less		10 µA or less				0 mA			1 mA or less					
Weight g	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:18	3 m:49	5 m:80	1 m:33 3 m:87 5 m:142	1 m:61 3 m:166 5 m:272			

\*1: Refer to Ending Page 1 for detailed switch specifications and dimensions.

\*2: Switches other than the above models, such as switches with connectors, are also available. Refer to Ending Page 1.

\*3: The max. load current is 20 mA at 25°C. The current is lower than 20 mA if the operating ambient temperature around the switch is higher than 25°C. (5 to 10 mA at 60°C)

\*4: Switch for AC magnetic field (T2YD/T2YDT) cannot be used in DC magnetic field.

\*5: The F-switch uses a bend-resistant lead wire.

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

SSD2

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending

SCP\*3  
CMK2  
CMA2  
SCM  
SCG  
SCA2  
SCS2  
CKV2  
CAV2/  
COVPIN2  
SSD2  
SSG  
SSD  
CAT  
MDC2  
MVC  
SMG  
MSD/  
MSDG  
FC\*  
STK  
SRL3  
SRG3  
SRM3  
SRT3  
MRL2  
MRG2  
SM-25  
ShkAbs  
FJ  
FK  
Spd  
Contr  
Ending


## Cylinder weight table (the weight of the switches is when there are 2 cylinder switches.) (Unit: g)

Stroke (mm)	5		10		15		20		25		30		35		40		45		50		75		100	
Bore size (mm)	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch
ø12	36	86	44	86	53	95	61	103	70	112	72	114	-	-	-	-	-	-	-	-	-	-	-	-
ø16	48	104	59	104	69	114	80	125	91	136	102	147	-	-	-	-	-	-	-	-	-	-	-	-
ø20	63	118	75	150	88	163	101	176	113	188	126	201	139	214	152	227	165	240	203	278	-	-	-	-
ø25	87	178	102	193	118	209	134	225	160	241	165	256	181	272	197	288	213	304	228	319	-	-	-	-
ø32	122	236	144	258	166	280	188	302	209	323	231	345	253	367	275	389	297	411	318	432	494	542	604	652
ø40	183	326	210	353	236	379	263	406	290	433	316	459	342	485	369	512	395	538	472	565	646	695	776	825
ø50	-	-	341	535	383	577	425	619	467	661	510	704	552	746	594	788	636	830	678	872	1025	1082	1235	1292
ø63	-	-	507	786	562	841	617	896	672	951	727	1006	782	1061	838	1117	893	1172	948	1227	1438	1502	1713	1777
ø80	-	-	928	1341	1015	1428	1101	1514	1188	1601	1274	1887	1361	1774	1448	1861	1535	1948	1621	2034	2401	2467	2833	2899
ø100	-	-	1433	2000	1547	2114	1660	2227	1774	2341	1888	2455	2002	2569	2115	2682	2229	2796	2343	2910	3406	3478	3973	4045

## Hexagon socket head cap screw weight (Unit: g)

Stroke (mm)	Cylinder 2 stroke													Connector
Bore size (mm)	5	10	15	20	25	30	35	40	45	50	75	100		
ø12	3.2	4	4.8	5.6	6.4	7.2	-	-	-	-	-	-	5.6	
ø16	3.2	2.4	2.4	2.4	2.4	2.4	-	-	-	-	-	-	5.6	
ø20	8	11	14	16	19	22	25	28	30	33	-	-	14	
ø25	8	11	14	16	19	22	25	28	30	33	-	-	14	
ø32	8	11	14	16	19	22	25	28	30	33	47	61	14	
ø40	8	11	14	16	19	22	25	28	30	33	47	61	14	
ø50	-	16.7	20.6	24.5	28.5	32.4	36.3	40.3	44.2	48.1	67.8	87.5	28.8	
ø63	-	40.8	47.2	53.6	60	66.4	72.8	79.2	85.6	92	124	156	60	
ø80	-	60	72	84	96	108	120	132	144	156	216	276	116	
ø100	-	60	72	84	96	108	120	132	144	156	216	276	116	

- (1) Cylinder 1
- (2) Cylinder 2
- (3) Hexagon socket head cap screw
- (4) Connector

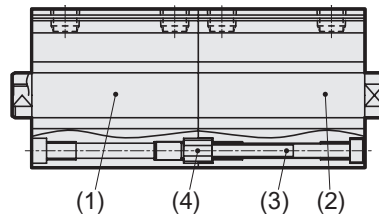

Total cylinder weight

Total weight = weight of cylinder 1 + weight of cylinder 2 + (hexagon socket head cap screw + connector).

[Example: Total weight of SSD-B-25-30-N-10-N]

Weight of ø25 with 30 mm stroke:....(1)

Weight of ø25 with 10 mm stroke:....(2)

Weight of hexagon socket head cap screw for ø25 cylinder 2 with 10 mm stroke + weight of connector: ... (3)

Total weight = (1) + (2) + (3) = 165 g + 102 g + 11 g + 14 g = 292 g

Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa											
		0.05	0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø12	Push	-	11.3	17.0	22.6	33.9	45.2	56.5	67.9	79.2	90.5	1.02x10 <sup>2</sup>	1.13x10 <sup>2</sup>
	Pull	-	8.48	12.7	17.0	25.4	33.9	42.4	50.9	59.4	67.9	76.3	84.8
ø16	Push	-	20.1	30.2	40.2	60.3	80.4	1.01x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.61x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.01x10 <sup>2</sup>
	Pull	-	15.1	22.6	30.2	45.2	60.3	75.4	90.5	1.06x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.36x10 <sup>2</sup>	1.51x10 <sup>2</sup>
ø20	Push	-	31.4	47.1	62.8	94.2	1.26x10 <sup>2</sup>	1.57x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.20x10 <sup>2</sup>	2.51x10 <sup>2</sup>	2.83x10 <sup>2</sup>	3.14x10 <sup>2</sup>
	Pull	-	23.6	35.3	47.1	70.7	94.2	1.18x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.65x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.12x10 <sup>2</sup>	2.36x10 <sup>2</sup>
ø25	Push	-	49.1	73.6	98.2	1.47x10 <sup>2</sup>	1.96x10 <sup>2</sup>	2.45x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.44x10 <sup>2</sup>	3.93x10 <sup>2</sup>	4.42x10 <sup>2</sup>	4.91x10 <sup>2</sup>
	Pull	-	37.8	56.7	75.6	1.13x10 <sup>2</sup>	1.51x10 <sup>2</sup>	1.89x10 <sup>2</sup>	2.27x10 <sup>2</sup>	2.64x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.40x10 <sup>2</sup>	3.78x10 <sup>2</sup>
ø32	Push	-	80.4	1.21x10 <sup>2</sup>	1.61x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.22x10 <sup>2</sup>	4.02x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.63x10 <sup>2</sup>	6.43x10 <sup>2</sup>	7.24x10 <sup>2</sup>	8.04x10 <sup>2</sup>
	Pull	-	60.3	90.5	1.21x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.62x10 <sup>2</sup>	4.22x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.43x10 <sup>2</sup>	6.03x10 <sup>2</sup>
ø40	Push	-	1.26x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.51x10 <sup>2</sup>	3.77x10 <sup>2</sup>	5.03x10 <sup>2</sup>	6.28x10 <sup>2</sup>	7.54x10 <sup>2</sup>	8.80x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.13x10 <sup>3</sup>	1.26x10 <sup>3</sup>
	Pull	-	1.06x10 <sup>2</sup>	1.58x10 <sup>2</sup>	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>
ø50	Push	-	1.96x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.93x10 <sup>2</sup>	5.89x10 <sup>2</sup>	7.85x10 <sup>2</sup>	9.82x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.37x10 <sup>3</sup>	1.57x10 <sup>3</sup>	1.77x10 <sup>3</sup>	1.96x10 <sup>3</sup>
	Pull	-	1.65x10 <sup>2</sup>	2.47x10 <sup>2</sup>	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>
ø63	Push	1.56x10 <sup>2</sup>	3.12x10 <sup>2</sup>	4.68x10 <sup>2</sup>	6.23x10 <sup>2</sup>	9.35x10 <sup>2</sup>	1.25x10 <sup>3</sup>	1.56x10 <sup>3</sup>	1.87x10 <sup>3</sup>	2.18x10 <sup>3</sup>	2.49x10 <sup>3</sup>	2.81x10 <sup>3</sup>	3.12x10 <sup>3</sup>
	Pull	1.40x10 <sup>2</sup>	2.80x10 <sup>2</sup>	4.20x10 <sup>2</sup>	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>	2.24x10 <sup>3</sup>	2.52x10 <sup>3</sup>	2.80x10 <sup>3</sup>
ø80	Push	2.51x10 <sup>2</sup>	5.03x10 <sup>2</sup>	7.54x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.51x10 <sup>3</sup>	2.01x10 <sup>3</sup>	2.51x10 <sup>3</sup>	3.02x10 <sup>3</sup>	3.52x10 <sup>3</sup>	4.02x10 <sup>3</sup>	4.52x10 <sup>3</sup>	5.03x10 <sup>3</sup>
	Pull	2.27x10 <sup>2</sup>	4.54x10 <sup>2</sup>	6.80x10 <sup>2</sup>	9.07x10 <sup>2</sup>	1.36x10 <sup>3</sup>	1.81x10 <sup>3</sup>	2.27x10 <sup>3</sup>	2.72x10 <sup>3</sup>	3.17x10 <sup>3</sup>	3.63x10 <sup>3</sup>	4.08x10 <sup>3</sup>	4.54x10 <sup>3</sup>
ø100	Push	3.93x10 <sup>2</sup>	7.85x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.57x10 <sup>3</sup>	2.36x10 <sup>3</sup>	3.14x10 <sup>3</sup>	3.93x10 <sup>3</sup>	4.71x10 <sup>3</sup>	5.50x10 <sup>3</sup>	6.28x10 <sup>3</sup>	7.07x10 <sup>3</sup>	7.85x10 <sup>3</sup>
	Pull	3.57x10 <sup>2</sup>	7.15x10 <sup>2</sup>	1.07x10 <sup>3</sup>	1.43x10 <sup>3</sup>	2.14x10 <sup>3</sup>	2.86x10 <sup>3</sup>	3.57x10 <sup>3</sup>	4.29x10 <sup>3</sup>	5.00x10 <sup>3</sup>	5.72x10 <sup>3</sup>	6.43x10 <sup>3</sup>	7.15x10 <sup>3</sup>

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

SSD2

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ


FK

Spd  
Contr

Ending

# SSD2-B Series

## How to order

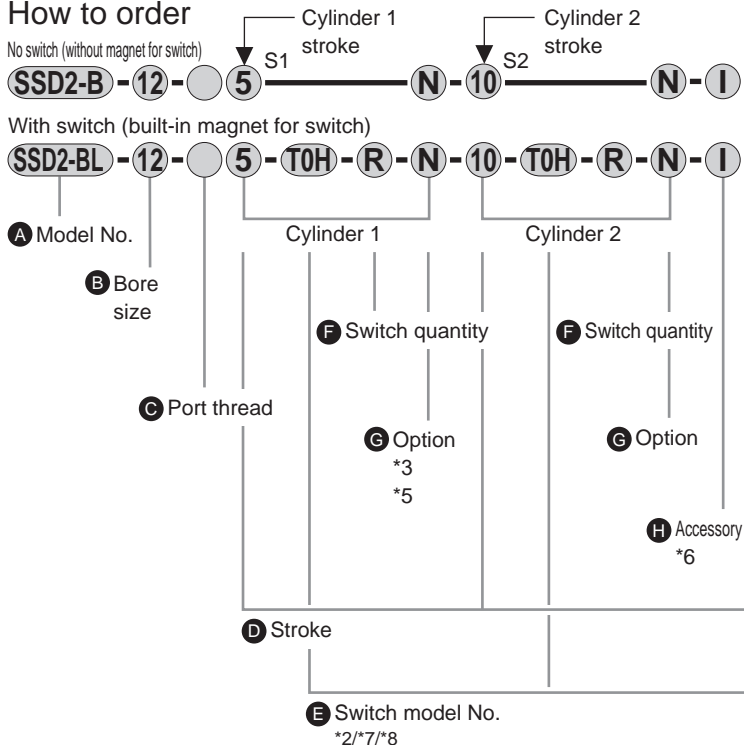

## ⚠ Precautions for model No. selection

- \*1 : When two cylinders are connected, the connection is from Cylinder 2 side. (Refer to dimensions)  
Determine cylinders 1 and 2 with the mounting method in mind.
- \*2 : The T2YD\* switch cannot be installed on ø12 and ø16. In addition, T8\* switch cannot be installed on ø12 to ø32.
- \*3 : Piston rod of ø12 to ø25 is stainless steel as standard.  
C-snap ring is stainless steel instead of steel.  
The rod end male thread nut is stainless steel.
- \*4 : Refer to pages 750 and 751 for combinations of variations/options.
- \*5 : Option "N" will be inscribed on both S1 and S2 sides, but for all other option codes, they will only be written on S2.
- \*6 : Two units are included when an accessory is selected. One unit each is included when "IY" is selected.
- \*7 : The F-switch with L type lead wire on ø20 models cannot be selected on strokes of 15 mm or under.
- \*8 : Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.
- \*9 : When S1 stroke is at or below that in the table below, the length of the usable mounting bolts will differ from the standard and so contact CKD.

Bore size	No switch	With switch
	S1 Stroke	
ø20	10 or less	-
ø25	5 or less	-
ø32	5 or less	-
ø50	5 or less	-
ø63	15 or less	5 or less
ø80	20 or less	10 or less
ø100	10 or less	-


\*10: F-switch cannot be selected.

## [Example of model No.]

### SSD2-BL-12-5-T0H-R-N-10-T0H-R-N

Model: Compact cylinder, back to back

- Ⓑ Bore size : ø12 mm
- Ⓒ Port thread : Rc thread
- Ⓓ Stroke S1 : 5 mm
- Ⓔ Switch model No. : Reed switch T0H, lead wire 1 m
- Ⓕ Switch quantity : 1 on rod side
- Ⓖ Option : Rod end male thread
- Ⓗ Stroke S2 : 10 mm
- Ⓖ Switch model No. : Reed switch T0H, lead wire 1 m
- Ⓕ Switch quantity : 1 on rod side
- Ⓖ Option : Rod end male thread

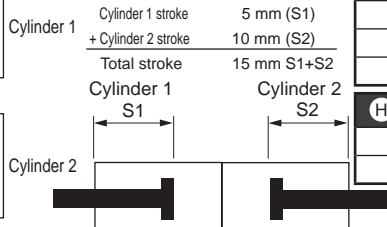

Code	Description																			
<b>A Model No.</b>																				
SSD2-B	Double acting/back to back																			
SSD2-BL	Double acting/back to back/with switch																			
<b>B Bore size (mm)</b>																				
12	ø12																			
16	ø16																			
20	ø20																			
25	ø25																			
32	ø32																			
40	ø40																			
50	ø50																			
63	ø63																			
80	ø80																			
100	ø100																			
<b>C Port thread</b>																				
Blank	Rc thread																			
NN	NPT thread (ø32 and over) (made-to-order product)																			
GN	G thread (ø32 and over) (made-to-order product)																			
<b>D Stroke (mm)</b>																				
Refer to the stroke table on the following page.																				
<b>E Switch model No.</b>																				
Lead wire	Lead wire	Contact	Voltage		Lead wire	Bore size														
			AC	DC		12	16	20	25	32	40	50	63	80	100					
Straight	L-shaped	Proximity	●	●	1-color LED	2-wire	●	●												
						3-wire		●	●											
						3-wire			●	●										
Straight	L-shaped	Proximity	●	●	1-color LED (PNP output) (custom)	3-wire			●	●										
						3-wire			●	●										
						3-wire				●	●									
Straight	L-shaped	Reed	●	●	1-color LED	2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	
						2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●
						2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Straight	L-shaped	Proximity	●	●	1-color LED	2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	
						2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●
						2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Straight	L-shaped	Proximity	●	●	2-color LED	2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	
						3-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●
						3-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Straight	L-shaped	Proximity	●	●	2-color LED (AC magnetic field)	2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	
						2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●
						2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Straight	L-shaped	Proximity	●	●	1-color LED off-delay	2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	
						2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●
						2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●	●

## \* Lead wire length

Blank	1 m (standard)
3	3 m (option)
5	5 m (option) <sup>*9</sup>

## Ⓕ Switch quantity

R	1 on rod side
H	1 on head side
D	2

## Ⓖ Option

Blank	Rod end female thread
N	Rod end male thread
M *3	Piston rod material (stainless steel)

## Ⓗ Accessory (available when rod end male thread "N" is selected)

I	Rod eye
Y	Rod clevis (pin and snap ring included)

### [Stroke table]

Stroke (mm)	Applicable bore size										
	12	16	20	25	32	40	50	63	80	100	
Standard stroke	5	●	●	●	●	●	●				
	10	●	●	●	●	●	●	●	●	●	●
	15	●	●	●	●	●	●	●	●	●	●
	20	●	●	●	●	●	●	●	●	●	●
	25	●	●	●	●	●	●	●	●	●	●
	30	●	●	●	●	●	●	●	●	●	●
	35			●	●	●	●	●	●	●	●
	40			●	●	●	●	●	●	●	●
	45			●	●	●	●	●	●	●	●
	50			●	●	●	●	●	●	●	●
	75					●	●	●	●	●	●
	100					●	●	●	●	●	●
Min. stroke (mm) *1	1										
Max. stroke (mm)	30		50			100					
Custom stroke *2	In 1 mm increments										

\*1: Less than 5 mm for 1-color LED switch and less than 10 mm for the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch are not available.

Refer to page 890 for the min. stroke with switch.

\*2: The total length when using a custom stroke is the same as that when using the next longer standard stroke.

### How to order switch



Switch model No.  
(Item ⑤ on page 894)

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr


Ending




# SSD2-B Series

## Internal structure and parts list


● SSD2-BL-12 to 25 (double acting/back to back/with switch)

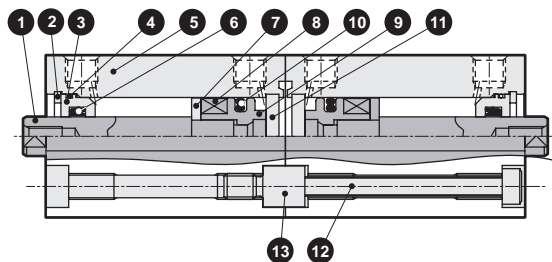


● SSD2-BL-32 to 50 (double acting/back to back/with switch)

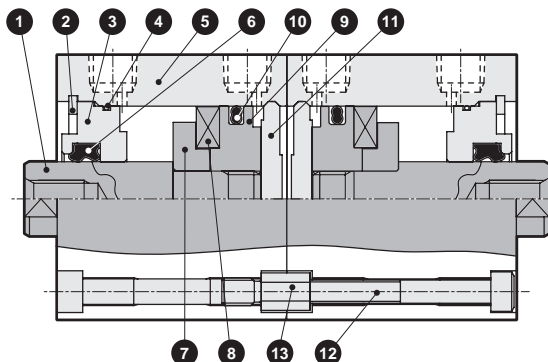

● SSD2-B-12 to 25 (double acting/back to back)

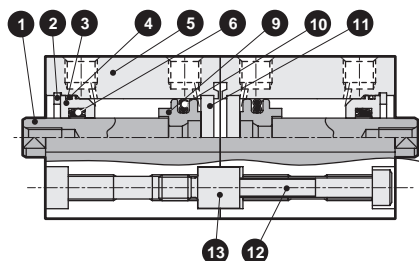

● SSD2-B-32 to 50 (double acting/back to back)

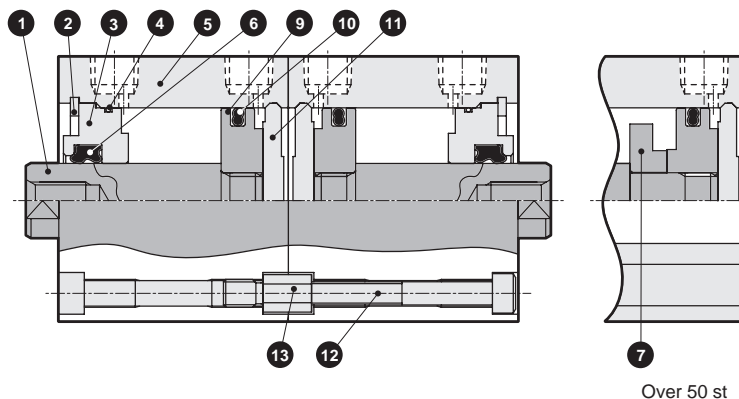


No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	ø12 to ø25: Stainless steel ø32 to ø50: Steel	ø16 to ø50 Industrial chrome plating	8	Magnet	Plastic	
2	C-snap ring	Steel	Zinc phosphate	9	Piston	Aluminum alloy	Chromate
3	Rod metal	Special aluminum	Alumite	10	Piston packing	Nitrile rubber	
4	Rod metal gasket	Nitrile rubber		11	Cover	ø12 to 25: Stainless steel ø32 to ø50: Aluminum alloy	ø32 to ø50: Alumite
5	Body	Aluminum alloy	Hard alumite	12	Hexagon socket head cap screw	Steel	Black finish
6	Rod packing	Nitrile rubber		13	Connector	Steel	Zinc chromate
7	Spacer	Aluminum alloy	Chromate				

## Repair parts list


Bore size (mm)	Kit No.	Repair parts No.
ø12	SSD2-B-12K	4 6 10
ø16	SSD2-B-16K	
ø20	SSD2-B-20K	
ø25	SSD2-B-25K	
ø32	SSD2-B-32K	
ø40	SSD2-B-40K	
ø50	SSD2-B-50K	

## SSD2-B application examples

When the same strokes are combined, 3 positions are possible.




When different strokes are combined, 4 positions are possible.




### Internal structure and parts list

● SSD2-BL-63 to 100 (double acting/back to back/with switch)

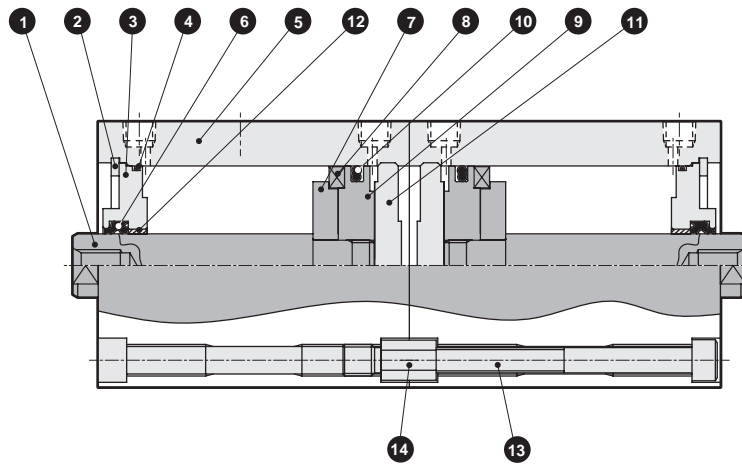

● SSD2-B-63 to 100 (double acting/back to back)

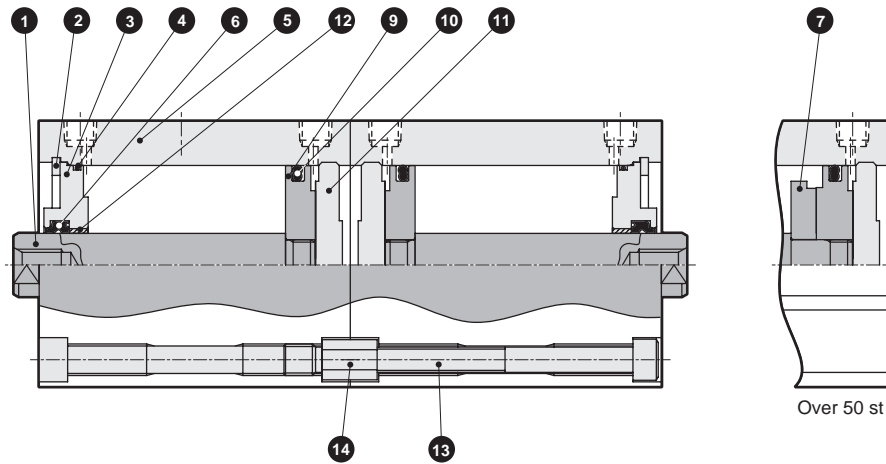

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	Steel	Industrial chrome plating	8	Magnet	Plastic	
2	C-snap ring	Steel	Zinc phosphate	9	Piston	Aluminum alloy	Chromate
3	Rod metal	Aluminum alloy	Chromate	10	Piston packing	Nitrile rubber	
4	Rod metal gasket	Nitrile rubber		11	Cover	Aluminum alloy	Alumite
5	Body	Aluminum alloy	Hard alumite	12	Bush	Oiles drymet	*1
6	Rod packing	Nitrile rubber		13	Hexagon socket head cap screw	Steel	Black finish
7	Spacer	Aluminum alloy	Chromate	14	Connector	Steel	Zinc chromate

\*1: Material is steel for copper and PTFE free specifications.

### Repair parts list

Bore size (mm)	Kit No.	Repair parts No.
ø63	SSD2-B-63K	4 6 10
ø80	SSD2-B-80K	
ø100	SSD2-B-100K	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr


Ending

# SSD2-B Series


## Dimensions

● SSD2-BL-12/16 (with switch)

● Rod end male thread

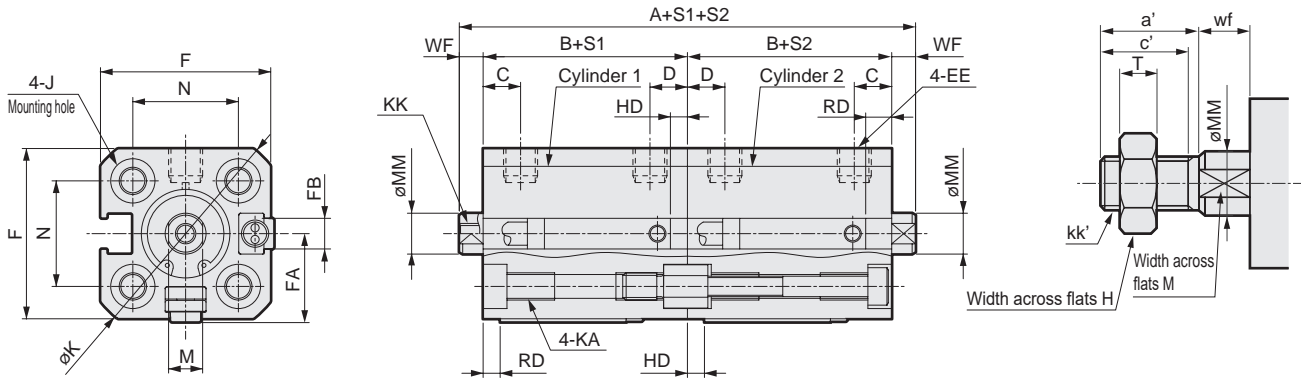

● SSD2-BL-25, 32 (with switch)

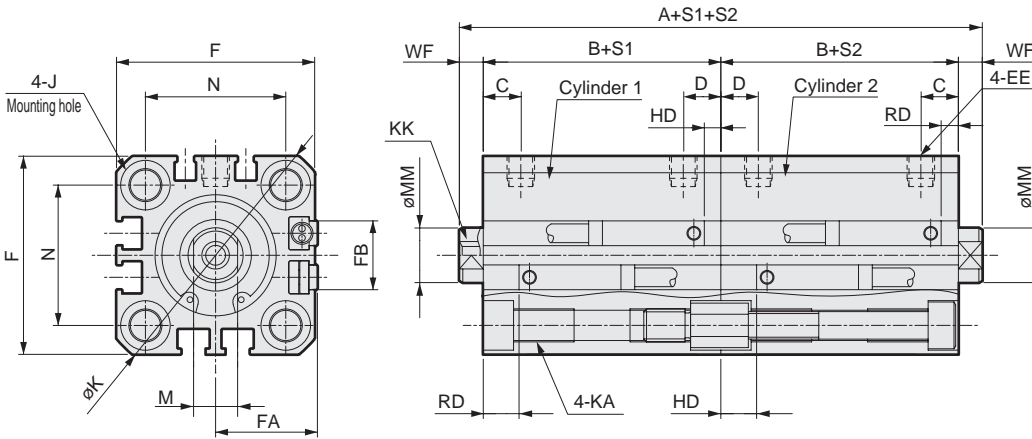

Code	Common dimensions with switch																
	Bore size (mm)	A <sup>*1</sup>	B <sup>*1</sup>	C	D	EE	F	FA <sup>*4</sup>	FB	J	K	KA	KK	M	MM	N	WF
STK	ø12	51	22	5.5	5.5	M5	25	13(16.5)	4.5	6.5 spot face depth 3.5	32	M4 depth 7	M3 depth 6	5	6	15.5	3.5
SRL3	ø16	51	22	5.5	5.5	M5	29	15(18.5)	4.5	6.5 spot face depth 3.5	38	M4 depth 7	M4 depth 8	6	8	20	3.5
	ø20	68	29.5	8	5.5	M5	36	18.5(22)	12.5	9 spot face depth 5.5	47	M6 depth 11	M5 depth 7	8	10	25.5	4.5
	ø25	75	32.5	11	6	M5	40	20.5(24)	13.5	9 spot face depth 5.5	51	M6 depth 11	M6 depth 12	10	12	28	5
Switch dimensions	Reed T0H/T0V, T5H/T5V *6		Proximity T2H/T2V, T3H/T3V *6		Proximity T2WH/T2WV, T3WH/T3WV *6		Proximity F2H/F2V, F3H/F3V, F2YH/F2YV, F3YH/F3YV		Proximity F2S/F3S								
	Bore size (mm)	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD						
	ø12	1.5	1.5	1.5	1.5	3.5	3.5										
	ø16	0	4	0	4.5	1	6										
	ø20	3	7.5	3	7.5	5	9.5	7.5	12	6.5	11						
	ø25	4	9.5	4	9.5	6	11.5	8.5	14	7.5	13						

\*1 : To calculate A + S1 + S2, B + S1 or B + S2 when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke.  
 (Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

\*2 : HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.

\*3 : Refer to page 1044 for HD, RD and protruding dimensions of the 2-color LED, off-delay, AC magnetic field proof, T1\* and T8\* switches.

\*4 : Dimensions in ( ) of FA are for the L-shaped lead wire.

\*5 : For dimensions of individual accessories, refer to pages 1046 to 1049.




\*6 : Only F-switch is available for the ø20 or ø25 piping port surface.

● Rod end male thread

Code	a'	c'	H	kk'	M	MM	T	wf	
Spd Contr	ø12	10.5	9	8	M5	5	6	3.2	3.5
	ø16	12	10	10	M6	6	8	3.6	3.5
	ø20	14	12	13	M8	8	10	5	4.5
Ending	ø25	17.5	15	17	M10x1.25	10	12	6	5



## Dimensions

● SSD2-B-12/16 (without switch)

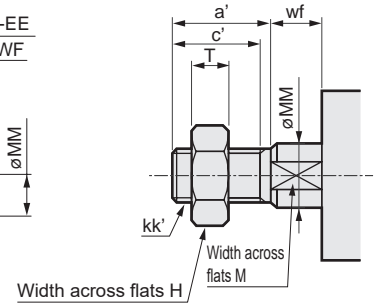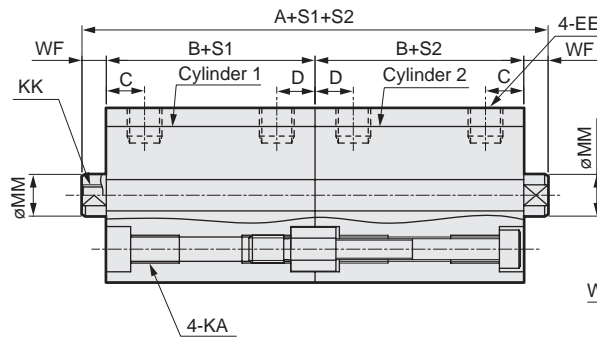

● Rod end male thread

● SSD2-B-20, 25 (without switch)

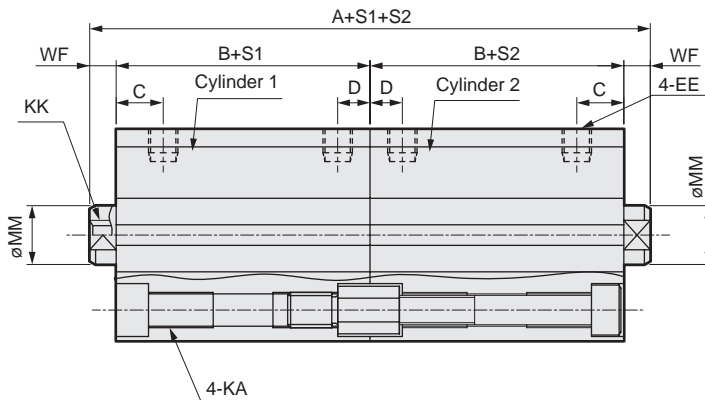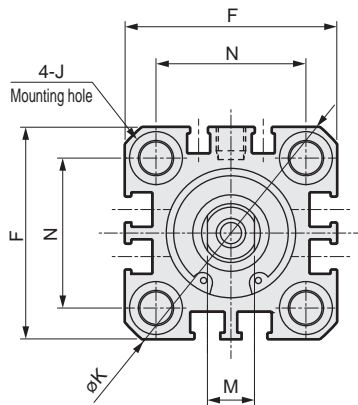

Code	Dimensions without switch and common dimensions													
Bore size (mm)	A <sup>*1</sup>	B <sup>*1</sup>	C	D	EE	F	J	K	KA	KK	M	MM	N	WF
ø12	41	17	5.5	5.5	M5	25	6.5 spot face depth 3.5	32	M4 depth 7	M3 depth 6	5	6	15.5	3.5
ø16	41	17	5.5	5.5	M5	29	6.5 spot face depth 3.5	38	M4 depth 7	M4 depth 8	6	8	20	3.5
ø20	48	19.5	8	5.5	M5	36	9 spot face depth 5.5	47	M6 depth 11	M5 depth 7	8	10	25.5	4.5
ø25	55	22.5	11	6	M5	40	9 spot face depth 5.5	51	M6 depth 11	M6 depth 12	10	12	28	5

● Rod end male thread

Code	a'	c'	H	kk'	M	MM	T	wf
Bore size (mm)								
ø12	10.5	9	8	M5	5	6	3.2	3.5
ø16	12	10	10	M6	6	8	3.6	3.5
ø20	14	12	13	M8	8	10	5	4.5
ø25	17.5	15	17	M10x1.25	10	12	6	5

\*1 : To calculate A + S1 + S2, B + S1 or B + S2 when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke. (Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

\*2: For dimensions of individual accessories, refer to pages 1046 to 1049.

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr




Ending

# SSD2-B Series



## Dimensions

● SSD2-BL-32 to 100 (with switch)

● Rod end male thread

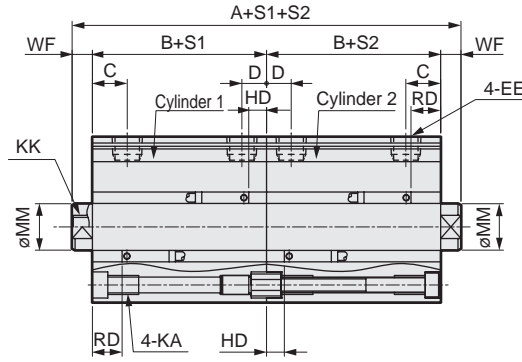

● SSD2-B-32 to 100 (without switch)

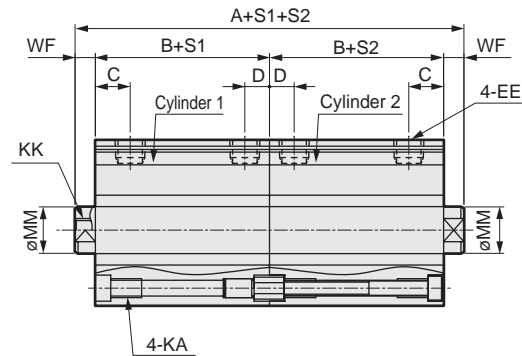

Code	No switch		Common dimensions with switch											
	A <sup>*1,*6</sup>	B <sup>*1,*6</sup>	A <sup>*1</sup>	B <sup>*1</sup>	C <sup>*8</sup>	D <sup>*8</sup>	EE	F	FA <sup>*4</sup>	FB	G	H	J	K
ø32	60(80)	23(33)	80	33	8(10)	8(5.5)	Rc1/8 <sup>*7</sup>	45	23(26.5)	20.5	49.5	12.5	9 spot face depth 5.5	60
ø40	73(93)	29.5(39.5)	93	39.5	12(11.5)	8.5(8)	Rc1/8	52	26.5(30)	27.5	57	15	9 spot face depth 5.5	69
ø50	77(97)	30.5(40.5)	97	40.5	10.5	10.5	Rc1/4	64	32.5(36)	28.5	71	18	11 spot face depth 6.5	86
ø63	88(108)	36(46)	108	46	13	11	Rc1/4	77	39(42.5)	28.5	84	23	14 spot face depth 9	103
ø80	107(127)	43.5(53.5)	127	53.5	16	13	Rc3/8	98	49.5(53)	28.5	104	31	17.5 spot face depth 11	132
ø100	130(150)	53(63)	150	63	23	15	Rc3/8	117	59(62.5)	28.5	123.5	38	17.5 spot face depth 11	156

Code	Common dimensions with switch							Reed T0H/T0V, T5H/T5V		Proximity T2H/T2V, T3H/T3V		Proximity T2WH/T2WV, T3WH T3WV	
	KA	KK	M	MM	N	O	WF	HD <sup>*2</sup>	RD <sup>*2</sup>	HD <sup>*2</sup>	RD <sup>*2</sup>	HD	RD
ø32	M6 depth 11	M8 depth 13	14	16	34	4.5	7	4	9.5	4	9.5	6	11.5
ø40	M6 depth 11	M8 depth 13	14	16	40	5	7	7	12	7	12	8.5	13.5
ø50	M8 depth 13	M10 depth 15	17	20	50	7	8	7.5	12.5	7.5	12.5	9	14
ø63	M10 depth 25	M10 depth 15	17	20	60	7	8	12.5	13	12.5	13	14	14.5
ø80	M12 depth 28	M16 depth 21	22	25	77	6	10	17.5	15.5	17.5	15.5	19	17
ø100	M12 depth 28	M20 depth 27	27	30	94	6.5	12	23	19.5	23	19.5	24.5	21

\*1 : To calculate A + S1 + S2, B + S1 or B + S2 when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke. (Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

\*2 : HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.

\*3 : Refer to page 1044 for HD, RD and protruding dimensions of the 2-color LED, off-delay, AC magnetic field proof, T1\* and T8\* switches.

\*4 : Dimensions in ( ) of FA are for the L-shaped lead wire.

\*5 : For dimensions of individual accessories, refer to pages 1046 to 1049.

\*6 : Dimensions in ( ) of codes A and B are for strokes of more than 50 mm.

\*7 : The ø32 bore size with a 5 mm stroke and without a switch has a port size of M5.\*8

Dimensions in ( ) of codes C and D are when the value is for a 5 mm stroke without switch.

● Rod end male thread

Code	a'	c'	H	kk'	M	MM	T	wf
ø32	23.5	20.5	22	M14x1.5	14	16	8	5
ø40	23.5	20.5	22	M14x1.5	14	16	8	5
ø50	28.5	26	27	M18x1.5	17	20	11	5
ø63	28.5	26	27	M18x1.5	17	20	11	5
ø80	35.5	32.5	32	M22x1.5	22	25	13	8
ø100	35.5	32.5	41	M26x1.5	27	30	16	8

---

# MEMO

---

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

**SSG**

**SSD**

**CAT**

**MDC2**

**MVC**

**SMG**

MSD/  
MSDG

**FC\***

**STK**

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25


ShkAbs

FJ

FK

Spd  
Contr

Ending



Compact cylinder double acting/2-stage

# SSD2-W Series

● Bore size:  $\phi 12/\phi 16/\phi 20/\phi 25/\phi 32/\phi 40/\phi 50/\phi 63/\phi 80/\phi 100$



## Specifications

Item	SSD2-W SSD2-WL (with switch)										
Bore size mm	$\phi 12$	$\phi 16$	$\phi 20$	$\phi 25$	$\phi 32$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$	
Actuation	Double acting/2-stage										
Working fluid	Compressed air										
Max. working pressure MPa	1.0 ( $\approx 150$ psi, 10 bar) (*1)										
Min. working pressure MPa	0.15 ( $\approx 22$ psi, 1.5 bar)							0.1 ( $\approx 15$ psi, 1 bar)			
Proof pressure MPa	1.6 ( $\approx 230$ psi, 16 bar)										
Ambient temperature $^{\circ}\text{C}$	-10 ( $14^{\circ}\text{F}$ ) to 60 ( $140^{\circ}\text{F}$ ) (no freezing)										
Port size	M5				Rc1/8 (*2)			Rc1/4		Rc3/8	
Stroke tolerance mm	$S_1 = \begin{smallmatrix} +1.0 \\ 0 \end{smallmatrix}$					$S_2 = \begin{smallmatrix} 0 \\ -1.5 \end{smallmatrix}$					
Working piston speed mm/s	50 to 500							50 to 300			
Cushion	None										
Lubrication	Not required (use turbine oil ISO VG32 if necessary for lubrication)										
Allowable absorbed energy J	0.004	0.01	0.016	0.021	0.025	0.092	0.1	0.12	0.27	0.56	

\*1: The max. working pressure is 0.5 MPa when S1 and S2 are the same value.

\*2: The  $\phi 32$  bore size with a 5 mm stroke and without a switch has a port size of M5.

## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\phi 12$	5/10/15/20	30	1
$\phi 16$	25/30		
$\phi 20$	5/10/15/20/25	50	
$\phi 25$			
$\phi 32$			
$\phi 40$			
$\phi 50$	10/15/20/25	50	
$\phi 63$			
$\phi 80$			
$\phi 100$			

## Min. stroke with switch (2 switches)

Bore size (mm)	T0H/V / T5H/V	T2H/V / T3H/V
$\phi 12$	10(5)	5
$\phi 16$		
$\phi 20$		
$\phi 25$		
$\phi 32$		
$\phi 40$		
$\phi 50$		
$\phi 63$		
$\phi 80$		
$\phi 100$		

\*1: Less than 10 mm with the 2-color LED, off-delay,

AC magnetic field proof, T1\* or T8\* switch is not available.

\*2: Values in ( ) are for the type with 1 on rod side.


\*1: The custom stroke is available in 1 mm increments. However, the total length is the same as that of the next longer standard stroke.

\*2: When using the type with switch, refer to the table on the right.

## Custom stroke

### ● SSD2-W Series

Item	Standard products	
	Standard stroke body with spacer	
Model No.	Refer to How to order.	
Description	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.	
Stroke range	Bore size	Stroke range
	12/16	1 to 29
	20 to 25	1 to 49
	32 to 100	1 to 99
Example of model No.	Model No.: SSD2-W-32-38 A + 2 mm spacer is added to the SSD2-W-32-40 standard cylinder to create 38 mm stroke. B + stroke is 63mm.	

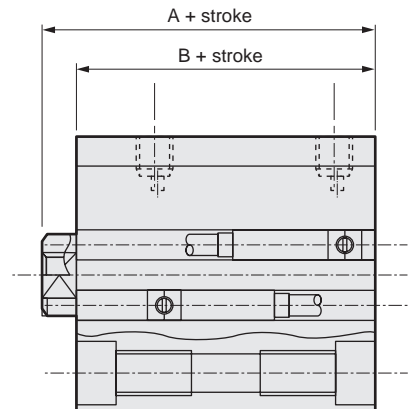

## Switch specifications (F-switch)

● 1-color/2-color LED

Item	2-wire proximity		3-wire proximity		2-wire proximity		3-wire proximity		
	F2S		F3S		F2H/F2V	F2YH/ F2YV	F3H/F3V	F3PH/F3PV (made to order)	F3YH/ F3YV
Applications	Dedicated for programmable controller		For programmable controller, relay		Dedicated for programmable controller		For programmable controller, relay		
Output method	-		NPN output		-		NPN output	PNP output	NPN output
Power supply voltage	-		10 to 28 VDC		-		10 to 28 VDC		
Load voltage	10 to 30 VDC		30 VDC or less		10 to 30 VDC	24 VDC ±10%	30 VDC or less		
Load current	5 to 20 mA		50 mA or less		5 to 20 mA		50 mA or less		
Indicator	LED (Lit when ON)				Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Yellow LED (Lit when ON)		Red/green LED (Lit when ON)
Leakage current	1 mA or less		10 µA or less		1 mA or less		10 µA or less		
Weight	g		1 m:10 3 m:29						

## Switch specifications (T-switch)

● 1-color/2-color LED/for AC magnetic field proof

Item	2-wire proximity		2-wire proximity		3-wire proximity				2-wire reed			2-wire proximity			
	T1H/ T1V	T2H/T2V/ T2JH/T2JV	T2YH/ T2YV	T2WH/ T2WV	T3H/ T3V	T3PH/ T3PV	T3YH/ T3YV	T3WH/ T3WV	T0H/T0V	T5H/T5V	T8H/T8V	T2YD(*4) T2YDT			
Applications	For programmable controller, relay, compact solenoid valve	Dedicated for programmable controller		For programmable controller, relay				For programmable controller, relay	For programmable controller, relay, IC circuit (no indicator lamp), serial connection	For programmable controller, relay		Dedicated for programmable controller			
Output method	-		-		NPN output	PNP output	NPN output	NPN output	-			-			
Pwr. supp. V.	-		-		10 to 28 VDC				-			-			
Load voltage	85 to 265 VAC	10 to 30 VDC	24 VDC ±10%	30 VDC or less				12/24 VDC	100/110 VAC	5/12/24 VDC	100/110 VAC	12/24 VDC	110 VAC	220 VAC	24 VDC ±10%
Load current	5 to 100 mA	5 to 20 mA (*3)		100 mA or less		50 mA or less		5 to 50 mA	7 to 20 mA	50 mA or less	20 mA or less	5 to 50 mA	7 to 20 mA	7 to 10 mA	5 to 20 mA
Indicator	LED (Lit when ON)	LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)		No indicator lamp	LED (Lit when ON)		Red/green LED (Lit when ON)	
Leakage current	≤ 1 mA at 100 VAC, ≤ 2 mA at 200 VAC	1 mA or less		10 µA or less				0 mA			1 mA or less				
Weight g	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80			1 m:33 3 m:87 5 m:142		1 m:61 3 m:166 5 m:272	

\*1: Refer to Ending Page 1 for detailed switch specifications and dimensions.

\*2: Switches other than the above models, such as switches with connectors, are also available. Refer to Ending Page 1.

\*3: The max. load current is 20 mA at 25°C. The current is lower than 20 mA if the operating ambient temperature around the switch is higher than 25°C. (5 to 10 mA at 60°C)

\*4: Switch for AC magnetic field (T2YD/T2YDT) cannot be used in DC magnetic field.

\*5: The F-switch uses a bend-resistant lead wire.

## Cylinder weight table (the weight of the switches is when there are 2 cylinder switches.)

(Unit: g)

Stroke (mm)	5		10		15		20		25		30		35		40		45		50		75		100	
	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch
ø12	37	87	45	87	54	96	62	104	71	113	73	115	-	-	-	-	-	-	-	-	-	-	-	-
ø16	49	105	60	105	70	115	81	126	92	137	103	148	-	-	-	-	-	-	-	-	-	-	-	-
ø20	65	120	77	152	90	165	103	178	115	190	128	203	141	216	154	229	167	242	205	280	-	-	-	-
ø25	90	181	105	196	121	212	137	228	163	244	168	259	184	275	200	291	216	307	231	322	-	-	-	-
ø32	126	240	148	262	170	284	192	306	213	327	235	349	257	371	279	393	301	415	322	436	494	542	604	652
ø40	189	332	216	359	242	385	269	412	296	439	322	465	348	491	375	518	401	544	478	571	646	695	776	825
ø50	-	-	354	548	396	590	438	632	480	674	523	717	565	759	607	801	649	843	691	885	1038	1095	1248	1305
ø63	-	-	543	822	598	877	653	932	708	987	763	1042	818	1097	874	1153	929	1208	984	1263	1474	1538	1749	1813
ø80	-	-	1002	1415	1089	1502	1175	1588	1262	1675	1348	1961	1435	1848	1522	1935	1609	2022	1695	2108	2475	2541	2907	2973
ø100	-	-	1558	2125	1672	2239	1785	2352	1899	2466	2013	2580	2127	2694	2240	2807	2354	2921	2468	3035	3531	3603	4098	4170

Total cylinder weight

Total weight = weight of cylinder 1 + weight of cylinder 2.

[Example: Total weight of SSD-W-25-30-N-10-N]

Weight of ø25 with 30 mm stroke:....(1)


Weight of ø25 with 10 mm stroke:....(2)

Total weight = (1) + (2) = 168 g + 105 g = 273 g



# SSD2-W Series

## How to order

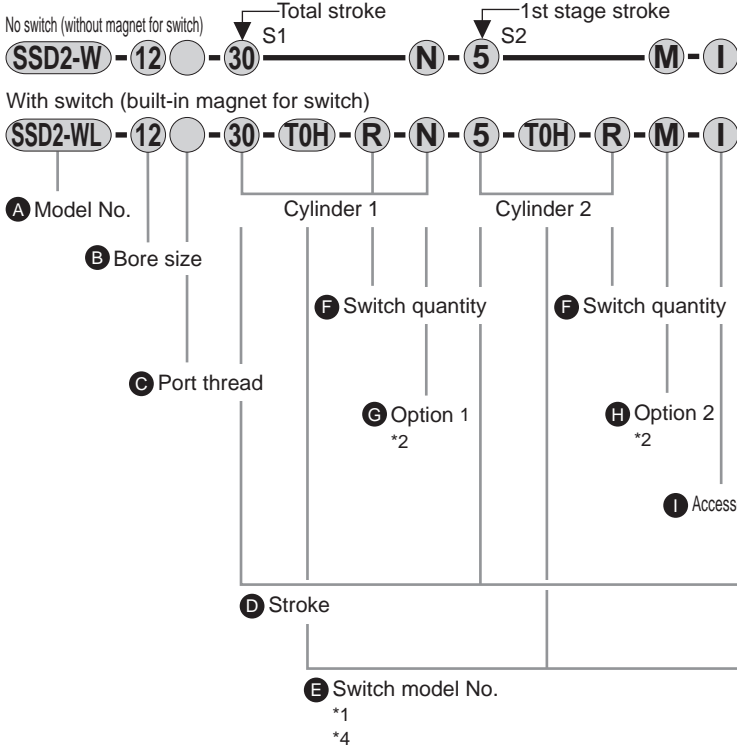

### ⚠ Precautions for model No. selection

- \*1 : T2YD\* switch cannot be installed on  $\phi 12$  and  $\phi 16$ . In addition, T8\* switch cannot be installed on  $\phi 12$  to  $\phi 32$ .
- \*2 : Piston rod of  $\phi 12$  to  $\phi 25$  is stainless steel as standard. C-snap ring is stainless steel instead of steel. The rod end male thread nut is stainless steel.
- \*3 : Refer to pages 750 and 751 for combinations of variations/options.
- \*4 : Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.
- \*5 : F-switch cannot be selected.

### [Example of model No.]

## SSD2-WL-12-30-T0H-R-N-5-T0H-R-I


Model: Compact cylinder 2-stage

- B** Bore size :  $\phi 12$  mm
- C** Port thread : Rc thread
- D** Total stroke S1 : 30 mm
- E** Switch model No. : Reed switch T0H, lead wire 1 m
- F** Switch quantity : 1 on rod side
- G** Option 1 : Rod end male thread
- D** 1st stage stroke S2 : 5 mm
- 2nd stage stroke : 25 mm
- E** Switch model No. : Reed switch T0H, lead wire 1 m
- F** Switch quantity : 1 on rod side
- I** Accessory : Rod eye

Cylinder 1

1st stage stroke 5 mm (S2)  
 + 2nd stage stroke 25 mm  
 Total stroke 30 mm (S1)

Cylinder 2



Code	Description
<b>A Model No.</b>	
<b>SSD2-W</b>	Double acting/2-stage
<b>SSD2-WL</b>	Double acting/2-stage/with switch

<b>B Bore size (mm)</b>	
<b>12</b>	$\phi 12$
<b>16</b>	$\phi 16$
<b>20</b>	$\phi 20$
<b>25</b>	$\phi 25$
<b>32</b>	$\phi 32$
<b>40</b>	$\phi 40$
<b>50</b>	$\phi 50$
<b>63</b>	$\phi 63$
<b>80</b>	$\phi 80$
<b>100</b>	$\phi 100$

<b>C Port thread</b>	
<b>Blank</b>	Rc thread
<b>NN</b>	NPT thread ( $\phi 32$ and over) (made-to-order product)
<b>GN</b>	G thread ( $\phi 32$ and over) (made-to-order product)

<b>D Stroke (mm)</b>	
Refer to the stroke table on the following page.	

<b>E Switch model No.</b>		Voltage	Contact	Lead wire	Bore size															
Lead wire	Lead wire				12	16	20	25	32	40	50	63	80	100						
Straight	L-shaped	AC	DC	2-wire																
-	F2S*			2-wire																
-	F3S*			3-wire																
F2H*	F2V*			2-wire																
F3H*	F3V*			3-wire																
F3PH*	F3PV*			3-wire																
F2YH*	F2YV*			2-wire																
F3YH*	F3YV*			3-wire																
T0H*	T0V*			2-wire																
T5H*	T5V*			2-wire																
T8H*	T8V*			2-wire																
T1H*	T1V*			2-wire																
T2H*	T2V*			2-wire																
T3H*	T3V*			2-wire																
T3PH*	T3PV*			3-wire																
T2WH*	T2WV*			2-wire																
T2YH*	T2YV*			2-wire																
T3WH*	T3WV*			3-wire																
T3YH*	T3YV*			3-wire																
T2YD*	-			2-wire																
T2YDT*	-			2-wire																
T2JH*	T2JV*			2-wire																

<b>* Lead wire length</b>	
<b>Blank</b>	1 m (standard)
<b>3</b>	3 m (option)
<b>5</b>	5 m (option) <span style="float: right;">*5</span>

<b>F Switch quantity</b>	
<b>R</b>	1 on rod side
<b>H</b>	1 on head side
<b>D</b>	2

<b>G Option 1</b>	
<b>Blank</b>	Rod end female thread
<b>N</b>	Rod end male thread

<b>H Option 2 <span style="float: right;">*2</span></b>	
<b>M</b>	Piston rod material (stainless steel)

<b>I Accessory (available when rod end male thread "N" is selected)</b>	
<b>I</b>	Rod eye
<b>Y</b>	Rod clevis (pin and snap ring included)

### [Stroke table]

Stroke (mm)	Applicable bore size										
	ø12	ø16	ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100	
Standard stroke	5	●	●	●	●	●	●				
	10	●	●	●	●	●	●	●	●	●	●
	15	●	●	●	●	●	●	●	●	●	●
	20	●	●	●	●	●	●	●	●	●	●
	25	●	●	●	●	●	●	●	●	●	●
	30	●	●	●	●	●	●	●	●	●	●
	35			●	●	●	●	●	●	●	●
	40			●	●	●	●	●	●	●	●
	45			●	●	●	●	●	●	●	●
	50			●	●	●	●	●	●	●	●
Min. stroke (mm)	1										
Max. stroke (mm)	30			50							
Custom stroke *1	In 1 mm increments										

\*1: Less than 5 mm with 1-color LED switch and less than 10 mm with the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch are not available.

Refer to page 902 for the number of installed switches and the min. stroke.

\*2: The total length is the same as that of the next longer standard stroke.

### How to order switch




Switch model No.  
(Item ㊦ on page 904)

SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/ COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/ MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending


# SSD2-W Series

## Internal structure and parts list


### ● SSD2-WL-12 to 50 (double acting/2-stage/with switch)

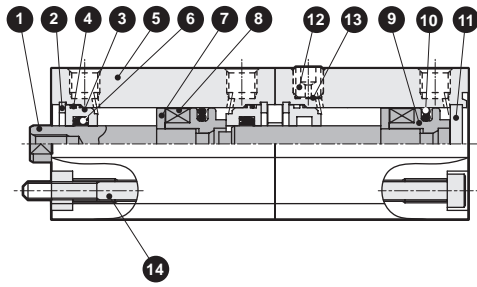


### ● SSD2-WL-63 to 100 (double acting/2-stage/with switch)

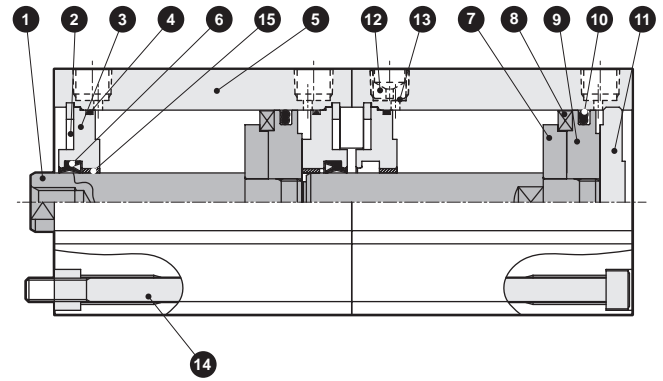

### ● SSD2-W-12 to 50 (double acting/2-stage)

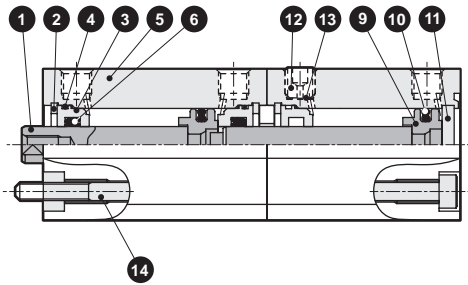

### ● SSD2-W-63 to 100 (double acting/2-stage)

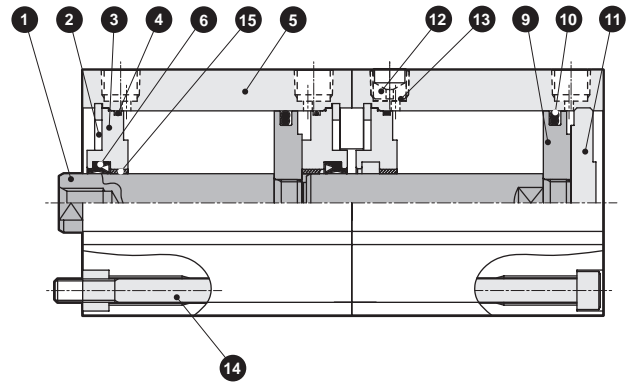

No.	Part name	Material	Remarks
1	Piston rod	ø12 to ø25: Stainless steel ø32 to ø100: Steel	ø16 to ø100 Industrial chrome plating
2	C-snap ring	Steel	Zinc phosphate
3	Rod metal	ø12 to ø50: Special aluminum ø63 to ø100: Aluminum alloy	ø12 to ø50: Alumite ø63 to ø100: Chromate
4	Rod metal gasket	Nitrile rubber	
5	Body	Aluminum alloy	Hard alumite
6	Rod packing	Nitrile rubber	
7	Spacer	Aluminum alloy	Chromate
8	Magnet	Plastic	

No.	Part name	Material	Remarks
9	Piston	Aluminum alloy	Chromate
10	Piston packing	Nitrile rubber	
11	Cover	ø12 to 25: Stainless steel ø32 to ø100: Aluminum alloy	ø32 to ø100 Alumite
12	Plug	Stainless steel	
13	Stainless steel mesh	Stainless steel	
14	Hexagon socket head cap screw	Steel	Black finish
15	Bush	Oiles drymet	

## Repair parts list


Bore size (mm)	Kit No.	Repair parts No.
ø12	SSD2-W-12K	4 6 10
ø16	SSD2-W-16K	
ø20	SSD2-W-20K	
ø25	SSD2-W-25K	
ø32	SSD2-W-32K	
ø40	SSD2-W-40K	
ø50	SSD2-W-50K	
ø63	SSD2-W-63K	
ø80	SSD2-W-80K	
ø100	SSD2-W-100K	

## SSD2-W application examples

Pressure setting: P2 > P1

- 1st stage push  
Keeping port 4 pressurized, pressurize port 1.
- 2nd stage push  
Keeping port 1 pressurized, pressurize port 3.

It may not be P2 = P1 depending on the load direction. When using a single acting cylinder with free fall load, ports 2 and 4 in the upper figure and ports 2 and 3 in the lower figure are breathing holes. Port 2, which basically needs no piping as a rule, is plugged with a filter.



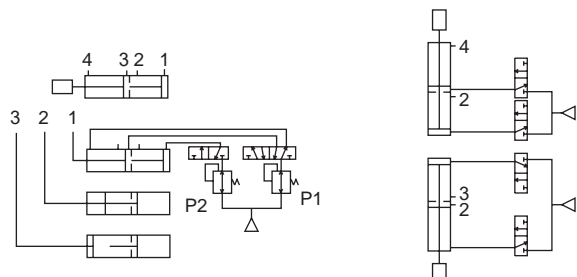


### Dimensions



● SSD2-WL-12 to 25 (with switch T0H/V, T5H/V, T2H/V, T3H/V)

● Rod end male thread

ø12/ø16

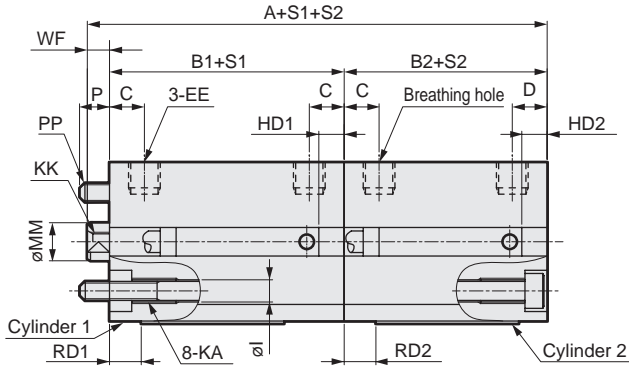

ø20/ø25

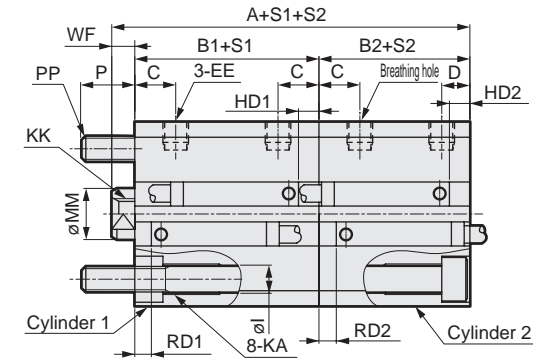

Code	Common dimensions with switch																			
Bore size (mm)	A	B1	B2	C	D	EE	F	FA <sup>*3</sup>	FB	I	J	K	KA	KK	M	MM	N	WF	P	PP
ø12	52.5	27	22	5.5	5.5	M5	25	13(16.5)	4.5	3.5	6.5 spot face depth 3.5	32	M4 depth 7	M3 depth 6	5	6	15.5	3.5	4.5	M3
ø16	52.5	27	22	5.5	5.5	M5	29	15(18.5)	4.5	3.5	6.5 spot face depth 3.5	38	M4 depth 7	M4 depth 8	6	8	20	3.5	4.5	M3
ø20	70	36	29.5	8	5.5	M5	36	18.5(22)	12.5	5.5	9 spot face depth 5.5	47	M6 depth 11	M5 depth 7	8	10	25.5	4.5	10	M5
ø25	76.5	39	32.5	11	6	M5	40	20.5(24)	13.5	5.5	9 spot face depth 5.5	51	M6 depth 11	M6 depth 12	10	12	28	5	9	M5
Switch dimensions	Reed T0H/TOV, T5H/T5V				Proximity T2HT/T2V, T3H/T3V				Proximity T2WH/T2WV, T3WH/T3WV				Proximity F2H/F2V, F3H/F3V, F2YH/F2YV, F3YH/F3YV							
	RD1, RD2	HD1	HD2		RD1, RD2	HD1	HD2		RD1, RD2	HD1	HD2		RD1, RD2	HD1	HD2					
ø12	1.5	6.5	1.5		1.5	6.5	1.5		3.5	8.5	3.5									
ø16	3.5	4.5	0		3.5	4.5	0		5.5	6.5	1.5									
ø20	7.5	9.5	3		7.5	9.5	3		9.5	11.5	5		12	14	7.5					
ø25	9.5	10.5	4		9.5	10.5	4		11.5	12.5	6		14	15	8.5					
Switch dimensions	Proximity F2S/F3S			Proximity T2YH/T2YV/ T3YH/T3YV/T2JH/T2JV			AC magnetic field proof T2YD/T2YDT/T1H/T1V													
	RD1, RD2	HD1	HD2	RD1, RD2	HD1	HD2	RD1, RD2	HD1	HD2											
ø12																				
ø16																				
ø20	11	13	6.5	6.5	8.5	2	6.5	8.5	2											
ø25	13	14	7.5	8.5	9.5	3	8.5	9.5	3											

\*1 : To calculate A + S1 + S2, B1 + S1 or B2 + S2 when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke. (Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.  
 \*2 : HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.  
 \*3 : Dimensions in ( ) of FA are for the L-shaped lead wire.  
 \*4 : For dimensions of individual accessories, refer to pages 1046 to 1049.  
 \*5 : Only F-switch is available for the ø20 or ø25 piping port surface.

● Rod end male thread

Code	a'	c'	H	kk'	M	MM	T	wf
ø12	10.5	9	8	M5	5	6	3.2	3.5
ø16	12	10	10	M6	6	8	3.6	3.5
ø20	14	12	13	M8	8	10	5	4.5
ø25	17.5	15	17	M10x1.25	10	12	6	5

SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending




# SSD2-W Series

## Dimensions



● SSD2-W-12 to 25 (without switch)

● Rod end male thread

ø12/ø16

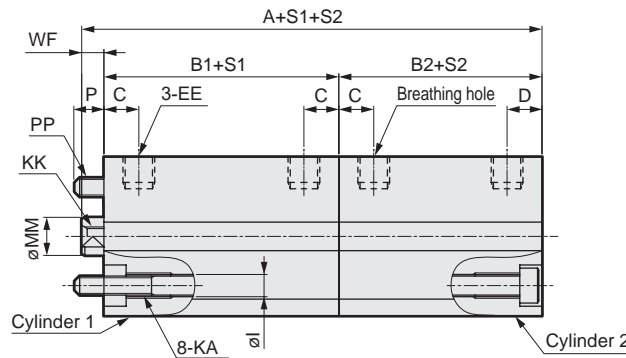

ø20/ø25

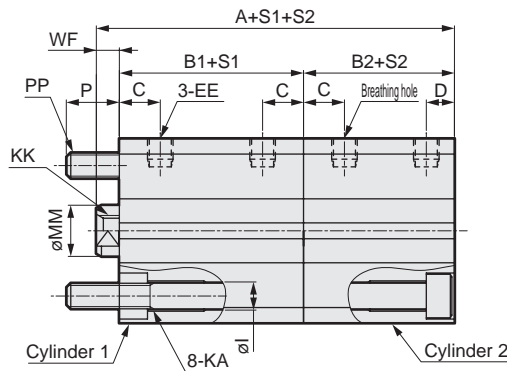

Code	Dimensions without switch and common dimensions																		
	Bore size (mm)	A	B1	B2	C	D	EE	F	I	J	K	KA	KK	M	MM	N	WF	P	PP
SRG3	ø12	42.5	22	17	5.5	5.5	M5	25	3.5	6.5 spot face depth 3.5	32	M4 depth 7	M3 depth 6	5	6	15.5	3.5	4.5	M3
SRM3	ø16	42.5	22	17	5.5	5.5	M5	29	3.5	6.5 spot face depth 3.5	38	M4 depth 7	M4 depth 8	6	8	20	3.5	4.5	M3
SRT3	ø20	50	26	19.5	8	5.5	M5	36	5.5	9 spot face depth 5.5	47	M6 depth 11	M5 depth 7	8	10	25.5	4.5	10	M5
SRL3	ø25	56.5	29	22.5	11	6	M5	40	5.5	9 spot face depth 5.5	51	M6 depth 11	M6 depth 12	10	12	28	5	9	M5

● Rod end male thread

Code	a'	c'	H	kk'	M	MM	T	wf	
MRG2	ø12	10.5	9	8	M5	5	6	3.2	3.5
SM-25	ø16	12	10	10	M6	6	8	3.6	3.5
ShkAbs	ø20	14	12	13	M8	8	10	5	4.5
	ø25	17.5	15	17	M10x1.25	10	12	6	5




\*1 : To calculate A + S1 + S2, B1 + S1 or B2 + S2 when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke. (Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

\*2 : For dimensions of individual accessories, refer to pages 1046 to 1049.



### Dimensions

● SSD2-WL-32 to 100 (with switch T0H/V, T5H/V, T2H/V, T3H/V)

● Rod end male thread

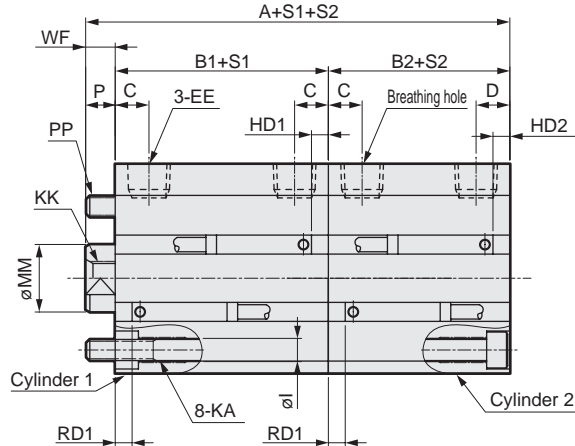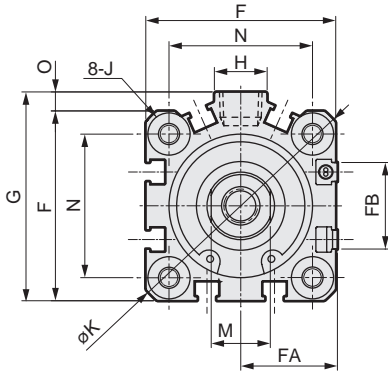

● SSD2-W-32 to 100 (without switch)

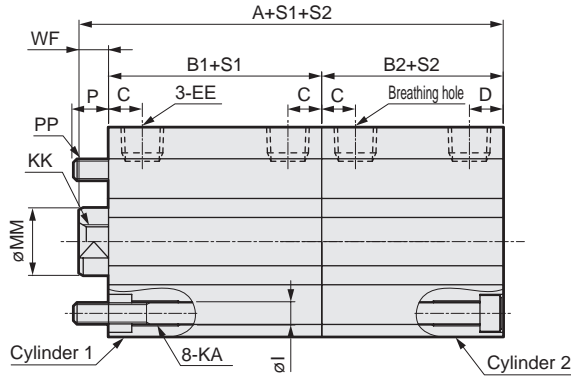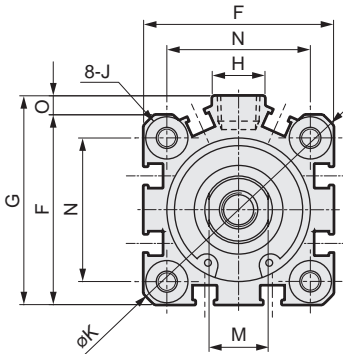


Code	No switch			Common dimensions with switch																						
	A	B1	B2	A	B1	B2	C <sup>7</sup>	D <sup>7</sup>	EE	F	FA <sup>3</sup>	FB	G	H	I	J	K	KA	KK	M	MM	N	O	WF	P	PP
ø32	60.5	30.5	23	80.5	40.5	33	8(11)	8(5.5)	Rc1/8 <sup>7</sup>	45	23(26.5)	20.5	49.5	12.5	5.5	9 spot face depth 5.5	60	M6 depth 11	M8 depth 13	14	16	34	4.5	7	7	M5
ø40	76.5	40	29.5	96.5	50	39.5	12(11.5)	8.5(8)	Rc1/8	52	26.5(30)	27.5	57	15	5.5	9 spot face depth 5.5	69	M6 depth 11	M8 depth 13	14	16	40	5	7	6	M5
ø50	79	40.5	30.5	99	50.5	40.5	10.5	10.5	Rc1/4	64	32.5(36)	28.5	71	18	6.9	11 spot face depth 5.5	86	M8 depth 13	M10 depth 15	17	20	50	7	8	10.5	M6
ø63	86	42	36	106	52	46	13	11	Rc1/4	77	39(42.5)	28.5	84	23	8.7	14 spot face depth 9	103	M10 depth 25	M10 depth 15	17	20	60	7	8	11	M8
ø80	104.5	51	43.5	124.5	61	53.5	16	13	Rc3/8	98	49.5(53)	28.5	104	31	10.5	17.5 spot face depth 11	132	M12 depth 28	M16 depth 21	22	25	77	6	10	11.5	M10
ø100	125.5	60.5	53	145.5	70.5	63	23	15	Rc3/8	117	59(62.5)	28.5	123.5	38	10.5	17.5 spot face depth 11	156	M12 depth 28	M20 depth 27	27	30	94	6.5	12	12.5	M10
Switch dimensions	Reed T0H/TOV, T5H/T5V				Proximity T2H/T2V, T3H/T3V			Proximity T2WH/T2WV, T3WH/T3WV			Proximity T2YH/T2YV, T3YH/T3YV/T2JH/T2JV			Reed T8H/T8V												
	RD1, RD2	HD1	HD2		RD1, RD2	HD1	HD2	RD1, RD2	HD1	HD2	RD1, RD2	HD1	HD2	RD1, RD2	HD1	HD2										
ø32	10	11.5	4		10	11.5	4	12	13.5	6	8.5	11	3.5	-	-	-										
ø40	13	18	7.5		13	18	7.5	15	20	9.5	10.5	16	5.5	6	11.5	1										
ø50	13	18.5	8.5		13	18.5	8.5	15	20.5	10.5	11	16	6	6.5	11.5	1.5										
ø63	13.5	19.5	13.5		13.5	19.5	13.5	15.5	21.5	15.5	11.5	17	11	7	12.5	6.5										
ø80	16	26	18.5		16	26	18.5	18	28	20.5	14	23.5	16	9.5	19	11.5										
ø100	20.5	31.5	24		20.5	31.5	24	22.5	33.5	26	18	29	21.5	13.5	24.5	17										
Switch dimensions	AC magnetic field proof T2YD/T2YDT/T1H/T1V																									
	RD1, RD2	HD1	HD2																							
ø32	8.5	11	3.5																							
ø40	10.5	16	5.5																							
ø50	11	16	6																							
ø63	11.5	17	11																							
ø80	14	23.5	16																							
ø100	18	29	21.5																							

\*1 : To calculate A + S1 + S2, B1 + S1 or B2 + S2 when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke. (Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.  
 \*2 : HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.  
 \*3 : Dimensions in ( ) of FA are for the L-shaped lead wire.  
 \*4 : For dimensions of individual accessories, refer to pages 1046 to 1049.  
 \*5 : Dimensions in ( ) of codes A and B are for strokes of more than 50 mm.  
 \*6 : The ø32 bore size with a 5 mm stroke and without a switch has a port size of M5.\*7 :

● Rod end male thread

Code	a'	c'	H	kk'	M	MM	T	wf
ø32	23.5	20.5	22	M14x1.5	14	16	8	5
ø40	23.5	20.5	22	M14x1.5	14	16	8	5
ø50	28.5	26	27	M18x1.5	17	20	11	5
ø63	28.5	26	27	M18x1.5	17	20	11	5
ø80	35.5	32.5	32	M22x1.5	22	25	13	8
ø100	35.5	32.5	41	M26x1.5	27	30	16	8

- SCP\*3
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS2
- CKV2
- CAV2/COVP/N2
- SSD2**
- SSG
- SSD
- CAT
- MDC2
- MVC
- SMG
- MSD/MSDG
- FC\*
- STK
- SRL3
- SRG3
- SRM3
- SRT3
- MRL2
- MRG2
- SM-25
- ShkAbs
- FJ
- FK
- Spd Contr
- Ending



Compact cylinder double acting/rotation-stop

# SSD2-M Series

- Bore size:  $\varnothing 12/\varnothing 16/\varnothing 20/\varnothing 25$   
 $\varnothing 32/\varnothing 40/\varnothing 50/\varnothing 63$



## Specifications

1 MPa = 10 bar

Item	SSD2-M SSD2-ML (with switch)										
	mm		$\varnothing 12$	$\varnothing 16$	$\varnothing 20$	$\varnothing 25$	$\varnothing 32$	$\varnothing 40$	$\varnothing 50$	$\varnothing 63$	
Bore size	mm		$\varnothing 12$	$\varnothing 16$	$\varnothing 20$	$\varnothing 25$	$\varnothing 32$	$\varnothing 40$	$\varnothing 50$	$\varnothing 63$	
Actuation	Double acting										
Working fluid	Compressed air										
Max. working pressure	1.0 ( $\approx 150$ psi, 10 bar)										
Min. working pressure	0.1 ( $\approx 15$ psi, 1 bar) 0.05 ( $\approx 7.3$ psi)										
Proof pressure	1.6 ( $\approx 230$ psi, 16 bar)										
Ambient temperature	$^{\circ}\text{C}$ -10 ( $14^{\circ}\text{F}$ ) to 60 ( $140^{\circ}\text{F}$ ) (no freezing)										
Port size	M5				Rc1/8 *1			Rc1/4			
Stroke tolerance	mm		+1.0 0								
Working piston speed	mm/s		50 to 500							50 to 300	
Cushion	None										
Lubrication	Not required (use turbine oil class 1 ISO VG32 if necessary for lubrication)										
Non-rotating accuracy (*2)	$\pm 1^{\circ}$			$\pm 0.7^{\circ}$			$\pm 0.8^{\circ}$				
Allowable absorbed energy	J	0.004	0.01	0.016	0.021	0.025	0.092	0.1	0.12		

\*1: The  $\varnothing 32$  bore size with a 5 mm stroke and without a switch has a port size of M5.\*2: Initial value at the pull end.

## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\varnothing 12$	5/10/15/20	30	1
$\varnothing 16$	25/30		
$\varnothing 20$	5/10/15/20/25	50	
$\varnothing 25$	30/35/40/45/50		
$\varnothing 32$	5/10/15/20/25/30/	100	
$\varnothing 40$	35/40/45/50/75/100		
$\varnothing 50$	10/15/20/25/30		
$\varnothing 63$	35/40/45/50/75/100		

## Min. stroke with switch (2 switches)

Bore size (mm)	T0H/V / T5H/V	T2H/V / T3H/V
$\varnothing 12$	10(5)	5
$\varnothing 16$		
$\varnothing 20$	5	
$\varnothing 25$		
$\varnothing 32$		
$\varnothing 40$		
$\varnothing 50$		
$\varnothing 63$		

\*1: When using the type with switch, refer to the table of the min. stroke with switch.


\*1: Less than 10 mm with the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch is not available.

\*2: Values in ( ) are for the type with 1 on rod side.

## Custom stroke

### ● SSD2-M Series

Item	Standard products	
	Standard stroke body with spacer	
Model No.	Refer to How to order.	
Description	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.	
Stroke range	Bore size	Stroke range
	12/16	1 to 29
	20 to 25	1 to 49
	32 to 63	1 to 99
Example of model No.	Model No.: SSD2-M-32-38 A +2 mm spacer is added to the SSD2-M-32-40 standard cylinder to create 38 mm stroke. B + stroke is 72 mm.	

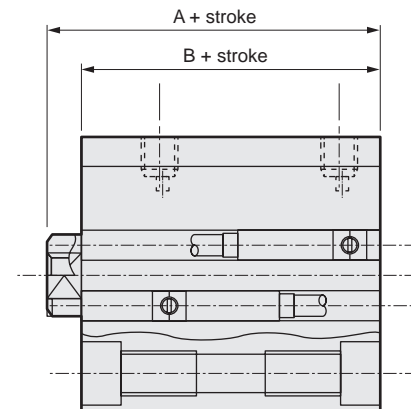

## Switch specifications (F-switch)

● 1-color/2-color LED

Item	2-wire proximity		3-wire proximity		2-wire proximity		3-wire proximity		
	F2S		F3S		F2H/F2V	F2YH/F2YV	F3H/F3V	F3PH/F3PV (made to order)	F3YH/F3YV
Applications	Dedicated for programmable controller		For programmable controller, relay		Dedicated for programmable controller		For programmable controller, relay		
Output method	-		NPN output		-		NPN output	PNP output	NPN output
Power supply voltage	-		10 to 28 VDC		-		10 to 28 VDC	4.5 to 28 VDC	10 to 28 VDC
Load voltage	10 to 30 VDC		30 VDC or less		10 to 30 VDC	24 VDC ±10%	30 VDC or less		
Load current	5 to 20 mA		50 mA or less		5 to 20 mA		50 mA or less		
Indicator	LED (Lit when ON)				Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Yellow LED (Lit when ON)		Red/green LED (Lit when ON)
Leakage current	1 mA or less		10 µA or less		1 mA or less		10 µA or less		
Weight	g				1 m:10 3 m:29				

## Switch specifications (T-switch)

● 1-color/2-color LED/for AC magnetic field proof

Item	2-wire proximity		2-wire proximity				3-wire proximity				2-wire reed			2-wire proximity			
	T1H/T1V	T2H/T2V	T2YH/T2YV	T2WH/T2WV	T3H/T3V	T3PH/T3PV	T3YH/T3YV	T3WH/T3WV	T0H/T0V	T5H/T5V	T8H/T8V		T2YD(*4) T2YDT				
Applications	For programmable controller, relay, compact solenoid valve	Dedicated for programmable controller				For programmable controller, relay				For programmable controller, relay	For programmable controller, relay, IC circuit (no indicator lamp), serial connection	For programmable controller, relay		Dedicated for programmable controller			
Output method	-	-				NPN output	PNP output	NPN output	NPN output	-			-				
Pwr. supp. V.	-																
Load voltage	85 to 265 VAC	10 to 30 VDC		24 VDC ±10%		30 VDC or less				12/24 VDC	100/110 VAC	5/12/24 VDC	100/110 VAC	12/24 VDC	110 VAC	220 VAC	24 VDC ±10%
Load current	5 to 100 mA	5 to 20 mA (*3)				100 mA or less		50 mA or less		5 to 50 mA	7 to 20 mA	50 mA or less	20 mA or less	5 to 50 mA	7 to 20 mA	7 to 10 mA	5 to 20 mA
Indicator	LED (Lit when ON)	LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	No indicator lamp		LED (Lit when ON)		Red/green LED (Lit when ON)			
Leakage current	≤ 1 mA at 100 VAC, ≤ 2 mA at 200 VAC	1 mA or less				10 µA or less				0 mA			1 mA or less				
Weight	g	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80			1 m:33 3 m:87 5 m:142	1 m:61 3 m:166 5 m:272				

\*1: Refer to Ending Page 1 for detailed switch specifications and dimensions.

\*2: Switches other than the above models, such as switches with connectors, are also available. Refer to Ending Page 1.

\*3: The max. load current is 20 mA at 25°C. The current is lower than 20 mA if the operating ambient temperature around the switch is higher than 25°C. (5 to 10 mA at 60°C)

\*4: Switch for AC magnetic field (T2YD/T2YDT) cannot be used in DC magnetic field.

\*5: The F-switch uses a bend-resistant lead wire.

## Cylinder weight table (the weight of the switches is when there are 2 cylinder switches.)

(Unit: g)

Stroke (mm)	5		10		15		20		25		30		35		40		45		50		75		100	
	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch
ø12	44	94	52	94	61	103	69	11	78	120	80	122	-	-	-	-	-	-	-	-	-	-	-	-
ø16	58	114	69	114	79	124	90	135	101	146	112	157	-	-	-	-	-	-	-	-	-	-	-	-
ø20	76	131	88	163	101	176	114	189	126	201	139	214	152	227	165	240	178	253	191	266	-	-	-	-
ø25	102	193	117	208	133	224	149	240	165	256	180	271	196	287	212	303	228	319	243	334	-	-	-	-
ø32	166	280	188	302	210	324	232	346	253	367	275	389	297	411	319	433	341	455	362	476	575	583	682	691
ø40	-	-	210	353	237	380	263	406	290	433	317	460	343	486	370	513	396	539	423	566	683	698	815	831
ø50	-	-	341	535	383	577	425	619	467	661	509	703	552	746	594	788	636	830	678	872	1065	1082	1275	1292
ø63	-	-	507	786	562	841	617	896	672	951	727	1006	782	1061	837	1116	893	1172	948	1227	1478	1502	1753	1777

## Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa											
		0.05	0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø12	Push	-	11.3	17.0	22.6	33.9	45.2	56.5	67.9	79.2	90.5	1.02x10 <sup>2</sup>	1.13x10 <sup>2</sup>
	Pull	-	8.48	12.7	17.0	25.4	33.9	42.4	50.9	59.4	67.9	76.3	84.8
ø16	Push	-	20.1	30.2	40.2	60.3	80.4	1.01x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.61x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.01x10 <sup>2</sup>
	Pull	-	15.1	22.6	30.2	45.2	60.3	75.4	90.5	1.06x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.36x10 <sup>2</sup>	1.51x10 <sup>2</sup>
ø20	Push	-	31.4	47.1	62.8	94.2	1.26x10 <sup>2</sup>	1.57x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.20x10 <sup>2</sup>	2.51x10 <sup>2</sup>	2.83x10 <sup>2</sup>	3.14x10 <sup>2</sup>
	Pull	-	23.6	35.3	47.1	70.7	94.2	1.18x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.65x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.12x10 <sup>2</sup>	2.36x10 <sup>2</sup>
ø25	Push	-	49.1	73.6	98.2	1.47x10 <sup>2</sup>	1.96x10 <sup>2</sup>	2.45x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.44x10 <sup>2</sup>	3.93x10 <sup>2</sup>	4.42x10 <sup>2</sup>	4.91x10 <sup>2</sup>
	Pull	-	37.8	56.7	75.6	1.13x10 <sup>2</sup>	1.51x10 <sup>2</sup>	1.89x10 <sup>2</sup>	2.27x10 <sup>2</sup>	2.64x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.40x10 <sup>2</sup>	3.78x10 <sup>2</sup>
ø32	Push	-	80.4	1.21x10 <sup>2</sup>	1.61x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.22x10 <sup>2</sup>	4.02x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.63x10 <sup>2</sup>	6.43x10 <sup>2</sup>	7.24x10 <sup>2</sup>	8.04x10 <sup>2</sup>
	Pull	-	60.3	90.5	1.21x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.62x10 <sup>2</sup>	4.22x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.43x10 <sup>2</sup>	6.03x10 <sup>2</sup>
ø40	Push	-	1.26x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.51x10 <sup>2</sup>	3.77x10 <sup>2</sup>	5.03x10 <sup>2</sup>	6.28x10 <sup>2</sup>	7.54x10 <sup>2</sup>	8.80x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.13x10 <sup>3</sup>	1.26x10 <sup>3</sup>
	Pull	-	1.06x10 <sup>2</sup>	1.58x10 <sup>2</sup>	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>
ø50	Push	-	1.96x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.93x10 <sup>2</sup>	5.89x10 <sup>2</sup>	7.85x10 <sup>2</sup>	9.82x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.37x10 <sup>3</sup>	1.57x10 <sup>3</sup>	1.77x10 <sup>3</sup>	1.96x10 <sup>3</sup>
	Pull	-	1.65x10 <sup>2</sup>	2.47x10 <sup>2</sup>	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>
ø63	Push	-	1.56x10 <sup>2</sup>	3.12x10 <sup>2</sup>	4.68x10 <sup>2</sup>	6.23x10 <sup>2</sup>	9.35x10 <sup>2</sup>	1.25x10 <sup>3</sup>	1.56x10 <sup>3</sup>	1.87x10 <sup>3</sup>	2.18x10 <sup>3</sup>	2.49x10 <sup>3</sup>	2.81x10 <sup>3</sup>
	Pull	-	1.40x10 <sup>2</sup>	2.80x10 <sup>2</sup>	4.20x10 <sup>2</sup>	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>	2.24x10 <sup>3</sup>	2.52x10 <sup>3</sup>



# SSD2-M Series


## How to order

No switch (without magnet for switch)

**SSD2-M** - 12 - 5 - N - LB - I

With switch (built-in magnet for switch)

**SSD2-ML** - 12 - 5 - T0H - R - N - LB - I

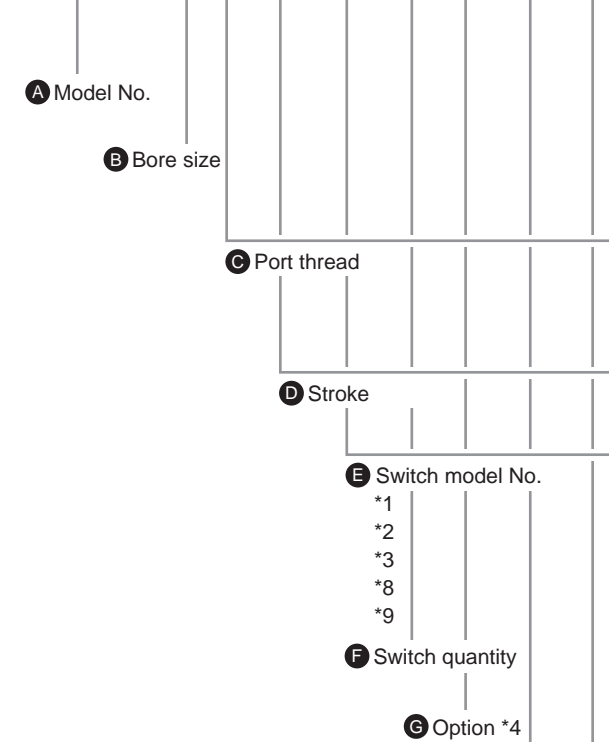

## ⚠ Precautions for model No. selection

- \*1 : The T2YD\* switch cannot be mounted on the  $\phi 12$  and  $\phi 16$  bore sizes.
- \*2 : The T8\* switch cannot be mounted on the  $\phi 12$  to  $\phi 32$  bore sizes.
- \*3 : The F-switch can only be mounted on the piping port surface of bore sizes  $\phi 20$  and  $\phi 25$ .
- \*4 : Piston rod of  $\phi 12$  to  $\phi 25$  is stainless steel as standard. C-snap ring is stainless steel instead of steel. The rod end male thread nut is stainless steel.
- \*5 : The mounting bracket is included at shipment.
- \*6 : The projection dimension of piston rod WF when LB or FA is selected is different from that of the standard. Refer to the dimensions on pages 917, 919, 921 and 922. The number of the specified protruding dimension will be added at the end of the model No. printed on the metal plate on the body.
- \*7 : "I" and "Y" cannot be selected together.
- \*8 : The F-switch with L type lead wire on  $\phi 20$  models cannot be selected on strokes 10 mm or under.
- \*9 : Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.
- \*10: Refer to pages 750 and 751 for combinations of variations/options.
- \*11 : F-switch cannot be selected.

[Example of model No.]

**SSD2-ML-12-5-T0H-R-N-LB-I**

Model: Compact cylinder rotation-stop

- B** Bore size :  $\phi 12$  mm
- C** Port thread : Rc thread
- D** Stroke : 5 mm
- E** Switch model No. : Reed T0H switch
- F** Switch quantity : 1 on rod side
- G** Option : Rod end male thread
- H** Mounting bracket : Axial foot
- I** Accessory : Rod eye

**H** Mounting bracket

\*5

\*6

**I** Accessory

\*7

Code	Description
<b>A Model No.</b>	
SSD2-M	Double acting/rotation-stop
SSD2-ML	Double acting/rotation-stop/with switch

<b>B Bore size (mm)</b>	
12	$\phi 12$
16	$\phi 16$
20	$\phi 20$
25	$\phi 25$
32	$\phi 32$
40	$\phi 40$
50	$\phi 50$
63	$\phi 63$

<b>C Port thread</b>	
Blank	Rc thread
NN	NPT thread ( $\phi 32$ and over) (made-to-order product)
GN	G thread ( $\phi 32$ and over) (made-to-order product)

<b>D Stroke (mm)</b>
Refer to the stroke table on the following page.

<b>E Switch model No.</b>																			
Lead wire	Lead wire	Contact	Voltage		Indicator	Lead wire	Bore size												
			AC	DC			12	16	20	25	32	40	50	63					
-	F2S*	Proximity	●	●	1-color LED	2-wire			●	●									
-	F3S*		●	●		3-wire			●	●									
F2H*	F2V*		●	●		2-wire			●	●									
F3H*	F3V*	Proximity	●	●	1-color LED (PNP output) (custom)	3-wire			●	●									
F3PH*	F3PV*		●	●		3-wire			●	●									
F2YH*	F2YV*		●	●		2-wire			●	●									
F3YH*	F3YV*	Reed	●	●	2-color LED	3-wire			●	●									
T0H*	T0V*		●	●		1-color LED	2-wire	●	●	●	●	●	●	●	●	●	●	●	
T5H*	T5V*		●	●		No indicator lamp	2-wire	●	●	●	●	●	●	●	●	●	●	●	
T8H*	T8V*	Proximity	●	●	1-color LED	2-wire									●	●	●		
T1H*	T1V*		●	●		1-color LED	2-wire			●	●	●	●	●	●	●	●	●	
T2H*	T2V*		●	●		1-color LED	2-wire	●	●	●	●	●	●	●	●	●	●	●	●
T3H*	T3V*	Proximity	●	●	1-color LED (PNP output)	3-wire	●	●	●	●	●	●	●	●	●	●	●	●	
T3PH*	T3PV*		●	●		2-wire	●	●	●	●	●	●	●	●	●	●	●	●	
T2WH*	T2WV*		●	●		2-wire	●	●	●	●	●	●	●	●	●	●	●	●	●
T2YH*	T2YV*	Proximity	●	●	2-color LED	2-wire			●	●	●	●	●	●	●	●	●	●	
T3WH*	T3WV*		●	●		3-wire	●	●	●	●	●	●	●	●	●	●	●	●	●
T3YH*	T3YV*		●	●		2-wire			●	●	●	●	●	●	●	●	●	●	●
T2YD*	-	Reed	●	●	2-color LED	2-wire			●	●	●	●	●	●	●	●	●	●	
T2YD*	-		●	●		AC magnetic field	2-wire			●	●	●	●	●	●	●	●	●	●
T2JH*	T2JV*		●	●		1-color LED off-delay	2-wire			●	●	●	●	●	●	●	●	●	●

### \* Lead wire length

Blank	1 m (standard)
3	3 m (option)
5	5 m (option) <span style="float: right;">*11</span>

### F Switch quantity

R	1 on rod side
H	1 on head side
D	2

### G Option

Blank	Rod end female thread
N	Rod end male thread
M *4	Piston rod material (stainless steel) (made to order ( $\phi 32$ to $\phi 63$ ))

### H Mounting bracket

Blank	Without mounting bracket
LB	Axial foot
CB	Clevis bracket (pin and snap ring included)
FA	Rod side flange
FB	Head side flange

### I Accessory (available when rod end male thread "N" is selected)

I	Rod eye
Y	Rod clevis (pin and snap ring included)

### [Stroke table]

Stroke (mm)	Applicable bore size							
	12	16	20	25	32	40	50	63
5	●	●	●	●	●	●	●	●
10	●	●	●	●	●	●	●	●
15	●	●	●	●	●	●	●	●
20	●	●	●	●	●	●	●	●
25	●	●	●	●	●	●	●	●
30	●	●	●	●	●	●	●	●
35			●	●	●	●	●	●
40			●	●	●	●	●	●
45			●	●	●	●	●	●
50			●	●	●	●	●	●
75					●	●	●	●
100					●	●	●	●
Min. stroke (mm) *1	1							
Max. stroke (mm)	30	50	100					
Custom stroke *2	In 1 mm increments							

\*1: Less than 5 mm for 1-color LED switch and less than 10 mm for the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch are not available. Refer to page 910 for the min. stroke with switch.

\*2: The total length when using a custom stroke is the same as that when using the next longer standard stroke.

### How to order switch



Switch model No.  
(Item ⑤ on page 912)

### How to order mounting bracket

Bore size (mm)	ø12	ø16	ø20	ø25	ø32	ø40	ø50
<b>Mounting bracket</b>							
Foot (LB)	SSD2-LB-12	SSD2-LB-16	SSD2-LB-20	SSD2-LB-25	SSD2-LB-32	SSD2-LB-40	SSD2-LB-50
Flange (FA/FB)	SSD2-FA-12	SSD2-FA-16	SSD2-FA-20	SSD2-FA-25	SSD2-FA-32	SSD2-FA-40	SSD2-FA-50
Clevis bracket (CB)	SSD2-CB-12	SSD2-CB-16	SSD2-CB-20	SSD2-CB-25	SSD2-CB-32	SSD2-CB-40	SSD2-CB-50
<b>Bore size (mm)</b>	<b>ø63</b>						
<b>Mounting bracket</b>							
Foot (LB)	SSD2-LB-63						
Flange (FA/FB)	SSD2-FA-63						
Clevis bracket (CB)	SSD2-CB-63						


\*1: The foot mounting bracket is provided as 2 pcs./set.

SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/ COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/ MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending


# SSD2-M Series

## Internal structure and parts list (ø12 to ø25)

● SSD2-ML-12 to 25 (double acting/rotation-stop/with switch)

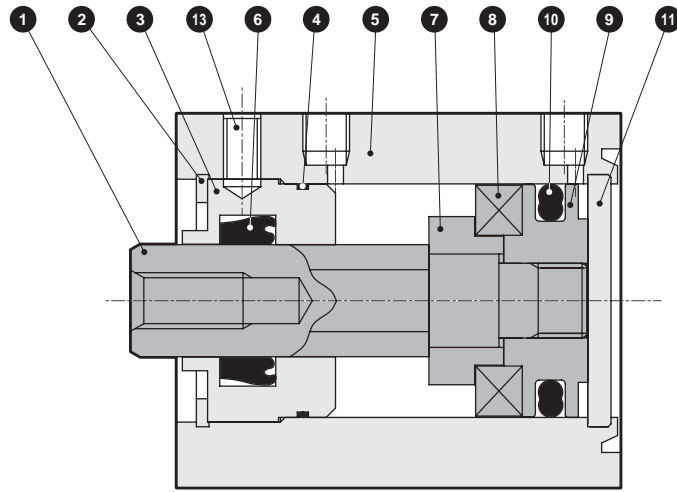

● SSD2-M-12 to 25 (double acting/rotation-stop)

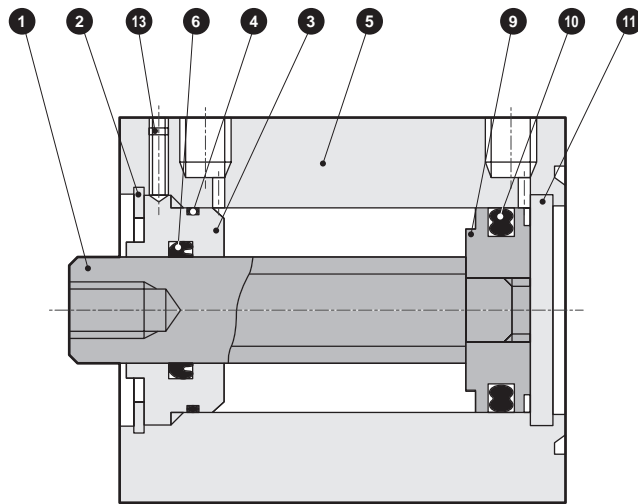


No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	Stainless steel		8	Magnet	Plastic	
2	C-snap ring	Steel	Zinc phosphate	9	Piston	Aluminum alloy	Chromate
3	Rod metal	Special aluminum	Alumite	10	Piston packing	Nitrile rubber	
4	Rod metal gasket	Nitrile rubber		11	Cover	Stainless steel	
5	Body	Aluminum alloy	Hard alumite	13	Hexagon socket set screw	Steel	
6	Rod packing	Nitrile rubber					
7	Spacer	Aluminum alloy	Chromate				

### Repair parts list


Bore size (mm)	Kit No.	Repair parts No.
ø12	SSD2-M-12K	4 6 10
ø16	SSD2-M-16K	
ø20	SSD2-M-20K	
ø25	SSD2-M-25K	

### Internal structure and parts list (ø32 to ø63)

● SSD2-ML-32 to 63 (double acting/rotation-stop/with switch)

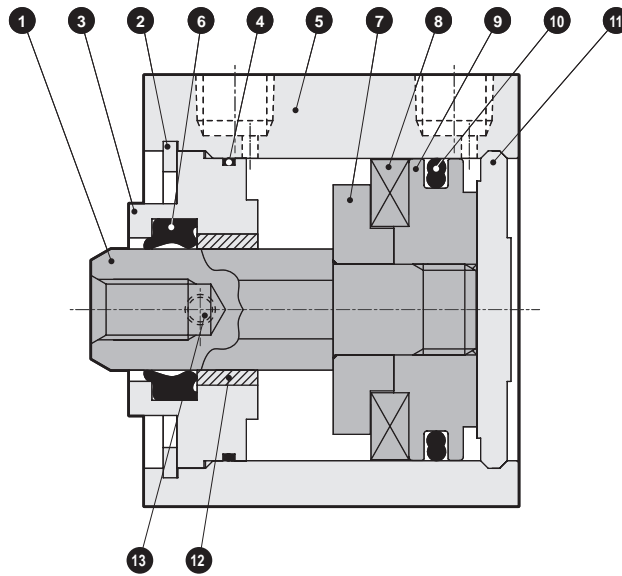

● SSD2-M-32 to 63 (double acting/rotation-stop)

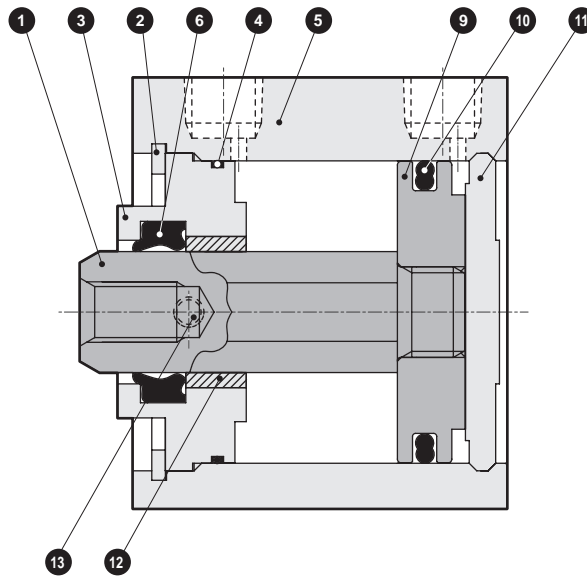

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	Steel	Industrial chrome plating	8	Magnet	Plastic	
2	C-snap ring	Steel	Zinc phosphate	9	Piston	Aluminum alloy	Chromate
3	Rod metal	ø32 to ø50: Special aluminum ø63: Aluminum alloy	Alumite	10	Piston packing	Nitrile rubber	
4	Rod metal gasket	Nitrile rubber		11	Cover	Aluminum alloy	Alumite
5	Body	Aluminum alloy	Hard alumite	12	Bush	Oil impregnated bearing alloy	
6	Rod packing	Nitrile rubber		13	Hexagon socket set screw	Steel	
7	Spacer	Aluminum alloy	Chromate				

### Repair parts list

Bore size (mm)	Kit No.	Repair parts No.
ø32	SSD2-M-32K	4 6 10
ø40	SSD2-M-40K	
ø50	SSD2-M-50K	
ø63	SSD2-M-63K	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending

# SSD2-M Series




## Dimensions





● SSD2-ML-12 to 25 (with switch)

● Rod end male thread

ø12/ø16

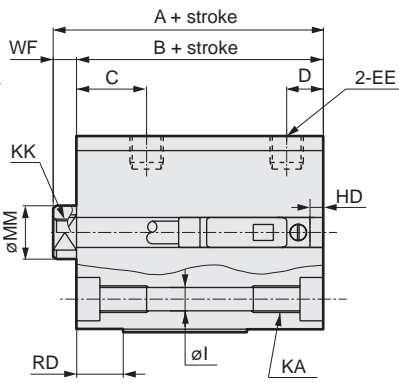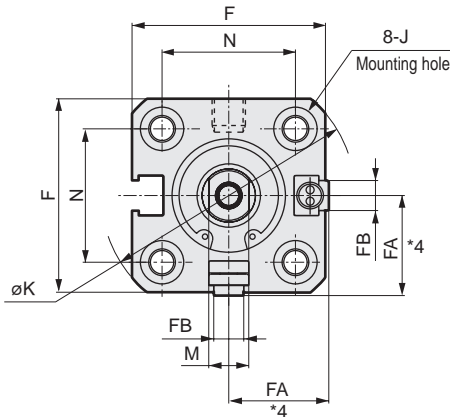

ø20/ø25

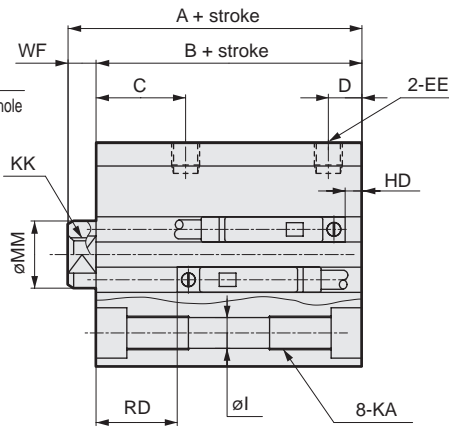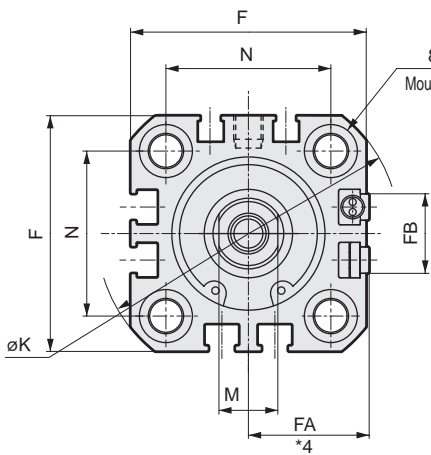

Code	Common dimensions with switch																	
	A <sup>*1</sup>	B <sup>*1</sup>	C	D	EE	F	FA <sup>*4</sup>	FB	I	J	K	KA	KK	M	MM	N	WF	
STK	ø12	30.5	27	10.5	5.5	M5	25	13(16.5)	4.5	3.5	6.5 spot face depth 3.5	32	M4 depth 7	M3 depth 6	5	6	15.5	3.5
	ø16	30.5	27	10.5	5.5	M5	29	15(18.5)	4.5	3.5	6.5 spot face depth 3.5	38	M4 depth 7	M4 depth 8	6	8	20	3.5
SRL3	ø20	39	34.5	13	5.5	M5	36	18.5(22)	12.5	5.5	9 spot face depth 5.5	47	M6 depth 11	M5 depth 7	8	10	25.5	4.5
	ø25	42.5	37.5	16	6	M5	40	20.5(24)	13.5	5.5	9 spot face depth 5.5	51	M6 depth 11	M6 depth 12	10	12	28	5
SRG3	Switch dimensions	Reed T0H/T0V, T5H/T5V		Proximity T2H/T2V, T3H/T3V		Proximity T2WH/T2WV, T3WH/T3WV		Proximity F2H/F2V, F3H/F3V, F2YH/F2YV, F3YH/F3YV			Proximity F2S/F3S							
		HD	RD	HD	RD	HD	RD	HD	RD	HD	RD							
SRM3	Bore size (mm)	ø12	0	7.5	0	7.5	2	9.5										
		ø16	0	7	0	7	2.5	9.5										
SRT3	Bore size (mm)	ø20	3	11.5	3	11.5	5	13	7.5	15.5	6.5	14.5						
		ø25	3	14.5	3	14.5	6	16	8.5	18.5	7.5	17.5						

\*1 : To calculate A+ stroke or B+ stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value. (Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

\*2 : HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.

\*3 : Refer to page 1044 for HD, RD and protruding dimensions of the 2-color LED, off-delay, AC magnetic field proof, T1\* and T8\* switches.

\*4 : Dimensions in ( ) of FA are for the L-shaped lead wire.

\*5 : For dimensions of individual accessories, refer to pages 1046 to 1049.


\*6 : Only F-switch is available for the ø20 or ø25 piping port surface.

● Dimensions of rod end male thread part


Code	a'	c'	H	kk'	M	MM	T	wf	
Spd Contr	ø12	10.5	9	8	M5	5	6	3.2	3.5
	ø16	12	10	10	M6	6	8	3.6	3.5
Ending	ø20	14	12	13	M8	8	10	5	4.5
	ø25	17.5	15	17	M10x1.25	10	12	6	5

## Dimensions with mounting bracket

- Axial foot (LB) with switch  
SSD2-ML-12 to 25 -LB

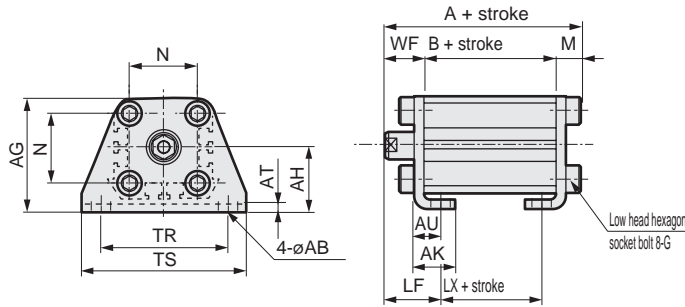


Rod end male thread




Code	Common dimensions										Female thread			
	Bore size (mm)	AB	AG	AH	AK	AT	AU	G	N	TR	TS	M		
ø12	5	29.5	17	12.5	2	8	M4x10	15.5	34	44	4.8			
ø16	5	33.5	19	13	2	8	M4x10	20	38	48	4.8			
ø20	7	42	24	15	3.2	9.2	M6x16	25.5	48	62	7.2			
ø25	7	46	26	16.5	3.2	10.7	M6x16	28	52	66	7.2			

Code	Male thread										
	Bore size (mm)	WF	LF	A	B	LX	a'	WF	LF	A	B
ø12	13.5	19.5	45.3	27	15	10.5	13.5	19.5	55.8	27	15
ø16	13.5	19.5	45.3	27	15	12	13.5	19.5	57.3	27	15
ø20	14.5	20.5	56.2	34.5	22.5	14	14.5	20.5	70.2	34.5	22.5
ø25	15	22.5	59.7	37.5	22.5	17.5	15	22.5	77.2	37.5	22.5

- Rod side flange (FA) with switch  
SSD2-ML-12 to 25 -FA

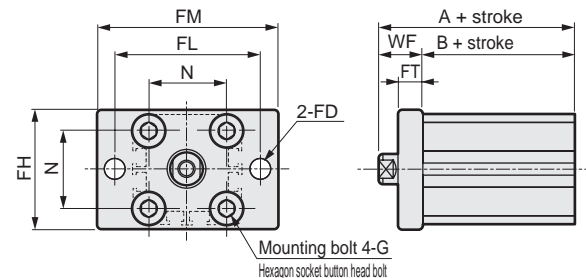


Rod end male thread




Code	Common dimensions						
	Bore size (mm)	FD	FH	FL	FM	FT	N
ø12	4.5	25	45	55	5.5	15.5	M4x12
ø16	4.5	30	45	55	5.5	20	M4x12
ø20	6.6	39	48	60	8	25.5	M6x16
ø25	6.6	42	52	64	8	28	M6x16

Code	Female thread				Male thread		
	Bore size (mm)	WF	A	B	a'	wf	A
ø12	13.5	40.5	27	10.5	13.5	51	27
ø16	13.5	40.5	27	12	13.5	52.5	27
ø20	14.5	49	34.5	14	14.5	63	34.5
ø25	15	52.5	37.5	17.5	15	70	37.5

- Clevis bracket (CB) with switch  
SSD2-MY-12 to 25 -CB

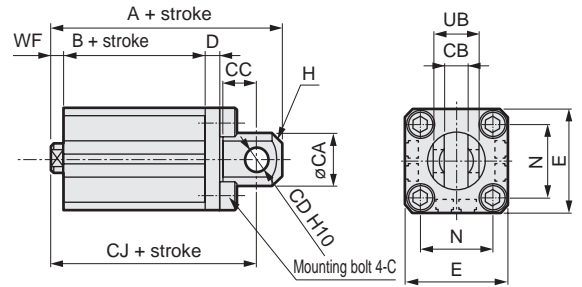


Rod end male thread




Code	Common dimensions									
	Bore size (mm)	CA	CB	CC	CD	D	E	G	H	N
ø12	12	5.2 <sup>+0.2</sup> <sub>0</sub>	7	5	4	25	M4x12	C1.5	15.5	10 <sup>+0.1</sup> <sub>-0.3</sub>
ø16	15	6.6 <sup>+0.3</sup> <sub>0</sub>	8	5	5	29	M4x12	C2	20	12 <sup>+0.1</sup> <sub>-0.4</sub>
ø20	20	8.2 <sup>+0.2</sup> <sub>0</sub>	12	8	5	36	M6x16	C4	25.5	16 <sup>+0.1</sup> <sub>-0.3</sub>
ø25	24	10.2 <sup>+0.2</sup> <sub>0</sub>	14	10	5	40	M6x16	C5	28	20 <sup>+0.1</sup> <sub>-0.3</sub>

Code	Female thread					Male thread				
	Bore size (mm)	WF	A	B	CJ	a'	wf	A	B	CJ
ø12	3.5	50.5	27	44.5	10.5	8.5	61	27	44.5	
ø16	3.5	51.5	27	45.5	12	8.5	63.5	27	45.5	
ø20	4.5	66	34.5	57	14	9.5	80	34.5	57	
ø25	5	72.5	37.5	62.5	17.5	10	90	37.5	62.5	

- Head side flange (FB) with switch  
SSD2-ML-12 to 25 -FB

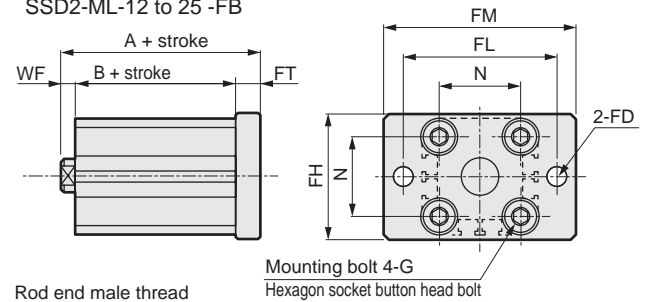

Rod end male thread



Code	Common dimensions						
	Bore size (mm)	FD	FH	FL	FM	FT	N
ø12	4.5	25	45	55	5.5	15.5	M4x12
ø16	4.5	30	45	55	5.5	20	M4x12
ø20	6.6	39	48	60	8	25.5	M6x16
ø25	6.6	42	52	64	8	28	M6x16

Code	Female thread				Male thread		
	Bore size (mm)	WF	A	B	a'	wf	A
ø12	3.5	36	27	10.5	8.5	46.5	27
ø16	3.5	36	27	12	8.5	48	27
ø20	4.5	47	34.5	14	9.5	61	34.5
ø25	5	50.5	37.5	17.5	10	68	37.5

- SCP\*3
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS2
- CKV2
- CAV2/COVP/N2
- SSD2**
- SSG
- SSD
- CAT
- MDC2
- MVC
- SMG
- MSD/MSDG
- FC\*
- STK
- SRL3
- SRG3
- SRM3
- SRT3
- MRL2
- MRG2
- SM-25
- ShkAbs
- FJ
- FK
- Spd Contr
- Ending

# SSD2-M Series



## Dimensions




### ● SSD2-M-12 to 25 (without switch)

### ● Rod end male thread

ø12/ø16

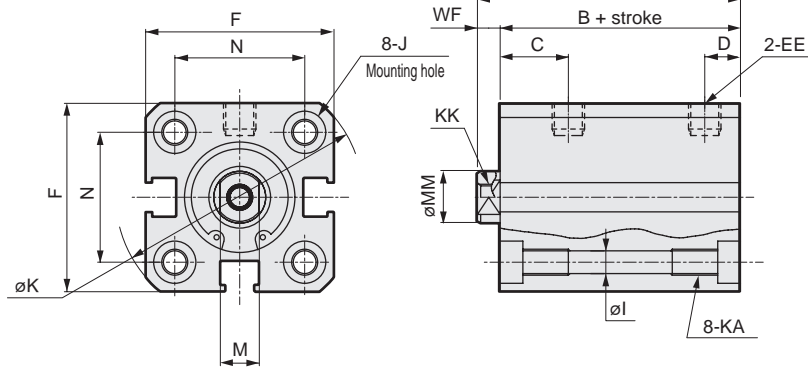

ø20/ø25

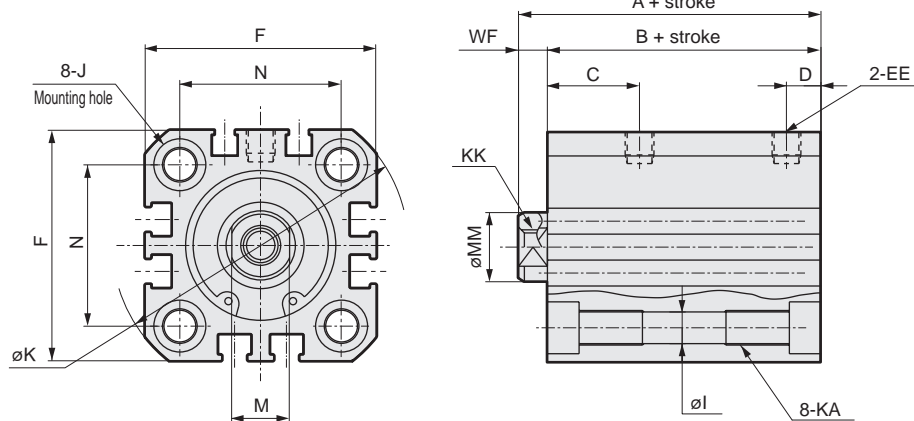

Code	No switch														
	A <sup>*1</sup>	B <sup>*1</sup>	C	D	EE	F	I	J	K	KA	KK	M	MM	N	WF
ø12	25.5	22	10.5	5.5	M5	25	3.5	6.5 spot face depth 3.5	32	M4 depth 7	M3 depth 6	5	6	15.5	3.5
ø16	25.5	22	10.5	5.5	M5	29	3.5	6.5 spot face depth 3.5	38	M4 depth 7	M4 depth 8	6	8	20	3.5
ø20	29	24.5	13	5.5	M5	36	5.5	9 spot face depth 5.5	47	M6 depth 11	M5 depth 7	8	10	25.5	4.5
ø25	32.5	27.5	16	6	M5	40	5.5	9 spot face depth 5.5	51	M6 depth 11	M6 depth 12	10	12	28	5

\*1 : To calculate A+ stroke or B+ stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value.  
 (Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

\*2: For dimensions of individual accessories, refer to pages 1046 to 1049.


### ● Dimensions of rod end male thread part

Code	a'	c'	H	kk'	M	MM	T	wf
ø12	10.5	9	8	M5	5	6	3.2	3.5
ø16	12	10	10	M6	6	8	3.6	3.5
ø20	14	12	13	M8	8	10	5	4.5
ø25	17.5	15	17	M10x1.25	10	12	6	5

## Dimensions with mounting bracket



- Axial foot (LB) without switch  
SSD2-M-12 to 25 -LB

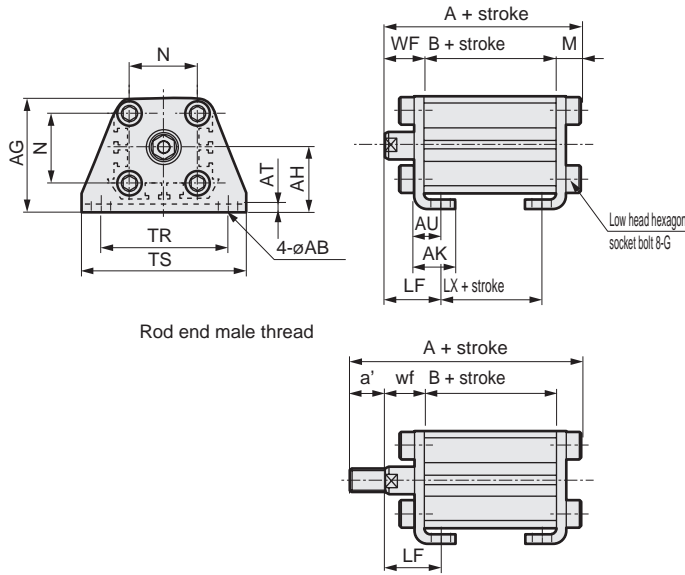


Rod end male thread

Code	Common dimensions						Female thread					
	Bore size (mm)	AB	AG	AH	AK	AT	AU	G	N	TR	TS	M
ø12	5	29.5	17	12.5	2	8	M4x10	15.5	34	44	4.8	
ø16	5	33.5	19	13	2	8	M4x10	20	38	48	4.8	
ø20	7	42	24	15	3.2	9.2	M6x16	25.5	48	62	7.2	
ø25	7	46	26	16.5	3.2	10.7	M6x16	28	52	66	7.2	

Code	Male thread											
	Bore size (mm)	WF	LF	A	B	LX	a'	WF	LF	A	B	LX
ø12	13.5	19.5	40.3	22	10	10.5	13.5	19.5	50.8	22	10	
ø16	13.5	19.5	40.3	22	10	12	13.5	19.5	52.3	22	10	
ø20	14.5	20.5	46.2	24.5	12.5	14	14.5	20.5	60.2	24.5	12.5	
ø25	15	22.5	49.7	27.5	12.5	17.5	15	22.5	67.2	27.5	12.5	

- Rod side flange (FA) without switch  
SSD2-M-12 to 25 -FA

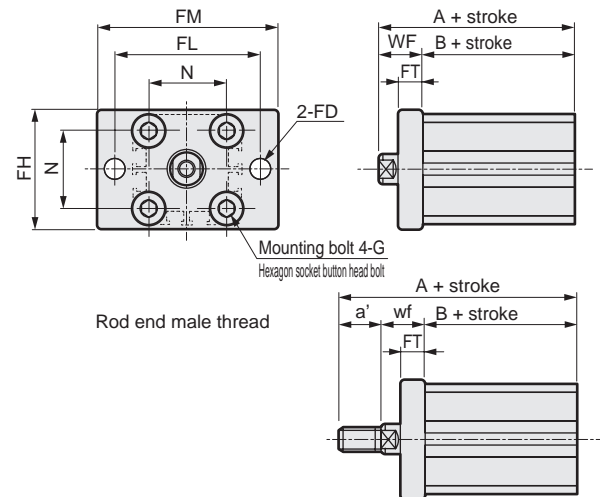


Rod end male thread

Code	Common dimensions							
	Bore size (mm)	FD	FH	FL	FM	FT	N	G
ø12	4.5	25	45	55	5.5	15.5	M4x12	
ø16	4.5	30	45	55	5.5	20	M4x12	
ø20	6.6	39	48	60	8	25.5	M6x16	
ø25	6.6	42	52	64	8	28	M6x16	

Code	Female thread				Male thread			
	Bore size (mm)	WF	A	B	a'	wf	A	B
ø12	13.5	35.5	22	10.5	13.5	46	22	
ø16	13.5	35.5	22	12	13.5	47.5	22	
ø20	14.5	39	24.5	14	14.5	53	24.5	
ø25	15	42.5	27.5	17.5	15	60	27.5	

- Clevis bracket (CB) without switch  
SSD2-M-12 to 25 -CB

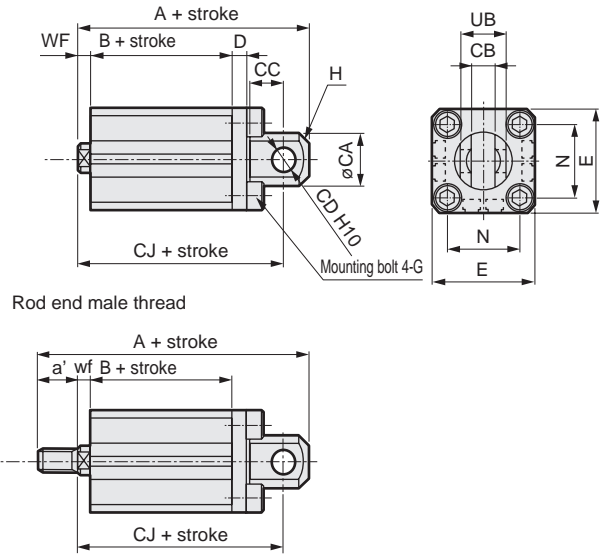


Rod end male thread

Code	Common dimensions										
	Bore size (mm)	CA	CB	CC	CD	D	E	G	H	N	UB
ø12	12	5.2 <sup>+0.2</sup> <sub>0</sub>	7	5	4	25	M4x12	C1.5	15.5	10 <sup>+0.1</sup> <sub>-0.3</sub>	
ø16	15	6.6 <sup>+0.3</sup> <sub>0</sub>	8	5	5	29	M4x12	C2	20	12 <sup>+0.1</sup> <sub>-0.4</sub>	
ø20	20	8.2 <sup>+0.2</sup> <sub>0</sub>	12	8	5	36	M6x16	C4	25.5	16 <sup>+0.1</sup> <sub>-0.3</sub>	
ø25	24	10.2 <sup>+0.2</sup> <sub>0</sub>	14	10	5	40	M6x16	C5	28	20 <sup>+0.1</sup> <sub>-0.3</sub>	

Code	Female thread				Male thread					
	Bore size (mm)	WF	A	B	CJ	a'	wf	A	B	CJ
ø12	3.5	45.5	22	39.5	10.5	8.5	56	22	39.5	
ø16	3.5	46.5	22	40.5	12	8.5	58.5	22	40.5	
ø20	4.5	56	24.5	47	14	9.5	70	24.5	47	
ø25	5	62.5	27.5	52.5	17.5	10	80	27.5	52.5	

- Head side flange (FB) without switch  
SSD2-M-12 to 25 -FB

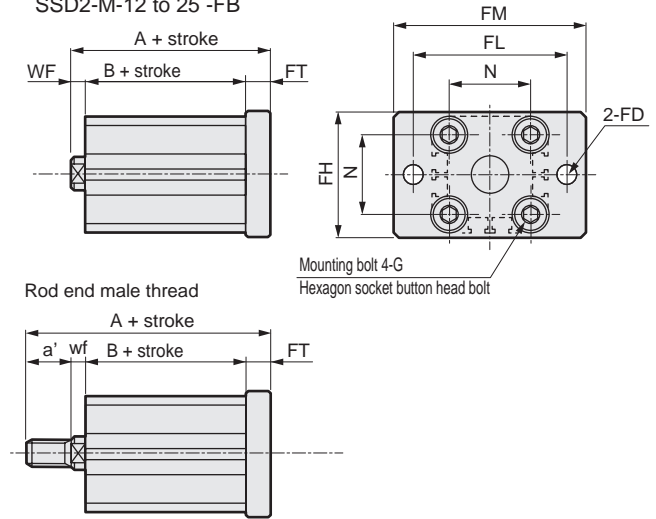

Rod end male thread

Code	Common dimensions							
	Bore size (mm)	FD	FH	FL	FM	FT	N	G
ø12	4.5	25	45	55	5.5	15.5	M4x12	
ø16	4.5	30	45	55	5.5	20	M4x12	
ø20	6.6	39	48	60	8	25.5	M6x16	
ø25	6.6	42	52	64	8	28	M6x16	

Code	Female thread				Male thread			
	Bore size (mm)	WF	A	B	a'	wf	A	B
ø12	3.5	31	22	10.5	8.5	41.5	22	
ø16	3.5	31	22	12	8.5	43	22	
ø20	4.5	37	24.5	14	9.5	51	24.5	
ø25	5	40.5	27.5	17.5	10	58	27.5	

- SCP\*3
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS2
- CKV2
- CAV2/COVP/N2
- SSD2**
- SSG
- SSD
- CAT
- MDC2
- MVC
- SMG
- MSD/MSDG
- FC\*
- STK
- SRL3
- SRG3
- SRM3
- SRT3
- MRL2
- MRG2
- SM-25
- ShkAbs
- FJ
- FK
- Spd Contr
- Ending





# SSD2-M Series


## Dimensions





### ● SSD2-ML-32 to 63 (with switch)

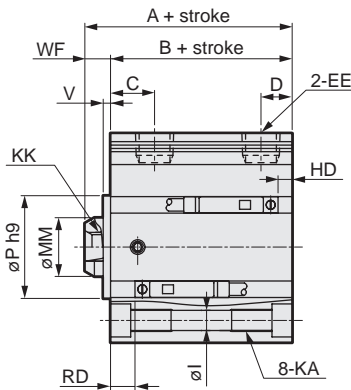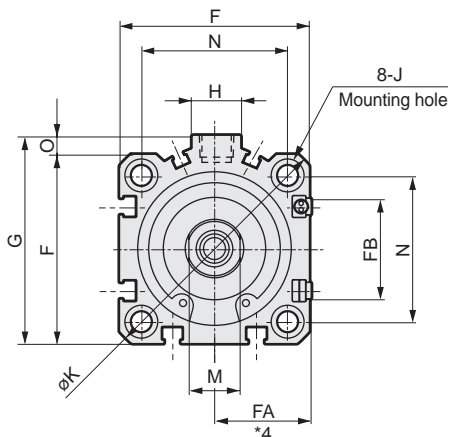

### ● Rod end male thread



### ● SSD2-M-32 to 63 (without switch)

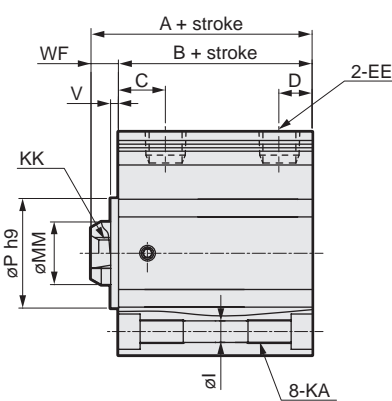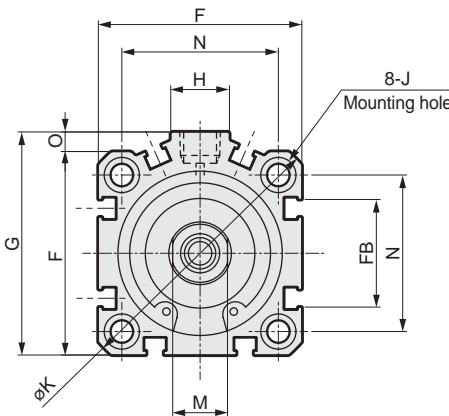

Code	No switch		Common dimensions with switch													
	A <sup>*1/6</sup>	B <sup>*1/6</sup>	A <sup>*1</sup>	B <sup>*1</sup>	C <sup>*8</sup>	D <sup>*8</sup>	EE	F	FA <sup>*4</sup>	FB	G	H	I	J	K	KA
ø32	39(49)	32(42)	49	42	18(20)	8(5.5)	Rc1/8 <sup>*7</sup>	45	23(26.5)	20.5	49.5	12.5	5.5	9 spot face depth 5.5	60	M6 depth 11
ø40	36.5(46.5)	29.5(39.5)	46.5	39.5	12(11.5)	8.5(8)	Rc1/8	52	26.5(30)	27.5	57	15	5.5	9 spot face depth 5.5	69	M6 depth 11
ø50	38.5(48.5)	30.5(40.5)	48.5	40.5	10.5	10.5	Rc1/4	64	32.5(36)	28.5	71	18	6.9	11 spot face depth 6.5	86	M8 depth 13
ø63	44(54)	36(46)	54	46	13	11	Rc1/4	77	39(42.5)	28.5	84	23	8.7	14 spot face depth 9	103	M10 depth 25

Code	Common dimensions with switch								Reed T0H/T0V, T5H/T5V		Proximity T2H/T2V, T3H/T3V		Proximity T2WH/T2WV, T3WH/T3WV	
	KK	M	MM	N	O	P	V	WF	HD <sup>*2</sup>	RD <sup>*2</sup>	HD <sup>*2</sup>	RD <sup>*2</sup>	HD	RD
ø32	M8 depth 13	14	16	34	4.5	21	2	7	4.5	19	4.5	19	5	20.5
ø40	M8 depth 13	14	16	40	5	28	2	7	7	12	7	12	8.5	13.5
ø50	M10 depth 15	18	20	50	7	35	2	8	7.5	12.5	7.5	12.5	9	14
ø63	M10 depth 15	18	20	60	7	35	2	8	12.5	13	12.5	13	14	14.5

\*1 : To calculate A+ stroke or B+ stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value. (Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

\*2 : HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.

\*3 : Refer to page 1044 for HD, RD and protruding dimensions of the 2-color LED, off-delay, AC magnetic field proof, T1\* and T8\* switches.

\*4 : Dimensions in ( ) of FA are for the L-shaped lead wire.

\*5 : For dimensions of individual accessories, refer to pages 1046 to 1049.

\*6 : Dimensions in ( ) of codes A and B are for strokes of more than 50 mm.

\*7 : The ø32 bore size with a 5 mm stroke and without a switch has a port size of M5.\*8 :

Dimensions in ( ) of codes C and D are when the value is for a 5 mm stroke without switch.


### ● Rod end male thread

Code	a'	c'	H	kk'	M	MM	T	wf
ø32	23.5	20.5	22	M14x1.5	14	16	8	5
ø40	23.5	20.5	22	M14x1.5	14	16	8	5
ø50	28.5	26	27	M18x1.5	18	20	11	5
ø63	28.5	26	27	M18x1.5	18	20	11	5

## Dimensions with mounting bracket



- Axial foot (LB)  
SSD2-M(L)-32 to 63 -LB

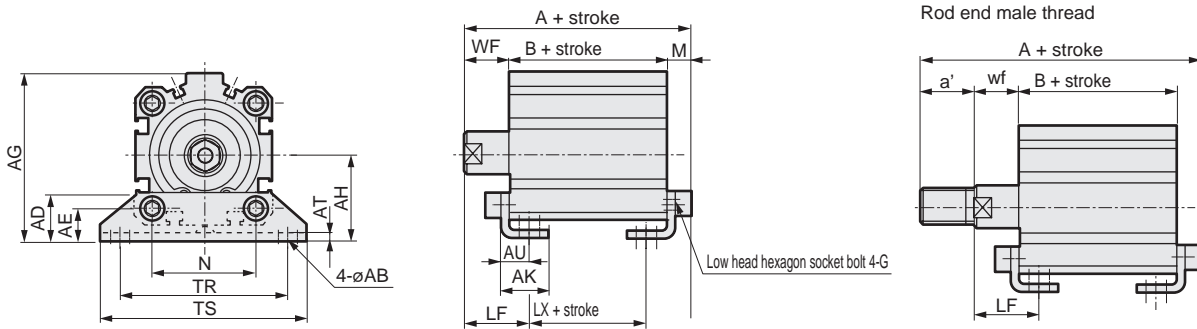

Code	Common dimensions														Female thread			
	AB	AD	AE	AG	AH	AK	AT	AU	G	N	TR	TS	M	WF	LF	No switch		
Bore size (mm)																A	B	LX
ø32	7	18.5	13	57	30	17	3.2	11.2	M6x16	34	57	71	7.2	17	25	56.2(66.2)	32(42)	16(26)
ø40	7	18	13	64	33	18.2	3.2	11.2	M6x16	40	64	78	7.2	17	25	53.7(63.7)	29.5(39.5)	13.5(23.5)
ø50	9	22	14	78	39	22.7	3.2	14.7	M8x20	50	79	95	8.2	18	29.5	56.7(66.7)	30.5(40.5)	7.5(17.5)
ø63	11	26	16	91.5	46	25.2	3.2	16.2	M10x25	60	95	113	9.2	18	31	63.2(73.2)	36(46)	10(20)


  

Code	Female thread			Male thread								
	With switch			a'	WF	LF	No switch			With switch		
	A	B	LX				A	B	LX	A	B	LX
ø32	66.2	42	26	23.5	15	23	77.7(87.7)	32(42)	16(26)	87.7	42	26
ø40	63.7	39.5	23.5	23.5	15	23	75.2(85.2)	29.5(39.5)	13.5(23.5)	85.2	39.5	23.5
ø50	66.7	40.5	17.5	28.5	15	26.5	82.2(92.2)	30.5(40.5)	7.5(17.5)	92.2	40.5	17.5
ø63	73.2	46	20	28.5	15	28	88.7(98.7)	36(46)	10(20)	98.7	46	20

\* Dimensions in ( ) are for strokes of more than 50 mm.

\* A pin and a snap ring are included.

- Clevis bracket (CB)  
SSD2-M(L)-32 to 63 -CB

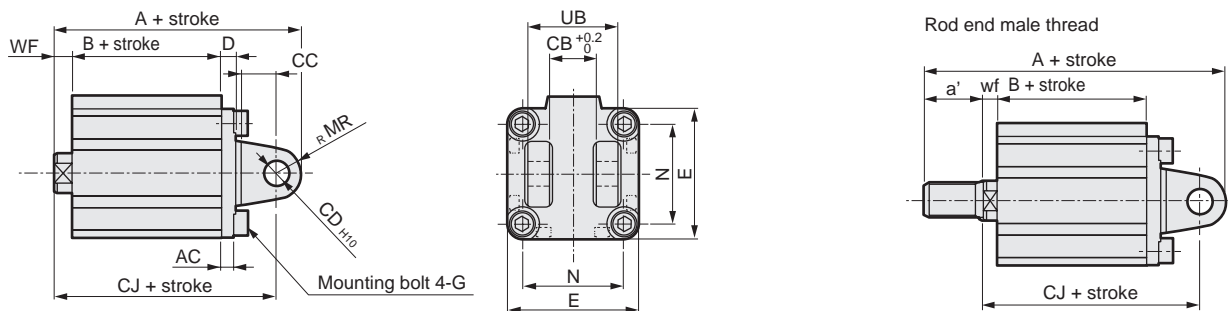

Code	Common dimensions										Female thread						Male thread								
	AC	CB	CC	CD	D	E	G	MR	N	UB	WF	No switch			With switch			a'	wf	No switch			With switch		
												A	B	CJ	A	B	CJ			A	B	CJ	A	B	CJ
ø32	4.5	18.2	14	10	5	45	M6x16	10	34	36	7	69	32	59	79	42	69	23.5	14	90.5	32	57	100.5	42	67
ø40	5	18.2	14	10	6	52	M6x16	10	40	36	7	68.5	29.5	58.5	78.5	39.5	68.5	23.5	5	90	29.5	56.5	100	39.5	66.5
ø50	6	22.2	20	14	7	64	M8x20	14	50	44	8	80.5	30.5	66.5	90.5	40.5	76.5	28.5	5	106	30.5	63.5	116	40.5	73.5
ø63	7	22.2	20	14	8	77	M10x25	14	60	44	8	88	36	74	98	46	84	28.5	5	113.5	36	71	123.5	46	81


- SCP\*3
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS2
- CKV2
- CAV2/  
COVP/N2
- SSD2
- SSG
- SSD
- CAT
- MDC2
- MVC
- SMG
- MSD/  
MSDG
- FC\*
- STK
- SRL3
- SRG3
- SRM3
- SRT3
- MRL2
- MRG2
- SM-25
- ShkAbs
- FJ
- FK
- Spd  
Contr
- Ending

# SSD2-M Series




## Dimensions with mounting bracket

- Rod side flange (FA)  
SSD2-M(L)-32 to 63 -FA

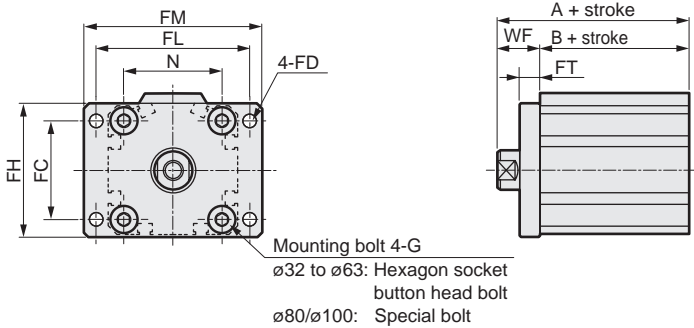

Rod end male thread




Code	Bore size (mm)	Common dimensions							Female thread					
		FC	FD	FH	FL	FM	FT	N	G	WF	No switch		With switch	
											A	B	A	B
SSD	ø32	34	5.5	48	56	65	8	34	M6x16	17	49(59)	32(42)	59	42
	ø40	40	5.5	54	62	72	8	40	M6x16	17	46.5(56.5)	29.5(39.5)	56.5	39.5
	ø50	50	6.6	67	76	89	9	50	M8x20	18	48.5(58.5)	30.5(40.5)	58.5	40.5
	ø63	60	9	80	92	108	9	60	M10x25	18	54(64)	36(46)	64	46


Code	Bore size (mm)	Male thread		No switch		With switch	
		a'	wf	A	B	A	B
SSG	ø32	23.5	15	70.5(80.5)	32(42)	80.5	42
	ø40	23.5	15	68(78)	29.5(39.5)	78	39.5
	ø50	28.5	15	74(84)	30.5(40.5)	84	40.5
	ø63	28.5	15	79.5(89.5)	36(46)	89.5	46

\* Dimensions in ( ) are for strokes of more than 50 mm.

- Head side flange (FB)  
SSD2-M(L)-32 to 63 -FB

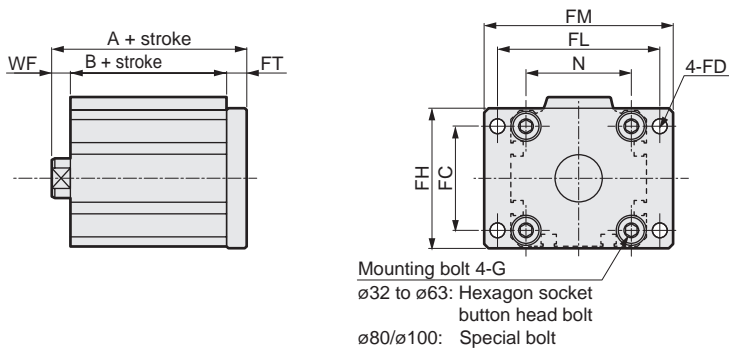

Rod end male thread



Code	Bore size (mm)	Common dimensions							Female thread				Male thread							
		FC	FD	FH	FL	FM	FT	N	G	WF	No switch		With switch		a'	wf	No switch		With switch	
											A	B	A	B			A	B	A	B
ShkAbs	ø32	34	5.5	48	56	65	8	34	M6x16	7	47	32	57	42	23.5	14	68.5	32	78.5	42
	ø40	40	5.5	54	62	72	8	40	M6x16	7	44.5	29.5	54.5	39.5	23.5	5	66	29.5	76	39.5
	ø50	50	6.6	67	76	89	9	50	M8x20	8	47.5	30.5	57.5	40.5	28.5	5	73	30.5	83	40.5
	ø63	60	9	80	92	108	9	60	M10x25	8	53	36	63	46	28.5	5	78.5	36	88.5	46

---

# MEMO

---

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

**SSG**

**SSD**

**CAT**

**MDC2**

**MVC**

**SMG**

MSD/  
MSDG

**FC\***

**STK**

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending



Compact cylinder double acting/double rod/rotation-stop

# SSD2-DM Series

- Bore size:  $\phi 12/\phi 16/\phi 20/\phi 25$   
 $\phi 32/\phi 40/\phi 50/\phi 63$



## Specifications

1 MPa = 10 bar

Item	SSD2-DM SSD2-DML (with switch)							
	$\phi 12$	$\phi 16$	$\phi 20$	$\phi 25$	$\phi 32$	$\phi 40$	$\phi 50$	$\phi 63$
Bore size mm	$\phi 12$	$\phi 16$	$\phi 20$	$\phi 25$	$\phi 32$	$\phi 40$	$\phi 50$	$\phi 63$
Actuation	Double acting							
Working fluid	Compressed air							
Max. working pressure MPa	1.0 ( $\approx 150$ psi, 10 bar)							
Min. working pressure MPa	0.15 ( $\approx 22$ psi, 1.5 bar)							0.1 ( $\approx 15$ psi)
Proof pressure MPa	1.6 ( $\approx 230$ psi, 16 bar)							
Ambient temperature $^{\circ}\text{C}$	-10 ( $14^{\circ}\text{F}$ ) to 60 ( $140^{\circ}\text{F}$ ) (no freezing)							
Port size	M5				Rc1/8 *1		Rc1/4	
Stroke tolerance mm	+1.0 0							
Working piston speed mm/s	50 to 500							50 to 300
Cushion	None							
Lubrication	Not required (use turbine oil class 1 ISO VG32 if necessary for lubrication)							
Non-rotating accuracy (*2)	$\pm 1^{\circ}$		$\pm 0.7^{\circ}$			$\pm 0.8^{\circ}$		
Allowable absorbed energy J	0.004	0.01	0.016	0.021	0.025	0.092	0.1	0.12

\*1: The  $\phi 32$  bore size with a 5 mm stroke and without a switch has a port size of M5.\*2: Initial value at the pull end.

## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\phi 12$	5/10/15/20	30	5
$\phi 16$	25/30		
$\phi 20$	5/10/15/20/25	50	
$\phi 25$	30/35/40/45/50		
$\phi 32$	5/10/15/20/25/30/	100	
$\phi 40$	35/40/45/50/75/100		
$\phi 50$	10/15/20/25/30		
$\phi 63$	35/40/45/50/75/100		

\*1: When using the type with switch, refer to the table of the min. stroke with switch.

## Min. stroke with switch (2 switches)

Bore size (mm)	T0H/V / T5H/V	T2H/V / T3H/V
$\phi 12$	10(5)	5
$\phi 16$		
$\phi 20$	5	
$\phi 25$		
$\phi 32$		
$\phi 40$	10	10
$\phi 50$		
$\phi 63$		

\*1: Less than 10 mm with the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch is not available.

\*2: Values in ( ) are for the type with 1 on rod side.

### Switch specifications (F-switch)

● 1-color/2-color LED

Item	2-wire proximity		3-wire proximity		2-wire proximity		3-wire proximity		
	F2S		F3S		F2H/F2V	F2YH/ F2YV	F3H/F3V	F3PH/F3PV (made to order)	F3YH/ F3YV
Applications	Dedicated for programmable controller		For programmable controller, relay		Dedicated for programmable controller		For programmable controller, relay		
Output method	-		NPN output		-		NPN output	PNP output	NPN output
Power supply voltage	-		10 to 28 VDC		-		10 to 28 VDC	4.5 to 28 VDC	10 to 28 VDC
Load voltage	10 to 30 VDC		30 VDC or less		10 to 30 VDC		24 VDC ±10%		
Load current	5 to 20 mA		50 mA or less		5 to 20 mA		50 mA or less		
Indicator	LED (Lit when ON)				Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Yellow LED (Lit when ON)		Red/green LED (Lit when ON)
Leakage current	1 mA or less		10 µA or less		1 mA or less		10 µA or less		
Weight	g		1 m:10 3 m:29						

### Switch specifications (T-switch)

● 1-color/2-color LED/for AC magnetic field proof

Item	2-wire proximity		2-wire proximity				3-wire proximity				2-wire reed				2-wire proximity	
	T1H/T1V	T2H/T2V/ T2JH/T2JV	T2YH/T2YV	T2WH/ T2WV	T3H/T3V	T3PH/ T3PV	T3YH/T3YV	T3WH/ T3WV	T0H/T0V	T5H/T5V	T8H/T8V		T2YD(*4) T2YDT			
Applications	For programmable controller, relay, compact solenoid valve	Dedicated for programmable controller				For programmable controller, relay				For programmable controller, relay	For programmable controller, relay, IC circuit (no indicator lamp), serial connection		For programmable controller, relay	Dedicated for programmable controller		
Output method	-		-		NPN output	PNP output	NPN output	NPN output	-				-			
Pwr. supp. V.	-		-		10 to 28 VDC				-				-			
Load voltage	85 to 265 VAC	10 to 30 VDC		24 VDC ±10%	30 VDC or less				12/24 VDC	100/110 VAC	5/12/24 VDC	100/110 VAC	12/24 VDC	110 VAC	220 VAC	24 VDC ±10%
Load current	5 to 100 mA	5 to 20 mA (*3)		100 mA or less				50 mA or less	5 to 50 mA	7 to 20 mA	50 mA or less	20 mA or less	5 to 50 mA	7 to 20 mA	7 to 10 mA	5 to 20 mA
Indicator	LED (Lit when ON)	LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)		No indicator lamp	LED (Lit when ON)		Red/green LED (Lit when ON)		
Leakage current	≤ 1 mA at 100 VAC, ≤ 2 mA at 200 VAC	1 mA or less		10 µA or less				0 mA				1 mA or less				
Weight g	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80			1 m:33 3 m:87 5 m:142		1 m:61 3 m:166 5 m:272		

\*1: Refer to Ending Page 1 for detailed switch specifications and dimensions.

\*2: Switches other than the above models, such as switches with connectors, are also available. Refer to Ending Page 1.

\*3: The max. load current is 20 mA at 25°C. The current is lower than 20 mA if the operating ambient temperature around the switch is higher than 25°C. (5 to 10 mA at 60°C)

\*4: Switch for AC magnetic field (T2YD/T2YDT) cannot be used in DC magnetic field.

\*5: The F-switch uses a bend-resistant lead wire.

### Cylinder weight table (the weight of the switches is when there are 2 cylinder switches.)

(Unit: g)

Stroke (mm)	5		10		15		20		25		30		35		40		45		50		75		100	
	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch
ø12	52	105	60	105	69	115	77	124	86	134	95	147	-	-	-	-	-	-	-	-	-	-	-	-
ø16	74	133	85	133	95	144	106	156	117	168	128	177	-	-	-	-	-	-	-	-	-	-	-	-
ø20	131	187	143	222	161	238	179	254	196	269	214	285	232	301	249	316	267	332	284	347	-	-	-	-
ø25	147	238	162	253	178	269	194	285	210	301	226	316	242	332	257	348	275	364	288	379	-	-	-	-
ø32	184	299	230	344	275	390	322	436	366	481	413	527	459	573	469	612	485	628	522	665	776	785	1004	1012
ø40	283	426	310	453	336	479	363	506	390	533	416	569	443	601	507	617	553	663	601	707	1317	1333	1475	1490
ø50	-	-	508	702	558	751	608	803	658	851	708	901	758	950	808	1001	835	1033	911	1105	2007	2025	2252	2270
ø63	-	-	902	1266	977	1341	1052	1416	1127	1491	1202	1566	1278	1642	1353	1717	1428	1792	1503	1867	2218	2242	2593	2617

### Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa										
		0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø12	Push/Pull	-	12.7	17.0	25.4	33.9	42.4	50.9	59.4	67.9	76.3	84.8
ø16	Push/Pull	-	22.6	30.2	45.2	60.3	75.4	90.5	1.06x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.36x10 <sup>2</sup>	1.51x10 <sup>2</sup>
ø20	Push/Pull	-	35.3	47.1	70.7	94.2	1.18x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.65x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.12x10 <sup>2</sup>	2.36x10 <sup>2</sup>
ø25	Push/Pull	-	56.7	75.6	1.13x10 <sup>2</sup>	1.51x10 <sup>2</sup>	1.89x10 <sup>2</sup>	2.27x10 <sup>2</sup>	2.64x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.40x10 <sup>2</sup>	3.78x10 <sup>2</sup>
ø32	Push/Pull	-	90.5	1.21x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.62x10 <sup>2</sup>	4.22x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.43x10 <sup>2</sup>	6.03x10 <sup>2</sup>
ø40	Push/Pull	-	1.58x10 <sup>2</sup>	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>
ø50	Push/Pull	-	2.47x10 <sup>2</sup>	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>
ø63	Push/Pull	2.80x10 <sup>2</sup>	4.20x10 <sup>2</sup>	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>	2.24x10 <sup>3</sup>	2.52x10 <sup>3</sup>	2.80x10 <sup>3</sup>

# SSD2-DM Series


## How to order

No switch (without magnet for switch)

**SSD2-DM** - 12 - 5 - N - LB - I

With switch (built-in magnet for switch)

**SSD2-DML** - 12 - 5 - T0H - R - N - LB - I

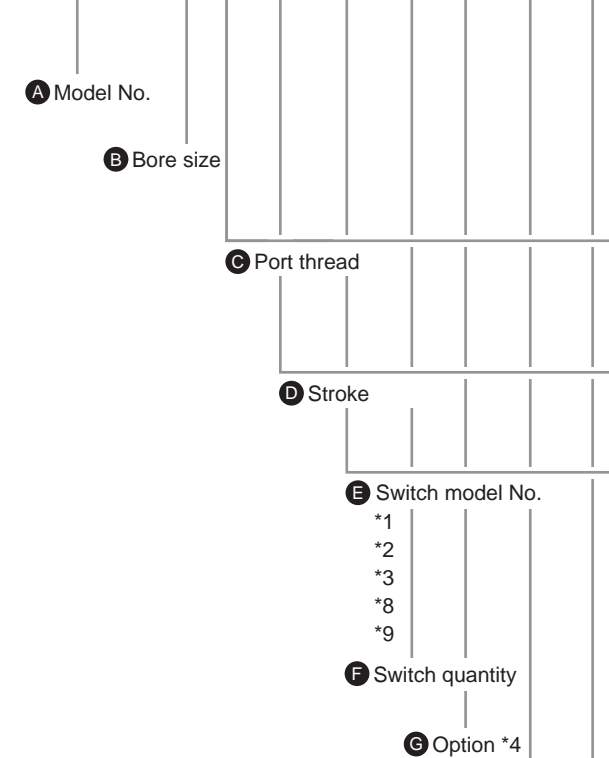

## Precautions for model No. selection

- \*1 : The T2YD\* switch cannot be mounted on the ø12 and ø16 bore sizes.
- \*2 : The T8\* switch cannot be mounted on the ø12 to ø32 bore sizes.
- \*3 : The F-switch can only be mounted on the piping port surface of bore sizes ø20 and ø25.
- \*4 : Piston rod of ø12 to ø25 is stainless steel as standard. C-snap ring is stainless steel instead of steel. The rod end male thread nut is stainless steel.
- \*5 : The mounting bracket is included at shipment.
- \*6 : The projection dimension of piston rod WF when LB or FA is selected is different from that of the standard. Refer to the dimensions on pages 931, 933 and 935. The number of the specified protruding dimension will be added at the end of the model No. printed on the metal plate on the body.
- \*7 : "I" and "Y" cannot be selected together.
- \*8 : The F-switch with L type lead wire on ø20 models cannot be selected on strokes 10 mm or under.
- \*9 : Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.
- \*10: Refer to pages 750 and 751 for combinations of variations/options.
- \*11 : F-switch cannot be selected.

[Example of model No.]

**SSD2-DML-12-5-T0H-R-N-LB-I**

Model: Compact cylinder rotation-stop

- B** Bore size : ø12 mm
- C** Port thread : Rc thread
- D** Stroke : 5 mm
- E** Switch model No. : Reed T0H switch
- F** Switch quantity : 1 on rod side
- G** Option : Rod end male thread
- H** Mounting bracket : Axial foot
- I** Accessory : Rod eye

- H** Mounting bracket \*5
- \*6
- I** Accessory \*7

Code	Description
<b>A Model No.</b>	
<b>SSD2-DM</b>	Double acting/double rod/rotation-stop
<b>SSD2-DML</b>	Double acting/double rod/rotation-stop/with switch

<b>B Bore size (mm)</b>	
<b>12</b>	ø12
<b>16</b>	ø16
<b>20</b>	ø20
<b>25</b>	ø25
<b>32</b>	ø32
<b>40</b>	ø40
<b>50</b>	ø50
<b>63</b>	ø63

<b>C Port thread</b>	
<b>Blank</b>	Rc thread
<b>NN</b>	NPT thread (ø32 and over) (made-to-order product)
<b>GN</b>	G thread (ø32 and over) (made-to-order product)

<b>D Stroke (mm)</b>
Refer to the stroke table on the following page.

<b>E Switch model No.</b>		Contact	Voltage	Indicator	Lead wire	Bore size									
Lead wire	Lead wire					AC	DC	12	16	20	25	32	40	50	63
-	F2S*	Proximity	●	1-color LED	2-wire			●	●						
-	F3S*		●		3-wire			●	●						
F2H*	F2V*		●		2-wire			●	●						
F3H*	F3V*		●		3-wire			●	●						
F3PH*	F3PV*	Proximity	●	1-color LED (PNP output) (custom)	3-wire			●	●						
F2YH*	F2YV*		●	2-wire			●	●							
F3YH*	F3YV*		●	3-wire			●	●							
T0H*	T0V*		●	2-wire	1-color LED	●	●	●	●	●	●	●	●	●	●
T5H*	T5V*	Reed	●	No indicator lamp	2-wire	●	●	●	●	●	●	●	●	●	
T8H*	T8V*		●	1-color LED	2-wire	●	●	●	●	●	●	●	●	●	
T1H*	T1V*		●	1-color LED	2-wire	●	●	●	●	●	●	●	●	●	
T2H*	T2V*		●	1-color LED	2-wire	●	●	●	●	●	●	●	●	●	
T3H*	T3V*	Proximity	●	1-color LED (PNP output)	3-wire	●	●	●	●	●	●	●	●	●	
T3PH*	T3PV*		●	2-wire	●	●	●	●	●	●	●	●	●	●	
T2WH*	T2WV*		●	3-wire	●	●	●	●	●	●	●	●	●	●	
T2YH*	T2YV*		●	2-wire	2-color LED	●	●	●	●	●	●	●	●	●	
T3WH*	T3WV*	Proximity	●	2-color LED	3-wire	●	●	●	●	●	●	●	●	●	
T3YH*	T3YV*		●	2-wire	2-color LED	●	●	●	●	●	●	●	●	●	
T2YD*	-		●	2-wire	2-color LED for AC magnetic field	●	●	●	●	●	●	●	●	●	
T2YDT*	-		●	2-wire	1-color LED off-delay	●	●	●	●	●	●	●	●	●	
T2JH*	T2JV*	●	2-wire	1-color LED off-delay	2-wire	●	●	●	●	●	●	●	●	●	

<b>* Lead wire length</b>	
<b>Blank</b>	1 m (standard)
<b>3</b>	3 m (option)
<b>5</b>	5 m (option)

<b>F Switch quantity</b>	
<b>R</b>	1 on rod side
<b>H</b>	1 on head side
<b>D</b>	2

<b>G Option</b>	
<b>Blank</b>	Rod end female thread
<b>N</b>	Rod end male thread
<b>M *4</b>	Piston rod material (stainless steel) (made to order (ø32 to ø63))

<b>H Mounting bracket</b>	
<b>Blank</b>	Without mounting bracket
<b>LB</b>	Axial foot
<b>FA</b>	Rod side flange

<b>I Accessory (available when rod end male thread "N" is selected)</b>	
<b>I</b>	Rod eye
<b>Y</b>	Rod clevis (pin and snap ring included)

### [Stroke table]

Stroke (mm)	Applicable bore size								
	12	16	20	25	32	40	50	63	
Standard stroke	5	●	●	●	●	●	●	●	●
	10	●	●	●	●	●	●	●	●
	15	●	●	●	●	●	●	●	●
	20	●	●	●	●	●	●	●	●
	25	●	●	●	●	●	●	●	●
	30	●	●	●	●	●	●	●	●
	35			●	●	●	●	●	●
	40			●	●	●	●	●	●
	45			●	●	●	●	●	●
	50			●	●	●	●	●	●
	75					●	●	●	●
	100					●	●	●	●
Min. stroke (mm) *1	5						10		
Max. stroke (mm)	30		50			100			
Custom stroke *2	-				By 5 mm increments				

\*1: Less than 5 mm for 1-color LED switch and less than 10 mm for the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch are not available.

Refer to page 924 for the min. stroke with switch.

\*2: Available only for more than 50 mm stroke.

### How to order switch



Switch model No.  
(Item ⑤ on page 926)

### How to order mounting bracket

Bore size (mm)	ø12	ø16	ø20	ø25	ø32	ø40	ø50
<b>Mounting bracket</b>							
Foot (LB)	SSD2-LB-12	SSD2-LB-16	SSD2-LB-20	SSD2-LB-25	SSD2-LB-32	SSD2-LB-40	SSD2-LB-50
Flange (FA)	SSD2-FA-12	SSD2-FA-16	SSD2-FA-20	SSD2-FA-25	SSD2-FA-32	SSD2-FA-40	SSD2-FA-50
<b>Bore size (mm)</b>	<b>ø63</b>						
<b>Mounting bracket</b>							
Foot (LB)	SSD2-LB-63						
Flange (FA)	SSD2-FA-63						

\*1: The foot mounting bracket is provided as 2 pcs./set.


SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/ COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/ MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending




# SSD2-DM Series

## Internal structure and parts list (ø12 to ø25)

● SSD2-DML-12 to 25 (double acting/double rod/rotation-stop/with switch)

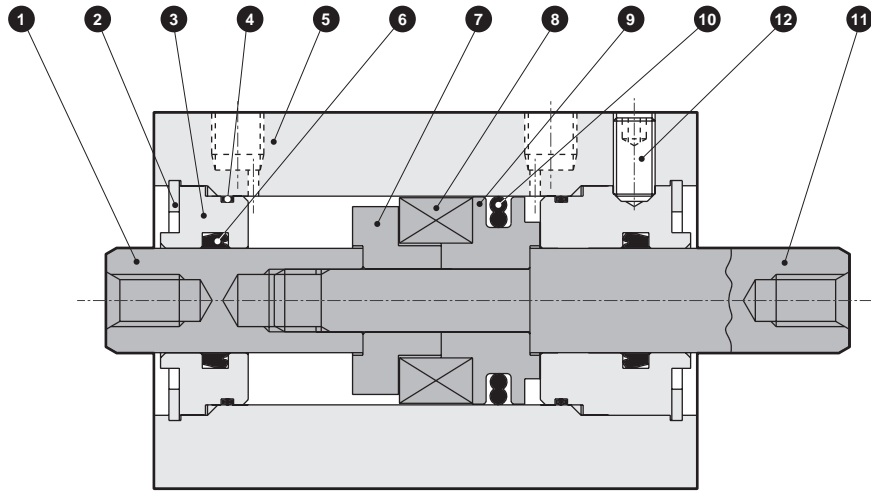

● SSD2-DM-12 to 25 (double acting/double rod/rotation-stop)

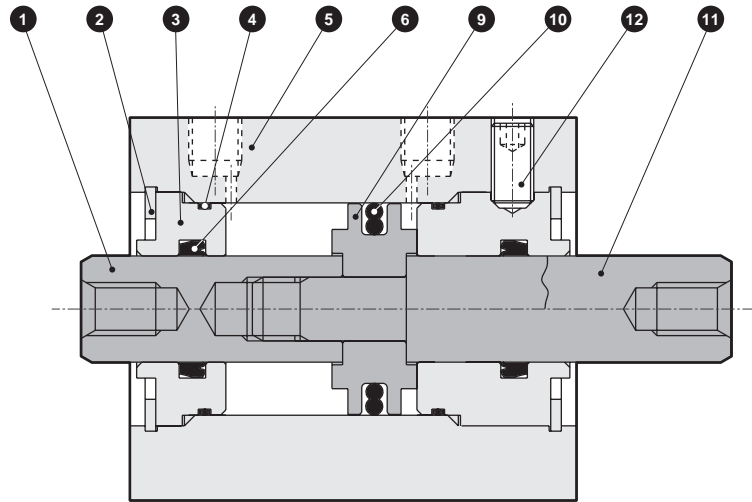


No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod A	Stainless steel	Industrial chrome plating	7	Spacer	Aluminum alloy	Chromate
2	C-snap ring	Steel	Zinc phosphate	8	Magnet	Plastic	
3	Rod metal	Special aluminum	Alumite	9	Piston	Aluminum alloy	Chromate
4	Rod metal gasket	Nitrile rubber		10	Piston packing	Nitrile rubber	
5	Body	Aluminum alloy	Hard alumite	11	Piston rod B	Stainless steel	Industrial chrome plating
6	Rod packing	Nitrile rubber		12	Hexagon socket set screw	Steel	

### Repair parts list


Bore size (mm)	Kit No.	Repair parts No.
ø12	SSD2-DM-12K	4 6 10
ø16	SSD2-DM-16K	
ø20	SSD2-DM-20K	
ø25	SSD2-DM-25K	

## Internal structure and parts list (ø32 to ø63)

● SSD2-DML-32 to 63 (double acting/double rod/rotation-stop/with switch)

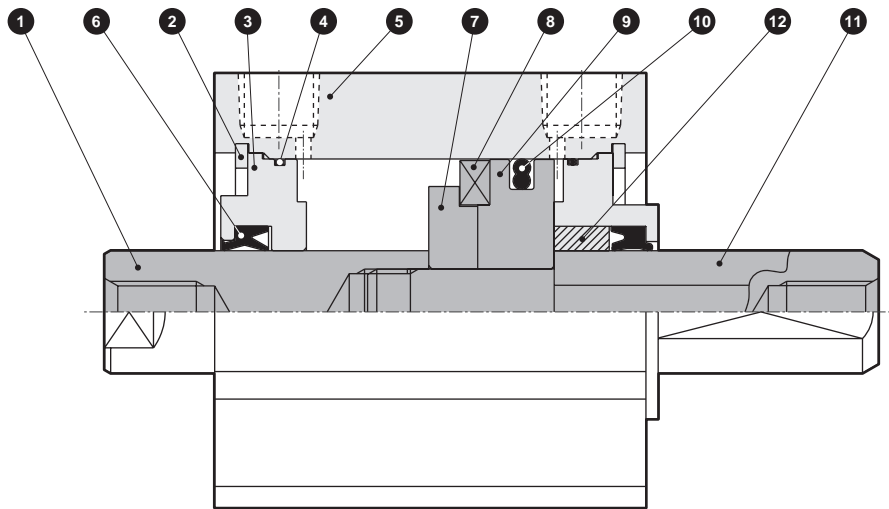

● SSD2-DM-32 to 63 (double acting/double rod/rotation-stop)

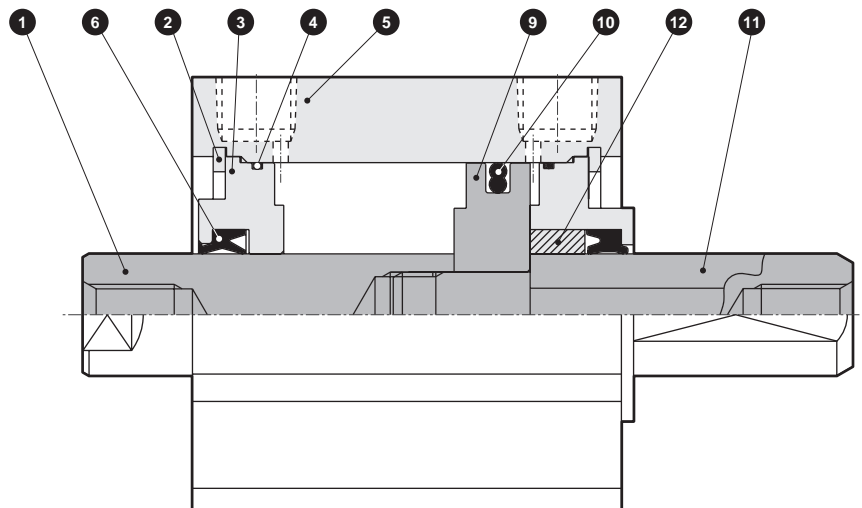

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	Steel	Industrial chrome plating	7	Spacer	Aluminum alloy	ø32: Chromate
2	C-snap ring	Steel	Zinc phosphate	8	Magnet	Plastic	
3	Rod metal	Special aluminum	Chromate	9	Piston	Aluminum alloy	Chromate
4	Rod metal gasket	Nitrile rubber		10	Piston packing	Nitrile rubber	
5	Body	Aluminum alloy	Hard alumite	11	Piston rod B	Steel	Industrial chrome plating
6	Rod packing	Nitrile rubber		12	Bush	Oil impregnated bearing alloy	

### Repair parts list

Bore size (mm)	Kit No.	Repair parts No.
ø32	SSD2-DM-32K	4 6 10
ø40	SSD2-DM-40K	
ø50	SSD2-DM-50K	
ø63	SSD2-DM-63K	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr






Ending

# SSD2-DM Series

## Dimensions

● SSD2-DML-12 to 25 (with switch)

● Rod end male thread

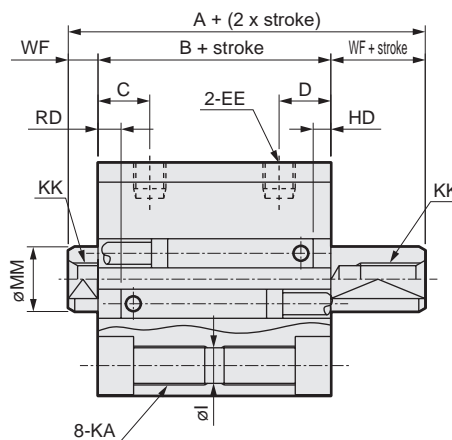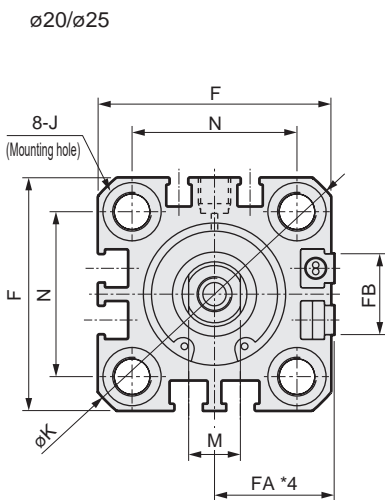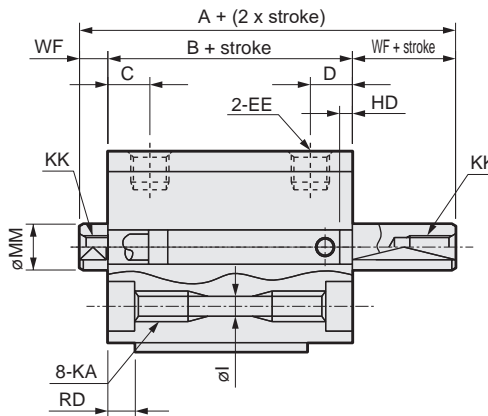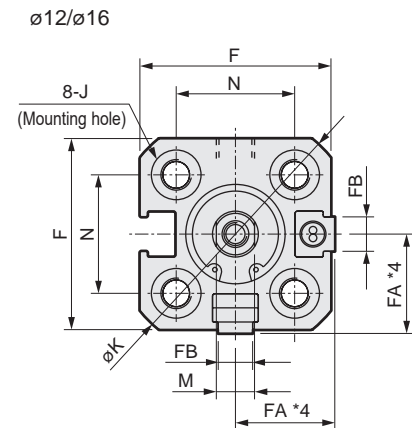

Note: The positions for the left and right widths across flats are unspecified.

Code	Common dimensions with switch																
	A	B	C	D	EE	F	FA <sup>*4</sup>	FB	I	J	K	KA	KK	M	MM	N	WF
∅12	39	32	5.5	10.5	M5	25	13(16.5)	4.5	3.5	6.5 spot face depth 3.5	32	M4 depth 7	M3 depth 6	5	6	15.5	3.5
∅16	39	32	5.5	10.5	M5	29	15(18.5)	4.5	3.5	6.5 spot face depth 3.5	38	M4 depth 7	M4 depth 8	6	8	20	3.5
∅20	50	41	8	13	M5	36	18.5(22)	12.5	5.5	9 spot face depth 5.5	47	M6 depth 11	M5 depth 7	8	10	25.5	4.5
∅25	54	44	11	16	M5	40	20.5(24)	13.5	5.5	9 spot face depth 5.5	51	M6 depth 11	M6 depth 12	10	12	28	5
Switch dimensions	Reed T0H/T0V, T5H/T5V *6		Proximity T2H/T2V, T3H/T3V *6		Proximity T2WH/T2WV, T3WH/T3WV *6		Proximity F2H/F2V, F3H/F3V, F2YH/F2YV, F3YH/F3YV		Proximity F2S/F3S								
	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD							
∅12	10	2.5	10	2.5	11.5	4											
∅16	10	2	10	2	11.5	3.5											
∅20	14.5	6.5	14.5	6.5	16	8	19	12	18	11							
∅25	16.5	9.5	16.5	9.5	18	11	20	13	19	12							

\*1 : Only F-switch is available for the ∅20 or ∅25 piping port surface.

\*2 : HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.

\*3 : Refer to page 1044 for HD, RD and protruding dimensions of the 2-color LED, off-delay, AC magnetic field proof, T1\* and T8\* switches.

\*4 : Dimensions in ( ) of FA are for the L-shaped lead wire.

\*5 : For dimensions of individual accessories, refer to pages 1046 to 1049.

\*6 : Dimensions in ( ) of codes HD and RD are for the type with rubber cushion.


\*7 : The RD side can be identified with a mark on the port surface of the body.

● Dimensions of rod end male thread part

Code	a'	c'	H	kk'	M	MM	T	wf
∅12	10.5	9	8	M5	5	6	3.2	3.5
∅16	12	10	10	M6	6	8	3.6	3.5
∅20	14	12	13	M8	8	10	5	4.5
∅25	17.5	15	17	M10x1.25	10	12	6	5

## Dimensions with mounting bracket

- Axial foot (LB) with switch  
SSD2-DML-12 to 25 -LB

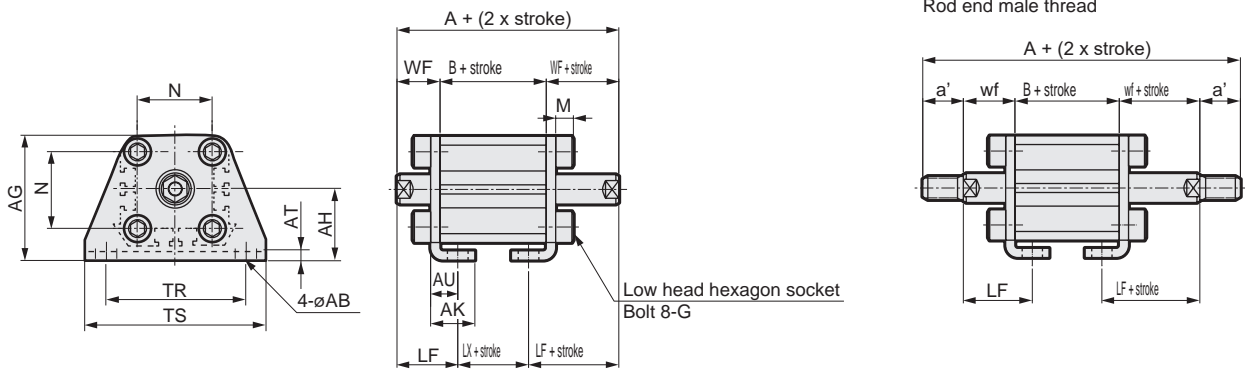


Code	Common dimensions										
Bore size (mm)	AB	AG	AH	AK	AT	AU	G	N	TR	TS	M
ø12	5	29.5	17	12.5	2	8	M4x10	15.5	34	44	4.8
ø16	5	33.5	19	13	2	8	M4x10	20	38	48	4.8
ø20	7	42	24	15	3.2	9.2	M6x16	25.5	48	62	7.2
ø25	7	46	26	16.5	3.2	10.7	M6x16	28	52	66	7.2

Code	Female thread					Male thread					
Bore size (mm)	WF	LF	A	B	LX	a'	wf	LF	A	B	LX
ø12	13.5	19.5	59	32	15	10.5	13.5	19.5	80	32	15
ø16	13.5	19.5	59	32	15	12	13.5	19.5	83	32	15
ø20	14.5	20.5	70	41	19	14	14.5	20.5	98	41	19
ø25	15	22.5	74	44	19	17.5	15	22.5	109	44	19

- Rod side flange (FA) with switch  
SSD2-DML-12 to 25 -FA

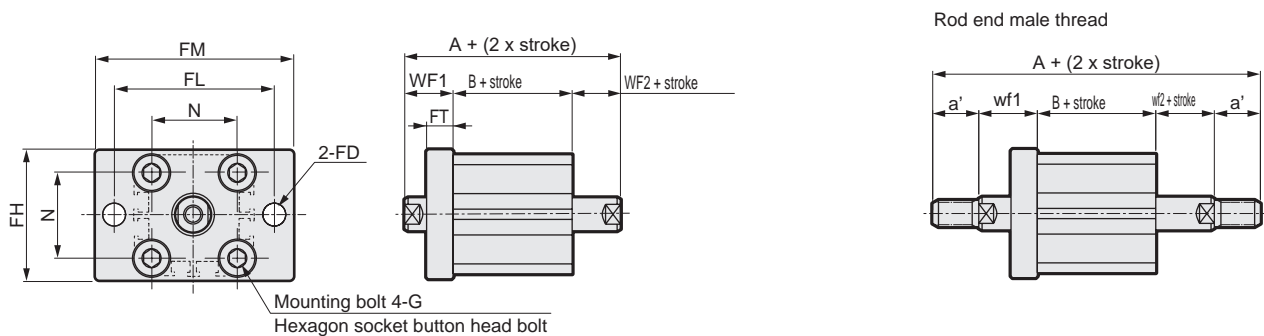

Code	Common dimensions							Female thread				Male thread				
Bore size (mm)	FD	FH	FL	FM	FT	N	G	WF1	WF2	A	B	a'	wf1	wf2	A	B
ø12	4.5	25	45	55	5.5	15.5	M4x12	13.5	3.5	49	32	10.5	13.5	3.5	70	32
ø16	4.5	30	45	55	5.5	20	M4x12	13.5	3.5	49	32	12	13.5	3.5	73	32
ø20	6.6	39	48	60	8	25.5	M6x16	14.5	4.5	60	41	14	14.5	4.5	88	41
ø25	6.6	42	52	64	8	28	M6x16	15	5	64	44	17.5	15	5	99	44

SCP\*3  
CMK2  
CMA2  
SCM  
SCG  
SCA2  
SCS2  
CKV2  
CAV2/  
COVP/N2  
SSD2  
SSG  
SSD  
CAT  
MDC2  
MVC  
SMG  
MSD/  
MSDG  
FC\*  
STK  
SRL3  
SRG3  
SRM3  
SRT3  
MRL2  
MRG2  
SM-25  
ShkAbs  
FJ  
FK  
Spd  
Contr  
Ending




# SSD2-DM Series

## Dimensions



● SSD2-DM-12 to 25 (without switch)

● Rod end male thread

ø12/ø16

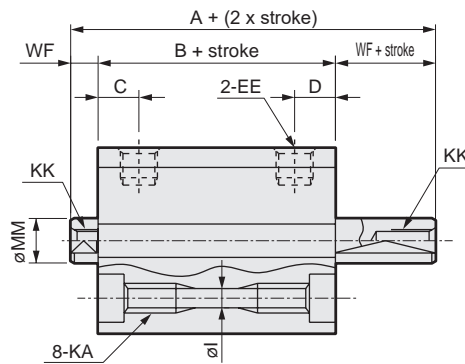

ø20/ø25

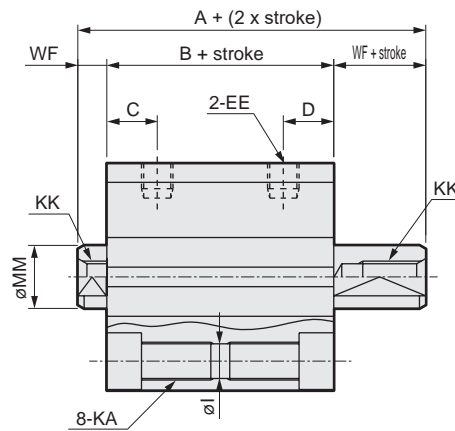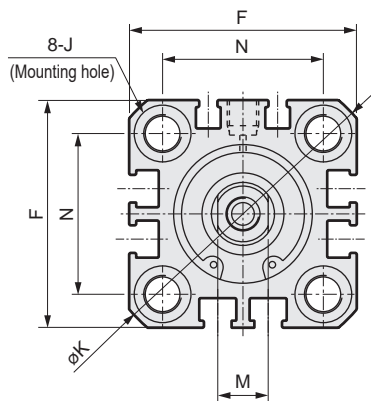

Note: The positions for the left and right widths across flats are unspecified.

Code	Dimensions without switch and common dimensions															
	Bore size (mm)	A	B	C	D	EE	F	I	J	K	KA	KK	M	MM	N	WF
SRL3	ø12	34	27	5.5	10.5	M5	25	3.5	6.5 spot face depth 3.5	32	M4 depth 7	M3 depth 6	5	6	15.5	3.5
	ø16	34	27	5.5	10.5	M5	29	3.5	6.5 spot face depth 3.5	38	M4 depth 7	M4 depth 8	6	8	20	3.5
SRG3	ø20	40	31	8	13	M5	36	5.5	9 spot face depth 5.5	47	M6 depth 11	M5 depth 7	8	10	25.5	4.5
	ø25	44	34	11	16	M5	40	5.5	9 spot face depth 5.5	51	M6 depth 11	M6 depth 12	10	12	28	5


● Dimensions of rod end male thread part

Code	a'	c'	H	kk'	M	MM	T	wf
SRT3								
MRL2	ø12	10.5	9	8	M5	5	3.2	3.5
	ø16	12	10	10	M6	6	3.6	3.5
MRG2	ø20	14	12	13	M8	8	5	4.5
	ø25	17.5	15	17	M10x1.25	10	6	5

\*1: For dimensions of individual accessories, refer to pages 1046 to 1049.

## Dimensions with mounting bracket

- Axial foot (LB) without switch  
SSD2-DM-12 to 25 -LB

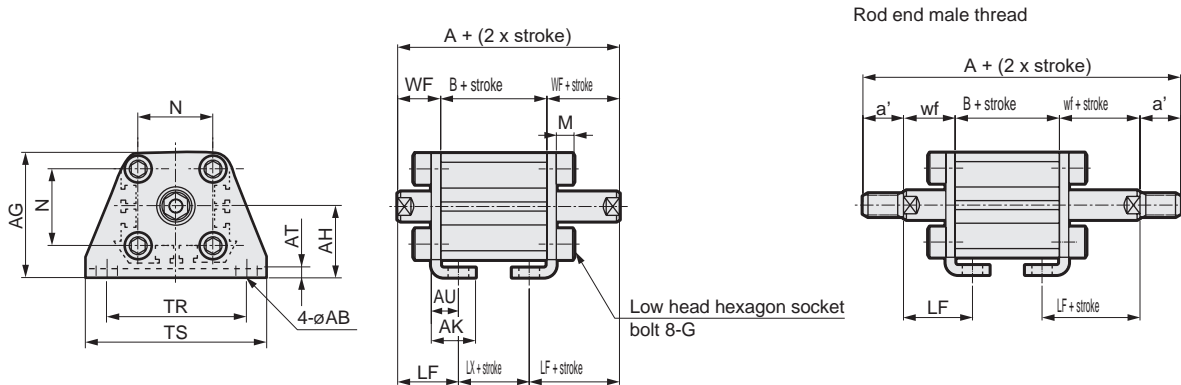


Code	Common dimensions										
Bore size (mm)	AB	AG	AH	AK	AT	AU	G	N	TR	TS	M
ø12	5	29.5	17	12.5	2	8	M4x10	15.5	34	44	4.8
ø16	5	33.5	19	13	2	8	M4x10	20	38	48	4.8
ø20	7	42	24	15	3.2	9.2	M6x16	25.5	48	62	7.2
ø25	7	46	26	16.5	3.2	10.7	M6x16	28	52	66	7.2

Code	Female thread					Male thread					
Bore size (mm)	WF	LF	A	B	LX	a'	wf	LF	A	B	LX
ø12	13.5	19.5	54	27	15	10.5	13.5	19.5	75	27	15
ø16	13.5	19.5	54	27	15	12	13.5	19.5	78	27	15
ø20	14.5	20.5	60	31	19	14	14.5	20.5	88	31	19
ø25	15	22.5	64	34	19	17.5	15	22.5	99	34	19

- Rod side flange (FA) without switch  
SSD2-DM-12 to 25 -FA

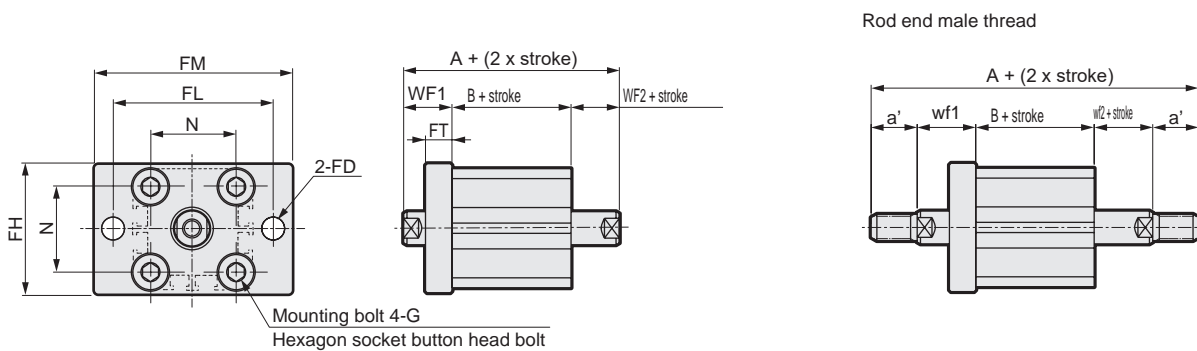

Code	Common dimensions							Female thread				Male thread				
Bore size (mm)	FD	FH	FL	FM	FT	N	G	WF1	WF2	A	B	a'	wf1	wf2	A	B
ø12	4.5	25	45	55	5.5	15.5	M4x12	13.5	3.5	44	27	10.5	13.5	3.5	65	27
ø16	4.5	30	45	55	5.5	20	M4x12	13.5	3.5	44	27	12	13.5	3.5	68	27
ø20	6.6	39	48	60	8	25.5	M6x16	14.5	4.5	50	31	14	14.5	4.5	78	31
ø25	6.6	42	52	64	8	28	M6x16	15	5	54	34	17.5	15	5	89	34

SCP\*3  
CMK2  
CMA2  
SCM  
SCG  
SCA2  
SCS2  
CKV2  
CAV2/  
COVP/N2  
SSD2  
SSG  
SSD  
CAT  
MDC2  
MVC  
SMG  
MSD/  
MSDG  
FC\*  
STK  
SRL3  
SRG3  
SRM3  
SRT3  
MRL2  
MRG2  
SM-25  
ShkAbs  
FJ  
FK  
Spd  
Contr  
Ending




# SSD2-DM Series

## Dimensions





● SSD2-DML-32 to 63 (with switch)

● Rod end male thread

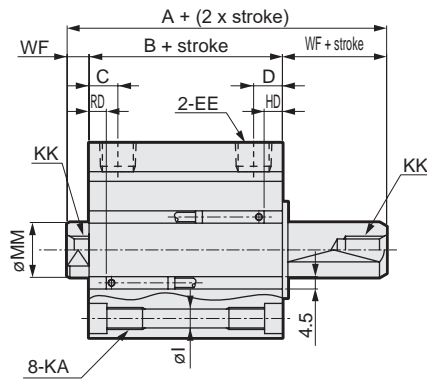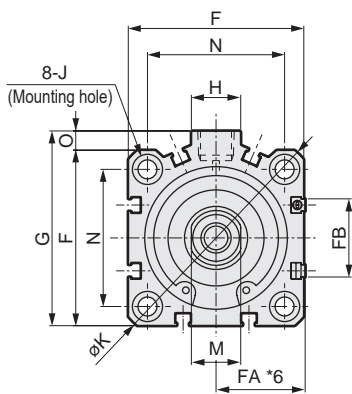

● SSD2-DM-32 to 63 (without switch)

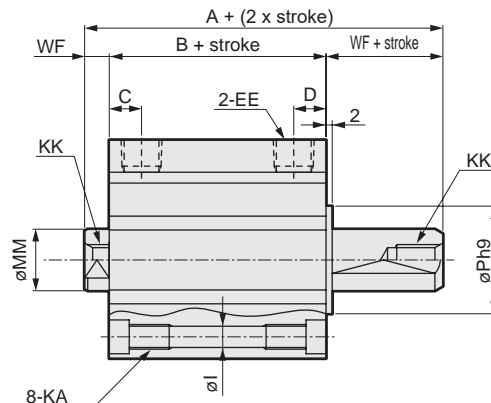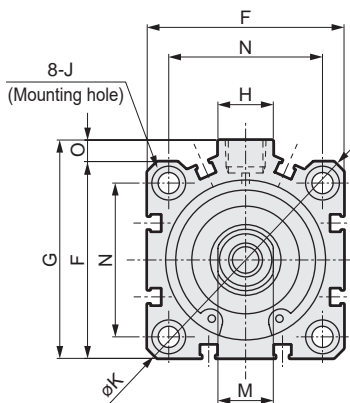

Note: The positions for the left and right widths across flats are unspecified.

Code	No switch		Common dimensions with switch														
	A <sup>*2, *8</sup>	B <sup>*3, *8</sup>	A <sup>*2</sup>	B <sup>*3</sup>	C <sup>*10</sup>	D <sup>*10</sup>	EE <sup>*9</sup>	F	FA <sup>*6</sup>	FB	G	H	I	J	K	KA	KK
ø32	53.5(63.5)	39.5(49.5)	63.5	49.5	8(5.5)	18(20)	Rc1/8	45	23(26.5)	20.5	49.5	12.5	5.5	9 spot face depth 5.5	60	M6 depth 11	M8 depth 13
ø40	54(64)	40(50)	64	50	12	12	Rc1/8	52	26.5(30)	27.5	57	15	5.5	9 spot face depth 5.5	69	M6 depth 11	M8 depth 13
ø50	56.5(66.5)	40.5(50.5)	66.5	50.5	10.5	10.5	Rc1/4	64	32.5(36)	28.5	71	18	6.9	11 spot face depth 6.5	86	M8 depth 13	M10 depth 15
ø63	58(68)	42(52)	68	52	13	13	Rc1/4	77	39(42.5)	28.5	84	23	8.7	14 spot face depth 9	103	M10 depth 25	M10 depth 15

Code	Common dimensions with switch						Switch dimensions					
	M	MM	N	O	P	WF	HD <sup>*4</sup>	RD <sup>*4</sup>	HD <sup>*4</sup>	RD <sup>*4</sup>	HD	RD
ø32	14	16	34	4.5	21	7	20	9	20	9	21.5	10.5
ø40	14	16	40	5	28	7	16.5	12	16.5	12	18	13.5
ø50	17	20	50	7	35	8	16.5	12.5	16.5	12.5	18	14
ø63	17	20	60	7	35	8	18	13	18	13	19.5	14.5

\*1 : Custom stroke is available only for more than 50 mm strokes.

\*2 : To calculate A + (2 x stroke) when using a custom stroke, apply "A + next longer standard stroke + custom stroke". (Example) If the custom stroke is 70 mm, apply "A + standard stroke 75 mm + custom stroke 70 mm".

\*3 : To calculate B + stroke when using custom stroke, apply the next longer standard stroke instead of the custom stroke. (Example) If the custom stroke is 70 mm, apply the standard stroke 75 mm.

\*4 : HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.

\*5 : Refer to page 1044 for HD, RD and protruding dimensions of the 2-color LED, off-delay, AC magnetic field proof, T1\* and T8\* switches.

\*6 : Dimensions in ( ) of FA are for the L-shaped lead wire.

\*7 : For dimensions of individual accessories, refer to pages 1046 to 1049.

\*8 : Dimensions in ( ) of codes A and B are for strokes of more than 50 mm.

\*9 : The ø32 bore size with a 5 mm stroke and without a switch has a port size of M5.\*10 :

Dimensions in ( ) of codes C and D are when the value is for a 5 mm stroke without switch.


\*11 : The RD side can be identified with a mark on the port surface of the body.

● Dimensions of rod end male thread part

Code	a'	c'	H	kk'	M	MM	T	wf
ø32	23.5	20.5	22	M14x1.5	14	16	8	5
ø40	23.5	20.5	22	M14x1.5	14	16	8	5
ø50	28.5	26	27	M18x1.5	17	20	11	5
ø63	28.5	26	27	M18x1.5	17	20	11	5

## Dimensions with mounting bracket

- Axial foot (LB)  
SSD2-DM(L)-32 to 63-LB

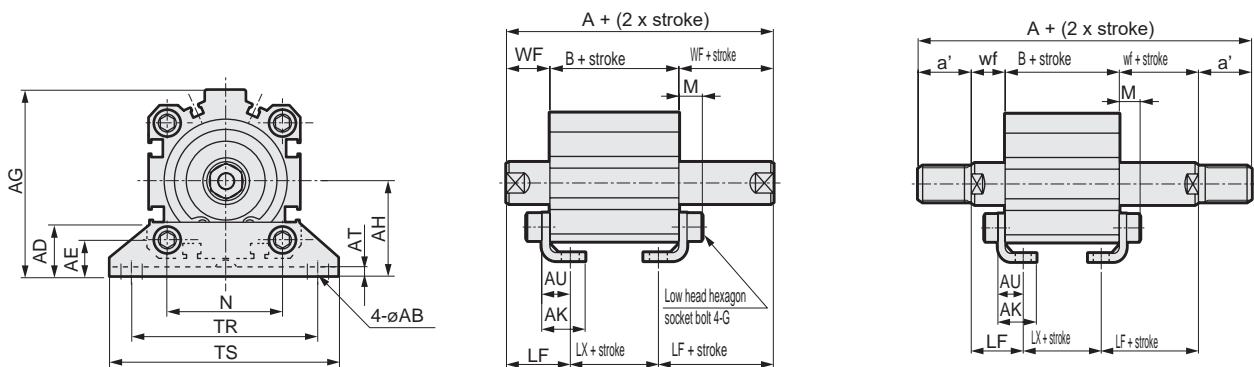


Code	Common dimensions												
Bore size (mm)	AB	AD	AE	AG	AH	AK	AT	AU	G	N	TR	TS	M
ø32	7	18.5	13	57	30	17	3.2	11.2	M6x16	34	57	71	7.2
ø40	7	18	13	64	33	18.2	3.2	11.2	M6x16	40	64	78	7.2
ø50	9	22	14	78	39	22.7	3.2	14.7	M8x20	50	79	95	8.2
ø63	11	26	16	91.5	46	25.2	3.2	16.2	M10x25	60	95	113	9.2

Code	Female thread						Male thread										
Bore size (mm)	WF	LF	No switch			With switch			a'	wf	LF	No switch			With switch		
			A	B	LX	A	B	LX				A	B	LX	A	B	LX
ø32	17	25	64.5(74.5)	30.5(40.5)	14.5(24.5)	74.5	40.5	24.5	23.5	15	23	107.5(117.5)	30.5(40.5)	14.5(24.5)	117.5	40.5	24.5
ø40	17	25	74(84)	40(50)	24(34)	84	50	34	23.5	15	23	117(127)	40(50)	24(34)	127	50	34
ø50	18	29.5	76.5(86.5)	40.5(50.5)	17.5(27.5)	86.5	50.5	27.5	28.5	15	26.5	127.5(137.5)	40.5(50.5)	17.5(27.5)	137.5	50.5	27.5
ø63	18	31	78(88)	42(52)	16(26)	88	52	26	28.5	15	28	129(139)	42(52)	16(26)	139	52	26

\* Dimensions in ( ) are for strokes of more than 50 mm.

- Rod side flange (FA)  
SSD2-DM(L)-32 to 63-FA

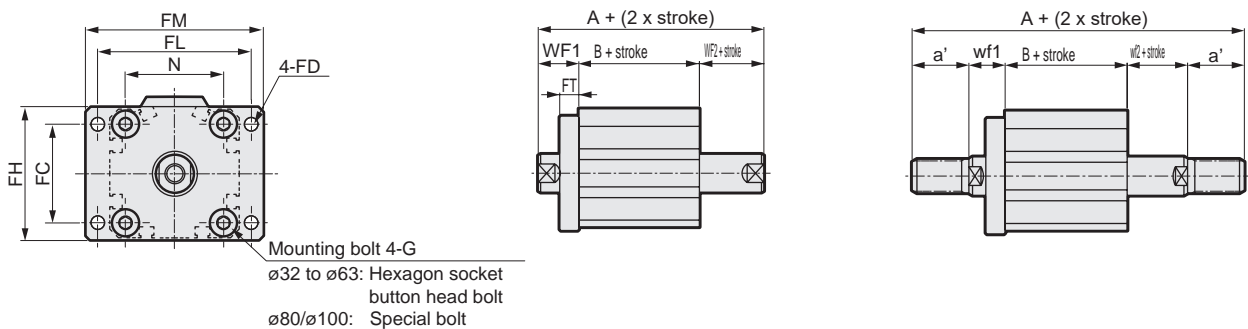

Code	Common dimensions								
Bore size (mm)	FC	FD	FH	FL	FM	FT	N	G	
ø32	34	5.5	48	56	65	8	34	M6x16	
ø40	40	5.5	54	62	72	8	40	M6x16	
ø50	50	6.6	67	76	89	9	50	M8x20	
ø63	60	9	80	92	108	9	60	M10x25	


  

Code	Female thread						Male thread										
Bore size (mm)	WF1	WF2	No switch			With switch			a'	wf1	wf2	No switch			With switch		
			A	B	LX	A	B	LX				A	B	LX	A	B	LX
ø32	17	7	54.5(64.5)	30.5(40.5)	14.5(24.5)	64.5	40.5	24.5	23.5	15	5	97.5(107.5)	30.5(40.5)	14.5(24.5)	107.5	40.5	24.5
ø40	17	7	64(74)	40(50)	24(34)	74	50	34	23.5	15	5	107(117)	40(50)	24(34)	117	50	34
ø50	18	8	66.5(76.5)	40.5(50.5)	17.5(27.5)	76.5	50.5	27.5	28.5	15	5	117.5(127.5)	40.5(50.5)	17.5(27.5)	127.5	50.5	27.5
ø63	18	8	68(78)	42(52)	16(26)	78	52	26	28.5	15	5	119(129)	42(52)	16(26)	129	52	26

\* Dimensions in ( ) are for strokes of more than 50 mm.

SCP\*3  
CMK2  
CMA2  
SCM  
SCG  
SCA2  
SCS2  
CKV2  
CAV2/  
COVP/N2  
SSD2  
SSG  
SSD  
CAT  
MDC2  
MVC  
SMG  
MSD/  
MSDG  
FC\*  
STK  
SRL3  
SRG3  
SRM3  
SRT3  
MRL2  
MRG2  
SM-25  
ShkAbs  
FJ  
FK  
Spd  
Contr  
Ending





Compact cylinder double acting/single rod/rubber scraper

# SSD2-G Series

● Bore size:  $\varnothing 20/\varnothing 25/\varnothing 32/\varnothing 40/\varnothing 50/\varnothing 63/\varnothing 80/\varnothing 100$



## Specifications

Item	SSD2-G SSD2-GL (with switch)								
	$\varnothing 20$	$\varnothing 25$	$\varnothing 32$	$\varnothing 40$	$\varnothing 50$	$\varnothing 63$	$\varnothing 80$	$\varnothing 100$	
Bore size mm	$\varnothing 20$	$\varnothing 25$	$\varnothing 32$	$\varnothing 40$	$\varnothing 50$	$\varnothing 63$	$\varnothing 80$	$\varnothing 100$	
Actuation	Double acting								
Working fluid	Compressed air								
Max. working pressure MPa	1.0 ( $\approx 150$ psi, 10 bar)								
Min. working pressure MPa	0.15 ( $\approx 22$ psi, 1.5 bar)					0.1 ( $\approx 15$ psi, 1 bar)			
Proof pressure MPa	1.6 ( $\approx 230$ psi, 16 bar)								
Ambient temperature $^{\circ}\text{C}$	-10 ( $14^{\circ}\text{F}$ ) to 60 ( $140^{\circ}\text{F}$ ) (no freezing)								
Port size	M5		Rc1/8 *1		Rc1/4		Rc3/8		
Stroke tolerance mm	$+1.0$ 0								
Working piston speed mm/s	50 to 500					50 to 300			
Cushion	None								
Lubrication	Not required (use turbine oil class 1 ISO VG32 if necessary for lubrication)								
Allowable absorbed energy J	0.016	0.021	0.025	0.092	0.1	0.12	0.27	0.56	

\*1: The  $\varnothing 32$  bore size with a 5 mm stroke and without a switch has a port size of M5.

## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\varnothing 20$	5/10/15/20/25	50	1
$\varnothing 25$	30/35/40/45/50		
$\varnothing 32$	5/10/15/20/25/30/		
$\varnothing 40$	35/40/45/50/75/100	100	
$\varnothing 50$	10/15/20/25		
$\varnothing 63$	30/35/40/45/50		
$\varnothing 80$	75/100		
$\varnothing 100$			

\*1: When using the type with switch, refer to the table of the min. stroke with switch.

## Min. stroke with switch (2 switches)


Bore size (mm)	T0H/V / T5H/V	T2H/V / T3H/V
$\varnothing 20$	5	5
$\varnothing 25$		
$\varnothing 32$		
$\varnothing 40$		
$\varnothing 50$		
$\varnothing 63$		
$\varnothing 80$		
$\varnothing 100$		

\*1: Less than 10 mm with the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch is not available.

## Custom stroke

### ● SSD2 Series

Item	Standard products	
	Standard stroke body with spacer	
Model No.	Refer to How to order.	
Description	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.	
Stroke range	Bore size	Stroke range
	20 to 25	1 to 49
	32 to 100	1 to 99
Example of model No.	Model No.: SSD2-G-32-38 A +2 mm spacer is added to the SSD2-G-32-40 standard cylinder to create 38 mm stroke. B + stroke is 63 mm.	

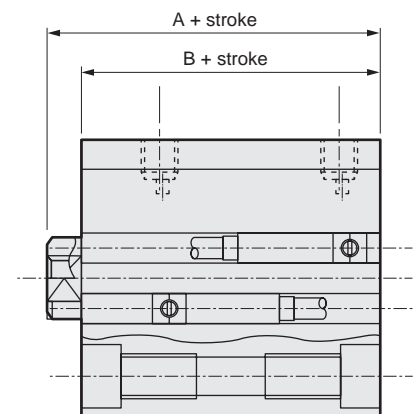

### Switch specifications (F-switch)

● 1-color/2-color LED

Item	2-wire proximity		3-wire proximity		2-wire proximity		3-wire proximity		
	F2S		F3S		F2H/F2V		F2YH/F2YV	F3H/F3V	F3PH/F3PV (made to order)
Applications	Dedicated for programmable controller		For programmable controller, relay		Dedicated for programmable controller		For programmable controller, relay		
Output method	-		NPN output		-		NPN output	PNP output	NPN output
Power supply voltage	-		10 to 28 VDC		-		10 to 28 VDC	4.5 to 28 VDC	10 to 28 VDC
Load voltage	10 to 30 VDC		30 VDC or less		10 to 30 VDC   24 VDC ±10%		30 VDC or less		
Load current	5 to 20 mA		50 mA or less		5 to 20 mA		50 mA or less		
Indicator	LED (Lit when ON)				Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Yellow LED (Lit when ON)		Red/green LED (Lit when ON)
Leakage current	1 mA or less		10 µA or less		1 mA or less		10 µA or less		
Weight	g				1 m:10 3 m:29				

### Switch specifications (T-switch)

● 1-color/2-color LED/for AC magnetic field proof

Item	2-wire proximity		2-wire proximity				3-wire proximity				2-wire reed				2-wire proximity		
	T1H/T1V	T2H/T2V	T2YH/ T2YV	T2WH/ T2WV	T3H/ T3V	T3PH/ T3PV	T3YH/ T3YV	T3WH/ T3WV	T0H/T0V	T5H/T5V		T8H/T8V		T2YD(*4) T2YDT			
Applications	For programmable controller, relay, compact solenoid valve	Dedicated for programmable controller				For programmable controller, relay				For programmable controller, relay	For programmable controller, relay, IC circuit (no indicator lamp), serial connection		For programmable controller, relay		Dedicated for programmable controller		
Output method	-				NPN output	PNP output	NPN output	NPN output	-				-				
Pwr. supp. V.	-				10 to 28 VDC				-				-				
Load voltage	85 to 265 VAC	10 to 30 VDC		24 VDC ±10%		30 VDC or less				12/24 VDC	100/110 VAC	5/12/24 VDC	100/110 VAC	12/24 VDC	110 VAC	220 VAC	24 VDC ±10%
Load current	5 to 100 mA	5 to 20 mA (*3)				100 mA or less		50 mA or less		5 to 50 mA	7 to 20 mA	50 mA or less	20 mA or less	5 to 50 mA	7 to 20 mA	7 to 10 mA	5 to 20 mA
Indicator	LED (Lit when ON)	LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	No indicator lamp		LED (Lit when ON)		Red/green LED (Lit when ON)			
Leakage current	≤ 1 mA at 100 VAC, ≤ 2 mA at 200 VAC	1 mA or less				10 µA or less				0 mA				1 mA or less			
Weight	g	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80				1 m:33 3 m:87 5 m:142		1 m:61 3 m:166 5 m:272		

\*1: Refer to Ending Page 1 for detailed switch specifications and dimensions.

\*2: Switches other than the above models, such as switches with connectors, are also available. Refer to Ending Page 1.

\*3: The max. load current is 20 mA at 25°C. The current is lower than 20 mA if the operating ambient temperature around the switch is higher than 25°C.  
(5 to 10 mA at 60°C)

\*4: Switch for AC magnetic field (T2YD/T2YDT) cannot be used in DC magnetic field.

\*5: The F-switch uses a bend-resistant lead wire.

### Cylinder weight table

(the weight of the switches is when there are 2 cylinder switches.)

(Unit: g)

Stroke (mm)	5		10		15		20		25		30		35		40		45		50		75		100	
	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch
ø20	108	163	120	195	133	208	146	221	158	233	171	246	184	259	197	272	210	285	223	298	-	-	-	-
ø25	151	242	166	257	182	273	198	289	214	305	229	320	245	336	261	352	293	384	292	383	-	-	-	-
ø32	230	344	252	366	274	388	296	410	317	431	339	453	361	475	383	497	427	519	426	540	487	648	707	755
ø40	301	444	328	471	354	497	381	524	408	551	434	577	461	604	487	630	540	657	540	683	625	816	890	948
ø50	-	-	513	707	555	749	597	791	639	833	682	876	734	918	766	960	890	1002	850	1044	787	1254	1384	1728
ø63	-	-	733	1012	788	1067	843	1122	898	1177	953	1232	1009	1288	1064	1343	1175	1398	1174	1453	1384	1728	1939	2003
ø80	-	-	1532	1945	1619	2032	1705	2118	1792	2203	1878	2288	1965	2377	2052	2465	2226	2552	2225	2638	2564	3071	3434	3503
ø100	-	-	2212	2779	2326	2893	2439	3006	2553	3120	2667	3234	2781	3348	2894	3461	3121	3575	3122	3689	3622	4259	4757	4829

### Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa											
		0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0	
ø20	Push	-	47.1	62.8	94.2	1.26x10 <sup>2</sup>	1.57x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.20x10 <sup>2</sup>	2.51x10 <sup>2</sup>	2.83x10 <sup>2</sup>	3.14x10 <sup>2</sup>	
	Pull	-	35.3	47.1	70.7	94.2	1.18x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.65x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.12x10 <sup>2</sup>	2.36x10 <sup>2</sup>	
ø25	Push	-	73.6	98.2	1.47x10 <sup>2</sup>	1.96x10 <sup>2</sup>	2.45x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.44x10 <sup>2</sup>	3.93x10 <sup>2</sup>	4.42x10 <sup>2</sup>	4.91x10 <sup>2</sup>	
	Pull	-	56.7	75.6	1.13x10 <sup>2</sup>	1.51x10 <sup>2</sup>	1.89x10 <sup>2</sup>	2.27x10 <sup>2</sup>	2.64x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.40x10 <sup>2</sup>	3.78x10 <sup>2</sup>	
ø32	Push	-	1.21x10 <sup>2</sup>	1.61x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.22x10 <sup>2</sup>	4.02x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.63x10 <sup>2</sup>	6.43x10 <sup>2</sup>	7.24x10 <sup>2</sup>	8.04x10 <sup>2</sup>	
	Pull	-	90.5	1.21x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.62x10 <sup>2</sup>	4.22x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.43x10 <sup>2</sup>	6.03x10 <sup>2</sup>	
ø40	Push	-	1.88x10 <sup>2</sup>	2.51x10 <sup>2</sup>	3.77x10 <sup>2</sup>	5.03x10 <sup>2</sup>	6.28x10 <sup>2</sup>	7.54x10 <sup>2</sup>	8.80x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.13x10 <sup>3</sup>	1.26x10 <sup>3</sup>	
	Pull	-	1.58x10 <sup>2</sup>	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>	
ø50	Push	-	2.95x10 <sup>2</sup>	3.93x10 <sup>2</sup>	5.89x10 <sup>2</sup>	7.85x10 <sup>2</sup>	9.82x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.37x10 <sup>3</sup>	1.57x10 <sup>3</sup>	1.77x10 <sup>3</sup>	1.96x10 <sup>3</sup>	
	Pull	-	2.47x10 <sup>2</sup>	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>	
ø63	Push	3.12x10 <sup>2</sup>	4.68x10 <sup>2</sup>	6.23x10 <sup>2</sup>	9.35x10 <sup>2</sup>	1.25x10 <sup>3</sup>	1.56x10 <sup>3</sup>	1.87x10 <sup>3</sup>	2.18x10 <sup>3</sup>	2.49x10 <sup>3</sup>	2.81x10 <sup>3</sup>	3.12x10 <sup>3</sup>	
	Pull	2.80x10 <sup>2</sup>	4.20x10 <sup>2</sup>	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>	2.24x10 <sup>3</sup>	2.52x10 <sup>3</sup>	2.80x10 <sup>3</sup>	
ø80	Push	5.03x10 <sup>2</sup>	7.54x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.51x10 <sup>3</sup>	2.01x10 <sup>3</sup>	2.51x10 <sup>3</sup>	3.02x10 <sup>3</sup>	3.52x10 <sup>3</sup>	4.02x10 <sup>3</sup>	4.52x10 <sup>3</sup>	5.03x10 <sup>3</sup>	
	Pull	4.54x10 <sup>2</sup>	6.80x10 <sup>2</sup>	9.07x10 <sup>2</sup>	1.36x10 <sup>3</sup>	1.81x10 <sup>3</sup>	2.27x10 <sup>3</sup>	2.72x10 <sup>3</sup>	3.17x10 <sup>3</sup>	3.63x10 <sup>3</sup>	4.08x10 <sup>3</sup>	4.54x10 <sup>3</sup>	
ø100	Push	7.85x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.57x10 <sup>3</sup>	2.36x10 <sup>3</sup>	3.14x10 <sup>3</sup>	3.93x10 <sup>3</sup>	4.71x10 <sup>3</sup>	5.50x10 <sup>3</sup>	6.28x10 <sup>3</sup>	7.07x10 <sup>3</sup>	7.85x10 <sup>3</sup>	
	Pull	7.15x10 <sup>2</sup>	1.07x10 <sup>3</sup>	1.43x10 <sup>3</sup>	2.14x10 <sup>3</sup>	2.86x10 <sup>3</sup>	3.57x10 <sup>3</sup>	4.29x10 <sup>3</sup>	5.00x10 <sup>3</sup>	5.72x10 <sup>3</sup>	6.43x10 <sup>3</sup>	7.15x10 <sup>3</sup>	

SCP\*3  
CMK2  
CMA2  
SCM  
SCG  
SCA2  
SCS2  
CKV2  
CAV2/COVP/N2  
SSD2  
SSG  
SSD  
CAT  
MDC2  
MVC  
SMG  
MSD/MSDG  
FC\*  
STK  
SRL3  
SRG3  
SRM3  
SRT3  
MRL2  
MRG2  
SM-25  
ShkAbs  
FJ  
FK  
Spd Contr  
Ending

# SSD2-G Series

## How to order

No switch (without magnet for switch)

**SSD2-G** - **32** - **5** - **N** - **LB** - **I**

With switch (built-in magnet for switch)

**SSD2-GL** - **32** - **10** - **T0H** - **R** - **N** - **LB** - **I**

**A** Model No.

**B** Bore size

**C** Stroke

**D** Switch model No.

\*1  
\*2  
\*5  
\*6

**E** Switch quantity

**F** Option

**G** Mounting bracket  
\*3  
\*8

## ⚠ Precautions for model No. selection

- \*1 : The T8\* switch cannot be mounted on the ø20 to ø32 bore sizes.
- \*2 : The F-switch can only be mounted on the piping port surface of bore sizes ø20 and ø25.
- \*3 : The mounting bracket is included at shipment.
- \*4 : "I" and "Y" cannot be selected together.
- \*5 : The F-switch with L type lead wire on ø20 models cannot be selected on strokes of 15 mm or under.
- \*6 : Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.
- \*7 : F-switch cannot be selected.
- \*8 : The structure of bore sizes ø20 to ø32 does not permit retrofitting of the foot bracket (LB) or flange bracket (FA) on the rod side. Assembly before shipment is available as made to order.

[Example of model No.]

## SSD2-GL-20-10-T0H-R-N-LB-I

Model: Compact cylinder rubber scraper

- B** Bore size : ø20 mm
- C** Stroke : 10 mm
- D** Switch model No.: Reed T0H switch/  
Lead wire length 1 m
- E** Switch quantity : 1 on rod side
- F** Option : Rod end male thread
- G** Mounting bracket: Axial foot
- H** Accessory : Rod eye

**H** Accessory  
\*4

Code	Description													
<b>A Model No.</b>														
SSD2-G	Double acting/single rod/rubber scraper													
SSD2-GL	Double acting/single rod/rubber scraper/with switch													
<b>B Bore size (mm)</b>														
20	ø20													
25	ø25													
32	ø32													
40	ø40													
50	ø50													
63	ø63													
80	ø80													
100	ø100													
<b>C Stroke (mm)</b>														
Refer to the stroke table on the following page.														
<b>D Switch model No.</b>														
Lead wire	Lead wire	Contact	Voltage	Indicator	Lead wire	Bore size								
Straight	L-shaped		AC	DC		20	25	32	40	50	63	80	100	
-	F2S*	Proximity	●	●	1-color LED	2-wire	●	●						
-	F3S*		●	●		3-wire	●	●						
F2H*	F2V*		●	●		2-wire	●	●						
F3H*	F3V*		●	●	3-wire	●	●							
F3PH*	F3PV*		●	●	1-color LED (PNP output) (custom)	3-wire	●	●						
F2YH*	F2YV*		●	●	2-color LED	2-wire	●	●						
F3YH*	F3YV*	●	●	3-wire	●	●								
T0H*	T0V*	Reed	●	●	1-color LED	2-wire	●	●	●	●	●	●	●	
T5H*	T5V*		●	●	No indicator lamp		●	●	●	●	●	●	●	
T8H*	T8V*		●	●	1-color LED		●	●	●	●	●	●	●	
T1H*	T1V*	Proximity	●	●	1-color LED	2-wire	●	●	●	●	●	●	●	
T2H*	T2V*		●	●			3-wire	●	●	●	●	●	●	●
T3H*	T3V*		●	●			1-color LED (PNP output)	●	●	●	●	●	●	●
T3PH*	T3PV*		●	●	2-color LED	2-wire	●	●	●	●	●	●	●	
T2WH*	T2WV*		●	●			3-wire	●	●	●	●	●	●	●
T2YH*	T2YV*		●	●			2-wire	●	●	●	●	●	●	●
T3WH*	T3WV*	●	●	2-color LED	3-wire	●	●	●	●	●	●	●		
T3YH*	T3YV*	●	●			2-wire	●	●	●	●	●	●	●	
T2YD*	-	●	●			2-wire	●	●	●	●	●	●	●	
T2YDT*	-	●	●	AC magnetic field	2-wire	●	●	●	●	●	●	●		
T2JH*	T2JV*	●	●	1-color LED off-delay	2-wire	●	●	●	●	●	●	●		
<b>* Lead wire length</b>														
Blank	1 m (standard)													
3	3 m (option)													
5	5 m (option)													
<b>E Switch quantity</b>														
R	1 on rod side													
H	1 on head side													
D	2													
<b>F Option</b>														
Blank	Rod end female thread													
N	Rod end male thread													
<b>G Mounting bracket</b>														
Blank	Without mounting bracket													
LB	Axial foot (made-to-order product)													
CB	Clevis bracket (pin and snap ring included)													
FA	Rod side flange (made-to-order product)													
FB	Head side flange													
<b>H Accessory (available when rod end male thread "N" is selected)</b>														
I	Rod eye													
Y	Rod clevis (pin and snap ring included)													

### [Stroke table]


Stroke (mm)	Applicable bore size								
	20	25	32	40	50	63	80	100	
Standard stroke	5	●	●	●	●				
	10	●	●	●	●	●	●	●	●
	15	●	●	●	●	●	●	●	●
	20	●	●	●	●	●	●	●	●
	25	●	●	●	●	●	●	●	●
	30	●	●	●	●	●	●	●	●
	35	●	●	●	●	●	●	●	●
	40	●	●	●	●	●	●	●	●
	45	●	●	●	●	●	●	●	●
	50	●	●	●	●	●	●	●	●
	75			●	●	●	●	●	●
	100			●	●	●	●	●	●
Min. stroke (mm) *1	1								
Max. stroke (mm)	50		100						
Custom stroke *2	In 1 mm increments								

\*1: Less than 5 mm for 1-color LED switch and less than 10 mm for the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch are not available.

Refer to page 936 for the min. stroke with switch.

\*2: The total length when using a custom stroke is the same as that when using the next longer standard stroke.

### How to order switch



### How to order mounting bracket

Bore size (mm)	ø20	ø25	ø32	ø40	ø50	ø63	ø80
<b>Mounting bracket</b>							
Foot (LB)				SSD2-LB-40	SSD2-LB-50	SSD2-LB-63	SSD2-LB-80
Flange (FA/FB)				SSD2-FA-40	SSD2-FA-50	SSD2-FA-63	SSD2-FA-80
Clevis bracket (CB)	SSD2-CB-20	SSD2-CB-25	SSD2-CB-32	SSD2-CB-40	SSD2-CB-50	SSD2-CB-63	SSD2-CB-80
<b>Bore size (mm)</b>	<b>ø100</b>						
<b>Mounting bracket</b>							
Foot (LB)	SSD2-LB-100						
Flange (FA/FB)	SSD2-FA-100						
Clevis bracket (CB)	SSD2-CB-100						

\*1: The foot mounting bracket is provided as 2 pcs./set.

\*2: The structure of bore sizes ø20 to ø32 does not permit retrofitting of the foot bracket (LB) or flange bracket (FA) on the rod side. Contact CKD for details.

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK


Spd  
Contr

Ending


# SSD2-G Series

## Internal structure and parts list


● SSD2-GL-20, 25 (double acting/single rod/rubber scraper/ with switch)

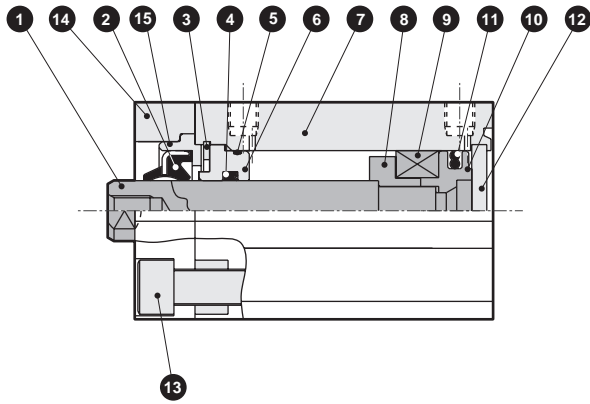


● SSD2-GL-32 (double acting/single rod/rubber scraper/ with switch)

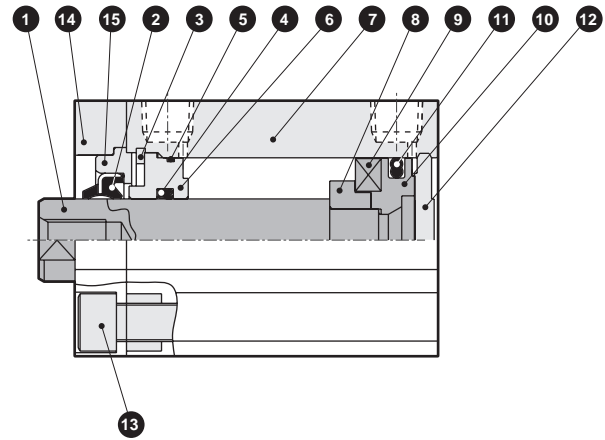

● SSD2-G-20, 25 (double acting/single rod/rubber scraper)

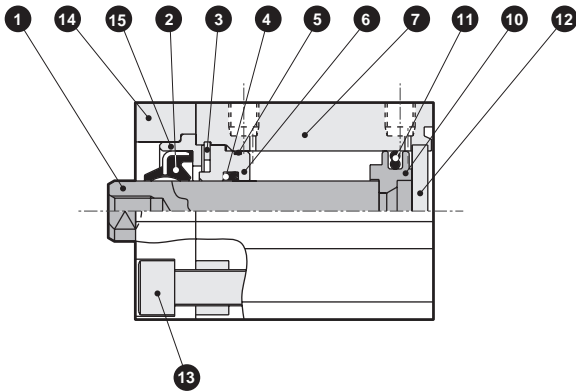

● SSD2-G-32 (double acting/single rod/rubber scraper)

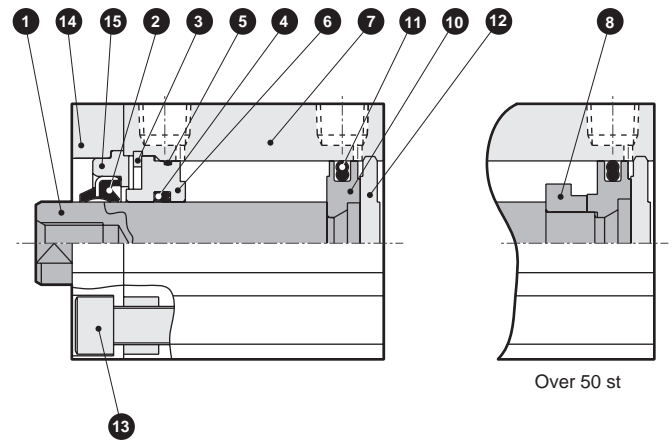


No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	ø20, ø25: Stainless steel ø32: Steel	Industrial chrome plating	9	Magnet	Plastic	
2	Scraper	Nitrile rubber		10	Piston	Aluminum alloy	Chromate
3	C-snap ring	Stainless steel		11	Piston packing	Nitrile rubber	
4	Rod packing	Nitrile rubber		12	Cover	ø20 to ø25: Stainless steel ø32: Aluminum alloy	ø32: Alumite
5	Rod metal gasket	Nitrile rubber		13	Hexagon socket head cap screw	Stainless steel	
6	Rod metal	Special aluminum	Alumite	14	Adaptor (A)	Aluminum alloy	Alumite
7	Body	Aluminum alloy	Hard alumite	15	Adaptor (B)	Aluminum alloy	Alumite
8	Spacer	Aluminum alloy	Chromate				

## Repair parts list


Part name	Kit No.	Repair parts No.
Bore size (mm)		
ø20	SSD2-G-20K	2 4 5 11
ø25	SSD2-G-25K	
ø32	SSD2-G-32K	

### Internal structure and parts list


● SSD2-GL-40, 50 (double acting/single rod/rubber scraper/ with switch)

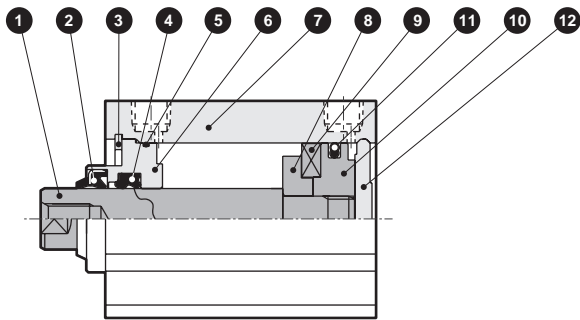


● SSD2-GL-63 to 100 (double acting/single rod/rubber scraper/ with switch)

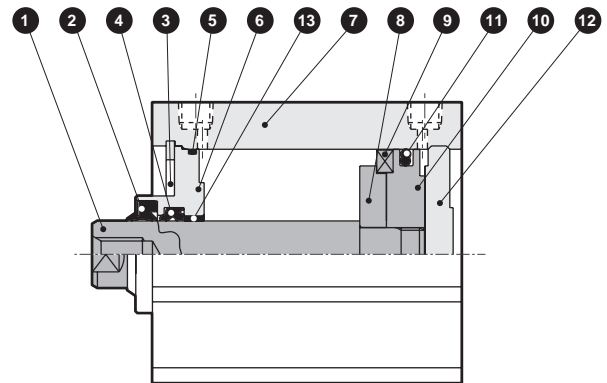

● SSD2-G-40, 50 (double acting/single rod/rubber scraper)

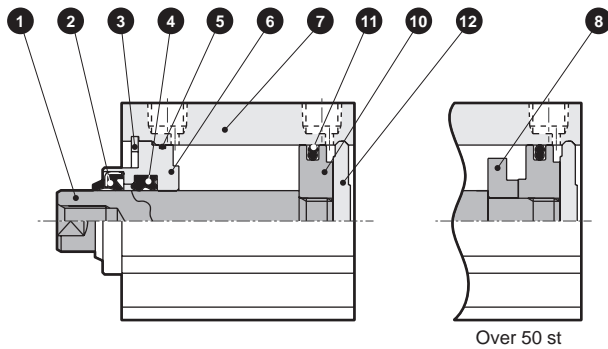

● SSD2-G-63 to 100 (double acting/single rod/rubber scraper)

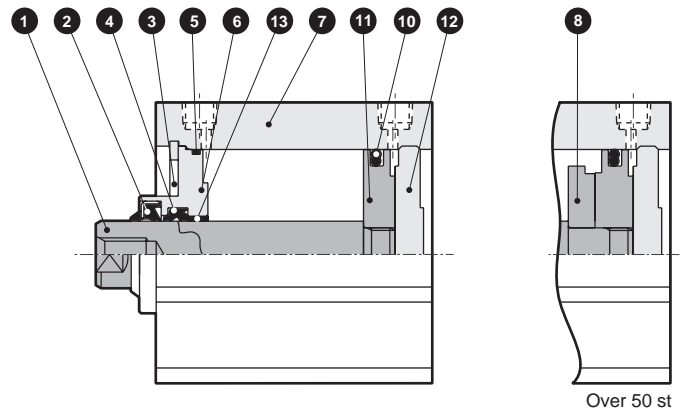

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	Steel	Industrial chrome plating	7	Body	Aluminum alloy	Hard alumite
2	Scraper	Nitrile rubber		8	Spacer	Aluminum alloy	Chromate
3	C-snap ring	Stainless steel		9	Magnet	Plastic	
4	Rod packing	Nitrile rubber		10	Piston	Aluminum alloy	Chromate
5	Rod metal gasket	Nitrile rubber		11	Piston packing	Nitrile rubber	
6	Rod metal	ø40, ø50: Special aluminum ø63 to ø100: Aluminum alloy	ø40, ø50: Alumite ø63 to ø100: Chromate	12	Cover	Aluminum alloy	Alumite
				13	Bush	Oiles drymet	ø63 to ø100 only

### Repair parts list

Part name	Kit No.	Repair parts No.
Bore size (mm)		
ø40	SSD2-G-40K	
ø50	SSD2-G-50K	
ø63	SSD2-G-63K	2 4 5 11
ø80	SSD2-G-80K	
ø100	SSD2-G-100K	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr






Ending

# SSD2-G Series



## dimensions

### ● SSD2-G(L)

### ● Rod end male thread

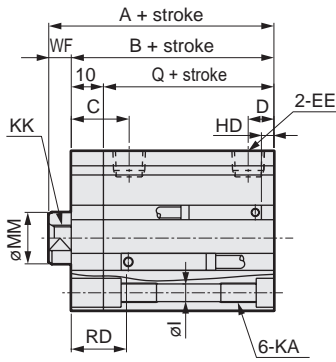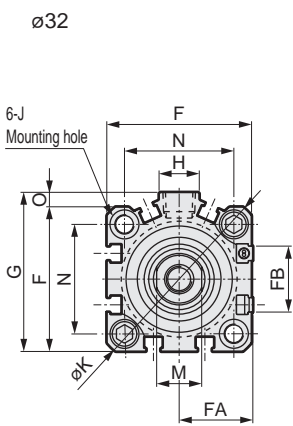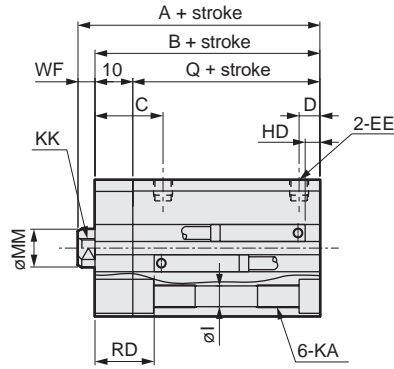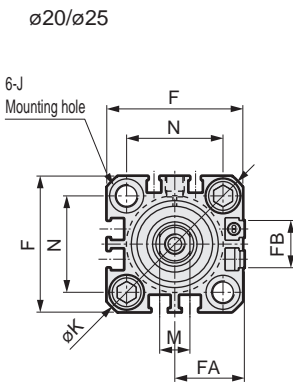

### ø40 to ø100

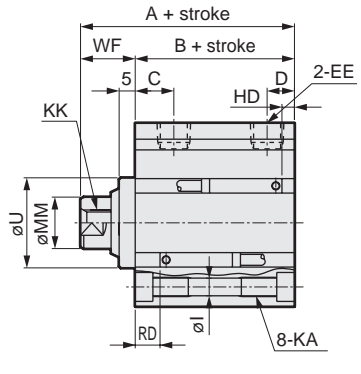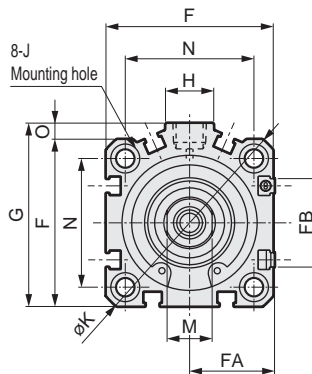

\*1: To calculate A + stroke or B + stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value. (Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

\*2: HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.

\*3 :For Dimensions of individual accessories Pages 1046 to 1049.

\*4: Dimensions in ( ) of codes A, B and Q are for strokes of more than 50 mm.

\*5: The ø32 bore size with a 5 mm stroke and without a switch has a port size of M5.\*6: Dimensions in ( ) of FA are for the L-shaped lead wire type.

\*7: Dimensions in ( ) of code J are for the rod side mounting hole.

Code	Dimensions without switch				Common dimensions with switch															
	A <sup>*1</sup>	B <sup>*1</sup>	Q		A <sup>*1</sup>	B <sup>*1</sup>	Q	C	D	EE <sup>*5</sup>	F	FA <sup>*6</sup>	FB	G	H	I	J	K	KA	KK
ø20	34	29.5	19.5		44	39.5	29.5	18	5.5	M5	36	18.5 (22)	12.5	-	-	5.5	9 spot face depth 5.5(15.5)	47	M6 depth 11	M5 depth 7
ø25	37.5	32.5	22.5		47.5	42.5	32.5	21	6	M5	40	20.5 (24)	13.5	-	-	5.5	9 spot face depth 5.5(15.5)	51	M6 depth 11	M6 depth 12
ø32	40 (50)	33 (43)	23 (33)		50	43	33	18	8	Rc1/8	45	23 (26.5)	20.5	49.5	12.5	5.5	9 spot face depth 5.5(15.5)	60	M6 depth 11	M8 depth 13
ø40	46.5 (56.5)	29.5 (39.5)	-		56.5	39.5	-	12	8.5	Rc1/8	52	26.5 (30)	27.5	57	15	5.5	9 spot face depth 5.5	69	M6 depth 11	M8 depth 13
ø50	48.5 (58.5)	30.5 (40.5)	-		58.5	40.5	-	10.5	10.5	Rc1/4	64	32.5 (36)	28.5	71	18	6.9	11 spot face depth 6.5	86	M8 depth 13	M10 depth 15
ø63	54 (64)	36 (46)	-		64	46	-	13	11	Rc1/4	77	39 (42.5)	28.5	84	23	8.7	14 spot face depth 9	103	M10 depth 25	M10 depth 15
ø80	63.5 (73.5)	43.5 (53.5)	-		73.5	53.5	-	16	13	Rc3/8	98	49.5 (53)	28.5	104	31	10.5	17.5 spot face depth 11	132	M12 depth 28	M16 depth 21
ø100	75 (85)	53 (63)	-		85	63	-	23	15	Rc3/8	117	59 (62.5)	28.5	123.5	38	10.5	17.5 spot face depth 11	156	M12 depth 28	M20 depth 27

Code	Common dimensions with switch						Reed TOH/TOV, T5H/TSV		Proximity T2H/T2V, T3H/T3V		Proximity T2WH/T2VW, T3WH/T3VW		Proximity F2H/F2V, F3H/F3V, F2YH/F2YV, F3YH/F3YV		Proximity F2S/F3S		Dimensions of rod end male thread part							
	M	MM	N	O	U	WF	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD	a'	c'	H	KK'	M	MM	T	wf
ø20	8	10	25.5	-	-	4.5	3	17.5	3	17.5	5	19.5	7.5	22	6.5	21	14	12	13	M8	8	10	5	4.5
ø25	10	12	28	-	-	5	4	19.5	4	19.5	6	21.5	8.5	24	7.5	23	17.5	15	17	M 10 x 1.25	10	12	6	5
ø32	14	16	34	4.5	-	7	4	19.5	4	19.5	6	21.5					23.5	20.5	22	M 14 x 1.5	14	16	8	5
ø40	14	16	40	5	28	17	7	12	7	12	8.5	13.5					23.5	20.5	22	M 14 x 1.5	14	16	8	15
ø50	17	20	50	7	35	18	7.5	12.5	7.5	12.5	9	14					28.5	26	27	M 18 x 1.5	17	20	11	15
ø63	17	20	60	7	35	18	12.5	13	12.5	13	14	14.5					28.5	26	27	M 18 x 1.5	17	20	1	15
ø80	22	25	77	6	43	20	17.5	15.5	17.5	15.5	19	17					35.5	32.5	32	M 22 x 1.5	22	25	13	18
ø100	27	30	94	6.5	59	22	23	19.5	23	19.5	24.5	21					35.5	32.5	41	M 26 x 1.5	27	30	16	18

---

# MEMO

---

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

**SSG**

**SSD**

**CAT**

**MDC2**

**MVC**

**SMG**

MSD/  
MSDG

**FC\***

**STK**

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending




# SSD2-G Series

## Dimensions with mounting bracket


● Clevis bracket (CB)  
SSD2-G(L)-20 to 100 -CB

•  $\phi 20/\phi 25$


•  $\phi 32$  to  $\phi 100$

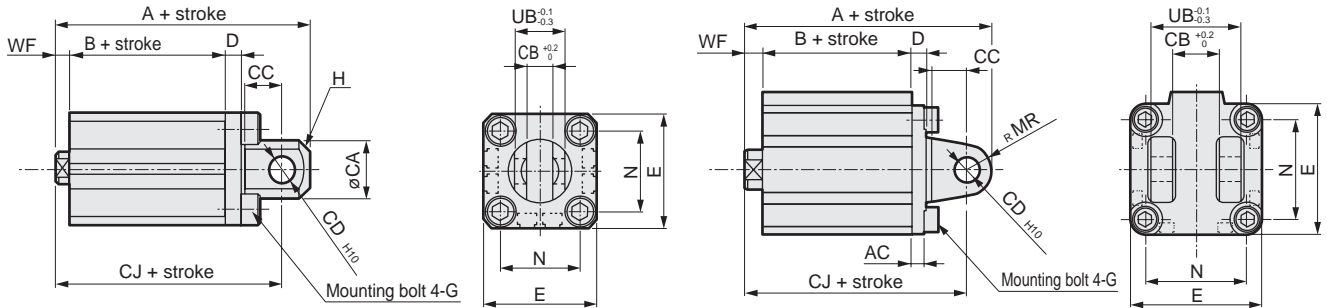

Rod end male thread



Rod end male thread




Code	Common dimensions															
	Bore size(mm)	AC	CA	CB	CC	CD	D	E	G	MR	N	UB				
SCP*3	$\phi 20$	-	20	8.2	12	8	5	36	M 6 x 16	-	25.5	16				
CMK2	$\phi 25$	-	24	10.2	14	10	5	40	M 6 x 16	-	28	20				
CMA2	$\phi 32$	4.5	-	18.2	14	10	5	45	M 6 x 16	10	34	36				
SCM	$\phi 40$	5	-	18.2	14	10	6	52	M 6 x 16	10	40	36				
SCG	$\phi 50$	6	-	22.2	20	14	7	64	M 8 x 20	14	50	44				
SCA2	$\phi 63$	7	-	22.2	20	14	8	77	M 10 x 25	14	60	44				
SCS2	$\phi 80$	9	-	28.2	27	18	10	98	M 12 x 40	18	77	56				
CKV2	$\phi 100$	12	-	32.2	31	22	13	117	M 12 x 40	22	94	64				
Code	Bore size(mm)	Female thread						Male thread								
		WF	No switch			With switch			a'	wf	No switch			With switch		
MRL2		A	B	CJ	A	B	CJ					A	B	CJ	A	B
MRG2	$\phi 20$	4.5	61	29.5	52	71	39.5	62	14	4.5	75	29.5	52	85	39.5	62
	$\phi 25$	5	67.5	32.5	57.5	77.5	42.5	67.5	17.5	5	85	32.5	57.5	95	42.5	67.5
SM-25	$\phi 32$	7	70	33	60	80	43	70	23.5	5	91.5	33	58	101.5	43	68
	$\phi 40$	17	78.5	29.5	68.5	88.5	39.5	78.5	23.5	15	100	29.5	66.5	110	39.5	76.5
ShkAbs	$\phi 50$	18	90.5	30.5	76.5	100.5	40.5	86.5	28.5	15	116	30.5	73.5	126	40.5	83.5
	$\phi 63$	18	98	36	84	108	46	94	28.5	15	123.5	36	81	133.5	46	91
FJ	$\phi 80$	20	119.5	43.5	101.5	129.5	53.5	111.5	35.5	18	153	43.5	99.5	163	53.5	109.5
FK	$\phi 100$	22	142	53	120	152	63	130	35.5	18	173.5	53	116	183.5	63	126


### Dimensions with mounting bracket

- Head side flange (FB)  
SSD2-G(L)-20 to 100 -FB


·  $\phi 20/\phi 25$

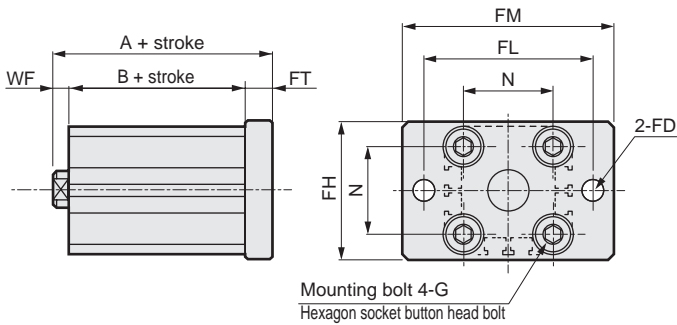


·  $\phi 32$  to  $\phi 100$

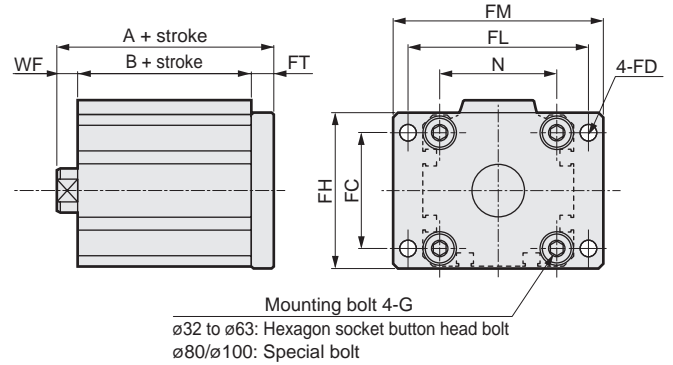

Rod end male thread

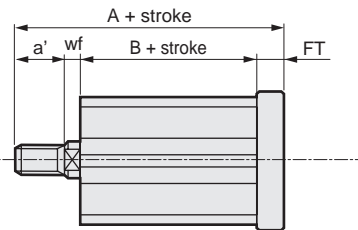

Rod end male thread



Code	Common dimensions								Female thread				Male thread							
	Bore size (mm)	FC	FD	FH	FL	FM	FT	N	G	WF	No switch		With switch		a'	wf	No switch		With switch	
											A	B	A	B			A	B	A	B
ø20	-	6.6	39	48	60	8	25.5	M6x16	4.5	42	29.5	52	39.5	14	4.5	56	29.5	66	39.5	
ø25	-	6.6	42	52	64	8	28	M6x16	5	45.5	32.5	55.5	42.5	17.5	5	63	32.5	73	42.5	
ø32	34	5.5	48	56	65	8	34	M6x16	7	48	33	58	43	23.5	5	69.5	33	79.5	43	
ø40	40	5.5	54	62	72	8	40	M6x16	17	54.5	29.5	64.5	39.5	23.5	15	76	29.5	86	39.5	
ø50	50	6.6	67	76	89	9	50	M8x20	18	57.5	30.5	67.5	40.5	28.5	15	83	30.5	93	40.5	
ø63	60	9	80	92	108	9	60	M10x25	18	63	36	73	46	28.5	15	88.5	36	98.5	46	
ø80	77	11	99	116	134	11	77	M12x40	20	74.5	43.5	84.5	53.5	35.5	18	108	43.5	118	53.5	
ø100	94	11	117	136	154	11	94	M12x40	22	86	53	96	63	35.5	18	117.5	53	127.5	63	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25


ShkAbs

FJ

FK

Spd  
Contr

Ending



Compact cylinder Double acting/coolant proof

# SSD2-G2/G3 Series

● Bore size:  $\phi 16/\phi 20/\phi 25/\phi 32/\phi 40/\phi 50/\phi 63/\phi 80/\phi 100$

JIS symbol



## Specifications

Item	SSD2-G2/G3									
	SSD2-G2L/G3L (with switch)									
Bore size mm	$\phi 16$	$\phi 20$	$\phi 25$	$\phi 32$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$	
Actuation	Double acting									
Working fluid	Compressed air									
Max. working pressure MPa	1.0									
Min. working pressure MPa	0.15					0.1				
Proof pressure MPa	1.6									
Ambient temperature °C	-10 to 60 (no freezing)									
Port size	M5			Rc1/8 (*1)			Rc1/4		Rc3/8	
Stroke tolerance mm	$^{+1.0}$ 0									
Working piston speed mm/s	50 to 500					50 to 300				
Cushion	No									
Lubrication	Not required (use turbine oil class 1 ISO VG32 if lubrication is necessary)									
Allowable absorbed energy J	0.01	0.016	0.021	0.025	0.092	0.1	0.12	0.27	0.56	

\*1: The  $\phi 32$  bore size with a 5 mm stroke and without a switch has a port size of M5.


## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\phi 16$	5/10/15/20/25/30	30	1 (10) The value in ( ) is for types with one or two switches.
$\phi 20$	5/10/15/20/25/30/	50	
$\phi 25$	35/40/45/50		
$\phi 32$	5/10/15/20/25/30/35/	100	
$\phi 40$	40/45/50/75/100		
$\phi 50$	10/15/20/25/30/35/40/45	100	
$\phi 63$			
$\phi 80$			
$\phi 100$	/50/75/100		

## Custom stroke

### ● SSD2-G2/G3 Series

Item	Standard product	
	Standard stroke body with spacer	
Model No.	Refer to How to order.	
Product Descriptions	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.	
Stroke range	Bore size	Stroke range
	16	1 to 29
	20 to 25	1 to 49
	32 to 100	1 to 99
Example of model No.	Model No.: SSD2-G2-32-38 A +2 mm spacer is added to the SSD2-G2-32-40 standard cylinder to create 38mm stroke. B + stroke is 73 mm.	

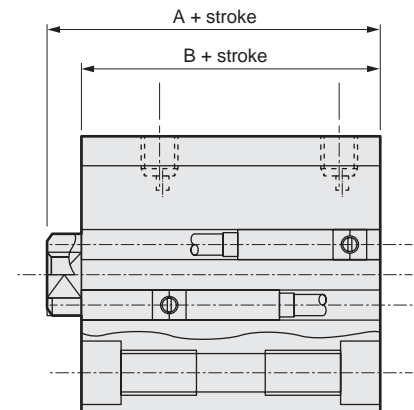

## Switch specifications

● Proximity switch

Model No.	Proximity/2-wire	Proximity/3-wire
Item	T2YLH/T2YLV	T3YLH/T3YLV
Applications	Dedicated for programmable controller	Programmable controller, relay
Power supply voltage	-	10 to 28 VDC
Load voltage/current	10 to 30 VDC, 5 to 20 mA *1	30 VDC or less, 50 mA or less
Indicator	Red/green LED (Lit when ON)	
Leakage current	1 mA or less	10 μA or less
Max. shock resistance	980 m/S <sup>2</sup>	
Weight	g 1 m:33 3 m:87 5 m:142	

\*1 : The above max. load current is 20 mA at 25°C. The current is lower than 20 mA if the operating ambient temperature around the switch is higher than 25°C. (5 to 10 mA at 60°C)

\*2: Refer to Ending Page 1 for other switch specifications.

## Cylinder weight table (the weight of the switches is when there are 2 cylinder switches.)

(Unit: g)

Stroke (mm)	5		10		15		20		25		30		35		40		45		50		75		100	
	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch
ø16	62	118	73	118	83	158	94	139	105	150	116	161	-	-	-	-	-	-	-	-	-	-	-	-
ø20	108	163	120	195	133	208	146	221	158	233	171	246	184	259	197	272	210	285	223	298	-	-	-	-
ø25	151	242	166	257	182	273	198	289	214	305	229	320	245	336	261	352	293	384	292	383	-	-	-	-
ø32	230	344	252	366	274	388	296	410	317	431	339	453	361	475	383	497	427	519	426	540	487	648	707	755
ø40	301	444	328	471	354	497	381	524	408	551	434	577	461	604	487	630	540	657	540	683	625	816	890	948
ø50	-	-	513	707	555	749	597	791	639	833	682	876	734	918	766	960	890	1002	850	1044	787	1254	1307	1464
ø63	-	-	733	1012	788	1067	843	1122	898	1177	953	1232	1009	1288	1064	1343	1175	1398	1174	1453	1384	1728	1939	2003
ø80	-	-	1532	1945	1619	2032	1705	2118	1792	2203	1878	2288	1965	2377	2052	2465	2226	2552	2225	2638	2564	3071	3434	3503
ø100	-	-	2212	2779	2326	2893	2439	3006	2553	3120	2667	3234	2781	3348	2894	3461	3121	3575	3122	3689	3622	4259	4757	4829

## Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa										
		0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø16	Push	-	30.2	40.2	60.3	80.4	1.01x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.61x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.01x10 <sup>2</sup>
	Pull	-	22.6	30.2	45.2	60.3	75.4	90.5	1.06x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.36x10 <sup>2</sup>	1.51x10 <sup>2</sup>
ø20	Push	-	47.1	62.8	94.2	1.26x10 <sup>2</sup>	1.57x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.20x10 <sup>2</sup>	2.51x10 <sup>2</sup>	2.83x10 <sup>2</sup>	3.14x10 <sup>2</sup>
	Pull	-	35.3	47.1	70.7	94.2	1.18x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.65x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.12x10 <sup>2</sup>	2.36x10 <sup>2</sup>
ø25	Push	-	73.6	98.2	1.47x10 <sup>2</sup>	1.96x10 <sup>2</sup>	2.45x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.44x10 <sup>2</sup>	3.93x10 <sup>2</sup>	4.42x10 <sup>2</sup>	4.91x10 <sup>2</sup>
	Pull	-	56.7	75.6	1.13x10 <sup>2</sup>	1.51x10 <sup>2</sup>	1.89x10 <sup>2</sup>	2.27x10 <sup>2</sup>	2.64x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.40x10 <sup>2</sup>	3.78x10 <sup>2</sup>
ø32	Push	-	1.21x10 <sup>2</sup>	1.61x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.22x10 <sup>2</sup>	4.02x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.63x10 <sup>2</sup>	6.43x10 <sup>2</sup>	7.24x10 <sup>2</sup>	8.04x10 <sup>2</sup>
	Pull	-	90.5	1.21x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.62x10 <sup>2</sup>	4.22x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.43x10 <sup>2</sup>	6.03x10 <sup>2</sup>
ø40	Push	-	1.88x10 <sup>2</sup>	2.51x10 <sup>2</sup>	3.77x10 <sup>2</sup>	5.03x10 <sup>2</sup>	6.28x10 <sup>2</sup>	7.54x10 <sup>2</sup>	8.80x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.13x10 <sup>3</sup>	1.26x10 <sup>3</sup>
	Pull	-	1.58x10 <sup>2</sup>	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>
ø50	Push	-	2.95x10 <sup>2</sup>	3.93x10 <sup>2</sup>	5.89x10 <sup>2</sup>	7.85x10 <sup>2</sup>	9.82x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.37x10 <sup>3</sup>	1.57x10 <sup>3</sup>	1.77x10 <sup>3</sup>	1.96x10 <sup>3</sup>
	Pull	-	2.47x10 <sup>2</sup>	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>
ø63	Push	3.12x10 <sup>2</sup>	4.68x10 <sup>2</sup>	6.23x10 <sup>2</sup>	9.35x10 <sup>2</sup>	1.25x10 <sup>3</sup>	1.56x10 <sup>3</sup>	1.87x10 <sup>3</sup>	2.18x10 <sup>3</sup>	2.49x10 <sup>3</sup>	2.81x10 <sup>3</sup>	3.12x10 <sup>3</sup>
	Pull	2.80x10 <sup>2</sup>	4.20x10 <sup>2</sup>	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>	2.24x10 <sup>3</sup>	2.52x10 <sup>3</sup>	2.80x10 <sup>3</sup>
ø80	Push	5.03x10 <sup>2</sup>	7.54x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.51x10 <sup>3</sup>	2.01x10 <sup>3</sup>	2.51x10 <sup>3</sup>	3.02x10 <sup>3</sup>	3.52x10 <sup>3</sup>	4.02x10 <sup>3</sup>	4.52x10 <sup>3</sup>	5.03x10 <sup>3</sup>
	Pull	4.54x10 <sup>2</sup>	6.80x10 <sup>2</sup>	9.07x10 <sup>2</sup>	1.36x10 <sup>3</sup>	1.81x10 <sup>3</sup>	2.27x10 <sup>3</sup>	2.72x10 <sup>3</sup>	3.17x10 <sup>3</sup>	3.63x10 <sup>3</sup>	4.08x10 <sup>3</sup>	4.54x10 <sup>3</sup>
ø100	Push	7.85x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.57x10 <sup>3</sup>	2.36x10 <sup>3</sup>	3.14x10 <sup>3</sup>	3.93x10 <sup>3</sup>	4.71x10 <sup>3</sup>	5.50x10 <sup>3</sup>	6.28x10 <sup>3</sup>	7.07x10 <sup>3</sup>	7.85x10 <sup>3</sup>
	Pull	7.15x10 <sup>2</sup>	1.07x10 <sup>3</sup>	1.43x10 <sup>3</sup>	2.14x10 <sup>3</sup>	2.86x10 <sup>3</sup>	3.57x10 <sup>3</sup>	4.29x10 <sup>3</sup>	5.00x10 <sup>3</sup>	5.72x10 <sup>3</sup>	6.43x10 <sup>3</sup>	7.15x10 <sup>3</sup>

# SSD2-G2/G3 Series

SCP\*3  
CMK2  
CMA2  
SCM  
SCG  
SCA2  
SCS2  
CKV2  
CAV2/  
COVPIN2  
SSD2  
SSG  
SSD  
CAT  
MDC2  
MVC  
SMG  
MSD/  
MSDG  
FC\*  
STK  
SRL3  
SRG3  
SRM3  
SRT3  
MRL2  
MRG2  
SM-25  
ShkAbs  
FJ  
FK  
Spd  
Contr  
Ending

## How to order

No switch (without magnet for switch)

**SSD2-G2-20-30-N-LB-I**

With switch (built-in magnet for switch)

**SSD2-G2L-20-30-T2YLH-R-N-LB-I**

**A** Degree of protection level  
**B** Bore size

**C** Port thread

**D** Stroke

**E** Switch model No.

\*1

\*6

**F** Switch quantity

**G** Option

**H** Mounting bracket

\*2

\*3

**I** Accessory

\*4

## ⚠ Precautions for model No. selection

\*1 : The F-switch can only be mounted on the piping port surface of bore sizes  $\phi 20$  and  $\phi 25$ .

\*2 : The mounting bracket is included at shipment.

\*3 : The structure of bore sizes  $\phi 16$  to  $\phi 32$  does not permit retrofitting of the foot bracket (LB) or flange bracket (FA) on the rod side. Assembly before shipment is available as made to order.

\*4 : "I" and "Y" cannot be selected together.

\*5 : Refer to pages 750 and 751 for combinations of variations/options.

\*6 : Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.

[Example of model No.]

**SSD2-G2L-32-30-T2YLH-R-N**

Model: Compact cylinder

**A** Degree of protection level : Coolant proof scraper + packing NBR, with switch

**B** Bore size :  $\phi 32$  mm

**C** Port thread : Rc thread

**D** Stroke : 30 mm

**E** Switch model No. : Proximity switch T2YLH, lead wire 1 m

**F** Switch quantity : 1 on rod side

**G** Option : Rod end male thread

**H** Mounting bracket : Axial foot

Code	Description
<b>A Degree of protection level</b>	
<b>G2</b>	Coolant proof scraper + packing NBR
<b>G3</b>	Coolant proof scraper + packing FKM
<b>G2L</b>	Coolant proof scraper + packing NBR, with switch
<b>G3L</b>	Coolant proof scraper + packing FKM, with switch

<b>B Bore size (mm)</b>	
<b>16</b>	$\phi 16$
<b>20</b>	$\phi 20$
<b>25</b>	$\phi 25$
<b>32</b>	$\phi 32$
<b>40</b>	$\phi 40$
<b>50</b>	$\phi 50$
<b>63</b>	$\phi 63$
<b>80</b>	$\phi 80$
<b>100</b>	$\phi 100$

<b>C Port thread</b>	
<b>Blank</b>	Rc thread
<b>NN</b>	NPT thread ( $\phi 32$ and over) (made-to-order product)
<b>GN</b>	G thread ( $\phi 32$ and over) (made-to-order product)

<b>D Stroke (mm)</b>
Refer to the stroke table on the following page.

<b>E Switch model No.</b>					
Lead wire	Lead wire	Contact	Voltage	Indicator	Lead wire
Straight	L-shaped				
<b>T2YLH*</b>	<b>T2YLV*</b>	Proximity	DC	2-color LED	2-wire
<b>T3YLH*</b>	<b>T3YLV*</b>				

<b>* Lead wire length</b>	
<b>Blank</b>	1 m (standard)
<b>3</b>	3 m (option)
<b>5</b>	5 m (option)

<b>F Switch quantity</b>	
<b>R</b>	1 on rod side
<b>H</b>	1 on head side
<b>D</b>	2

<b>G Option</b>	
<b>Blank</b>	Rod end female thread
<b>N</b>	Rod end male thread

<b>H Mounting bracket</b>	
<b>Blank</b>	Without mounting bracket
<b>LB</b>	Axial foot (made-to-order product)
<b>CB</b>	Clevis bracket (pin and snap ring included)
<b>FA</b>	Rod side flange (made-to-order product)
<b>FB</b>	Head side flange

<b>I Accessory (available when rod end male thread "N" is selected)</b>	
<b>I</b>	Rod eye
<b>Y</b>	Rod clevis (pin and snap ring included)

### [Stroke table]


Stroke (mm)	Applicable bore size									
	16	20	25	32	40	50	63	80	100	
Standard stroke	5	●	●	●	●	●				
	10	●	●	●	●	●	●	●	●	●
	15	●	●	●	●	●	●	●	●	●
	20	●	●	●	●	●	●	●	●	●
	25	●	●	●	●	●	●	●	●	●
	30	●	●	●	●	●	●	●	●	●
	35		●	●	●	●	●	●	●	●
	40		●	●	●	●	●	●	●	●
	45		●	●	●	●	●	●	●	●
	50		●	●	●	●	●	●	●	●
	75				●	●	●	●	●	●
	100				●	●	●	●	●	●
Min. stroke (mm) *1	1									
Max. stroke (mm)	30	50	100							
Custom stroke *2										

\*1: Less than 10 mm stroke is not available.

Refer to page 946 for the min. stroke with switch.

\*2: The total length when using a custom stroke is the same as that when using the next longer standard stroke.

### How to order switch



### How to order mounting bracket

Bore size (mm)	ø16	ø20	ø25	ø32	ø40	ø50	ø63
<b>Mounting bracket</b>							
Foot (LB)					SSD2-LB-40	SSD2-LB-50	SSD2-LB-63
Flange (FA/FB)					SSD2-FA-40	SSD2-FA-50	SSD2-FA-63
Clevis bracket (CB)	SSD2-CB-16	SSD2-CB-20	SSD2-CB-25	SSD2-CB-32	SSD2-CB-40	SSD2-CB-50	SSD2-CB-63
Bore size (mm)	ø80	ø100					
<b>Mounting bracket</b>							
Foot (LB)	SSD2-LB-80	SSD2-LB-100					
Flange (FA/FB)	SSD2-FA-80	SSD2-FA-100					
Clevis bracket (CB)	SSD2-CB-80	SSD2-CB-100					

\*1: The foot mounting bracket is provided as 2 pcs./set.

\*2: The structure of bore sizes ø16 to ø32 does not permit retrofitting of the foot bracket (LB) or flange bracket (FA) on the rod side. Contact CKD for details.


SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/ COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/ MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending

# SSD2-G2/G3 Series


## Internal structure and parts list

● Degree of protection: Packing NBR SSD2-G2/G2L  
Packing FKM SSD2-G3/G3L


● SSD2-G<sub>2</sub><sup>2</sup>-16 (without switch)

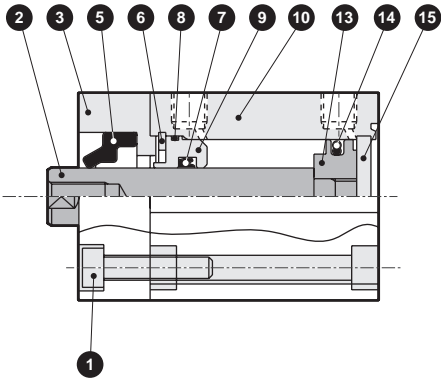


● SSD2-G<sub>2</sub><sup>2</sup>L-16 (with switch)

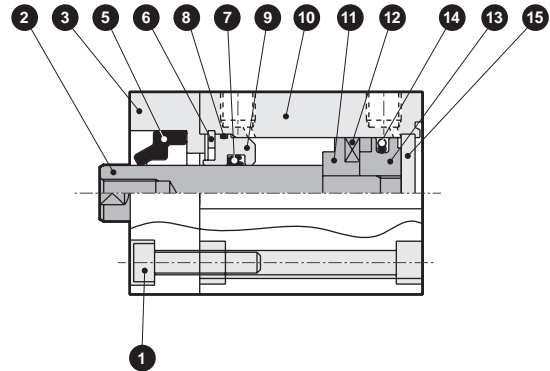


● SSD2-G<sub>2</sub><sup>2</sup>-20, 25 (without switch)

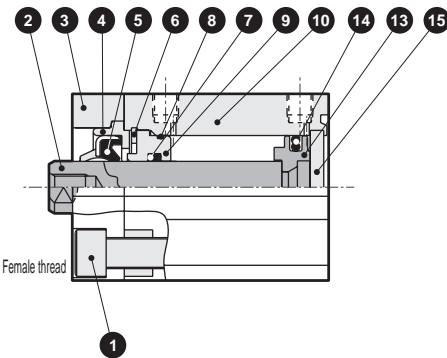


● SSD2-G<sub>2</sub><sup>2</sup>L-20, 25 (with switch)

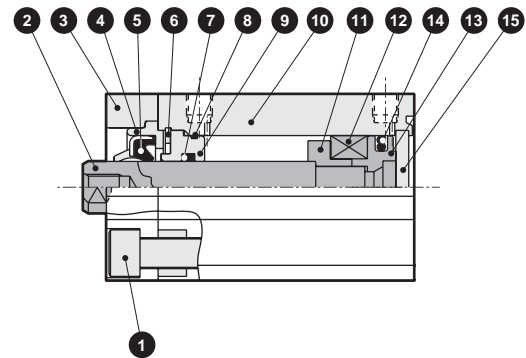


● SSD2-G<sub>2</sub><sup>2</sup>-32 (without switch)

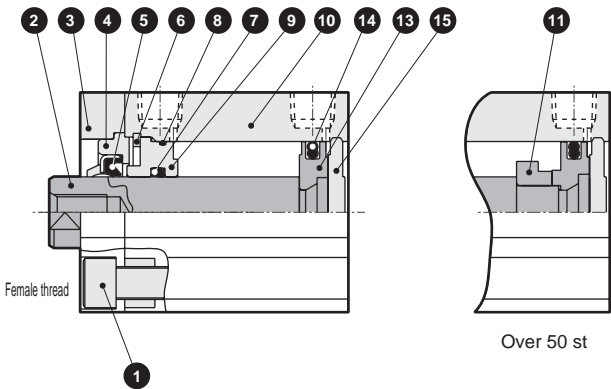


● SSD2-G<sub>2</sub><sup>2</sup>L-32 (with switch)

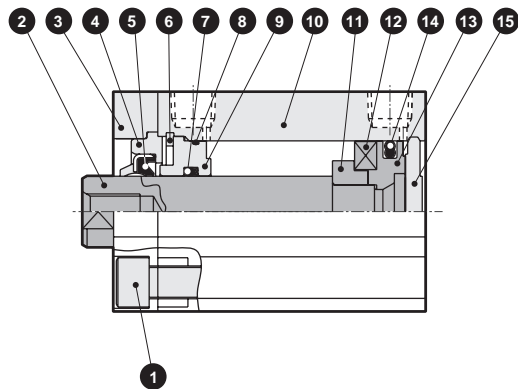

● SSD2-G<sub>2</sub><sup>2</sup>-40, 50 (without switch)

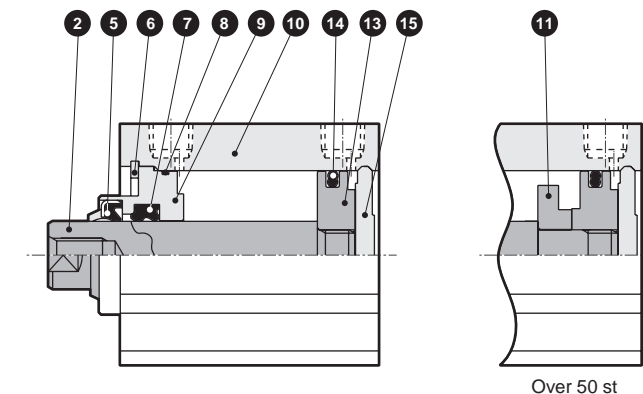


● SSD2-G<sub>2</sub><sup>2</sup>L-40, 50 (with switch)

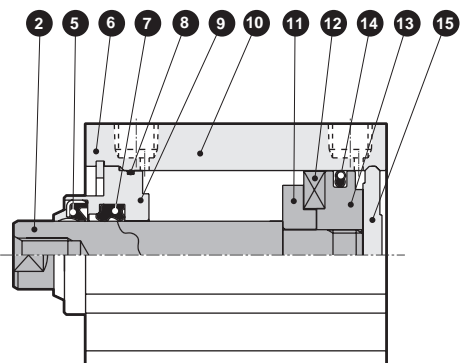


## Internal structure and parts list

- Degree of protection: Packing NBR SSD2-G2/G2L  
Packing FKM SSD2-G3/G3L

- SSD2-G<sub>2</sub>-63 to 100 (without switch)

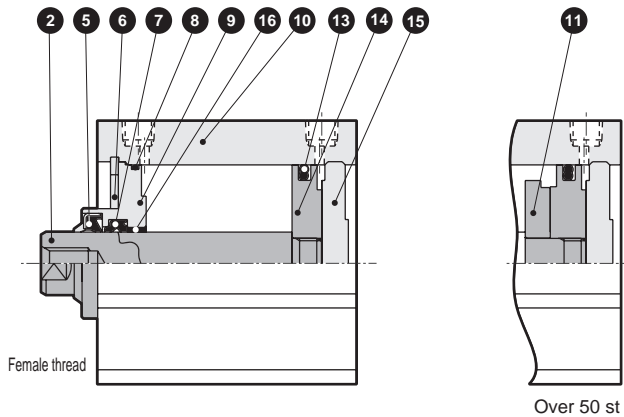

- SSD2-G<sub>2</sub> L-63 to 100 (with switch)

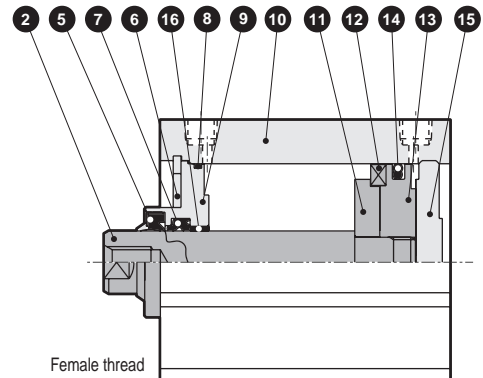

## Main parts list

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Hexagon socket head cap screw	Stainless steel	ø16 to ø32 only	9	Rod metal	ø16 to ø50: Special aluminum ø63 to ø100: Aluminum alloy	ø16 to ø50: Alumite ø63 to ø100: Chromate
2	Piston rod	Stainless steel	Industrial chrome plating	10	Body	Aluminum alloy	Hard alumite
3	Adaptor (A)	Aluminum alloy	Alumite: ø16 to ø32 only	11	Spacer	Aluminum alloy	Chromate
4	Adaptor (B)	Aluminum alloy	Alumite: ø16 to ø32 only	12	Magnet	Plastic	
5	Scraper	G2	Nitrile rubber	13	Piston	Aluminum alloy	Chromate
		G3	Fluoro rubber				
6	C-snap ring	Stainless steel		14	Piston packing	G2	Nitrile rubber
7	Rod packing	G2	Nitrile rubber			G3	Fluoro rubber
		G3	Fluoro rubber				
8	Rod metal gasket	G2	Nitrile rubber	15	Cover	ø16 to ø25: Stainless steel ø32 to ø100: Aluminum alloy	Alumite: ø32 to ø100
		G3	Fluoro rubber				
				16	Bush	Oiles drymet	ø63 to ø100 only

## Repair parts list

Part name	Kit No.	Repair parts No.
Bore size (mm)		
	ø16	SSD2-G2-16K SSD2-G3-16K
ø20		SSD2-G2-20K SSD2-G3-20K
	ø25	SSD2-G2-25K SSD2-G3-25K
ø32		SSD2-G2-32K SSD2-G3-32K
	ø40	SSD2-G2-40K SSD2-G3-40K
ø50		SSD2-G2-50K SSD2-G3-50K
	ø63	SSD2-G2-63K SSD2-G3-63K
ø80		SSD2-G2-80K SSD2-G3-80K
	ø100	SSD2-G2-100K SSD2-G3-100K

5 7 8 14

Note: Specify the kit No. when placing an order.

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

SSD2

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending




# SSD2-G2/G3 Series

## dimensions

- Degree of protection: Packing NBR  
SSD2-G2/G2L
- Degree of protection: Packing FKM  
SSD2-G3/G3L

● Rod end male thread

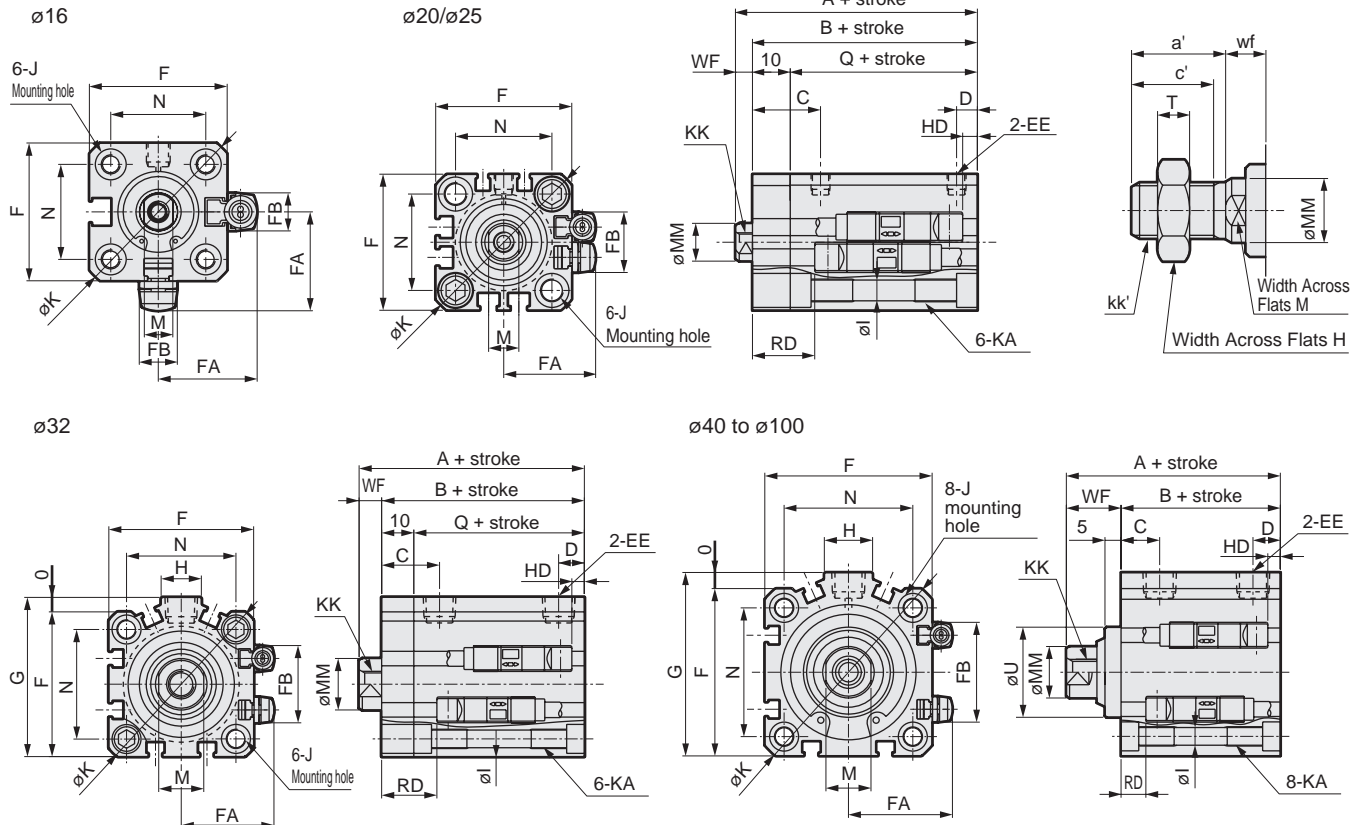

- \*1: To calculate A + stroke or B + stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value. (Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.
- \*2: HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.
- \*3: For dimensions of individual accessories, refer to pages 1046 to 1049.
- \*4: Dimensions in ( ) of codes A, B and Q are for strokes of more than 50 mm.
- \*5: The ø32 bore size with a 5 mm stroke and without a switch has a port size of M5.\*6: Dimensions in ( ) of code J are for the spot face of rod side mounting hole.

Code	Dimensions without switch			Common dimensions with switch															
	A <sup>*1</sup>	B <sup>*1</sup>	Q	A <sup>*1</sup>	B <sup>*1</sup>	Q	C	D	EE <sup>*5</sup>	F	FA	FB	G	H	I	J	K	KA	KK
ø16	35.5	27	17	40.5	32	22	15.5	5.5	M5	29	20.5	8	-	-	3.5	6.5 spot face depth 3.5(13.4)	38	M4 depth 7	M4 depth 8
ø20	39	29.5	19.5	49	39.5	29.5	18	5.5	M5	36	24.5	16	-	-	5.5	9 spot face depth 5.5(15.5)	47	M6 depth 11	M5 depth 7
ø25	42.5	32.5	22.5	52.5	42.5	32.5	21	6	M5	40	26.5	17	-	-	5.5	9 spot face depth 5.5(15.5)	51	M6 depth 11	M6 depth 12
ø32	45 (55)	33 (43)	23 (33)	55	43	33	18	8	Rc1/8	45	29	24	49.5	12.5	5.5	9 spot face depth 5.5(15.5)	60	M6 depth 11	M8 depth 13
ø40	46.5 (56.5)	29.5 (39.5)	-	56.5	39.5	-	12	8.5	Rc1/8	52	32.5	31	57	15	5.5	9 spot face depth 5.5	69	M6 depth 11	M8 depth 13
ø50	48.5 (58.5)	30.5 (40.5)	-	58.5	40.5	-	10.5	10.5	Rc1/4	64	38.5	32	71	18	6.9	11 spot face depth 6.5	86	M8 depth 13	M10 depth 15
ø63	54 (64)	36 (46)	-	64	46	-	13	11	Rc1/4	77	45	32	84	23	8.7	14 spot face depth 9	103	M10 depth 25	M10 depth 15
ø80	63.5 (73.5)	43.5 (53.5)	-	73.5	53.5	-	16	13	Rc3/8	98	55.5	32	104	31	10.5	17.5 spot face depth 11	132	M12 depth 28	M16 depth 21
ø100	75 (85)	53 (63)	-	85	63	-	23	15	Rc3/8	117	65	32	123.5	38	10.5	17.5 spot face depth 11	156	M12 depth 28	M20 depth 27

Code	Common dimensions with switch						Proximity T2YLH, T2YLV, T3YLH, T3YLV		Dimensions of rod end male thread part							
	M	MM	N	O	U	WF	RD	HD	a'	c'	H	KK'	M	MM	T	wf
ø16	6	8	20	-	-	8.5	1.5	0	12	10	10	M6	6	8	3.6	8.5
ø20	8	10	25.5	-	-	9.5	16.5	2	14	12	13	M8	8	10	5	9.5
ø25	10	12	28	-	-	10	18.5	3	17.5	15	17	M 10 x 1.25	10	12	6	10
ø32	14	16	34	4.5	-	12	19	3	23.5	20.5	22	M 14 x 1.5	14	16	8	10
ø40	14	16	40	5	28	17	12	6.5	23.5	20.5	22	M 14 x 1.5	14	16	8	15
ø50	17	20	50	7	35	18	12	7.5	28.5	26	27	M 18 x 1.5	17	20	11	15
ø63	17	20	60	7	35	18	12.5	12.5	28.5	26	27	M 18 x 1.5	17	20	11	15
ø80	22	25	77	6	43	20	15	17.5	35.5	32.5	32	M 22 x 1.5	22	25	13	18
ø100	27	30	94	6.5	59	22	19	23	35.5	32.5	41	M 26 x 1.5	27	30	16	18

---

# MEMO

---

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

**SSG**

**SSD**

**CAT**

**MDC2**

**MVC**

**SMG**

MSD/  
MSDG

**FC\***

**STK**

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending



# SSD2-G2/G3 Series

## Dimensions with mounting bracket


● Clevis bracket (CB)  
SSD2-G2(L)/G3(L)-16 to 100 -CB

•  $\phi 16$  to  $\phi 25$


•  $\phi 32$  to  $\phi 100$

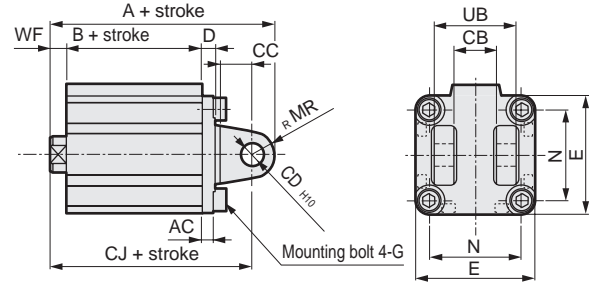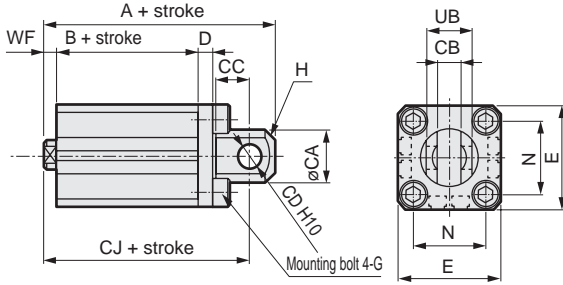

Rod end male thread



Rod end male thread




Code	Common dimensions															
	Bore size(mm)	AC	CA	CB	CC	CD	D	E	G	H	MR	N	UB			
FC*	$\phi 16$	-	15	6.6 <sup>+0.3 0</sup>	8	5	5	29	M 4 x 12	C2	-	20	12			
STK	$\phi 20$	-	20	8.2 <sup>+0.2 0</sup>	12	8	5	36	M 6 x 16	C4	-	25.5	16			
SRL3	$\phi 25$	-	24	10.2 <sup>+0.2 0</sup>	14	10	5	40	M 6 x 16	C5	-	28	20			
SRG3	$\phi 32$	4.5	-	18.2 <sup>+0.2 0</sup>	14	10	5	45	M 6 x 16	-	10	34	36			
	$\phi 40$	5	-	18.2 <sup>+0.2 0</sup>	14	10	6	52	M 6 x 16	-	10	40	36			
SRM3	$\phi 50$	6	-	22.2 <sup>+0.2 0</sup>	20	14	7	64	M 8 x 20	-	14	50	44			
	$\phi 63$	7	-	22.2 <sup>+0.2 0</sup>	20	14	8	77	M 10 x 25	-	14	60	44			
SRT3	$\phi 80$	9	-	28.2 <sup>+0.2 0</sup>	27	18	10	98	M 12 x 40	-	18	77	56			
	$\phi 100$	12	-	32.2 <sup>+0.2 0</sup>	31	22	13	117	M 12 x 40	-	22	94	64			
Code	Bore size(mm)	Female thread						Male thread								
		WF	No switch			With switch			a'	wf	No switch			With switch		
MRG2		A	B	CJ	A	B	CJ					A	B	CJ	A	B
SM-25	$\phi 16$	8.5	56.5	27	50.5	61.5	32	55.5	12	8.5	68.5	27	50.5	73.5	32	55.5
	$\phi 20$	9.5	66	29.5	57	76	39.5	67	14	9.5	80	29.5	57	90	39.5	67
	$\phi 25$	10	72.5	32.5	62.5	82.5	42.5	72.5	17.5	10	90	32.5	62.5	100	42.5	72.5
ShkAbs	$\phi 32$	12	75	33	65	85	43	75	23.5	10	96.5	33	63	106.5	43	73
	$\phi 40$	17	78.5	29.5	68.5	88.5	39.5	78.5	23.5	15	100	29.5	66.5	110	39.5	76.5
FJ	$\phi 50$	18	90.5	30.5	76.5	100.5	40.5	86.5	28.5	15	116	30.5	73.5	126	40.5	83.5
	$\phi 63$	18	98	36	84	108	46	94	28.5	15	123.5	36	81	133.5	46	91
FK	$\phi 80$	20	119.5	43.5	101.5	129.5	53.5	111.5	35.5	18	153	43.5	99.5	163	53.5	109.5
Spd Contr	$\phi 100$	22	142	53	120	152	63	130	35.5	18	173.5	53	116	183.5	63	126


## Dimensions with mounting bracket

- Head side flange (FB)  
SSD2-G2(L)/G3 (L)-20 to 100-FB


·  $\phi 16$  to  $\phi 25$

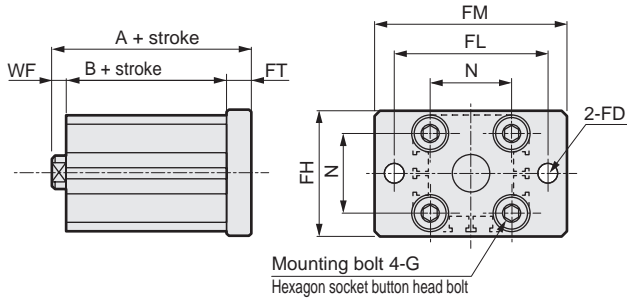


·  $\phi 32$  to  $\phi 100$

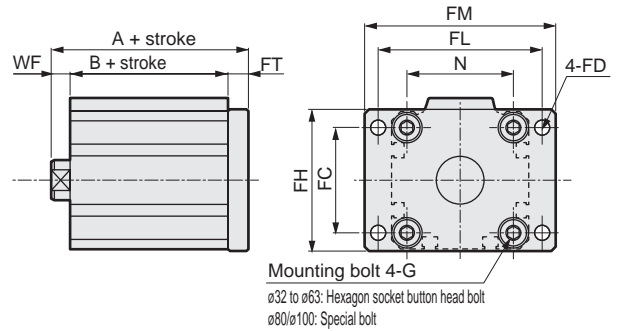

Rod end male thread



Rod end male thread



Code	Common dimensions								Female thread				Male thread							
	Bore size (mm)	FC	FD	FH	FL	FM	FT	G	N	WF	No switch		With switch		a'	wf	No switch		With switch	
											A	B	A	B			A	B	A	B
$\phi 16$	-	4.5	30	45	55	5.5	M4x12	20	8.5	41	27	46	32	12	8.5	53	27	58	32	
$\phi 20$	-	6.6	39	48	60	8	M6x16	25.5	9.5	47	29.5	57	39.5	14	9.5	61	29.5	71	39.5	
$\phi 25$	-	6.6	42	52	64	8	M6x16	28	10	50.5	32.5	60.5	42.5	17.5	10	68	32.5	78	42.5	
$\phi 32$	34	5.5	48	56	65	8	M6x16	34	12	53	33	63	43	23.5	10	74.5	33	84.5	43	
$\phi 40$	40	5.5	54	62	72	8	M6x16	40	17	54.5	29.5	64.5	39.5	23.5	15	76	29.5	86	39.5	
$\phi 50$	50	6.6	67	76	89	9	M8x20	50	18	57.5	30.5	67.5	40.5	28.5	15	83	30.5	93	40.5	
$\phi 63$	60	9	80	92	108	9	M10x25	60	18	63	36	73	46	28.5	15	88.5	36	98.5	46	
$\phi 80$	77	11	99	116	134	11	M12x40	77	20	74.5	43.5	84.5	53.5	35.5	18	108	43.5	118	53.5	
$\phi 100$	94	11	117	136	154	11	M12x40	94	22	86	53	96	63	35.5	18	117.5	53	127.5	63	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25


ShkAbs

FJ

FK

Spd  
Contr

Ending



# Compact cylinder double acting/high load/coolant proof SSD2-KG2/KG3 Series

- Bore size:  $\varnothing 16/\varnothing 20/\varnothing 25/\varnothing 32/\varnothing 40/\varnothing 50$   
 $\varnothing 63/\varnothing 80/\varnothing 100$



## Specifications

Item	SSD2-KG2/KG3									
	SSD2-KG2L/KG3L (with switch)									
Bore size mm	$\varnothing 16$	$\varnothing 20$	$\varnothing 25$	$\varnothing 32$	$\varnothing 40$	$\varnothing 50$	$\varnothing 63$	$\varnothing 80$	$\varnothing 100$	
Actuation	Double acting									
Working fluid	Compressed air									
Max. working pressure MPa	1.0 ( $\approx 150$ psi, 10 bar)									
Min. working pressure MPa	0.15 ( $\approx 22$ psi, 1.5 bar)					0.1 ( $\approx 15$ psi, 1 bar)				
Proof pressure MPa	1.6 ( $\approx 230$ psi, 16 bar)									
Ambient temperature $^{\circ}\text{C}$	-10 ( $14^{\circ}\text{F}$ ) to 60 ( $140^{\circ}\text{F}$ ) (no freezing)									
Port size	M5x0.8			Rc1/8			Rc1/4		Rc3/8	
Stroke tolerance mm	$+2.0$ 0									
Working piston speed mm/s	50 to 500					50 to 300				
Cushion	Rubber cushion									
Lubrication	Not required (use turbine oil class 1 ISO VG32 if necessary for lubrication)									
Allowable absorbed energy J	0.09	0.16	0.16	0.4	0.63	0.98	1.56	2.51	3.92	

## Stroke


Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\varnothing 16$	5/10/15/20/25/30	30	1(10) The value in ( ) is for types with one or two switches.
$\varnothing 20$	5/10/15/20/25/30/35/40/45/50	50	
$\varnothing 25$	5/10/15/20/25/30/35/40/45/50/75/100	100	
$\varnothing 32$	10/15/20/25/30/35/40/45/50/75/100	100	
$\varnothing 40$			
$\varnothing 50$			
$\varnothing 63$			
$\varnothing 80$			
$\varnothing 100$			

\*1: The custom stroke is available in 1 mm increments. (Less than 10 mm with switch is not available.) However, the total length is the same as that of the next longer standard stroke.

## Custom stroke

### ● SSD2-KG2/KG3 Series

Item	Standard products	
	Standard stroke body with spacer	
Model No.	Refer to How to order.	
Description	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.	
Stroke range	Bore size	Stroke range
	16	1 to 29
	20 to 25	1 to 49
	32 to 100	1 to 99
Example of model No.	Model No.: SSD2-KG2-32-41 A + 4 mm spacer is added to the SSD2-KG2-32-45 standard cylinder to create 41 mm stroke. B + stroke is 88 mm.	

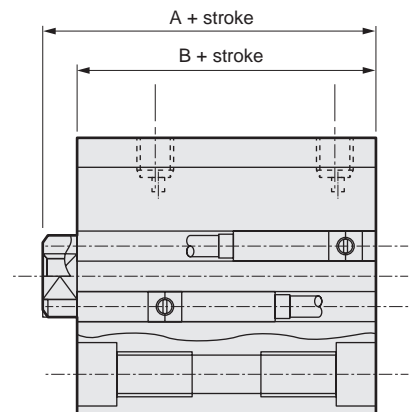

### Switch specifications

● Proximity switch

Type/model No. Item	Proximity/2-wire	Proximity/3-wire
	T2YLH/T2YLV	T3YLH/T3YLV
Applications	Dedicated for programmable controller	Programmable controller, relay
Power supply voltage	-	10 to 28 VDC
Load voltage/current	10 to 30 VDC, 5 to 20 mA *1	30 VDC or less, 50 mA or less
Indicator	Red/green LED (Lit when ON)	
Leakage current	1 mA or less	10 μA or less
Max. shock resistance	980 m/S <sup>2</sup>	
Weight	g 1 m:33 3 m:87 5 m:142	

\*1 : The above max. load current is 20 mA at 25°C. The current is lower than 20 mA if the operating ambient temperature around the switch is higher than 25°C. (5 to 10 mA at 60°C)

\*2: Refer to Ending Page 1 for other switch specifications.

### Cylinder weight table (the weight of the switches is when there are 2 cylinder switches.)

(Unit: g)

Stroke (mm)	5		10		15		20		25		30		35		40		45		50		75		100	
	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch
ø16	69	114	79	124	90	135	101	146	112	157	123	168	-	-	-	-	-	-	-	-	-	-	-	-
ø20	68	163	101	176	114	189	126	201	139	214	151	226	164	239	176	251	189	264	201	276	-	-	-	-
ø25	118	209	134	225	150	241	166	257	181	272	198	289	214	305	230	321	246	337	262	353	-	-	-	-
ø32	211	325	232	346	253	367	275	389	297	411	319	433	341	455	362	476	384	498	405	519	513	627	620	734
ø40	289	432	316	459	343	486	369	512	395	538	422	565	449	592	475	618	502	645	528	671	661	804	793	936
ø50	-	-	509	703	551	745	594	788	637	831	678	872	720	914	762	956	804	998	846	1040	1056	1250	1266	1460
ø63	-	-	727	1006	782	1061	837	1116	893	1172	948	1227	1003	1282	1058	1337	1113	1392	1168	1447	1443	1722	1718	1997
ø80	-	-	1274	1687	1361	1774	1447	1860	1534	1947	1621	2034	1708	2121	1794	2207	1881	2294	1967	2380	2400	2813	2832	3245
ø100	-	-	1887	2454	2001	2568	2115	2682	2229	2796	2342	2909	2456	3023	2570	3137	2684	3251	2798	3365	3368	3935	3938	4505

### Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa										
		0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø16	Push	-	30.2	40.2	60.3	80.4	1.01x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.61x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.01x10 <sup>2</sup>
	Pull	-	22.6	30.2	45.2	60.3	75.4	90.5	1.06x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.36x10 <sup>2</sup>	1.51x10 <sup>2</sup>
ø20	Push	-	47.1	62.8	94.2	1.26x10 <sup>2</sup>	1.57x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.20x10 <sup>2</sup>	2.51x10 <sup>2</sup>	2.83x10 <sup>2</sup>	3.14x10 <sup>2</sup>
	Pull	-	35.3	47.1	70.7	94.2	1.18x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.65x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.12x10 <sup>2</sup>	2.36x10 <sup>2</sup>
ø25	Push	-	73.6	98.2	1.47x10 <sup>2</sup>	1.96x10 <sup>2</sup>	2.45x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.44x10 <sup>2</sup>	3.93x10 <sup>2</sup>	4.42x10 <sup>2</sup>	4.91x10 <sup>2</sup>
	Pull	-	56.7	75.6	1.13x10 <sup>2</sup>	1.51x10 <sup>2</sup>	1.89x10 <sup>2</sup>	2.27x10 <sup>2</sup>	2.64x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.40x10 <sup>2</sup>	3.78x10 <sup>2</sup>
ø32	Push	-	1.21x10 <sup>2</sup>	1.61x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.22x10 <sup>2</sup>	4.02x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.63x10 <sup>2</sup>	6.43x10 <sup>2</sup>	7.24x10 <sup>2</sup>	8.04x10 <sup>2</sup>
	Pull	-	90.5	1.21x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.62x10 <sup>2</sup>	4.22x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.43x10 <sup>2</sup>	6.03x10 <sup>2</sup>
ø40	Push	-	1.88x10 <sup>2</sup>	2.51x10 <sup>2</sup>	3.77x10 <sup>2</sup>	5.03x10 <sup>2</sup>	6.28x10 <sup>2</sup>	7.54x10 <sup>2</sup>	8.80x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.13x10 <sup>3</sup>	1.26x10 <sup>3</sup>
	Pull	-	1.58x10 <sup>2</sup>	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>
ø50	Push	-	2.95x10 <sup>2</sup>	3.93x10 <sup>2</sup>	5.89x10 <sup>2</sup>	7.85x10 <sup>2</sup>	9.82x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.37x10 <sup>3</sup>	1.57x10 <sup>3</sup>	1.77x10 <sup>3</sup>	1.96x10 <sup>3</sup>
	Pull	-	2.47x10 <sup>2</sup>	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>
ø63	Push	3.12x10 <sup>2</sup>	4.68x10 <sup>2</sup>	6.23x10 <sup>2</sup>	9.35x10 <sup>2</sup>	1.25x10 <sup>3</sup>	1.56x10 <sup>3</sup>	1.87x10 <sup>3</sup>	2.18x10 <sup>3</sup>	2.49x10 <sup>3</sup>	2.81x10 <sup>3</sup>	3.12x10 <sup>3</sup>
	Pull	2.80x10 <sup>2</sup>	4.20x10 <sup>2</sup>	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>	2.24x10 <sup>3</sup>	2.52x10 <sup>3</sup>	2.80x10 <sup>3</sup>
ø80	Push	5.03x10 <sup>2</sup>	7.54x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.51x10 <sup>3</sup>	2.01x10 <sup>3</sup>	2.51x10 <sup>3</sup>	3.02x10 <sup>3</sup>	3.52x10 <sup>3</sup>	4.02x10 <sup>3</sup>	4.52x10 <sup>3</sup>	5.03x10 <sup>3</sup>
	Pull	4.54x10 <sup>2</sup>	6.80x10 <sup>2</sup>	9.07x10 <sup>2</sup>	1.36x10 <sup>3</sup>	1.81x10 <sup>3</sup>	2.27x10 <sup>3</sup>	2.72x10 <sup>3</sup>	3.17x10 <sup>3</sup>	3.63x10 <sup>3</sup>	4.08x10 <sup>3</sup>	4.54x10 <sup>3</sup>
ø100	Push	7.85x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.57x10 <sup>3</sup>	2.36x10 <sup>3</sup>	3.14x10 <sup>3</sup>	3.93x10 <sup>3</sup>	4.71x10 <sup>3</sup>	5.50x10 <sup>3</sup>	6.28x10 <sup>3</sup>	7.07x10 <sup>3</sup>	7.85x10 <sup>3</sup>
	Pull	7.15x10 <sup>2</sup>	1.07x10 <sup>3</sup>	1.43x10 <sup>3</sup>	2.14x10 <sup>3</sup>	2.86x10 <sup>3</sup>	3.57x10 <sup>3</sup>	4.29x10 <sup>3</sup>	5.00x10 <sup>3</sup>	5.72x10 <sup>3</sup>	6.43x10 <sup>3</sup>	7.15x10 <sup>3</sup>

# SSD2-KG2/KG3 Series

SCP\*3  
CMK2  
CMA2  
SCM  
SCG  
SCA2  
SCS2  
CKV2  
CAV2/  
COVPIN2  
SSD2  
SSG  
SSD  
CAT  
MDC2  
MVC  
SMG  
MSD/  
MSDG  
FC\*  
STK  
SRL3  
SRG3  
SRM3  
SRT3  
MRL2  
MRG2  
SM-25  
ShkAbs  
FJ  
FK  
Spd  
Contr  
Ending

## How to order

No switch (without magnet for switch)

**SSD2-KG2-16-30-N-LB-I**

With switch (built-in magnet for switch)

**SSD2-KG2L-16-30-T2YLH-R-N-LB-I**

**A** Degree of protection level

**B** Bore size

**C** Stroke

**D** Switch model No.  
\*5

**E** Switch quantity

**F** Option

**G** Mounting bracket  
\*1  
\*2

**H** Accessory \*3

## ⚠ Precautions for model No. selection

\*1 : The mounting bracket is included at shipment.

\*2 : The structure of bore sizes  $\phi 16$  to  $\phi 25$  does not permit retrofitting of the foot bracket (LB) or flange bracket (FA) on the rod side. Assembly before shipment is available as made to order.

\*3 : "I" and "Y" cannot be selected together.

\*4 : Refer to pages 750 and 751 for combinations of variations/options.

\*5 : Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.

[Example of model No.]

### SSD2-KG2L-32-30-T2YLH-R-N-LB

Model: Compact cylinder, high load

**A** Degree of protection level: Coolant proof scraper + packing NBR, with switch

**B** Bore size :  $\phi 32$  mm

**C** Stroke : 30 mm

**D** Switch model No. : Proximity switch T2YLH, lead wire 1 m

**E** Switch quantity : 1 on rod side

**F** Option : Rod end male thread

**G** Mounting bracket : Axial foot

Code	Description				
<b>A Degree of protection level</b>					
<b>KG2</b>	High load + coolant proof scraper + packing NBR				
<b>KG3</b>	High load + coolant proof scraper + packing FKM				
<b>KG2L</b>	High load + coolant proof scraper + packing NBR, with switch				
<b>KG3L</b>	High load + coolant proof scraper + packing FKM, with switch				
<b>B Bore size (mm)</b>					
<b>16</b>	$\phi 16$				
<b>20</b>	$\phi 20$				
<b>25</b>	$\phi 25$				
<b>32</b>	$\phi 32$				
<b>40</b>	$\phi 40$				
<b>50</b>	$\phi 50$				
<b>63</b>	$\phi 63$				
<b>80</b>	$\phi 80$				
<b>100</b>	$\phi 100$				
<b>C Stroke (mm)</b>					
Refer to the stroke table on the following page.					
<b>D Switch model No.</b>					
<b>Lead wire</b>	<b>Lead wire</b>	<b>Contact</b>	<b>Voltage</b>	<b>Indicator</b>	<b>Lead wire</b>
<b>Straight</b>	<b>L-shaped</b>	<b>Proximity</b>	<b>DC</b>	<b>2-color LED</b>	<b>2-wire</b>
<b>T2YLH*</b>	<b>T2YLV*</b>				<b>3-wire</b>
<b>T3YLH*</b>	<b>T2YLV*</b>				
<b>* Lead wire length</b>					
<b>Blank</b>	1 m (standard)				
<b>3</b>	3 m (option)				
<b>5</b>	5 m (option)				
<b>E Switch quantity</b>					
<b>R</b>	1 on rod side				
<b>H</b>	1 on head side				
<b>D</b>	2				
<b>F Option</b>					
<b>Blank</b>	Rod end female thread				
<b>N</b>	Rod end male thread				
<b>G Mounting bracket</b>					
<b>Blank</b>	Without mounting bracket				
<b>LB</b>	Axial foot (made-to-order product)				
<b>CB</b>	Clevis bracket (pin and snap ring included)				
<b>FA</b>	Rod side flange (made-to-order product)				
<b>FB</b>	Head side flange				
<b>H Accessory (available when rod end male thread "N" is selected)</b>					
<b>I</b>	Rod eye				
<b>Y</b>	Rod clevis (pin and snap ring included)				

### How to order switch

**SW - T2YLH**

Switch model No.  
(Item ① on page 958)

### [Stroke table]

Stroke (mm)	Applicable bore size									
	16	20	25	32	40	50	63	80	100	
Standard stroke	5	●	●	●	●	●				
	10	●	●	●	●	●	●	●	●	●
	15	●	●	●	●	●	●	●	●	●
	20	●	●	●	●	●	●	●	●	●
	25	●	●	●	●	●	●	●	●	●
	30	●	●	●	●	●	●	●	●	●
	35		●	●	●	●	●	●	●	●
	40		●	●	●	●	●	●	●	●
	45		●	●	●	●	●	●	●	●
	50		●	●	●	●	●	●	●	●
	75				●	●	●	●	●	●
	100				●	●	●	●	●	●
	Min. stroke (mm) *1	1								
Max. stroke (mm)	30	50	100							
Custom stroke *2										

\*1: Less than 10 mm stroke is not available.

Refer to page 956 for the number of installed switches and the min. stroke.

\*2: The total length is the same as that of the next longer standard stroke.

### How to order mounting bracket

Bore size (mm)	ø16	ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100
Mounting bracket									
Foot (LB)					SSD2-LB-40	SSD2-LB-50	SSD2-LB-63	SSD2-LB-80	SSD2-LB-100
Flange (FA/FB)					SSD2-FA-40	SSD2-FA-50	SSD2-FA-63	SSD2-FA-80	SSD2-FA-100
Clevis bracket (CB)	SSD2-CB-16	SSD2-CB-20	SSD2-CB-25	SSD2-CB-32	SSD2-CB-40	SSD2-CB-50	SSD2-CB-63	SSD2-CB-80	SSD2-CB-100

\*1: The foot mounting bracket is provided as 2 pcs./set.

\*2: The structure of bore sizes ø16 to ø25 does not permit retrofitting of the foot bracket (LB) or flange bracket (FA) on the rod side. Contact CKD for details.

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending




# SSD2-KG2/KG3 Series

## Internal structure and parts list


- SCP\*3
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS2
- CKV2
- CAV2/  
COVPIN2
- SSD2**
- SSG
- SSD
- CAT
- MDC2
- MVC
- SMG
- MSD/  
MSDG
- FC\*
- STK
- SRL3
- SRG3
- SRM3
- SRT3
- MRL2
- MRG2
- SM-25
- ShkAbs
- FJ
- FK
- Spd  
Contr
- Ending

- Degree of protection: Packing NBR SSD2-KG2/KG2L
- Degree of protection: Packing FKM SSD2-KG3/KG3L


● SSD2-KG<sub>2</sub> L-16 (with switch)

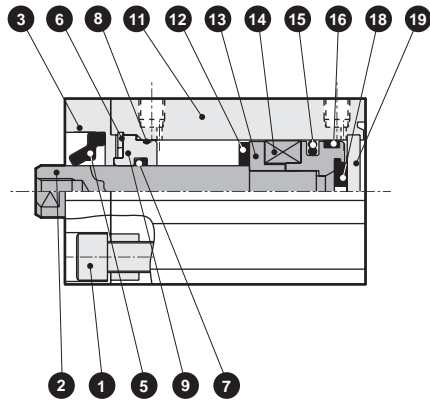


● SSD2-KG<sub>2</sub> L-20, 25 (with switch)

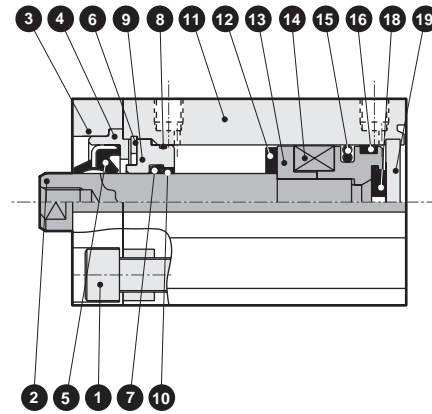


● SSD2-KG<sub>2</sub> L-32 to 50 (with switch)

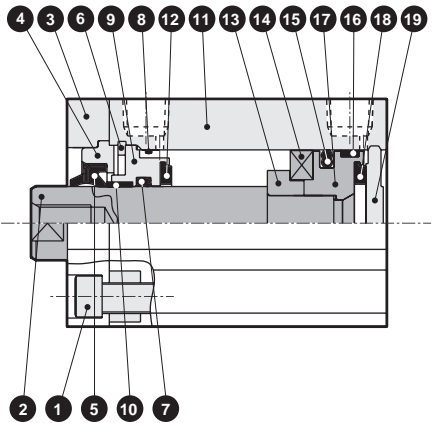


● SSD2-KG<sub>2</sub> L-63 to 100 (with switch)

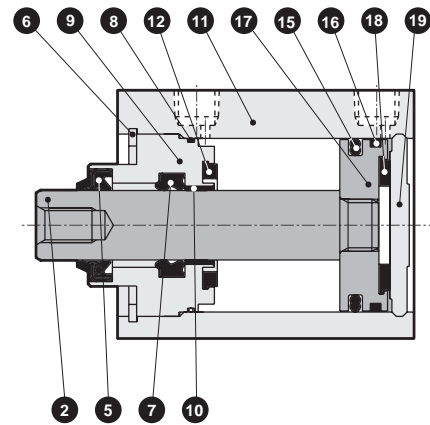


● SSD2-KG<sub>2</sub> -16 (without switch)

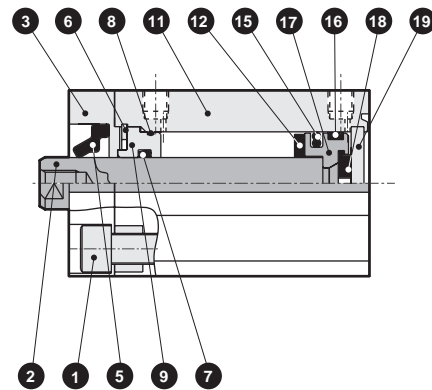


● SSD2-KG<sub>2</sub> -20, 25 (without switch)

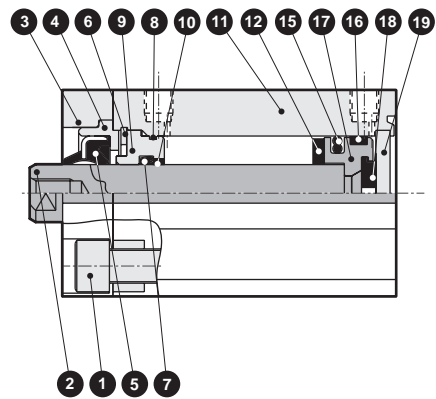

● SSD2-KG<sub>2</sub> -32 to 50 (without switch)

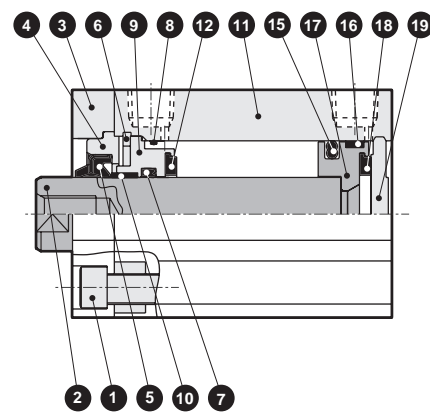

● SSD2-KG<sub>2</sub> -63 to 100 (without switch)

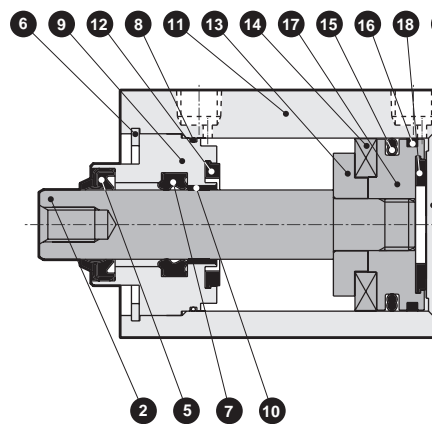

# SSD2-KG2/KG3 Series

## Internal structure and parts list

### Main parts list

Part No.	Part name	Material	Remarks	Part No.	Part name	Material	Remarks
1	Hexagon socket head cap screw	Stainless steel	ø16 to ø32 only	10	Bush	Oiles drymet	ø20 to ø100 only
2	Piston rod	Stainless steel	Industrial chrome plating	11	Body	Aluminum alloy	Hard alumite
3	Adaptor (A)	Aluminum alloy	ø16 to ø32 only	12	Cushion rubber (R)	Urethane rubber	
4	Adaptor (B)	Aluminum alloy	ø16 to ø32 only	13	Spacer	Aluminum alloy	ø16 to ø32: Chromate
5	Scraper	G2	Nitrile rubber	14	Magnet	Plastic	
		G3	Fluoro rubber				
6	C-snap ring (for hole)	Stainless steel		15	Piston packing	G2	Nitrile rubber
						G3	Fluoro rubber
7	Rod packing	G2	Nitrile rubber	16	Wear ring	Polyacetal resin	
		G3	Fluoro rubber				
8	Rod metal gasket	G2	Nitrile rubber	17	Piston	Aluminum alloy	
		G3	Fluoro rubber			Chromate	
9	Rod metal	Aluminum alloy		18	Cushion rubber (H)	Urethane rubber	
		Alumite					
				19	Cover	ø16 to ø25: Stainless steel ø32 to ø100: Aluminum alloy	Alumite: ø32 to ø100

### Consumable parts list

Part name	Kit No.	Consumable parts No.
Bore size (mm)		
ø16	SSD2-KG2-16K	
	SSD2-KG3-16K	
ø20	SSD2-KG2-20K	
	SSD2-KG3-20K	
ø25	SSD2-KG2-25K	
	SSD2-KG3-25K	
ø32	SSD2-KG2-32K	
	SSD2-KG3-32K	
ø40	SSD2-KG2-40K	
	SSD2-KG3-40K	
ø50	SSD2-KG2-50K	
	SSD2-KG3-50K	
ø63	SSD2-KG2-63K	
	SSD2-KG3-63K	
ø80	SSD2-KG2-80K	
	SSD2-KG3-80K	
ø100	SSD2-KG2-100K	
	SSD2-KG3-100K	

Note: Specify the kit No. when placing an order.

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

SSD2

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr


Ending

# SSD2-KG2/KG3 Series

## dimensions

- Degree of protection: Packing NBR  
SSD2-KG/KG2L
- Degree of protection: Packing FKM  
SSD2-KG3/KG3L

● Rod end male thread

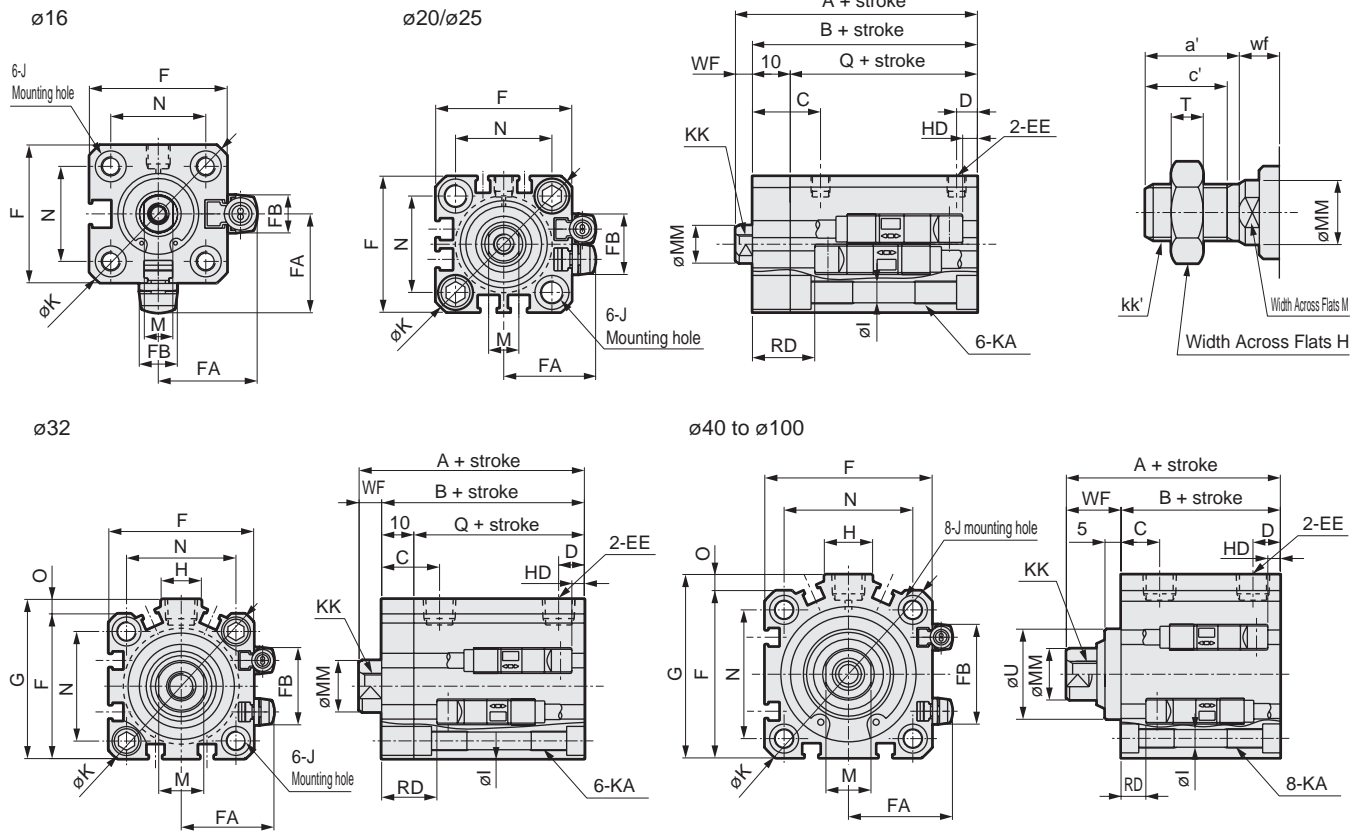

- \*1: To calculate A + stroke or B + stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value. (Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.
- \*2: HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.
- \*3: For dimensions of individual accessories, refer to pages 1046 to 1049.
- \*4: Dimensions in ( ) of codes A and B are for strokes of more than 50 mm.
- \*5: Dimensions in ( ) of code J are for the spot face of rod side mounting hole.

Code	Dimensions without switch			Common dimensions with switch															
	A <sup>*1</sup>	B <sup>*1</sup>	Q <sup>*1</sup>	A <sup>*1</sup>	B <sup>*1</sup>	Q <sup>*1</sup>	C	D	EE	F	FA	FB	G	H	I	J	K	KA	KK
ø16	40.5	32	22	45.5	37	27	15.5	5.5	M5	29	21	8	-	-	3.5	6.5 spot face depth 3.5(13.4)	38	M4 depth 7	M4 depth 8
ø20	44	34.5	24.5	54	44.5	34.5	18	5.5	M5	36	24.5	16	-	-	5.5	9 spot face depth 5.5(15.5)	47	M6 depth 11	M5 depth 7
ø25	47.5	37.5	27.5	57.5	47.5	37.5	21	6	M5	40	26.5	17	-	-	5.5	9 spot face depth 5.5(15.5)	51	M6 depth 11	M6 depth 12
ø32	55 (65)	43 (53)	33 (43)	65	53	43	18	8	Rc1/8	45	29	24	49.5	12.5	5.5	9 spot face depth 5.5(15.5)	60	M6 depth 11	M8 depth 13
ø40	56.5 (66.5)	39.5 (49.5)	-	66.5	49.5	-	12	8.5	Rc1/8	52	32.5	31	57	15	5.5	ø9 spot face depth 5.5	69	M6 depth 11	M8 depth 13
ø50	58.5 (68.5)	40.5 (50.5)	-	68.5	50.5	-	10.5	10.5	Rc1/4	64	38.5	32	71	18	6.9	ø11 spot face depth 6.5	86	M8 depth 13	M10 depth 15
ø63	64 (74)	46 (56)	-	74	56	-	13	11	Rc1/4	77	45	32	84	23	8.7	ø14 spot face depth 9	103	M10 depth 25	M10 depth 15
ø80	73.5 (83.5)	53.5 (63.5)	-	83.5	63.5	-	16	13	Rc3/8	98	55.5	32	104	31	10.5	ø17.5 spot face depth 11	132	M12 depth 28	M16 depth 21
ø100	85 (95)	63 (73)	-	95	73	-	23	15	Rc3/8	117	65	32	123.5	38	10.5	ø17.5 spot face depth 11	156	M12 depth 28	M20 depth 27

Code	Common dimensions with switch						Proximity T2YLH, T2YLV, T3YLH, T3YLV		Dimensions of rod end male thread part							
	M	MM	N	O	U	WF	HD	RD	a'	c'	H	KK'	M	MM	T	wf
ø16	6	8	20	-	-	8.5	2.5	14.5	12	10	10	M6	6	8	3.6	8.5
ø20	8	10	25.5	-	-	9.5	4.5	20.0	14	12	13	M8	8	10	5	9.5
ø25	10	12	28	-	-	10	4.5	22.5	17.5	15	17	M 10 x 1.25	10	12	6	10
ø32	14	16	34	4.5	-	12	9.5	25.5	23.5	20.5	22	M 14 x 1.5	14	16	8	10
ø40	14	16	40	5	28	17	10.5	31.0	23.5	20.5	22	M 14 x 1.5	14	16	8	15
ø50	17	20	50	7	35	18	11.5	31.0	28.5	26	27	M 18 x 1.5	17	20	11	15
ø63	17	20	60	7	35	18	18.0	29.0	28.5	26	27	M 18 x 1.5	17	20	11	15
ø80	22	25	77	6	43	20	24.0	31.5	35.5	32.5	32	M 22 x 1.5	22	25	13	18
ø100	27	30	94	6.5	59	22	29.5	35.5	35.5	32.5	41	M 26 x 1.5	27	30	16	18

---

# MEMO

---

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

**SSG**

**SSD**

**CAT**

**MDC2**

**MVC**

**SMG**

MSD/  
MSDG

**FC\***

**STK**

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr


Ending

# SSD2-KG2/KG3 Series


## Dimensions with mounting bracket

● Clevis bracket (CB)  
SSD2-KG2(L)/KG3(L)-20 to 100 -CB


•  $\phi 16$  to  $\phi 25$

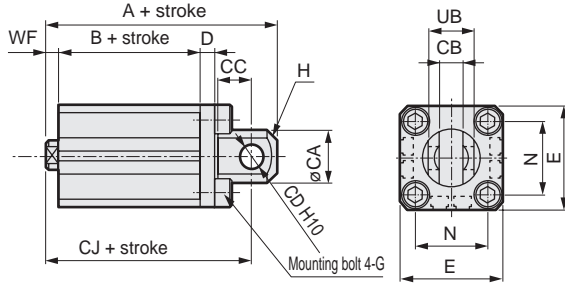


•  $\phi 32$  to  $\phi 100$

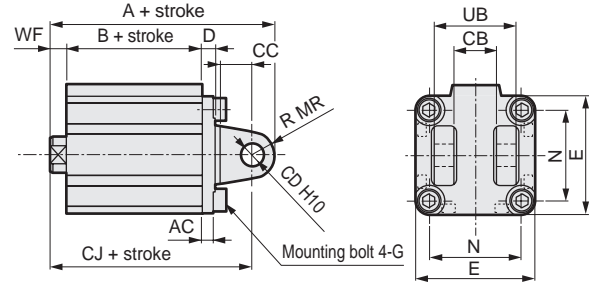

Rod end male thread



Rod end male thread



Code	Common dimensions															
	Bore size(mm)	AC	CA	CB	CC	CD	D	E	G	H	MR	N	UB			
FC*	$\phi 16$	-	15	6.6 <sup>+0.3 0</sup>	8	5	5	29	M 4 x 12	C2	-	20	12			
STK	$\phi 20$	-	20	8.2 <sup>+0.2 0</sup>	12	8	5	36	M 6 x 16	C4	-	25.5	16			
SRL3	$\phi 25$	-	24	10.2 <sup>+0.2 0</sup>	14	10	5	40	M 6 x 16	C5	-	28	20			
SRG3	$\phi 32$	4.5	-	18.2 <sup>+0.2 0</sup>	14	10	5	45	M 6 x 16	-	10	34	36			
	$\phi 40$	5	-	18.2 <sup>+0.2 0</sup>	14	10	6	52	M 6 x 16	-	10	40	36			
SRM3	$\phi 50$	6	-	22.2 <sup>+0.2 0</sup>	20	14	7	64	M 8 x 20	-	14	50	44			
	$\phi 63$	7	-	22.2 <sup>+0.2 0</sup>	20	14	8	77	M 10 x 25	-	14	60	44			
SRT3	$\phi 80$	9	-	28.2 <sup>+0.2 0</sup>	27	18	10	98	M 12 x 40	-	18	77	56			
	$\phi 100$	12	-	32.2 <sup>+0.2 0</sup>	31	22	13	117	M 12 x 40	-	22	94	64			
Code	Bore size(mm)	Female thread						Male thread								
		WF	No switch			With switch			a'	wf	No switch			With switch		
A	B		CJ	A	B	CJ	A	B			CJ	A	B	CJ		
MRG2	$\phi 16$	8.5	61.5	32	55.5	66.5	37	60.5	12	8.5	73.5	32	55.5	78.5	37	60.5
	$\phi 20$	9.5	71	34.5	62	81	44.5	72	14	9.5	85	34.5	62	95	44.5	72
SM-25	$\phi 25$	10	77.5	37.5	67.5	87.5	47.5	77.5	17.5	10	95	37.5	67.5	105	47.5	77.5
ShkAbs	$\phi 32$	12	85	43	75	95	53	85	23.5	10	106.5	43	73	116.5	53	83
	$\phi 40$	17	88.5	39.5	78.5	98.5	49.5	88.5	23.5	15	110	39.5	76.5	120	49.5	86.5
FJ	$\phi 50$	18	100.5	40.5	86.5	110.5	50.5	96.5	28.5	15	126	40.5	83.5	136	50.5	93.5
	$\phi 63$	18	108	46	94	118	56	104	28.5	15	133.5	46	91	143.5	56	101
FK	$\phi 80$	20	129.5	53.5	111.5	139.5	63.5	121.5	35.5	18	163	53.5	109.5	173	63.5	119.5
Spd Contr	$\phi 100$	22	152	63	130	162	73	140	35.5	18	183.5	63	126	193.5	73	136


# SSD2-KG2/KG3 Series

Dimensions with mounting bracket


## Dimensions with mounting bracket

- Head side flange (FB)  
SSD2-KG2(L)/KG3(L)-20 to 100 -FB


·  $\phi 16$  to  $\phi 25$

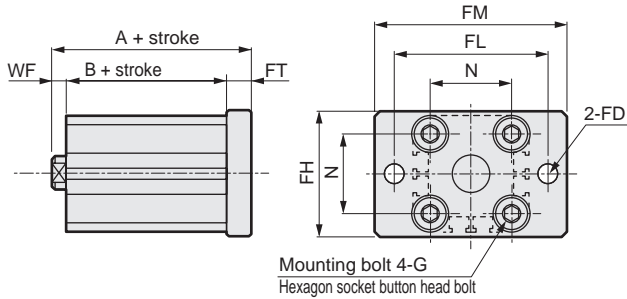


·  $\phi 32$  to  $\phi 100$

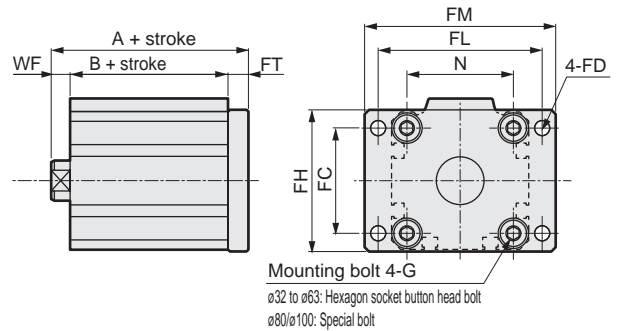

Rod end male thread



Rod end male thread



Code	Common dimensions								Female thread				Male thread							
	Bore size (mm)	FC	FD	FH	FL	FM	FT	G	N	WF	No switch		With switch		a'	wf	No switch		With switch	
											A	B	A	B			A	B	A	B
$\phi 16$	-	4.5	30	45	55	5.5	M4x12	20	8.5	46	32	51	37	12	8.5	58	32	63	37	
$\phi 20$	-	6.6	39	48	60	8	M6x16	25.5	9.5	52	34.5	62	44.5	14	9.5	66	34.5	76	44.5	
$\phi 25$	-	6.6	42	52	64	8	M6x16	28	10	55.5	37.5	65.5	47.5	17.5	10	73	37.5	83	47.5	
$\phi 32$	34	5.5	48	56	65	8	M6x16	34	12	63	43	73	53	23.5	10	84.5	43	94.5	53	
$\phi 40$	40	5.5	54	62	72	8	M6x16	40	17	64.5	39.5	74.5	49.5	23.5	15	86	39.5	96	49.5	
$\phi 50$	50	6.6	67	76	89	9	M8x20	50	18	67.5	40.5	77.5	50.5	28.5	15	93	40.5	103	50.5	
$\phi 63$	60	9	80	92	108	9	M10x25	60	18	73	46	83	56	28.5	15	98.5	46	108.5	56	
$\phi 80$	77	11	99	116	134	11	M12x40	77	20	84.5	53.5	94.5	63.5	35.5	18	118	53.5	128	63.5	
$\phi 100$	94	11	117	136	154	11	M12x40	94	22	96	63	106	73	35.5	18	127.5	63	137.5	73	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25


ShkAbs

FJ

FK

Spd  
Contr

Ending



Compact cylinder  
double acting/single rod/coil scraper

Compact cylinder  
double acting/single rod/anti-spatter adherence

# SSD2-G1 Series SSD2-G4 Series

● Bore size:  $\phi 25/\phi 32/\phi 40/\phi 50/\phi 63/\phi 80/\phi 100$



## Specifications

Item	SSD2-G1/G4 SSD2-G1L/G4L (with switch)							
	$\phi 25$	$\phi 32$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$	
Bore size mm	$\phi 25$	$\phi 32$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$	
Actuation	Double acting							
Working fluid	Compressed air							
Max. working pressure MPa	1.0 ( $\approx 150$ psi, 10 bar)							
Min. working pressure MPa	0.15 ( $\approx 22$ psi, 1.5 bar)				0.1 ( $\approx 15$ psi, 1 bar)			
Proof pressure MPa	1.6 ( $\approx 230$ psi, 16 bar)							
Ambient temperature $^{\circ}\text{C}$	-10 ( $14^{\circ}\text{F}$ ) to 60 ( $140^{\circ}\text{F}$ ) (no freezing)							
Port size	M5	Rc1/8		Rc1/4		Rc3/8		
Stroke tolerance mm	$\begin{matrix} +1.0 \\ 0 \end{matrix}$							
Working piston speed mm/s	50 to 500				50 to 300			
Cushion	None							
Lubrication	Not required (use turbine oil class 1 ISO VG32 if necessary for lubrication)							
Allowable absorbed energy J	0.021	0.025	0.092	0.1	0.12	0.27	0.56	

\*1: The  $\phi 32$  bore size with a 5 mm stroke and without a switch has a port size of M5.


## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\phi 25$	5/10/15/20/25/ 30/35/40/45/50	50	1(10) The value in ( ) is for types with one or two switches.
$\phi 32$	5/10/15/20/25/30/ 35/40/45/50/75/100	100	
$\phi 40$			
$\phi 50$	10/15/20/25		
$\phi 63$	30/35/40/45/50		
$\phi 80$	75/100		
$\phi 100$			

## Custom stroke

### ● SSD2-G1, G4 Series

Item	Standard products	
	Standard stroke body with spacer	
Model No.	Refer to How to order.	
Description	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.	
Stroke range	Bore size	Stroke range
	25	1 to 49
	32 to 100	1 to 99
Example of model No.	Model No.: SSD2-G1-32-38 A +2 mm spacer is added to the SSD2-G1-32-40 standard cylinder to create 38 mm stroke. B + stroke is 63mm.	

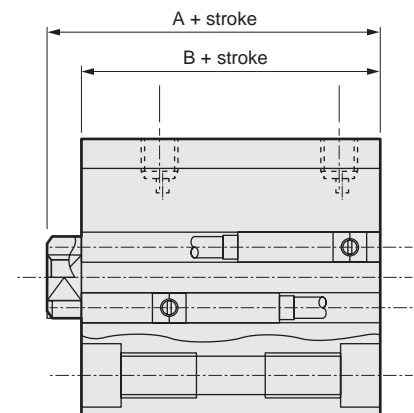

## Switch specifications

Item	2-wire proximity	
	T2YD/T2YDT	
Applications	Dedicated for programmable controller	
Indicator	Red/green LED (Lit when ON)	
Load voltage	24 VDC ±10%	
Load current	5 to 20 VDC	
Internal voltage drop	6V or less	
Leakage current	1.0 mA or less	
Output delay time *1 (Delay ON, delay OFF)	60 ms or less	
Lead wire length	1 m (oil resistant vinyl cabtyre cable ø 6, 0.5 mm <sup>2</sup> x 2-conductor) *2, *3	
Insulation resistance	100 MΩ and over with 500 VDC megger	
Withstand voltage	No failure after 1 minute of 1,000 VAC application.	
Max. shock resistance	980 m/s <sup>2</sup>	
Ambient temperature	-10 to +60°C	
Degree of protection	JIS C0920 (water-tight), IEC standards IP67, oil resistance	
Weight	g 1 m:61 3 m:166 5 m:272	

\*1: Indicates the time from magnetic sensor detection of the piston magnet until switch output.

\*2: 3 m and 5 m lead wires are available as options.

\*3: Flame-resistant lead wires are available as options.

\*4: This switch cannot be used in DC environments.

## Cylinder weight table (the weight of the switches is when there are 2 cylinder switches.)

(Unit: g)

Stroke (mm)	5		10		15		20		25		30		35		40		45		50		75		100	
	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch
ø25	131	222	146	237	162	253	178	269	194	285	209	300	225	600	241	332	257	166	272	363	-	-	-	-
ø32	184	298	206	320	228	342	250	364	271	385	293	407	315	429	337	451	359	473	380	494	553	602	661	709
ø40	265	408	292	435	318	461	345	488	372	515	398	541	425	568	451	594	478	621	504	647	722	780	854	912
ø50	-	-	460	654	502	696	544	738	586	780	629	823	671	865	713	907	755	949	797	991	1144	1201	1354	1411
ø63	-	-	658	937	713	992	768	1047	823	1102	878	1157	934	1213	989	1268	1044	1323	1099	1378	1589	1653	1864	1928
ø80	-	-	1180	1593	1267	1680	1353	1765	1440	1853	1526	1939	1613	2026	1700	2113	1787	2200	1873	2286	2650	2719	3082	3151
ø100	-	-	1768	2335	1882	2449	1995	2562	2109	2676	2223	2790	2337	2904	2450	3017	2564	3131	2678	3245	3743	3815	4313	4385

## Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa										
		0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø25	Push	-	73.6	98.2	1.47x10 <sup>2</sup>	1.96x10 <sup>2</sup>	2.45x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.44x10 <sup>2</sup>	3.93x10 <sup>2</sup>	4.42x10 <sup>2</sup>	4.91x10 <sup>2</sup>
	Pull	-	56.7	75.6	1.13x10 <sup>2</sup>	1.51x10 <sup>2</sup>	1.89x10 <sup>2</sup>	2.27x10 <sup>2</sup>	2.64x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.40x10 <sup>2</sup>	3.78x10 <sup>2</sup>
ø32	Push	-	1.21x10 <sup>2</sup>	1.61x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.22x10 <sup>2</sup>	4.02x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.63x10 <sup>2</sup>	6.43x10 <sup>2</sup>	7.24x10 <sup>2</sup>	8.04x10 <sup>2</sup>
	Pull	-	90.5	1.21x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.62x10 <sup>2</sup>	4.22x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.43x10 <sup>2</sup>	6.03x10 <sup>2</sup>
ø40	Push	-	1.88x10 <sup>2</sup>	2.51x10 <sup>2</sup>	3.77x10 <sup>2</sup>	5.03x10 <sup>2</sup>	6.28x10 <sup>2</sup>	7.54x10 <sup>2</sup>	8.80x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.13x10 <sup>3</sup>	1.26x10 <sup>3</sup>
	Pull	-	1.58x10 <sup>2</sup>	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>
ø50	Push	-	2.95x10 <sup>2</sup>	3.93x10 <sup>2</sup>	5.89x10 <sup>2</sup>	7.85x10 <sup>2</sup>	9.82x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.37x10 <sup>3</sup>	1.57x10 <sup>3</sup>	1.77x10 <sup>3</sup>	1.96x10 <sup>3</sup>
	Pull	-	2.47x10 <sup>2</sup>	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>
ø63	Push	3.12x10 <sup>2</sup>	4.68x10 <sup>2</sup>	6.23x10 <sup>2</sup>	9.35x10 <sup>2</sup>	1.25x10 <sup>3</sup>	1.56x10 <sup>3</sup>	1.87x10 <sup>3</sup>	2.18x10 <sup>3</sup>	2.49x10 <sup>3</sup>	2.81x10 <sup>3</sup>	3.12x10 <sup>3</sup>
	Pull	2.80x10 <sup>2</sup>	4.20x10 <sup>2</sup>	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>	2.24x10 <sup>3</sup>	2.52x10 <sup>3</sup>	2.80x10 <sup>3</sup>
ø80	Push	5.03x10 <sup>2</sup>	7.54x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.51x10 <sup>3</sup>	2.01x10 <sup>3</sup>	2.51x10 <sup>3</sup>	3.02x10 <sup>3</sup>	3.52x10 <sup>3</sup>	4.02x10 <sup>3</sup>	4.52x10 <sup>3</sup>	5.03x10 <sup>3</sup>
	Pull	4.54x10 <sup>2</sup>	6.80x10 <sup>2</sup>	9.07x10 <sup>2</sup>	1.36x10 <sup>3</sup>	1.81x10 <sup>3</sup>	2.27x10 <sup>3</sup>	2.72x10 <sup>3</sup>	3.17x10 <sup>3</sup>	3.63x10 <sup>3</sup>	4.08x10 <sup>3</sup>	4.54x10 <sup>3</sup>
ø100	Push	7.85x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.57x10 <sup>3</sup>	2.36x10 <sup>3</sup>	3.14x10 <sup>3</sup>	3.93x10 <sup>3</sup>	4.71x10 <sup>3</sup>	5.50x10 <sup>3</sup>	6.28x10 <sup>3</sup>	7.07x10 <sup>3</sup>	7.85x10 <sup>3</sup>
	Pull	7.15x10 <sup>2</sup>	1.07x10 <sup>3</sup>	1.43x10 <sup>3</sup>	2.14x10 <sup>3</sup>	2.86x10 <sup>3</sup>	3.57x10 <sup>3</sup>	4.29x10 <sup>3</sup>	5.00x10 <sup>3</sup>	5.72x10 <sup>3</sup>	6.43x10 <sup>3</sup>	7.15x10 <sup>3</sup>



# SSD2-G1/G4 Series

SCP\*3  
CMK2  
CMA2  
SCM  
SCG  
SCA2  
SCS2  
CKV2  
CAV2/  
COVPIN2  
**SSD2**  
SSG  
SSD  
CAT  
MDC2  
MVC  
SMG  
MSD/  
MSDG  
FC\*  
STK  
SRL3  
SRG3  
SRM3  
SRT3  
MRL2  
MRG2  
SM-25  
ShkAbs  
FJ  
FK  
Spd  
Contr  
Ending

## How to order

No switch (without magnet for switch)

**SSD2-G4-32-10-N-LB-I**

With switch (built-in magnet for switch)

**SSD2-G4L-32-10-T2YD-R-N-LB-I**

**A** Model No.

**B** Bore size

**C** Stroke  
\*1

**D** Switch model No.

**E** Switch quantity

**F** Option

**G** Mounting bracket  
\*1

**H** Accessory  
\*2

Code	Description				
<b>A Model No.</b>					
SSD2-G1	Double acting/single rod/coil scraper				
SSD2-G1L	Double acting/single rod/coil scraper/with switch				
SSD2-G4	Double acting/single rod/anti-spatter adherence				
SSD2-G4L	Double acting/single rod/anti-spatter adherence/with switch				
<b>B Bore size (mm)</b>					
25	ø25				
32	ø32				
40	ø40				
50	ø50				
63	ø63				
80	ø80				
100	ø100				
<b>C Stroke (mm)</b>					
Refer to the stroke table on the following page.					
<b>D Switch model No.</b>					
Lead wire Straight	Lead wire L-shaped	Contact	Voltage	Indicator	Lead wire
T2YD*	-	Proximity	DC	2-color LED for AC magnetic field	2-wire
T2YDT*	-				
<b>* Lead wire length</b>					
Blank	1 m (standard)				
3	3 m (option)				
5	5 m (option)				
<b>E Switch quantity</b>					
R	1 on rod side				
H	1 on head side				
D	2				
<b>F Option</b>					
Blank	Rod end female thread				
N	Rod end male thread				
<b>G Mounting bracket</b>					
Blank	Without mounting bracket				
LB	Axial foot (made to order)				
CB	Clevis bracket (pin and snap ring included)				
FA	Rod side flange (made to order)				
FB	Head side flange				
<b>H Accessory (available when rod end male thread "N" is selected)</b>					
I	Rod eye				
Y	Rod clevis (pin and snap ring included)				

## ⚠ Precautions for model No. selection

\*1: The mounting bracket is included at shipment.

\*2: "I" and "Y" cannot be selected together.

## [Example of model No.]

**SSD2-G4L-32-10-T2YD-R-N**

Model: Compact cylinder

Double acting/anti-spatter adherence

**B** Bore size : ø32 mm

**C** Stroke : 10 mm

**D** Switch model No.: Proximity switch for AC magnetic field  
T2YD, lead wire length 1 m

**E** Switch quantity : 1 on rod side

**F** Option : Rod end male thread

### [Stroke table]

Stroke (mm)	Applicable bore size							
	25	32	40	50	63	80	100	
Standard stroke	5	●	●	●				
	10	●	●	●	●	●	●	●
	15	●	●	●	●	●	●	●
	20	●	●	●	●	●	●	●
	25	●	●	●	●	●	●	●
	30	●	●	●	●	●	●	●
	35	●	●	●	●	●	●	●
	40	●	●	●	●	●	●	●
	45	●	●	●	●	●	●	●
	50	●	●	●	●	●	●	●
	75		●	●	●	●	●	●
	100		●	●	●	●	●	●
Min. stroke (mm) *1	1							
Max. stroke (mm)	50	100						
Custom stroke *2	In 1 mm increments							

\*1: Less than 10 mm stroke is not available.

Refer to page 966 for the min. stroke with switch.

\*2: The total length when using a custom stroke is the same as that when using the next longer standard stroke.

### How to order switch



Switch model No.  
(Item ④ on page 968)

### How to order mounting bracket

Bore size (mm)	ø25	ø32	ø40	ø50	ø63	ø80
<b>Mounting bracket</b>						
Flange (FB)	SSD2-FA-25	SSD2-G1-FA-32	SSD2-FA-40	SSD2-FA-50	SSD2-FA-63	SSD2-FA-80
Clevis bracket (CB)	SSD2-CB-25	SSD2-CB-32	SSD2-CB-40	SSD2-CB-50	SSD2-CB-63	SSD2-CB-80
<b>Bore size (mm)</b>	<b>ø100</b>					
<b>Mounting bracket</b>						
Flange (FB)	SSD2-FA-100					
Clevis bracket (CB)	SSD2-CB-100					


\*1: The foot mounting bracket is provided as 2 pcs./set.

SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/ COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/ MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending


# SSD2-G1/G4 Series

## Internal structure and parts list


● SSD2-G1L, G4L-25 to 50 (double acting/anti-spatter adherence/with switch)

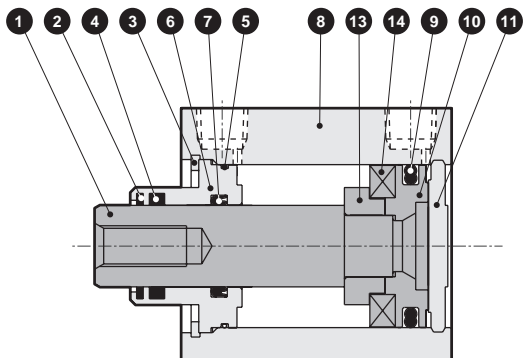

● SSD2-G1L, G4L-63 to 100 (double acting/anti-spatter adherence/with switch)

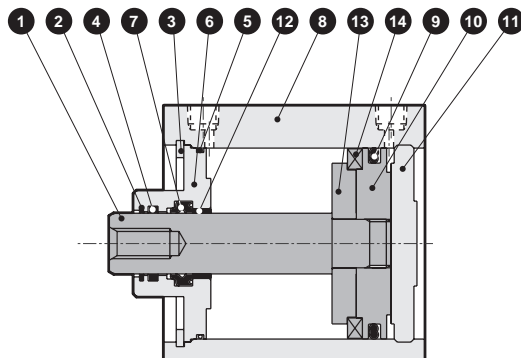


● SSD2-G1, G4-25 to 50 (double acting/anti-spatter adherence)

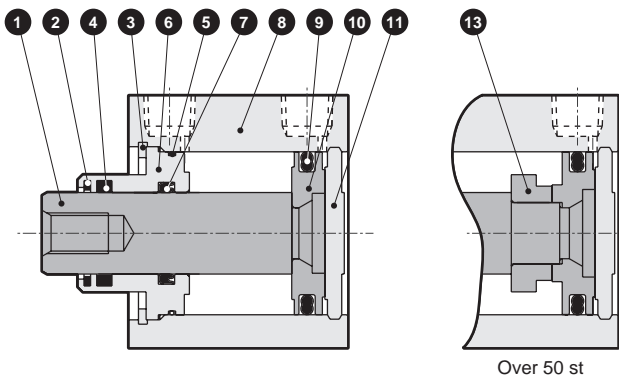

Over 50 st

● SSD2-G1, G4-63 to 100 (double acting/anti-spatter adherence)

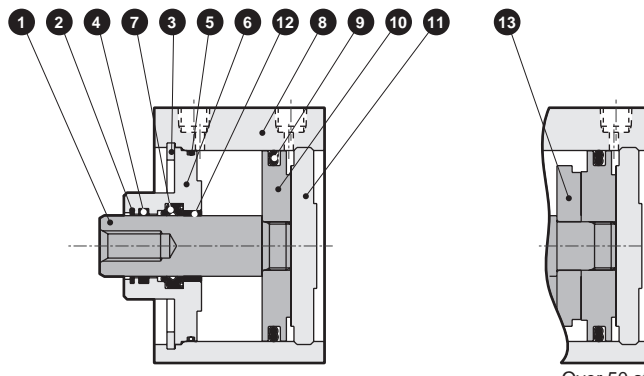

Over 50 st

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	ø25: Stainless steel ø32 to ø100: Steel	Industrial chrome plating	8	Body	Aluminum alloy	Hard alumite
2	Coil scraper	Phosphor bronze		9	Piston packing	Nitrile rubber	
3	C-snap ring	Steel	Zinc phosphate	10	Piston	Aluminum alloy	Chromate
4	Lube keeping structure	Special rubber	G4 only	11	Cover	ø25: Stainless steel ø32 to ø100: Aluminum alloy	ø32 to ø100: Alumite
5	Rod metal gasket	Nitrile rubber		12	Bush	Oiles drymet	
6	Rod metal	ø25 to ø50: Special aluminum ø63 to ø100: Aluminum alloy	ø25 to ø50: Alumite ø63 to ø100: Chromate	13	Spacer	Aluminum alloy	Chromate
7	Rod packing	Nitrile rubber		14	Magnet	Plastic	



## Repair parts list

Part name	Kit No.	Repair parts No.
<b>Bore size (mm)</b>		
ø25	SSD2-G1-25K	2 5 7 9
ø32	SSD2-G1-32K	
ø40	SSD2-G1-40K	
ø50	SSD2-G1-50K	
ø63	SSD2-G1-63K	
ø80	SSD2-G1-80K	
ø100	SSD2-G1-100K	


### Dimensions





● SSD2-G1L/G4L-25 to 100 (with switch, T0H/V, T5H/V, T2H/V, T3H/V)

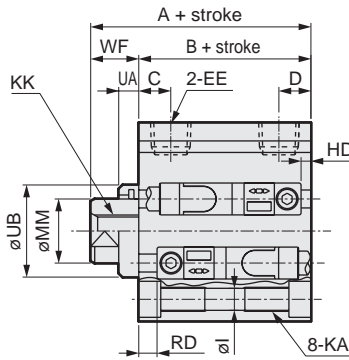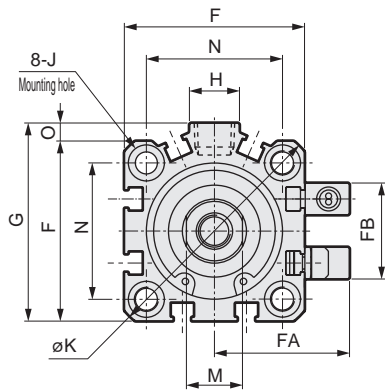

● Rod end male thread

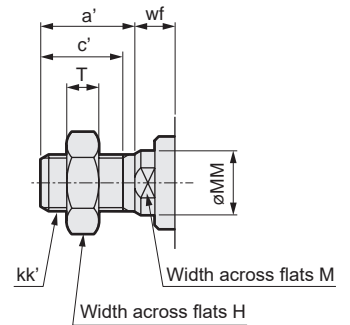

● SSD2-G1/G4-25 to 100 (without switch)

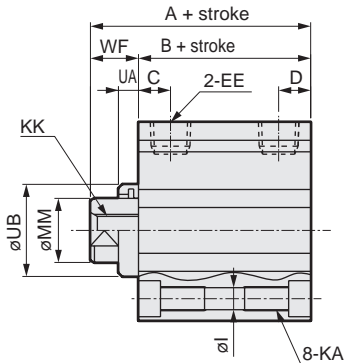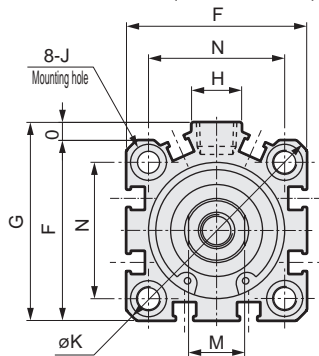

Code	No switch			Common dimensions with switch											
	A <sup>*1</sup>		B <sup>*6</sup>	A <sup>*1</sup>		B <sup>*1</sup>	C <sup>*6</sup>	D <sup>*6</sup>	EE	F	FA	FB	G	H	I
	G1	G4		G1	G4										
ø25	37.5	37.5	32.5	47.5	47.5	42.5	11	6	M5	40	31.5	17	-	-	5.5
ø32	35(45)	40(50)	23(33)	45	50	33	8(10)	8(5.5)	Rc1/8 <sup>*5</sup>	45	33.5	24	49.5	12.5	5.5
ø40	41.5(51.5)	46.5(56.5)	29.5(39.5)	51.5	56.5	39.5	12(11.5)	8.5(8)	Rc1/8	52	37	31	57	15	5.5
ø50	43.5(53.5)	48.5(58.5)	30.5(40.5)	53.5	58.5	40.5	10.5	10.5	Rc1/4	64	43	32	71	18	6.9
ø63	49(59)	54(64)	36(46)	59	64	46	13	11	Rc1/4	77	49.5	32	84	23	8.7
ø80	58.5(68.5)	63.5(73.5)	43.5(53.5)	68.5	73.5	53.5	16	13	Rc3/8	98	60	32	104	31	10.5
ø100	70(80)	75(85)	53(63)	80	85	63	23	15	Rc3/8	117	69.5	32	123.5	38	10.5

Code	Common dimensions with switch												Proximity T2YD		
	J	K	KA	KK	M	MM	N	O	UA		UB	WF		HD	RD <sup>*2</sup>
									G1	G4		G1	G4		
ø25	9 spot face depth 5.5	51	M6 depth 11	M6 depth 12	10	12	28	-	-	-	-	5	5	3	8.5
ø32	9 spot face depth 5.5	60	M6 depth 11	M8 depth 13	14	16	34	4.5	5	10	23 h9	12	17	3.5	8.5
ø40	9 spot face depth 5.5	69	M6 depth 11	M8 depth 13	14	16	40	5	5	10	28 h9	12	17	5.5	10.5
ø50	11 spot face depth 6.5	86	M8 depth 13	M10 depth 15	17	20	50	7	5	10	35 h9	13	18	6	11
ø63	14 spot face depth 9	103	M10 depth 25	M10 depth 15	17	20	60	7	5	10	35 h9	13	18	11	11.5
ø80	17.5 spot face depth 11	132	M12 depth 28	M16 depth 21	22	25	77	6	5	10	43 h9	15	20	16	14
ø100	17.5 spot face depth 11	156	M12 depth 28	M20 depth 27	27	30	94	6.5	5	10	59 h9	17	22	21.5	18

\*1 : To calculate A+ stroke or B+ stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value. (Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

\*2 : HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.

\*3 : For dimensions of individual accessories, refer to pages 1046 to 1049.

\*4 : Dimensions in ( ) of codes A and B are for strokes of more than 50 mm.

\*5 : The ø32 bore size with a 5 mm stroke and without a switch has a port size of M5.\*6

Dimensions in ( ) of codes C and D are when the value is for a 5 mm stroke without switch.

● Rod end male thread

Code	Bore size (mm)	a'	c'	H	kk'	M	MM	T	wf	
									G1	G4
									ø25	17.5
ø32	23.5	20.5	22	M14x1.5	14	16	8	10	15	
ø40	23.5	20.5	22	M14x1.5	14	16	8	10	15	
ø50	28.5	26	27	M18x1.5	17	20	11	10	15	
ø63	28.5	26	27	M18x1.5	17	20	11	10	15	
ø80	35.5	32.5	32	M22x1.5	22	25	13	13	18	
ø100	35.5	32.5	41	M26x1.5	27	30	16	13	18	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/COVP/N2

SSD2

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd Contr

Ending


# SSD2-G1/G4 Series

## Dimensions with mounting bracket




● Clevis bracket (CB)  
SSD2-G1(L)/G4(L)-25 to 100 -CB


•  $\phi 25$

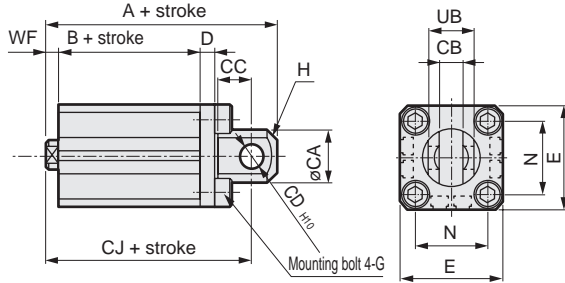


•  $\phi 32$  to  $\phi 100$

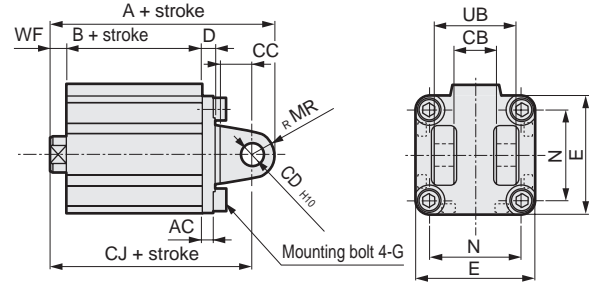

Rod end male thread



Rod end male thread



Code	Common dimensions												Female thread											
	Bore size (mm)	AC	CA	CB	CC	CD	D	E	G	H	MR	N	UB	WF		No switch				With switch				
		A		CJ		A		B		G1		G4		G1		G4		G1		G4				
		G1	G4	G1	G4	G1	G4	G1	G4	G1	G4	G1	G4	G1	G4	G1	G4	G1	G4	G1	G4			
$\phi 25$	-	24	10.2	14	10	5	40	M 6 x 16	C2	-	28	20	5	5	67.5	67.5	32.5	57.5	57.5	77.5	77.5	42.5	67.5	67.5
$\phi 32$	4.5	-	18.2	14	10	5	45	M 6 x 16	C4	10	34	36	12	17	65	70	23	55	60	75	80	33	65	70
$\phi 40$	5	-	18.2	14	10	6	52	M 6 x 16	C5	10	40	36	12	17	73.5	78.5	29.5	63.5	68.5	83.5	88.5	39.5	73.5	78.5
$\phi 50$	6	-	22.2	20	14	7	64	M 8 x 20	-	14	50	44	13	18	85.5	90.5	30.5	71.5	76.5	95.5	100.5	40.5	81.5	86.5
$\phi 63$	7	-	22.2	20	14	8	77	M 10 x 25	-	14	60	44	13	18	93	98	36	79	84	103	108	46	89	94
$\phi 80$	9	-	28.2	27	18	10	98	M 12 x 40	-	18	77	56	15	20	114.5	119.5	43.5	96.5	101.5	124.5	129.5	53.5	106.5	111.5
$\phi 100$	12	-	32.2	31	22	13	117	M 12 x 40	-	22	94	64	17	22	137	142	53	115	120	147	152	63	125	130


  

Code	Male thread												
	Bore size (mm)	a'	wf		No switch				With switch				
			A		B		A		B		CJ		
			G1	G4	G1	G4	G1	G4	G1	G4	G1	G4	
$\phi 25$	17.5	5	5	85	85	32.5	57.5	57.5	95	95	42.5	67.5	67.5
$\phi 32$	23.5	10	15	86.5	91.5	23	53	58	96.5	101.5	33	63	68
$\phi 40$	23.5	10	15	95	100	29.5	61.5	66.5	105	110	39.5	71.5	76.5
$\phi 50$	28.5	10	15	111	116	30.5	68.5	73.5	121	126	40.5	78.5	83.5
$\phi 63$	28.5	10	15	118.5	123.5	36	76	81	128.5	133.5	46	86	91
$\phi 80$	35.5	13	18	148	153	43.5	94.5	99.5	158	163	53.5	104.5	109.5
$\phi 100$	35.5	13	18	168.5	173.5	53	111	116	178.5	183.5	63	121	126


## Dimensions with mounting bracket

● Head side flange (FB)  
SSD2-G1(L)/G4(L)-25 to 100 -FB


•  $\phi 25$

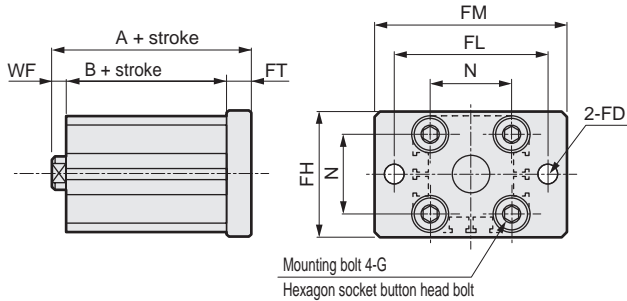


•  $\phi 32$  to  $\phi 100$

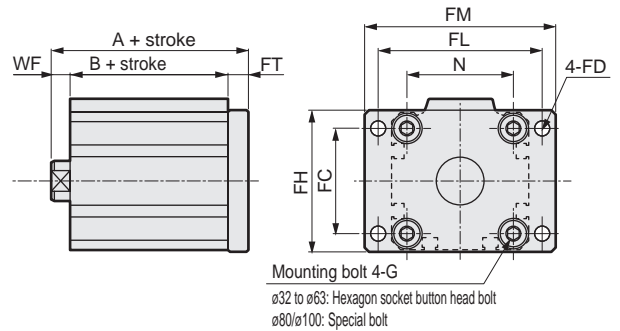

Rod end male thread



Rod end male thread



Code	Common dimensions								Female thread								
	Bore size (mm)	FC	FD	FH	FL	FM	FT	N	G	WF		No switch			With switch		
										G1	G4	A		B	A		B
												G1	G4		G1	G4	
$\phi 25$	-	6.6	42	52	64	8	28	M 6 x 16	5	5	45.5	45.5	32.5	55.5	55.5	42.5	
$\phi 32$	34	5.5	48	56	65	8	34	M 6 x 16	12	17	43	48	23	53	58	33	
$\phi 40$	40	5.5	54	62	72	8	40	M 6 x 16	12	17	49.5	54.5	29.5	59.5	64.5	39.5	
$\phi 50$	50	6.6	67	76	89	9	50	M 8 x 20	13	18	52.5	57.5	30.5	62.5	67.5	40.5	
$\phi 63$	60	9	80	92	108	9	60	M 10 x 25	13	18	58	63	36	68	73	46	
$\phi 80$	77	11	99	116	134	11	77	M 12 x 40	15	20	69.5	74.5	43.5	79.5	84.5	53.5	
$\phi 100$	94	11	117	136	154	11	94	M 12 x 40	17	22	81	86	53	91	96	63	

Code	Male thread									
	Bore size (mm)	a'	wf		No switch			With switch		
			G1	G4	A		B	A		B
					G1	G4		G1	G4	
$\phi 25$	17.5	5	5	63	63	32.5	73	73	42.5	
$\phi 32$	23.5	10	15	64.5	69.5	23	74.5	79.5	33	
$\phi 40$	23.5	10	15	71	76	29.5	81	86	39.5	
$\phi 50$	28.5	10	15	78	83	30.5	88	93	40.5	
$\phi 63$	28.5	10	15	83.5	88.5	36	93.5	98.5	46	
$\phi 80$	35.5	13	18	103	108	43.5	113	118	53.5	
$\phi 100$	35.5	13	18	112.5	117.5	53	122.5	127.5	63	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25


ShkAbs

FJ

FK

Spd  
Contr

Ending



Compact cylinder  
double acting/single rod/high load/coil scraper

Compact cylinder  
double acting/single rod/high load/anti-spatter adherence

# SSD2-KG1 Series SSD2-KG4 Series

● Bore size:  $\varnothing 25/\varnothing 32/\varnothing 40/\varnothing 50/\varnothing 63/\varnothing 80/\varnothing 100$



## Specifications

Item	SSD2-KG1/KG4 SSD2-KG1L/KG4L (with switch)							
	mm	$\varnothing 25$	$\varnothing 32$	$\varnothing 40$	$\varnothing 50$	$\varnothing 63$	$\varnothing 80$	$\varnothing 100$
Bore size	mm	$\varnothing 25$	$\varnothing 32$	$\varnothing 40$	$\varnothing 50$	$\varnothing 63$	$\varnothing 80$	$\varnothing 100$
Actuation		Double acting						
Working fluid		Compressed air						
Max. working pressure	MPa	1.0 ( $\approx 150$ psi, 10 bar)						
Min. working pressure	MPa	0.15 ( $\approx 22$ psi, 1.5 bar)			0.1 ( $\approx 15$ psi, 1 bar)			
Proof pressure	MPa	1.6 ( $\approx 230$ psi, 16 bar)						
Ambient temperature	$^{\circ}\text{C}$	-10 ( $14^{\circ}\text{F}$ ) to 60 ( $140^{\circ}\text{F}$ ) (no freezing)						
Port size		M5	Rc1/8	Rc1/4		Rc3/8		
Stroke tolerance	mm	$+2.0$ 0						
Working piston speed	mm/s	50 to 500			50 to 300			
Cushion		Rubber cushion						
Lubrication		Not required (use turbine oil ISO VG32 if necessary for lubrication)						
Allowable absorbed energy	J	0.16	0.40	0.63	0.98	1.56	2.51	3.92

## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\varnothing 25$	5/10/15/20/25/ 30/35/40/45/50	50	1(10) The value in ( ) is for types with one or two switches.
$\varnothing 32$	5/10/15/20/25/30/ 35/40/45/50/75/100	100	
$\varnothing 40$	10/15/20/25 30/35/40/45/50 75/100		
$\varnothing 50$			
$\varnothing 63$			
$\varnothing 80$			
$\varnothing 100$			


\*1: The custom stroke is available in 1 mm increments.

\*2: Dimensions of custom stroke (example: 64 mm stroke) are the same as the next stroke up (example: 75 mm stroke).

## Custom stroke

### ● SSD2-KG1, KG4 Series

Item	Standard products	
	Standard stroke body with spacer	
Model No.	Refer to How to order.	
Description	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.	
Stroke range	Bore size	Stroke range
	25	1 to 49
	32 to 100	1 to 99
Example of model No.	Model No.: SSD2-KG1-32-38 A +2 mm spacer is added to the SSD2-KG1-32-40 standard cylinder to create 38 mm stroke. B + stroke is 83mm.	

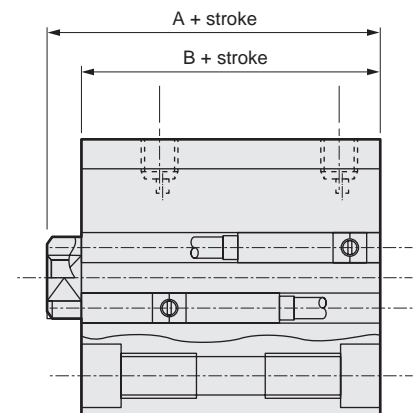

## Switch specifications

Item	2-wire proximity	
	T2YD/T2YDT	
Applications	Dedicated for programmable controller	
Indicator	Red/green LED (Lit when ON)	
Load voltage	24 VDC ±10%	
Load current	5 to 20 mA	
Internal voltage drop	6 V or less	
Leakage current	1.0 mA or less	
Output delay time *1 (Delay ON, delay OFF)	30 to 60 ms	
Lead wire length	1 m (oil resistant vinyl cabtyre cable ø 6, 0.5 mm <sup>2</sup> x 2-conductor) *2, *3	
Insulation resistance	100 MΩ and over at 500 VDC megger	
Withstand voltage	No failure after 1 minute of 1,000 VAC application.	
Max. shock resistance	980 m/s <sup>2</sup>	
Ambient temperature	-10 to +60°C	
Degree of protection	JIS C0920 (water-tight), IEC standards IP67, oil resistance	
Weight	g 1 m:61 3 m:166 5 m:272	

\*1: Indicates the time from magnetic sensor detection of the piston magnet until switch output.

\*2: 3 m and 5 m lead wires are available as options.

\*3: Flame-resistant lead wires are available as options.

\*4: This switch cannot be used in DC environments.

## Cylinder weight table (the weight of the switches is when there are 2 cylinder switches.)

(Unit: g)

Stroke (mm)	5		10		15		20		25		30		35		40		45		50		75		100	
	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch
ø25	146	237	162	253	178	269	194	285	209	300	226	317	242	333	258	349	274	365	290	381	-	-	-	-
ø32	228	342	249	363	270	384	292	406	314	428	336	450	358	472	379	493	401	515	422	536	530	644	637	751
ø40	318	461	345	488	372	515	398	541	424	567	451	594	478	621	504	647	531	674	557	700	690	833	822	965
ø50	-	-	549	743	591	785	634	828	677	871	718	912	760	954	802	996	844	1038	886	1080	1096	1290	1306	1500
ø63	-	-	782	1061	837	1116	892	1171	948	1227	1003	1282	1058	1337	1113	1392	1168	1447	1223	1502	1498	1777	1773	2052
ø80	-	-	1382	1795	1469	1882	1555	1968	1642	2055	1729	2142	1816	2229	1902	2315	1989	2402	2075	2488	2508	2921	2940	3353
ø100	-	-	2029	2596	2143	2710	2257	2824	2371	2938	2484	3051	2598	3165	2712	3279	2826	3393	2940	3507	3510	4077	4080	4647

## Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa										
		0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø25	Push	-	73.6	98.2	1.47x10 <sup>2</sup>	1.96x10 <sup>2</sup>	2.45x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.44x10 <sup>2</sup>	3.93x10 <sup>2</sup>	4.42x10 <sup>2</sup>	4.91x10 <sup>2</sup>
	Pull	-	56.7	75.6	1.13x10 <sup>2</sup>	1.51x10 <sup>2</sup>	1.89x10 <sup>2</sup>	2.27x10 <sup>2</sup>	2.64x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.40x10 <sup>2</sup>	3.78x10 <sup>2</sup>
ø32	Push	-	1.21x10 <sup>2</sup>	1.61x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.22x10 <sup>2</sup>	4.02x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.63x10 <sup>2</sup>	6.43x10 <sup>2</sup>	7.24x10 <sup>2</sup>	8.04x10 <sup>2</sup>
	Pull	-	90.5	1.21x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.62x10 <sup>2</sup>	4.22x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.43x10 <sup>2</sup>	6.03x10 <sup>2</sup>
ø40	Push	-	1.88x10 <sup>2</sup>	2.51x10 <sup>2</sup>	3.77x10 <sup>2</sup>	5.03x10 <sup>2</sup>	6.28x10 <sup>2</sup>	7.54x10 <sup>2</sup>	8.80x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.13x10 <sup>3</sup>	1.26x10 <sup>3</sup>
	Pull	-	1.58x10 <sup>2</sup>	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>
ø50	Push	-	2.95x10 <sup>2</sup>	3.93x10 <sup>2</sup>	5.89x10 <sup>2</sup>	7.85x10 <sup>2</sup>	9.82x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.37x10 <sup>3</sup>	1.57x10 <sup>3</sup>	1.77x10 <sup>3</sup>	1.96x10 <sup>3</sup>
	Pull	-	2.47x10 <sup>2</sup>	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>
ø63	Push	3.12x10 <sup>2</sup>	4.68x10 <sup>2</sup>	6.23x10 <sup>2</sup>	9.35x10 <sup>2</sup>	1.25x10 <sup>3</sup>	1.56x10 <sup>3</sup>	1.87x10 <sup>3</sup>	2.18x10 <sup>3</sup>	2.49x10 <sup>3</sup>	2.81x10 <sup>3</sup>	3.12x10 <sup>3</sup>
	Pull	2.80x10 <sup>2</sup>	4.20x10 <sup>2</sup>	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>	2.24x10 <sup>3</sup>	2.52x10 <sup>3</sup>	2.80x10 <sup>3</sup>
ø80	Push	5.03x10 <sup>2</sup>	7.54x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.51x10 <sup>3</sup>	2.01x10 <sup>3</sup>	2.51x10 <sup>3</sup>	3.02x10 <sup>3</sup>	3.52x10 <sup>3</sup>	4.02x10 <sup>3</sup>	4.52x10 <sup>3</sup>	5.03x10 <sup>3</sup>
	Pull	4.54x10 <sup>2</sup>	6.80x10 <sup>2</sup>	9.07x10 <sup>2</sup>	1.36x10 <sup>3</sup>	1.81x10 <sup>3</sup>	2.27x10 <sup>3</sup>	2.72x10 <sup>3</sup>	3.17x10 <sup>3</sup>	3.63x10 <sup>3</sup>	4.08x10 <sup>3</sup>	4.54x10 <sup>3</sup>
ø100	Push	7.85x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.57x10 <sup>3</sup>	2.36x10 <sup>3</sup>	3.14x10 <sup>3</sup>	3.93x10 <sup>3</sup>	4.71x10 <sup>3</sup>	5.50x10 <sup>3</sup>	6.28x10 <sup>3</sup>	7.07x10 <sup>3</sup>	7.85x10 <sup>3</sup>
	Pull	7.15x10 <sup>2</sup>	1.07x10 <sup>3</sup>	1.43x10 <sup>3</sup>	2.14x10 <sup>3</sup>	2.86x10 <sup>3</sup>	3.57x10 <sup>3</sup>	4.29x10 <sup>3</sup>	5.00x10 <sup>3</sup>	5.72x10 <sup>3</sup>	6.43x10 <sup>3</sup>	7.15x10 <sup>3</sup>



# SSD2-KG1/KG4 Series

SCP\*3  
CMK2  
CMA2  
SCM  
SCG  
SCA2  
SCS2  
CKV2  
CAV2/  
COVPIN2  
SSD2  
SSG  
SSD  
CAT  
MDC2  
MVC  
SMG  
MSD/  
MSDG  
FC\*  
STK  
SRL3  
SRG3  
SRM3  
SRT3  
MRL2  
MRG2  
SM-25  
ShkAbs  
FJ  
FK  
Spd  
Contr  
Ending

## How to order

No switch (without magnet for switch)

**SSD2-KG4-32-10-N-LB-I**

With switch (built-in magnet for switch)

**SSD2-KG4L-32-10-T2YD-R-N-LB-I**

**A** Model No.

**B** Bore size

**C** Stroke

**D** Switch model No.

**E** Switch quantity

**F** Option

**G** Mounting bracket \*1

**H** Accessory \*2

Code	Description				
<b>A Model No.</b>					
<b>SSD2-KG1</b>	Double acting/single rod/high load/coil scraper				
<b>SSD2-KG1L</b>	Double acting/single rod/high load/coil scraper/with switch				
<b>SSD2-KG4</b>	Double acting/single rod/high load/anti-spatter adherence				
<b>SSD2-KG4L</b>	Double acting/single rod/high load/anti-spatter adherence/with switch				
<b>B Bore size (mm)</b>					
<b>25</b>	ø25				
<b>32</b>	ø32				
<b>40</b>	ø40				
<b>50</b>	ø50				
<b>63</b>	ø63				
<b>80</b>	ø80				
<b>100</b>	ø100				
<b>C Stroke (mm)</b>					
Refer to the stroke table on the following page.					
<b>D Switch model No.</b>					
<b>Lead wire</b>	<b>Lead wire</b>	<b>Contact</b>	<b>Voltage</b>	<b>Indicator</b>	<b>Lead wire</b>
<b>Straight</b>	<b>L-shaped</b>	<b>Proximity</b>	<b>DC</b>	<b>2-color LED</b>	<b>2-wire</b>
<b>T2YD*</b>	-			<b>for AC magnetic field</b>	
<b>T2YDT*</b>	-				
<b>* Lead wire length</b>					
<b>Blank</b>	1 m (standard)				
<b>3</b>	3 m (option)				
<b>5</b>	5 m (option)				
<b>E Switch quantity</b>					
<b>R</b>	1 on rod side				
<b>H</b>	1 on head side				
<b>D</b>	2				
<b>F Option</b>					
<b>Blank</b>	Rod end female thread				
<b>N</b>	Rod end male thread				
<b>G Mounting bracket</b>					
<b>Blank</b>	Without mounting bracket				
<b>LB</b>	Axial foot (made-to-order product)				
<b>CB</b>	Clevis bracket (pin and snap ring included)				
<b>FA</b>	Rod side flange (made-to-order product)				
<b>FB</b>	Head side flange				
<b>H Accessory (available when rod end male thread "N" is selected)</b>					
<b>I</b>	Rod eye				
<b>Y</b>	Rod clevis (pin and snap ring included)				

## ⚠ Precautions for model No. selection

\*1: The mounting bracket is included at shipment.

\*2: "I" and "Y" cannot be selected together.

## [Example of model No.]

### SSD2-KG4L-32-10-T2YD-R-N

Model: Compact cylinder

Double acting, high load, anti-spatter adherence

**B** Bore size : ø32 mm


**C** Stroke : 10 mm

**D** Switch model No.: Proximity switch for AC magnetic field  
T2YD, lead wire length 1 m

**E** Switch quantity : 1 on rod side

**F** Option : Rod end male thread

## How to order switch



Switch model No.  
(Item ④ on page 976)

## [Stroke table]

Stroke (mm)	Applicable bore size							
	25	32	40	50	63	80	100	
Standard stroke	5	●	●	●				
	10	●	●	●	●	●	●	●
	15	●	●	●	●	●	●	●
	20	●	●	●	●	●	●	●
	25	●	●	●	●	●	●	●
	30	●	●	●	●	●	●	●
	35	●	●	●	●	●	●	●
	40	●	●	●	●	●	●	●
	45	●	●	●	●	●	●	●
	50	●	●	●	●	●	●	●
	75		●	●	●	●	●	●
	100		●	●	●	●	●	●
	Min. stroke (mm) *1	1						
Max. stroke (mm)	50	100						
Custom stroke *2	In 1 mm increments							

\*1: Less than 10 mm stroke is not available.

\*2: The total length is the same as that of the next longer standard stroke.

## How to order mounting bracket

Bore size (mm)	ø25	ø32	ø40	ø50	ø63	ø80	ø100
Mounting bracket							
Flange (FB)	SSD2-FA-25	SSD2-G1-FA-32	SSD2-FA-40	SSD2-FA-50	SSD2-FA-63	SSD2-FA-80	SSD2-FA-100
Clevis bracket (CB)	SSD2-CB-25	SSD2-CB-32	SSD2-CB-40	SSD2-CB-50	SSD2-CB-63	SSD2-CB-80	SSD2-CB-100

\*1: The foot mounting bracket is provided as 2 pcs./set.

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

SSD2

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr


Ending

# SSD2-KG1/KG4 Series


## Internal structure and parts list

SCP\*3  
CMK2  
CMA2  
SCM  
SCG  
SCA2  
SCS2  
CKV2  
CAV2/  
COVPIN2  
SSD2  
SSG  
SSD  
CAT  
MDC2  
MVC  
SMG  
MSD/  
MSDG  
FC\*  
STK  
SRL3  
SRG3  
SRM3  
SRT3  
MRL2  
MRG2  
SM-25  
ShkAbs  
FJ  
FK  
Spd  
Contr  
Ending


● SSD2-KG1L/KG4L-25  
(double acting/single rod high load/anti-spatter adherence/with switch)

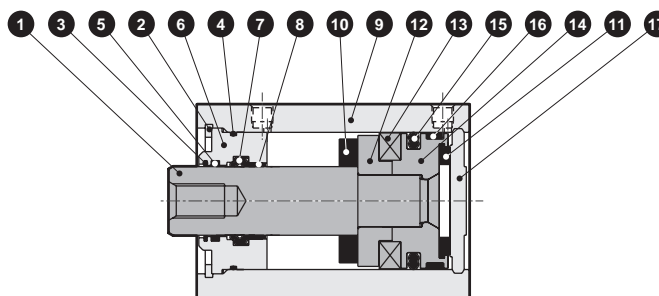


● SSD2-KG1L/KG4L-32 to 50  
(double acting/single rod high load/anti-spatter adherence/with switch)

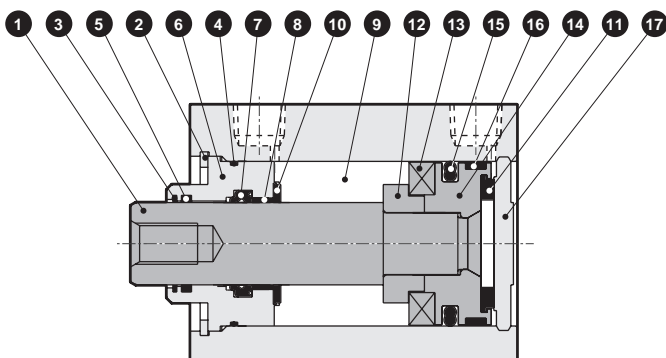

● SSD2-KG1/KG4-25  
(double acting/single rod/high load/anti-spatter adherence)

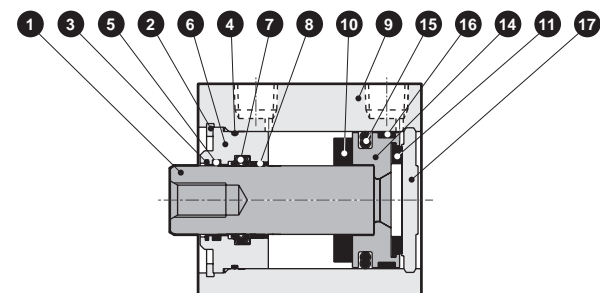

● SSD2-KG1/KG4-32 to 50  
(double acting/single rod/high load/anti-spatter adherence)

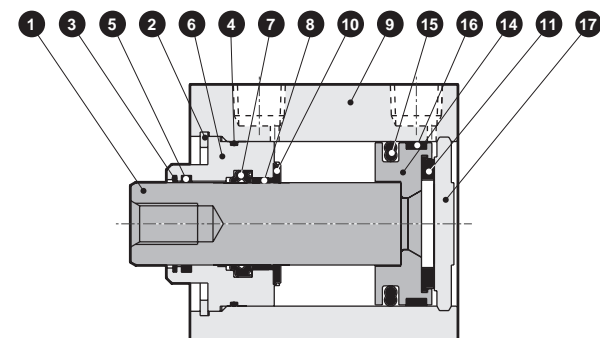


No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	ø25: Stainless steel ø32 to ø50: Steel	Industrial chrome plating	10	Cushion rubber R	Urethane rubber	
2	C-snap ring for hole	Steel	Zinc phosphate	11	Cushion rubber H	Urethane rubber	
3	Coil scraper	Phosphor bronze		12	Spacer	Aluminum alloy	ø25, ø32: Chromate
4	Rod metal gasket	Nitrile rubber		13	Magnet	Plastic	
5	Lube keeping structure	Special rubber	G4 only	14	Piston	Aluminum alloy	Chromate
6	Rod metal	Special aluminum	Alumite	15	Piston packing	Nitrile rubber	
7	Rod packing	Nitrile rubber		16	Wear ring	Polyacetal resin	
8	Bush	Oiles drymet		17	Cover	ø25: Stainless steel ø32 to 50: Aluminum alloy	ø32 to ø50: Alumite
9	Body	Aluminum alloy	Hard alumite				

## Repair parts list


Part name	Kit No.	Repair parts No.
Bore size (mm)		
ø25	SSD2-KG1-25K	3 4 7
ø32	SSD2-KG1-32K	10 11 15 16
ø40	SSD2-KG1-40K	
ø50	SSD2-KG1-50K	

## Internal structure and parts list

- SSD2-KG1L/KG4L-63 to 100 (double acting/single rod high load/anti-spatter adherence/with switch)

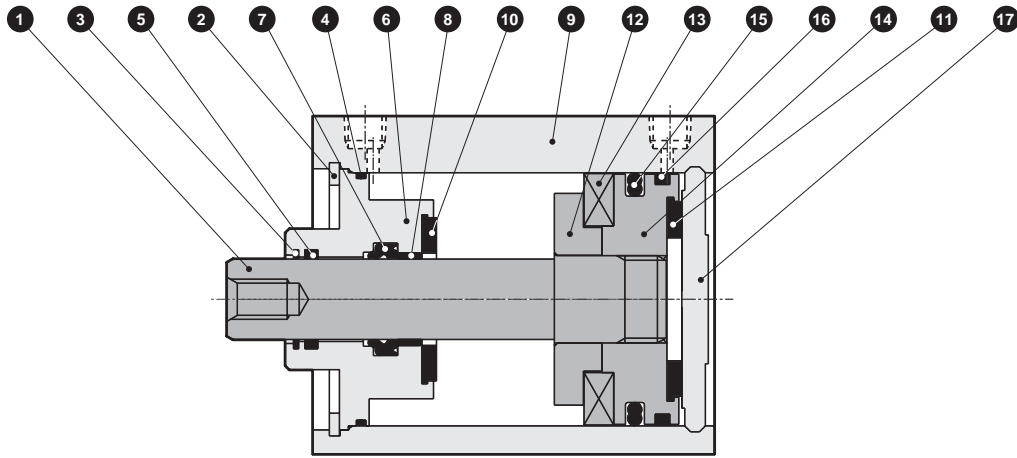

- SSD2-KG1/KG4-63 to 100 (double acting/single rod high load/anti-spatter adherence)

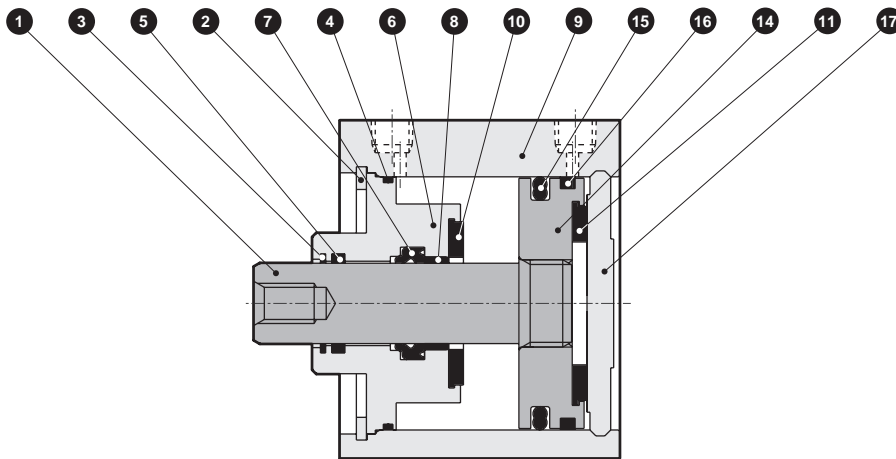

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	Steel	Industrial chrome plating	10	Cushion rubber R	Urethane rubber	
2	C-snap ring for hole	Steel	Zinc phosphate	11	Cushion rubber H	Urethane rubber	
3	Coil scraper	Phosphor bronze		12	Spacer	Aluminum alloy	Chromate
4	Rod metal gasket	Nitrile rubber		13	Magnet	Plastic	
5	Lube keeping structure	Special rubber	G4 only	14	Piston	Aluminum alloy	Chromate
6	Rod metal	Aluminum alloy	Chromate	15	Piston packing	Nitrile rubber	
7	Rod packing	Nitrile rubber		16	Wear ring	Polyacetal resin	
8	Bush	Oiles drymet		17	Cover	Aluminum alloy	Alumite
9	Body	Aluminum alloy	Hard alumite				

## Repair parts list

Part name	Kit No.	Repair parts No.
Bore size (mm)		
ø63	SSD2-KG1-63K	3 4 7 10
ø80	SSD2-KG1-80K	11 15 16
ø100	SSD2-KG1-100K	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending




# SSD2-KG1/KG4 Series

## Dimensions



● SSD2-KG1L/KG4L-25 to 100 (with switch, T0H/V, T5H/V, T2H/V, T3H/V)

● Rod end male thread

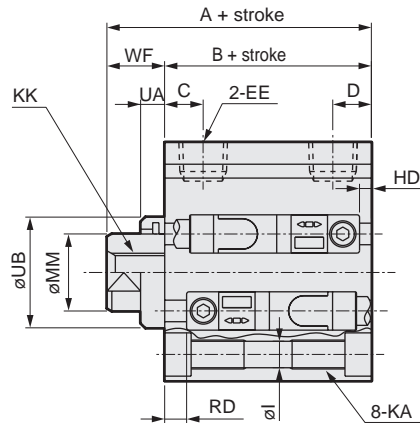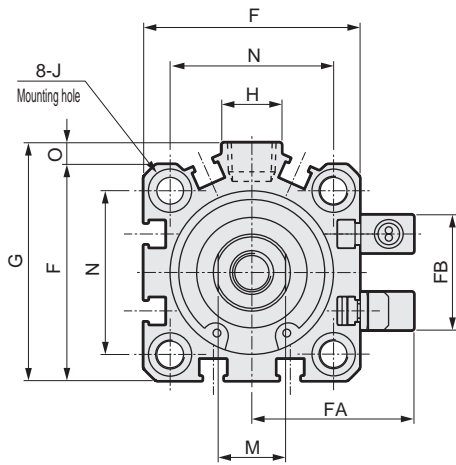

Code	Dimensions with switch														
	Bore size (mm)	A <sup>*1</sup>		B <sup>*1</sup>	C	D	EE	F	FA	FB	G	H	I	J	K
G1		G4													
ø25	52.5	52.5	47.5	11	6	M5	40	31.5	17	-	-	5.5	9 spot face depth 5.5	51	M6 depth 11
ø32	55	60	43	8	8	Rc1/8	45	33.5	24	49.5	12.5	5.5	9 spot face depth 5.5	60	M6 depth 11
ø40	61.5	66.5	49.5	12	8.5	Rc1/8	52	37	31	57	15	5.5	9 spot face depth 5.5	69	M6 depth 11
ø50	63.5	68.5	50.5	10.5	10.5	Rc1/4	64	43	32	71	18	6.9	11 spot face depth 6.5	86	M8 depth 13
ø63	69	74	56	13	11	Rc1/4	77	49.5	32	84	23	8.7	14 spot face depth 9	103	M10 depth 25
ø80	78.5	83.5	63.5	16	13	Rc3/8	98	60	32	104	31	10.5	17.5 spot face depth 11	132	M12 depth 28
ø100	90	95	73	23	15	Rc3/8	117	69.5	32	123.5	38	10.5	17.5 spot face depth 11	156	M12 depth 28

Code	Dimensions with switch										Proximity T2YD		
	Bore size (mm)	KK	M	MM	N	O	UA		UB	WF		HD	RD <sup>*2</sup>
							G1	G4		G1	G4		
ø25	M6 depth 12	10	12	28	-	-	-	-	5	5	2	20	
ø32	M8 depth 13	14	16	34	4.5	5	10	23 h9	12	17	4.5	20.5	
ø40	M8 depth 13	14	16	40	5	5	10	28 h9	12	17	8	23.5	
ø50	M10 depth 15	17	20	50	7	5	10	35 h9	13	18	9	23.5	
ø63	M10 depth 15	17	20	60	7	5	10	35 h9	13	18	13	24	
ø80	M16 depth 21	22	25	77	6	5	10	43 h9	15	20	19	26.5	
ø100	M20 depth 27	27	30	94	6.5	5	10	59 h9	17	22	24.5	30.5	

\*1 : To calculate A+ stroke or B+ stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value. (Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

\*2 : HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.

\*3 : For dimensions of individual accessories, refer to pages 1046 to 1049.




● Rod end male thread

Code	Bore size (mm)	a'	c'	H	kk'	M	MM	T	wf	
									G1	G4
ø25	17.5	15	17	M10x1.25	10	12	6	5	5	
ø32	23.5	20.5	22	M14x1.5	14	16	8	10	15	
ø40	23.5	20.5	22	M14x1.5	14	16	8	10	15	
ø50	28.5	26	27	M18x1.5	17	20	11	10	15	
ø63	28.5	26	27	M18x1.5	17	20	11	10	15	
ø80	35.5	32.5	32	M22x1.5	22	25	13	13	18	
ø100	35.5	32.5	41	M26x1.5	27	30	16	13	18	

### Dimensions

● SSD2-KG1/KG4-25 to 100 (without switch)

● Rod end male thread

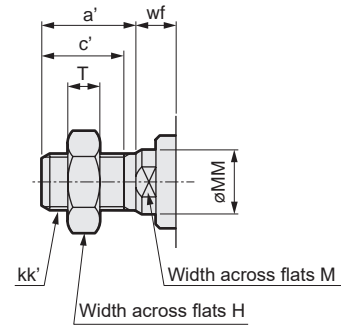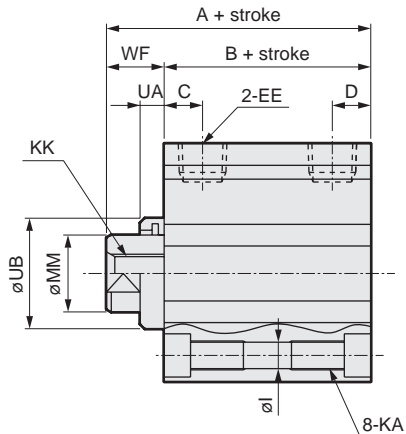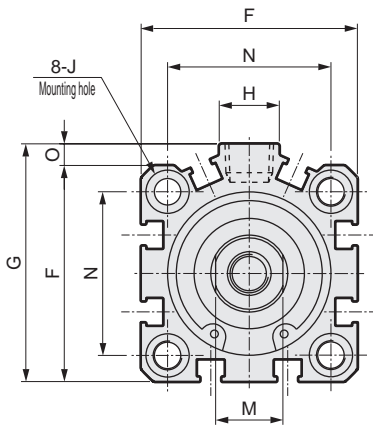

Code Bore size (mm)	Dimensions without switch												
	A <sup>*1, *4</sup>		B <sup>*1, *4</sup>	C	D	EE <sup>*5</sup>	F	G	H	I	J	K	KA
G1	G4												
ø25	42.5	42.5	37.5	11	6	M5	40	-	-	5.5	9 spot face depth 5.5	51	M6 depth 11
ø32	45(55)	50(60)	33(43)	10	5.5	Rc1/8	45	49.5	12.5	5.5	9 spot face depth 5.5	60	M6 depth 11
ø40	51.5(61.5)	56.5(66.5)	39.5(49.5)	11.5	8	Rc1/8	52	57	15	5.5	9 spot face depth 5.5	69	M6 depth 11
ø50	53.5(63.5)	58.5(68.5)	40.5(50.5)	10.5	10.5	Rc1/4	64	71	18	6.9	11 spot face depth 6.5	86	M8 depth 13
ø63	59(69)	64(74)	46(56)	13	11	Rc1/4	77	84	23	8.7	14 spot face depth 9	103	M10 depth 25
ø80	68.5(78.5)	73.5(83.5)	53.5(63.5)	16	13	Rc3/8	98	104	31	10.5	17.5 spot face depth 11	132	M12 depth 28
ø100	80(90)	85(95)	63(73)	23	15	Rc3/8	117	123.5	38	10.5	17.5 spot face depth 11	156	M12 depth 28

Code Bore size (mm)	Dimensions without switch									
	KK	M	MM	N	O	UA		UB	WF	
						G1	G4		G1	G4
ø25	M6 depth 12	10	12	28	-	-	-	-	5	5
ø32	M8 depth 13	14	16	34	4.5	5	10	23 h9	12	17
ø40	M8 depth 13	14	16	40	5	5	10	28 h9	12	17
ø50	M10 depth 15	17	20	50	7	5	10	35 h9	13	18
ø63	M10 depth 15	17	20	60	7	5	10	35 h9	13	18
ø80	M16 depth 21	22	25	77	6	5	10	43 h9	15	20
ø100	M20 depth 27	27	30	94	6.5	5	10	59 h9	17	22

\*1 : To calculate A+ stroke or B+ stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value. (Example)

If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

\*2 : HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.

\*3 : For dimensions of individual accessories, refer to pages 1046 to 1049.

\*4 : Dimensions in ( ) of codes A and B are for strokes of more than 50 mm.

\*5 : The ø32 bore size with a 5 mm stroke and without a switch has a port size of M5.

● Rod end male thread

Code Bore size (mm)	a'	c'	H	kk'	M	MM	T	wf	
								G1	G4
ø25	17.5	15	17	M10x1.25	10	12	6	5	5
ø32	23.5	20.5	22	M14x1.5	14	16	8	10	15
ø40	23.5	20.5	22	M14x1.5	14	16	8	10	15
ø50	28.5	26	27	M18x1.5	17	20	11	10	15
ø63	28.5	26	27	M18x1.5	17	20	11	10	15
ø80	35.5	32.5	32	M22x1.5	22	25	13	13	18
ø100	35.5	32.5	41	M26x1.5	27	30	16	13	18

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

SSD2

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending


# SSD2-KG1/KG4 Series

## Dimensions with mounting bracket




- Clevis bracket (CB)
- SSD2-G1(L)/G4(L)-25 to 100 -CB


•  $\phi 25$

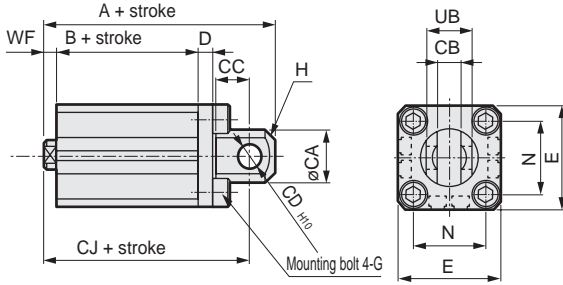


•  $\phi 32$  to  $\phi 100$

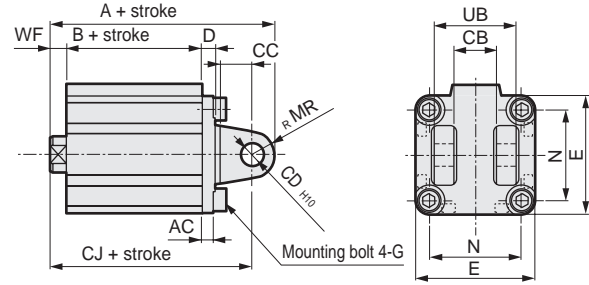

Rod end male thread



Rod end male thread



Code	Common dimensions												Female thread											
	Bore size (mm)	AC	CA	CB	CC	CD	D	E	G	H	MR	N	UB	WF		No switch				With switch				
		A		CJ		A		B		G1		G4		B		A		B						
		G1	G4	G1	G4	G1	G4	G1	G4	G1	G4	G1	G4	G1	G4	G1	G4	G1	G4					
$\phi 25$	-	24	10.2	14	10	5	40	M 6 x 16	C2	-	28	20	5	5	67.5	67.5	32.5	57.5	57.5	77.5	77.5	42.5	67.5	67.5
$\phi 32$	4.5	-	18.2	14	10	5	45	M 6 x 16	C4	10	34	36	12	17	65	70	23	55	60	75	80	33	65	70
$\phi 40$	5	-	18.2	14	10	6	52	M 6 x 16	C5	10	40	36	12	17	73.5	78.5	29.5	63.5	68.5	83.5	88.5	39.5	73.5	78.5
$\phi 50$	6	-	22.2	20	14	7	64	M 8 x 20	-	14	50	44	13	18	85.5	90.5	30.5	71.5	76.5	95.5	100.5	40.5	81.5	86.5
$\phi 63$	7	-	22.2	20	14	8	77	M 10 x 25	-	14	60	44	13	18	93	98	36	79	84	103	108	46	89	94
$\phi 80$	9	-	28.2	27	18	10	98	M 12 x 40	-	18	77	56	15	20	114.5	119.5	43.5	96.5	101.5	124.5	129.5	53.5	106.5	111.5
$\phi 100$	12	-	32.2	31	22	13	117	M 12 x 40	-	22	94	64	17	22	137	142	53	115	120	147	152	63	125	130

Code	Male thread												
	Bore size (mm)	a'	wf		No switch				With switch				
			A		CJ		A		B		CJ		
			G1	G4	G1	G4	G1	G4	G1	G4	G1	G4	
$\phi 25$	17.5	5	5	85	85	32.5	57.5	57.5	95	95	42.5	67.5	67.5
$\phi 32$	23.5	10	15	86.5	91.5	23	53	58	96.5	101.5	33	63	68
$\phi 40$	23.5	10	15	95	100	29.5	61.5	66.5	105	110	39.5	71.5	76.5
$\phi 50$	28.5	10	15	111	116	30.5	68.5	73.5	121	126	40.5	78.5	83.5
$\phi 63$	28.5	10	15	118.5	123.5	36	76	81	128.5	133.5	46	86	91
$\phi 80$	35.5	13	18	148	153	43.5	94.5	99.5	158	163	53.5	104.5	109.5
$\phi 100$	35.5	13	18	168.5	173.5	53	111	116	178.5	183.5	63	121	126

# SSD2-KG1/KG4 Series


Dimensions with mounting bracket

## Dimensions with mounting bracket




- Head side flange (FB)  
SSD2-G1(L)/G4(L)-25 to 100 -FB


•  $\phi 25$

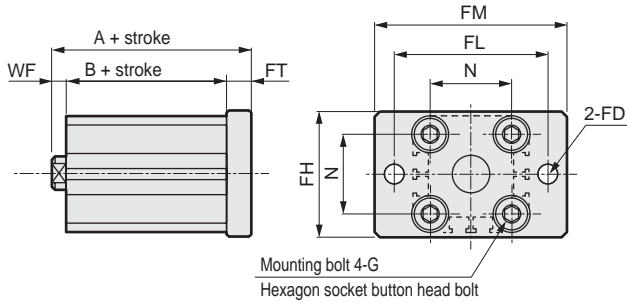


•  $\phi 32$  to  $\phi 100$

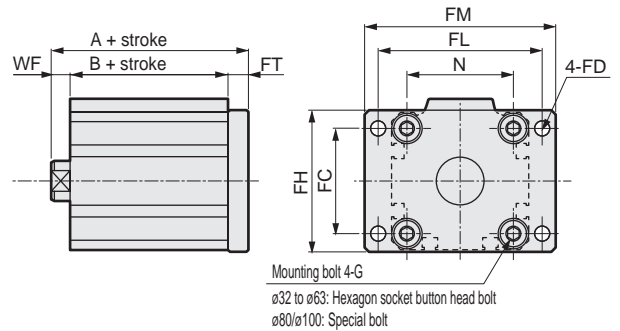

Rod end male thread



Rod end male thread



Code	Common dimensions								Female thread							
	FC	FD	FH	FL	FM	FT	N	G	WF		No switch			With switch		
									G1	G4	A		B	A		B
$\phi 25$	-	6.6	42	52	64	8	28	M 6 x 16	5	5	45.5	45.5	32.5	55.5	55.5	42.5
$\phi 32$	34	5.5	48	56	65	8	34	M 6 x 16	12	17	43	48	23	53	58	33
$\phi 40$	40	5.5	54	62	72	8	40	M 6 x 16	12	17	49.5	54.5	29.5	59.5	64.5	39.5
$\phi 50$	50	6.6	67	76	89	9	50	M 8 x 20	13	18	52.5	57.5	30.5	62.5	67.5	40.5
$\phi 63$	60	9	80	92	108	9	60	M 10 x 25	13	18	58	63	36	68	73	46
$\phi 80$	77	11	99	116	134	11	77	M 12 x 40	15	20	69.5	74.5	43.5	79.5	84.5	53.5
$\phi 100$	94	11	117	136	154	11	94	M 12 x 40	17	22	81	86	53	91	96	63

Code	Male thread								
	a'	wf		No switch			With switch		
		G1	G4	A		B	A		B
$\phi 25$	17.5	5	5	63	63	32.5	73	73	42.5
$\phi 32$	23.5	10	15	64.5	69.5	23	74.5	79.5	33
$\phi 40$	23.5	10	15	71	76	29.5	81	86	39.5
$\phi 50$	28.5	10	15	78	83	30.5	88	93	40.5
$\phi 63$	28.5	10	15	83.5	88.5	36	93.5	98.5	46
$\phi 80$	35.5	13	18	103	108	43.5	113	118	53.5
$\phi 100$	35.5	13	18	112.5	117.5	53	122.5	127.5	63

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs


FJ

FK

Spd  
Contr

Ending






Compact cylinder double acting/  
double rod/coil scraper

## SSD2-DG1 Series

● Bore size:  $\varnothing 25/\varnothing 32/\varnothing 40/\varnothing 50/\varnothing 63/\varnothing 80/\varnothing 100$



Compact cylinder double acting/  
double rod/anti-spatter adherence

## SSD2-DG4 Series



### Specifications

Item	SSD2-DG1/DG4 SSD2-DG1L/DG4L (with switch)								
	mm		$\varnothing 25$	$\varnothing 32$	$\varnothing 40$	$\varnothing 50$	$\varnothing 63$	$\varnothing 80$	$\varnothing 100$
Bore size	mm		$\varnothing 25$	$\varnothing 32$	$\varnothing 40$	$\varnothing 50$	$\varnothing 63$	$\varnothing 80$	$\varnothing 100$
Actuation	Double acting								
Working fluid	Compressed air								
Max. working pressure	MPa	1.0 ( $\approx 150$ psi, 10 bar)							
Min. working pressure	MPa	0.2 ( $\approx 29$ psi, 2 bar)				0.15 ( $\approx 22$ psi, 1.5 bar)			
Proof pressure	MPa	1.6 ( $\approx 230$ psi, 16 bar)							
Ambient temperature	$^{\circ}\text{C}$	-10 ( $14^{\circ}\text{F}$ ) to 60 ( $140^{\circ}\text{F}$ ) (no freezing)							
Port size	Rc1/8				Rc1/4		Rc3/8		
Stroke tolerance	mm	$+1.0$ 0							
Working piston speed	mm/s	50 to 500					50 to 300		
Cushion	None								
Lubrication	Not required (use turbine oil ISO VG32 if necessary for lubrication)								
Allowable absorbed energy	J	0.021	0.025	0.092	0.1	0.12	0.27	0.56	

### Stroke


Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\varnothing 25$	5/10/15/20/25/ 30/35/40/45/50	50	1(10) The value in ( ) is for types with one or two switches.
$\varnothing 32$	5/10/15/20/25/30/ 35/40/45/50/75/100	100	
$\varnothing 40$	10/15/20/25 30/35/40/45/50 75/100		
$\varnothing 50$			
$\varnothing 63$			
$\varnothing 80$			
$\varnothing 100$			

\*1: The custom stroke is available in 1 mm increments.

### Custom stroke

#### ● SSD2-DG1, DG4 Series

Item	Standard products	
	Standard stroke body with spacer	
Model No.	Refer to How to order.	
Description	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.	
Stroke range	Bore size	Stroke range
	25	1 to 49
	32 to 100	1 to 99
Example of model No.	Model No.: SSD2-DG1-32-38 A +2 mm spacer is added to the SSD2-DG1-32-40 standard cylinder to create 38 mm stroke. B + stroke is 90.5mm.	

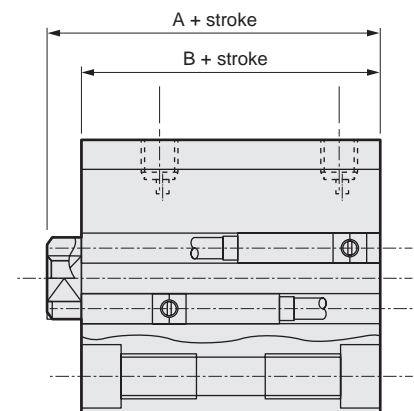

## Switch specifications

● Proximity switch for AC magnetic field

Item	2-wire proximity	
	T2YD/T2YDT	
Applications	Dedicated for programmable controller	
Indicator	Red/green LED (Lit when ON)	
Load voltage	24 VDC ±10%	
Load current	5 to 20 mA	
Internal voltage drop	6 V or less	
Leakage current	1.0 mA or less	
Output delay time *1 (Delay ON, delay OFF)	60 ms or less	
Lead wire length	1m (oil resistant vinyl cabtyre cable ø 6, 0.5 mm <sup>2</sup> x 2-conductor) *2, *3	
Insulation resistance	100 MΩ and over at 500 VDC megger	
Withstand voltage	No failure after 1 minute of 1,000 VAC application.	
Max. shock resistance	980 m/s <sup>2</sup>	
Ambient temperature	-10 to +60°C	
Degree of protection	JIS C0920 (water-tight), IEC standards IP67, oil resistance	
Weight	g	1 m:61 3 m:166 5 m:272

\*1: Indicates the time from magnetic sensor detection of the piston magnet until switch output.

\*2: 3 m and 5 m lead wires are available as options.

\*3: Flame-resistant lead wires are available as options.

\*4: This switch cannot be used in DC environments.

## Cylinder weight table (the weight of the switches is when there are 2 cylinder switches.)

(Unit: g)

Stroke (mm)	5		10		15		20		25		30		35		40		45		50		75		100	
	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch
ø25	234	325	249	340	265	356	281	372	297	388	313	403	329	419	344	435	360	461	375	486	-	-	-	-
ø32	308	423	354	468	399	514	446	560	490	605	537	651	584	696	631	741	678	786	725	831	960	1056	1195	1281
ø40	446	589	473	616	499	642	526	669	553	696	579	732	606	754	632	775	659	802	685	828	818	961	950	1093
ø50	-	-	746	940	796	989	846	1041	896	1089	946	1139	996	1189	1046	1239	1098	1291	1149	1343	1407	1603	1664	1863
ø63	-	-	1203	1567	1278	1642	1353	1717	1428	1792	1503	1867	1579	1943	1654	2018	1729	2093	1804	2168	2179	2543	2554	2918
ø80	-	-	2112	2042	2229	2420	2345	2798	2462	2915	2578	3031	2695	3153	2812	3275	2929	3392	3045	3508	3628	4091	4210	4673
ø100	-	-	3153	3775	3322	3924	3490	4072	3659	4256	3828	4440	3997	4604	4165	4767	4334	4931	4503	5095	5348	5915	6193	6735

## Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa									
		0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø25	Push/Pull	-	75.6	1.13x10 <sup>2</sup>	1.51x10 <sup>2</sup>	1.89x10 <sup>2</sup>	2.27x10 <sup>2</sup>	2.64x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.40x10 <sup>2</sup>	3.78x10 <sup>2</sup>
ø32	Push/Pull	-	1.21x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.62x10 <sup>2</sup>	4.22x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.43x10 <sup>2</sup>	6.03x10 <sup>2</sup>
ø40	Push/Pull	-	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>
ø50	Push/Pull	-	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>
ø63	Push/Pull	4.20x10 <sup>2</sup>	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>	2.24x10 <sup>3</sup>	2.52x10 <sup>3</sup>	2.80x10 <sup>3</sup>
ø80	Push/Pull	6.80x10 <sup>2</sup>	9.07x10 <sup>2</sup>	1.36x10 <sup>3</sup>	1.81x10 <sup>3</sup>	2.27x10 <sup>3</sup>	2.72x10 <sup>3</sup>	3.17x10 <sup>3</sup>	3.63x10 <sup>3</sup>	4.08x10 <sup>3</sup>	4.54x10 <sup>3</sup>
ø100	Push/Pull	1.07x10 <sup>3</sup>	1.43x10 <sup>3</sup>	2.14x10 <sup>3</sup>	2.86x10 <sup>3</sup>	3.57x10 <sup>3</sup>	4.29x10 <sup>3</sup>	5.00x10 <sup>3</sup>	5.72x10 <sup>3</sup>	6.43x10 <sup>3</sup>	7.15x10 <sup>3</sup>

# SSD2-DG1/DG4 Series

## How to order

No switch (without magnet for switch)

**SSD2-DG4** - **32** - **10** - **N** - **LB** - **I**

With switch (built-in magnet for switch)

**SSD2-DG4L** - **32** - **10** - **T2YD** - **R** - **N** - **LB** - **I**

**A** Model No.

**B** Bore size

**C** Stroke

**D** Switch model No.

**E** Switch quantity

**F** Option

**G** Mounting bracket

\*1

**H** Accessory

\*2

Code	Description				
<b>A Model No.</b>					
<b>SSD2-DG1</b>	Double acting/double rod/coil scraper				
<b>SSD2-DG1L</b>	Double acting/double rod/coil scraper/with switch				
<b>SSD2-DG4</b>	Double acting/double rod/anti-spatter adherence				
<b>SSD2-DG4L</b>	Double acting/double rod/anti-spatter adherence/with switch				
<b>B Bore size (mm)</b>					
<b>25</b>	ø25				
<b>32</b>	ø32				
<b>40</b>	ø40				
<b>50</b>	ø50				
<b>63</b>	ø63				
<b>80</b>	ø80				
<b>100</b>	ø100				
<b>C Stroke (mm)</b>					
Refer to the stroke table on the following page.					
<b>D Switch model No.</b>					
<b>Lead wire</b>	<b>Lead wire</b>	<b>Contact</b>	<b>Voltage</b>	<b>Indicator</b>	<b>Lead wire</b>
<b>Straight</b>	<b>L-shaped</b>				
<b>T2YD*</b>	-	Proximity	DC	2-color LED for AC magnetic field	2-wire
<b>T2YDT*</b>	-				
<b>T2YDU (Made-to-order product)</b>					
<b>* Lead wire length</b>					
<b>Blank</b>	1 m (standard)				
<b>3</b>	3 m (option)				
<b>5</b>	5 m (option)				
<b>E Switch quantity</b>					
<b>R</b>	1 on rod side				
<b>H</b>	1 on head side				
<b>D</b>	2				
<b>F Option</b>					
<b>Blank</b>	Rod end female thread				
<b>N</b>	Rod end male thread				
<b>G Mounting bracket</b>					
<b>Blank</b>	Without mounting bracket				
<b>LB</b>	Axial foot (made-to-order product)				
<b>FA</b>	Rod side flange (made-to-order product)				
<b>H Accessory (available when rod end male thread "N" is selected)</b>					
<b>I</b>	Rod eye				
<b>Y</b>	Rod clevis (pin and snap ring included)				

## How to order switch

**SW** - **T2YD**

Switch model No.  
(Item **D** above)

## ⚠ Precautions for model No. selection

\*1: The mounting bracket is included at shipment.

\*2: "I" and "Y" cannot be selected together.

## [Example of model No.]

**SSD2-DG4L-32-10-T2YD-R-N**

Model: Compact cylinder

Double acting, double rod, anti-spatter adherence

**B** Bore size : ø32 mm

**C** Stroke : 10 mm

**D** Switch model No.: Proximity switch for AC magnetic field  
T2YD, lead wire length 1 m

**E** Switch quantity : 1 on rod side

**F** Option : Rod end male thread

[Stroke table]

Stroke (mm)	Applicable bore size						
	25	32	40	50	63	80	100
Standard stroke	5	●	●	●			
	10	●	●	●	●	●	●
	15	●	●	●	●	●	●
	20	●	●	●	●	●	●
	25	●	●	●	●	●	●
	30	●	●	●	●	●	●
	35	●	●	●	●	●	●
	40	●	●	●	●	●	●
	45	●	●	●	●	●	●
	50	●	●	●	●	●	●
	75		●	●	●	●	●
	100		●	●	●	●	●
Min. stroke (mm) *1	1						
Max. stroke (mm)	50	100					
Custom stroke *2	In 1 mm increments						

\*1: Less than 10 mm stroke is not available.

\*2: The total length is the same as that of the next longer standard stroke.

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr


Ending

# SSD2-DG1/DG4 Series


SCP\*3  
CMK2  
CMA2  
SCM  
SCG  
SCA2  
SCS2  
CKV2  
CAV2/  
COVPIN2  
**SSD2**  
SSG  
SSD  
CAT  
MDC2  
MVC  
SMG  
MSD/  
MSDG  
FC\*  
STK  
SRL3  
SRG3  
SRM3  
SRT3  
MRL2  
MRG2  
SM-25  
ShkAbs  
FJ  
FK  
Spd  
Contr  
Ending

## Internal structure and parts list

● SSD2-DG1L/DG4L-25 to 50 (double acting/double rod/anti-spatter adherence/with switch)

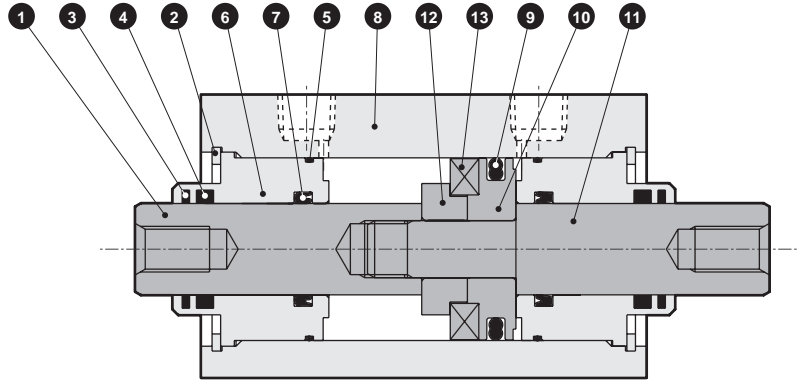

● SSD2-DG1/DG4-25 to 50 (double acting/double rod/anti-spatter adherence)

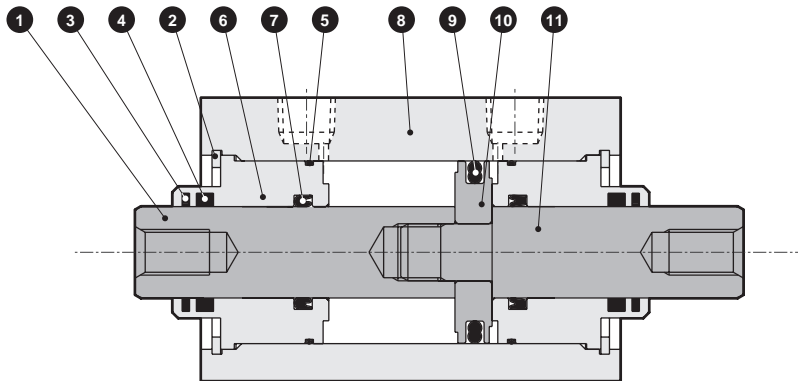


No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod A	ø25: Stainless steel ø32 to ø50: Steel	Industrial chrome plating	8	Body	Aluminum alloy	Hard alumite
2	C-snap ring for hole	Steel	Zinc phosphate	9	Piston packing	Nitrile rubber	
3	Coil scraper	Phosphor bronze		10	Piston	Aluminum alloy	Chromate
4	Lube keeping structure	Special rubber	G4 only	11	Piston rod B	ø25: Stainless steel ø32 to ø50: Steel	Industrial chrome plating
5	Rod metal gasket	Nitrile rubber		12	Spacer	Aluminum alloy	ø25, ø32: Chromate
6	Rod metal	Aluminum alloy	Alumite	13	Magnet	Plastic	
7	Rod packing	Nitrile rubber					

## Repair parts list


Part name	Kit No.	Repair parts No.
Bore size (mm)		
ø25	SSD2-DG1-25K	3 5 7 9
ø32	SSD2-DG1-32K	
ø40	SSD2-DG1-40K	
ø50	SSD2-DG1-50K	

## Internal structure and parts list

- SSD2-DG1L/DG4L-63 to 100 (double acting/double rod/anti-spatter adherence/with switch)

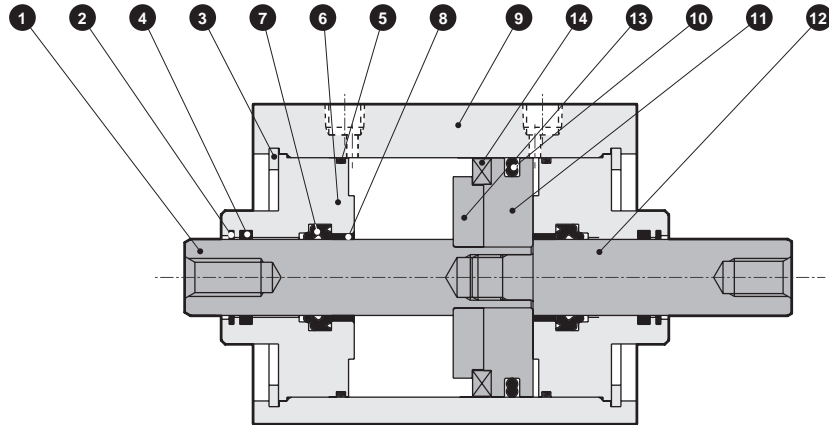

- SSD2-DG1/DG4-63 to 100 (double acting/double rod/anti-spatter adherence)

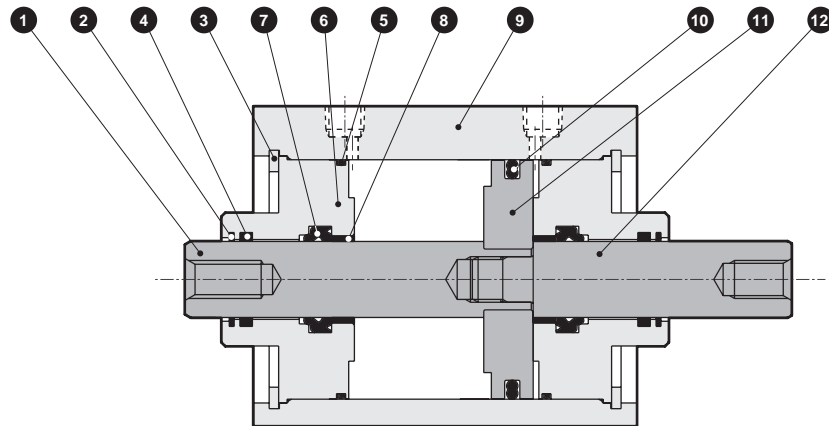

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod A	Steel	Industrial chrome plating	8	Bush	Oiles drymet	
2	Coil scraper	Phosphor bronze		9	Body	Aluminum alloy	Hard alumite
3	C-snap ring for hole	Steel	Zinc phosphate	10	Piston packing	Nitrile rubber	Chromate
4	Lube keeping structure	Special rubber	G4 only	11	Piston	Aluminum alloy	Chromate
5	Rod metal gasket	Nitrile rubber		12	Piston rod B	Steel	Industrial chrome plating
6	Rod metal	Aluminum alloy	Chromate	13	Spacer	Aluminum alloy	Chromate
7	Rod packing	Nitrile rubber		14	Magnet	Plastic	

## Repair parts list

Part name	Kit No.	Repair parts No.
Bore size (mm)		
ø63	SSD2-DG1-63K	
ø80	SSD2-DG1-80K	2 5 7 10
ø100	SSD2-DG1-100K	




SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/ COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/ MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending

# SSD2-DG1/DG4 Series



## Dimensions

● SSD2-DG1L/DG4L-25 (with switch)

● Rod end male thread

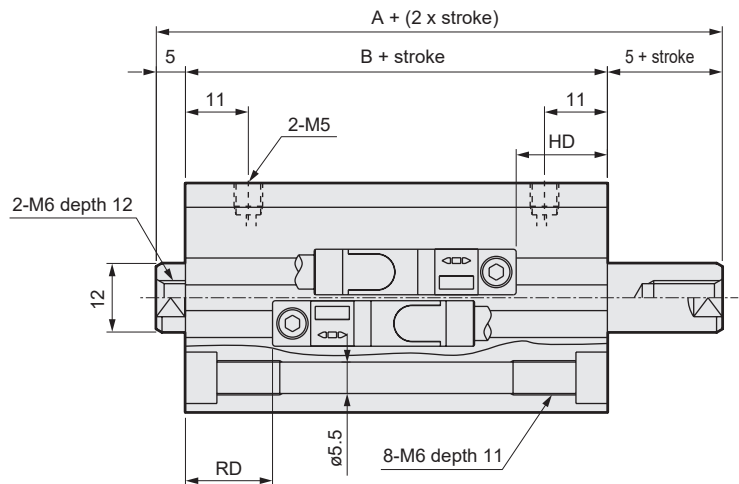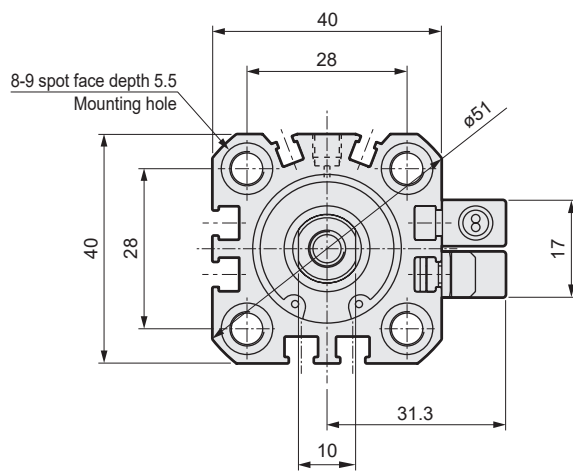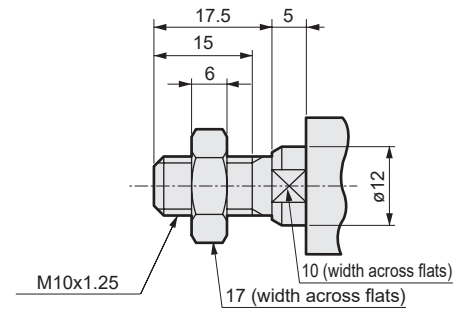

● SSD2-DG1/DG4-25 (without switch)

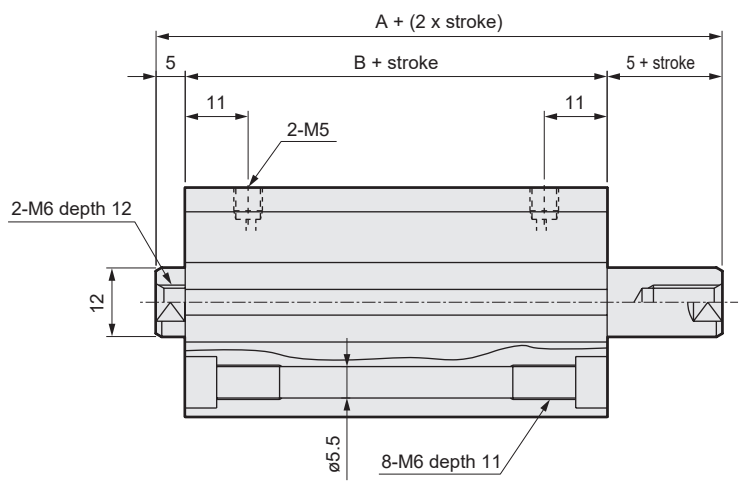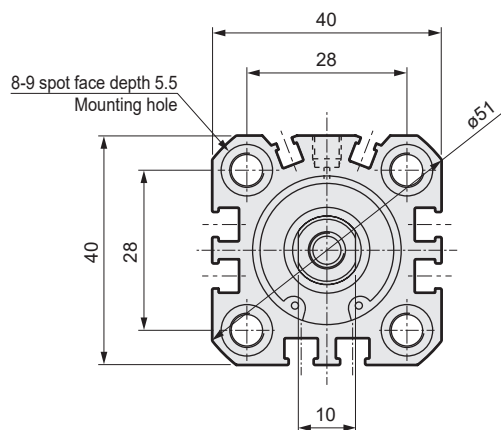

Code	No switch		Dimensions with switch					
	A <sup>*1</sup>	B <sup>*1</sup>	A <sup>*1</sup>	B <sup>*1</sup>	FA	FB	RD <sup>*2</sup>	HD
FJ	59	49	69	59	31.5	17	20	21.5

\*1 : To calculate A+ (2 x stroke), B+ stroke or 5+ stroke when using a custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value. Left and right projection dimensions of rod differ.  
(Example) If the custom stroke is 17 mm, apply the standard stroke 20 mm.

\*2 : RD dimensions for custom stroke differ from these dimensions according to the setting.

\*3 : For dimensions of individual accessories, refer to pages 1046 to 1049.



\*4 : The positions for the left and right widths across flats are unspecified.

# SSD2-DG1/DG4 Series


Double acting/double rod

## Dimensions



● SSD2-DG1L/DG4L-32 to 100 (with switch)

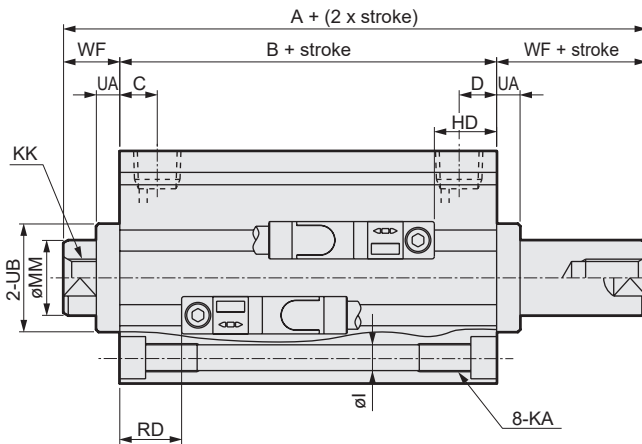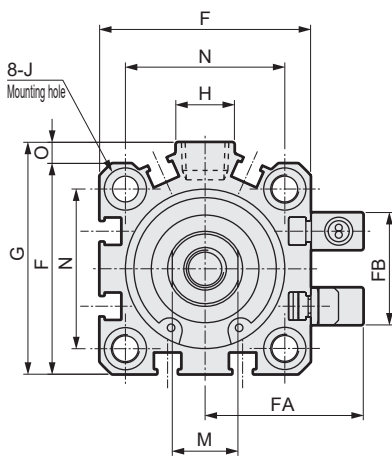

● Rod end male thread



● SSD2-DG1/DG4-32 to 100 (without switch)

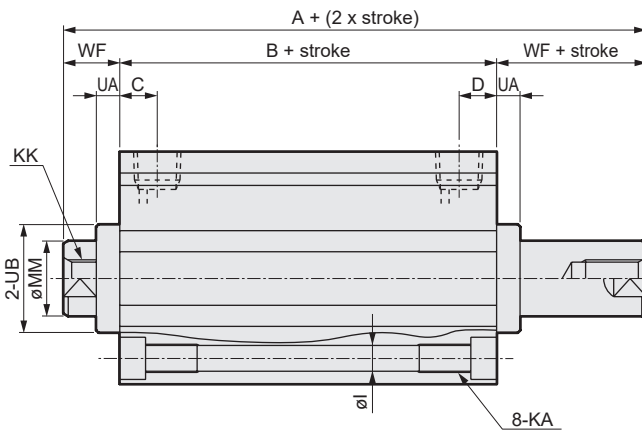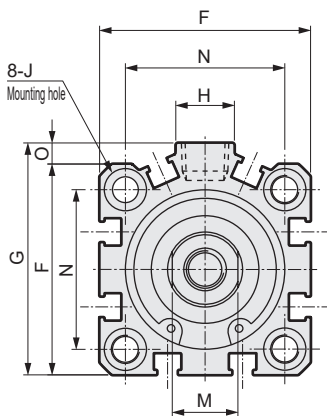

Code	No switch				Common dimensions with switch													
	A <sup>*1, *4</sup>		B <sup>*1, *4</sup>	A <sup>*1</sup>		B <sup>*1</sup>	C	D	EE	F	FA	FB	G	H	I	J	KA	KK
	G1	G4		G1	G4													
ø32	54.5(64.5)	64.5(74.5)	30.5(40.5)	64.5	74.5	40.5	8	8	Rc1/8	45	33.5	24	49.5	12.5	5.5	9 spot face depth 5.5	M6 depth 11	M8 depth 13
ø40	64(74)	74(84)	40(50)	74	84	50	12	12	Rc1/8	52	37	31	57	15	5.5	9 spot face depth 5.5	M6 depth 11	M8 depth 13
ø50	66.5(76.5)	76.5(86.5)	40.5(50.5)	76.5	86.5	50.5	10.5	10.5	Rc1/4	64	43	32	71	18	6.9	11 spot face depth 6.5	M8 depth 13	M10 depth 15
ø63	68(78)	78(88)	42(52)	78	88	52	13	13	Rc1/4	77	49.5	32	84	23	8.7	14 spot face depth 9	M10 depth 25	M10 depth 15
ø80	81(91)	91(101)	51(61)	91	101	61	16	16	Rc3/8	98	60	32	104	31	10.5	17 spot face depth 11	M12 depth 28	M16 depth 21
ø100	94.5(104.5)	104.5(114.5)	60.5(70.5)	104.5	114.5	70.5	23	23	Rc3/8	117	69.5	32	123.5	38	10.5	17.5 spot face depth 11	M12 depth 28	M20 depth 27

Code	Common dimensions with switch										With T2YD switch	
	M	MM	N	O	UA		UB	WF		RD <sup>*2</sup>	HD	
					G1	G4		G1	G4			
ø32	14	16	34	4.5	5	10	23 h9	12	17	20.5	22	
ø40	14	16	40	5	5	10	28 h9	12	17	23.5	27.5	
ø50	17	20	50	7	5	10	35 h9	13	18	23.5	27.5	
ø63	17	20	60	7	5	10	35 h9	13	18	24	28.5	
ø80	22	25	77	6	5	10	43 h9	15	20	26.5	35	
ø100	27	30	94	6.5	5	10	59 h9	17	22	30.5	40.5	

\*1 : To calculate A+ (2 x stroke), B+ stroke or WF+ stroke when using a custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value. Left and right projection dimensions of rod differ. (Example) If the custom stroke is 17 mm, apply the standard stroke 20 mm.

\*2 : RD dimensions for custom stroke differ from these dimensions according to the setting.

\*3 : For dimensions of individual accessories, refer to pages 1046 to 1049.

\*4 : Dimensions in ( ) of codes A and B are for strokes of more than 50 mm.

\*5 : The positions for the left and right widths across flats are unspecified.

● Dimensions of rod end male thread part

Code	a'	c'	H	kk'	M	MM	T	wf	
								G1	G4
ø32	23.5	20.5	22	M14x1.5	14	16	8	10	15
ø40	23.5	20.5	22	M14x1.5	14	16	8	10	15
ø50	28.5	26	27	M18x1.5	17	20	11	10	15
ø63	28.5	26	27	M18x1.5	17	20	11	10	15
ø80	35.5	32.5	32	M22x1.5	22	25	13	13	18
ø100	35.5	32.5	41	M26x1.5	27	30	16	13	18

SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending




Compact cylinder double acting single rod/environment-resistant scraper

# SSD2-G5 Series

● Bore size:  $\varnothing 20/\varnothing 25/\varnothing 32/\varnothing 40/\varnothing 50/\varnothing 63/\varnothing 80/\varnothing 100$

JIS symbol



## Specifications

Item	SSD2-G5 SSD2-G5L (with switch)									
	mm	$\varnothing 20$	$\varnothing 25$	$\varnothing 32$	$\varnothing 40$	$\varnothing 50$	$\varnothing 63$	$\varnothing 80$	$\varnothing 100$	
Bore size	mm	$\varnothing 20$	$\varnothing 25$	$\varnothing 32$	$\varnothing 40$	$\varnothing 50$	$\varnothing 63$	$\varnothing 80$	$\varnothing 100$	
Actuation		Double acting								
Working fluid		Compressed air								
Max. working pressure	MPa	1.0 ( $\approx 150$ psi, 10 bar)								
Min. working pressure	MPa	0.2 ( $\approx 29$ psi, 2 bar)					0.15 ( $\approx 22$ psi, 1.5 bar)			
Proof pressure	MPa	1.6 ( $\approx 230$ psi, 16 bar)								
Ambient temperature	$^{\circ}\text{C}$	-10 ( $14^{\circ}\text{F}$ ) to 60 ( $140^{\circ}\text{F}$ ) (no freezing)								
Port size		M5		Rc1/8 (*1)		Rc1/4		Rc3/8		
Stroke tolerance	mm	+1.0 0								
Working piston speed	mm/s	50 to 500					50 to 300			
Cushion		None								
Lubrication		Not required (use turbine oil class 1 ISO VG32 if necessary for lubrication)								
Allowable absorbed energy J		0.016	0.021	0.025	0.092	0.1	0.12	0.27	0.56	

\*1: The  $\varnothing 32$  bore size with a 5 mm stroke and without a switch has a port size of M5.

## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\varnothing 20$	5/10/15/20/25/ 30/35/40/45/50	50	1
$\varnothing 25$			
$\varnothing 32$	5/10/15/20/25/30/35/40/ 45/50/75/100	100	
$\varnothing 40$			
$\varnothing 50$	10/15/20/25/30/35/40/4 5/50/75/100	100	
$\varnothing 63$			
$\varnothing 80$			
$\varnothing 100$			

## Min. stroke with switch (2 switches)

Bore size (mm)	T0H/V / T5H/V	T2H/V / T3H/V
$\varnothing 20$	5	5
$\varnothing 25$		
$\varnothing 32$		
$\varnothing 40$		
$\varnothing 50$		
$\varnothing 63$		
$\varnothing 80$		
$\varnothing 100$		

\*1: Less than 10 mm with the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch is not available.

\*2: Values in ( ) are for the type with 1 on rod side.


\*1: For the type with switch, refer to the table of switch mounting quantity and minimum stroke.

\*2: The custom stroke is available in 1 mm increments. The total length when using a custom stroke is the same as that when using the next longer standard stroke.

## Custom stroke

### ● SSD2-G5 Series

Item	Standard products	
	Standard stroke body with spacer	
Model No.	Refer to How to order.	
Description	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.	
Stroke range	Bore size	Stroke range
	20 to 25	1 to 49
	32 to 100	1 to 99
Example of model No.	Model No.: SSD2-G5-32-38 A +2 mm spacer is added to the SSD2-G5-32-40 standard cylinder to create 38 mm stroke. B + stroke is 73mm.	

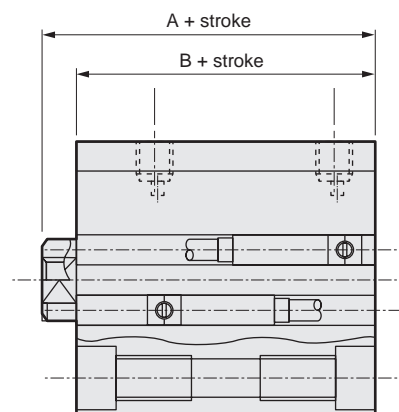

### Switch specifications (F-switch)

● 1-color/2-color LED

Item	2-wire proximity		3-wire proximity		2-wire proximity		3-wire proximity		
	F2S		F3S		F2H/F2V	F2YH/F2YV	F3H/F3V	F3PH/F3PV (made to order)	F3YH/F3YV
Applications	Dedicated for programmable controller		For programmable controller, relay		Dedicated for programmable controller		For programmable controller, relay		
Output method	-		NPN output		-		NPN output	PNP output	NPN output
Power supply voltage	-		10 to 28 VDC		-		10 to 28 VDC	4.5 to 28 VDC	10 to 28 VDC
Load voltage	10 to 30 VDC		30 VDC or less		10 to 30 VDC	24 VDC ±10%	30 VDC or less		
Load current	5 to 20 mA		50 mA or less		5 to 20 mA		50 mA or less		
Indicator	LED (Lit when ON)				Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Yellow LED (Lit when ON)		Red/green LED (Lit when ON)
Leakage current	1 mA or less		10 µA or less		1 mA or less		10 µA or less		
Weight	g				1 m:10 3 m:29				

### Switch specifications (T-switch)

● 1-color/2-color LED/for AC magnetic field proof

Item	2-wire proximity		2-wire proximity				3-wire proximity				2-wire reed				2-wire proximity		
	T1H/T1V	T2H/T2V	T2YH/T2YV	T2WH/T2WV	T3H/T3V	T3PH/T3PV	T3YH/T3YV	T3WH/T3WV	T0H/T0V	T5H/T5V	T8H/T8V		T2YD(*4) T2YDT				
Applications	For programmable controller, relay, compact solenoid valve	Dedicated for programmable controller				For programmable controller, relay				For programmable controller, relay	For programmable controller, relay, IC circuit (no indicator lamp), serial connection	For programmable controller, relay		Dedicated for programmable controller			
Output method	-		-		NPN output	PNP output	NPN output	NPN output	-								
Pwr. supp. V.	-		-		10 to 28 VDC				-								
Load voltage	85 to 265 VAC	10 to 30 VDC		24 VDC ±10%	30 VDC or less				12/24 VDC	100/110 VAC	5/12/24 VDC	100/110 VAC	12/24 VDC	110 VAC	220 VAC	24 VDC ±10%	
Load current	5 to 100 mA	5 to 20 mA (*3)				100 mA or less		50 mA or less		5 to 50 mA	7 to 20 mA	50 mA or less	20 mA or less	5 to 50 mA	7 to 20 mA	7 to 10 mA	5 to 20 mA
Indicator	LED (Lit when ON)	LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	No indicator lamp		LED (Lit when ON)	Red/green LED (Lit when ON)				
Leakage current	≤ 1 mA at 100 VAC, ≤ 2 mA at 200 VAC	1 mA or less				10 µA or less				0 mA				1 mA or less			
Weight	g	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80			1 m:33 3 m:87 5 m:142	1 m:61 3 m:166 5 m:272				

\*1: Refer to Ending Page 1 for detailed switch specifications and dimensions.

\*2: Switches other than the above models, such as switches with connectors, are also available. Refer to Ending Page 1.

\*3: The max. load current is 20 mA at 25°C. The current is lower than 20 mA if the operating ambient temperature around the switch is higher than 25°C. (5 to 10 mA at 60°C)

\*4: Switch for AC magnetic field (T2YD/T2YDT) cannot be used in DC magnetic field.

\*5: The F-switch uses a bend-resistant lead wire.

### Cylinder weight table (the weight of the switches is when there are 2 cylinder switches.)

(Unit: g)

Stroke (mm)	5		10		15		20		25		30		35		40		45		50		75		100	
	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch
ø20	95	150	107	182	120	195	133	208	145	220	158	233	171	246	184	259	197	272	210	285	-	-	-	-
ø25	131	222	146	237	162	253	178	269	194	285	209	300	225	316	241	332	257	348	272	363	-	-	-	-
ø32	185	299	207	321	229	343	251	365	272	386	294	408	316	430	338	452	360	474	381	495	552	600	662	710
ø40	269	412	296	439	322	465	349	492	376	519	402	545	429	572	455	598	482	625	508	651	726	784	858	916
ø50	-	-	476	670	518	712	560	754	602	796	645	839	687	881	729	923	771	965	813	1007	1160	1217	1370	1427
ø63	-	-	703	982	758	1037	813	1092	868	1147	923	1202	999	1258	1074	1313	1150	1369	1144	1423	1332	1696	1709	1973
ø80	-	-	1240	1653	1327	1740	1413	1826	1500	1908	1586	1990	1673	2082	1760	2173	1847	2265	1933	2346	2701	2754	3136	3211
ø100	-	-	1879	2446	1993	2560	2106	2673	2220	2787	2334	2901	2448	3015	2561	3128	2675	3242	2789	3356	3857	3929	4424	4496

### Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa										
		0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0	
ø20	Push	-	62.8	94.2	1.26x10 <sup>2</sup>	1.57x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.20x10 <sup>2</sup>	2.51x10 <sup>2</sup>	2.83x10 <sup>2</sup>	3.14x10 <sup>2</sup>	
	Pull	-	47.1	70.7	94.2	1.18x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.65x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.12x10 <sup>2</sup>	2.36x10 <sup>2</sup>	
ø25	Push	-	98.2	1.47x10 <sup>2</sup>	1.96x10 <sup>2</sup>	2.45x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.44x10 <sup>2</sup>	3.93x10 <sup>2</sup>	4.42x10 <sup>2</sup>	4.91x10 <sup>2</sup>	
	Pull	-	75.6	1.13x10 <sup>2</sup>	1.51x10 <sup>2</sup>	1.89x10 <sup>2</sup>	2.27x10 <sup>2</sup>	2.64x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.40x10 <sup>2</sup>	3.78x10 <sup>2</sup>	
ø32	Push	-	1.61x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.22x10 <sup>2</sup>	4.02x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.63x10 <sup>2</sup>	6.43x10 <sup>2</sup>	7.24x10 <sup>2</sup>	8.04x10 <sup>2</sup>	
	Pull	-	1.21x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.62x10 <sup>2</sup>	4.22x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.43x10 <sup>2</sup>	6.03x10 <sup>2</sup>	
ø40	Push	-	2.51x10 <sup>2</sup>	3.77x10 <sup>2</sup>	5.03x10 <sup>2</sup>	6.28x10 <sup>2</sup>	7.54x10 <sup>2</sup>	8.80x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.13x10 <sup>3</sup>	1.26x10 <sup>3</sup>	
	Pull	-	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>	
ø50	Push	-	3.93x10 <sup>2</sup>	5.89x10 <sup>2</sup>	7.85x10 <sup>2</sup>	9.82x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.37x10 <sup>3</sup>	1.57x10 <sup>3</sup>	1.77x10 <sup>3</sup>	1.96x10 <sup>3</sup>	
	Pull	-	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>	
ø63	Push	4.68x10 <sup>2</sup>	6.23x10 <sup>2</sup>	9.35x10 <sup>2</sup>	1.25x10 <sup>3</sup>	1.56x10 <sup>3</sup>	1.87x10 <sup>3</sup>	2.18x10 <sup>3</sup>	2.49x10 <sup>3</sup>	2.81x10 <sup>3</sup>	3.12x10 <sup>3</sup>	
	Pull	4.20x10 <sup>2</sup>	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>	2.24x10 <sup>3</sup>	2.52x10 <sup>3</sup>	2.80x10 <sup>3</sup>	
ø80	Push	7.54x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.51x10 <sup>3</sup>	2.01x10 <sup>3</sup>	2.51x10 <sup>3</sup>	3.02x10 <sup>3</sup>	3.52x10 <sup>3</sup>	4.02x10 <sup>3</sup>	4.52x10 <sup>3</sup>	5.03x10 <sup>3</sup>	
	Pull	6.80x10 <sup>2</sup>	9.07x10 <sup>2</sup>	1.36x10 <sup>3</sup>	1.81x10 <sup>3</sup>	2.27x10 <sup>3</sup>	2.72x10 <sup>3</sup>	3.17x10 <sup>3</sup>	3.63x10 <sup>3</sup>	4.08x10 <sup>3</sup>	4.54x10 <sup>3</sup>	
ø100	Push	1.18x10 <sup>3</sup>	1.57x10 <sup>3</sup>	2.36x10 <sup>3</sup>	3.14x10 <sup>3</sup>	3.93x10 <sup>3</sup>	4.71x10 <sup>3</sup>	5.50x10 <sup>3</sup>	6.28x10 <sup>3</sup>	7.07x10 <sup>3</sup>	7.85x10 <sup>3</sup>	
	Pull	1.07x10 <sup>3</sup>	1.43x10 <sup>3</sup>	2.14x10 <sup>3</sup>	2.86x10 <sup>3</sup>	3.57x10 <sup>3</sup>	4.29x10 <sup>3</sup>	5.00x10 <sup>3</sup>	5.72x10 <sup>3</sup>	6.43x10 <sup>3</sup>	7.15x10 <sup>3</sup>	

SCP\*3  
CMK2  
CMA2  
SCM  
SCG  
SCA2  
SCS2  
CKV2  
CAV2/COVP/N2  
SSD2  
SSG  
SSD  
CAT  
MDC2  
MVC  
SMG  
MSD/MSDG  
FC\*  
STK  
SRL3  
SRG3  
SRM3  
SRT3  
MRL2  
MRG2  
SM-25  
ShkAbs  
FJ  
FK  
Spd Contr  
Ending

# SSD2-G5 Series

## How to order

No switch (without magnet for switch)

**SSD2-G5** - **20** - **5** - **N** - **LB** - **I**

With switch (built-in magnet for switch)

**SSD2-G5L** - **20** - **5** - **T0H** - **R** - **N** - **LB** - **I**

**A** Model No.

**B** Bore size

**C** Port thread

**D** Stroke

**E** Switch model No.

\*1

\*4

**F** Switch quantity

**G** Option

**H** Mounting bracket

\*2

**I** Accessory

\*3

## Precautions for model No. selection

\*1 : The T8\* switch cannot be mounted on the ø20 to ø32 bore sizes.

\*2 : The mounting bracket is included at shipment. The WF/wf dimension of the cylinder for "LB" and "FA" is set 10 mm longer than that of standard products. The number of the specified protruding dimension will be added at the end of the model No. printed on the metal plate on the body.

\*3 : "I" and "Y" cannot be selected together.

\*4 : Switches are shipped with the product. Contact CKD if assembling before shipment is necessary.

\*5 : F-switch cannot be selected.

## [Example of model No.]

**SSD2-G5L-32-5-T0H-R-N-LB-I**

Model: Compact cylinder  
Double acting/single rod/environment-resistant scraper

- B** Bore size : ø32 mm
- C** Port thread : Type of Rc thread
- D** Stroke : 5 mm
- E** Switch model : Reed switch T0H  
No. Lead wire length 1 m
- F** Switch quantity : 1 on rod side
- G** Option : Rod end male thread
- H** Mounting bracket : Axial foot
- I** Accessory : Rod eye

Code	Description															
<b>A Model No.</b>																
<b>SSD2-G5</b>	Double acting/single rod/environment-resistant scraper (made-to-order product)															
<b>SSD2-G5L</b>	Double acting/single rod/environment-resistant scraper/switch (MTO)															
<b>B Bore size (mm)</b>																
<b>20</b>	ø20															
<b>25</b>	ø25															
<b>32</b>	ø32															
<b>40</b>	ø40															
<b>50</b>	ø50															
<b>63</b>	ø63															
<b>80</b>	ø80															
<b>100</b>	ø100															
<b>C Port thread</b>																
<b>Blank</b>	Rc thread/M5 thread															
<b>NN</b>	NPT thread (ø32 and over) (made-to-order product)															
<b>GN</b>	G thread (ø32 and over) (made-to-order product)															
<b>D Stroke (mm)</b>																
Refer to the stroke table on the following page.																
<b>E Switch model No.</b>																
Lead wire	Lead wire	Contact	Voltage		Indicator	Lead	Bore size									
			AC	DC			Line	20	25	32	40	50	63	80	100	
Straight	-	F2S*	Proximity	●	1-color LED	2-wire	●	●								
	-	F3S*		3-wire		●	●									
	F2H*	F2V*		2-wire		●	●									
	F3H*	F3V*		3-wire		●	●									
L-shaped	F3PH*	F3PV*	Proximity	●	1-color LED (PNP output) (custom)	3-wire	●	●								
	F2YH*	F2YV*		2-color LED	2-wire	●	●									
	F3YH*	F3YV*			3-wire	●	●									
	T0H*	T0V*		Reed	●	1-color LED	2-wire	●	●	●	●	●	●	●	●	●
T5H*	T5V*	●	No indicator lamp		2-wire	●	●	●	●	●	●	●	●	●	●	
T8H*	T8V*	●	1-color LED					●	●	●	●	●	●	●	●	
T1H*	T1V*	●			2-wire	●	●	●	●	●	●	●	●	●	●	●
Proximity	T2H*	T2V*	Proximity	●	1-color LED	2-wire	●	●	●	●	●	●	●	●	●	●
	T3H*	T3V*		●	1-color LED (PNP output)	3-wire	●	●	●	●	●	●	●	●	●	●
	T3PH*	T3PV*		●		2-wire	●	●	●	●	●	●	●	●	●	●
	T2WH*	T2WV*		●	2-color LED	3-wire	●	●	●	●	●	●	●	●	●	●
T2YH*	T2YV*	●	2-color LED	2-wire	●	●	●	●	●	●	●	●	●	●	●	
T3WH*	T3WV*	●		3-wire	●	●	●	●	●	●	●	●	●	●	●	
T3YH*	T3YV*	●	2-color LED	2-wire	●	●	●	●	●	●	●	●	●	●	●	
T2YD*	-	●		for AC magnetic field	2-wire	●	●	●	●	●	●	●	●	●	●	
T2YDT*	-	●	1-color LED off-delay	2-wire	●	●	●	●	●	●	●	●	●	●	●	
T2JH*	T2JV*	●														
<b>* Lead wire length</b>																
<b>Blank</b>	1 m (standard)															
<b>3</b>	3 m (option)															
<b>5</b>	5 m (option)															
	*5															
<b>F Switch quantity</b>																
<b>R</b>	1 on rod side															
<b>H</b>	1 on head side															
<b>D</b>	2															
<b>G Option</b>																
<b>Blank</b>	Rod end female thread															
<b>N</b>	Rod end male thread															
<b>H Mounting bracket</b>																
<b>Blank</b>	Without mounting bracket															
<b>LB</b>	Axial foot															
<b>CB</b>	Clevis bracket (pin and snap ring included)															
<b>FA</b>	Rod side flange															
<b>FB</b>	Head side flange															
<b>I Accessory (available when rod end male thread "N" is selected)</b>																
<b>I</b>	Rod eye															
<b>Y</b>	Rod clevis (pin and snap ring included)															

### [Stroke table]

Stroke (mm)	Applicable bore size								
	20	25	32	40	50	63	80	100	
Standard stroke	5	●	●	●	●				
	10	●	●	●	●	●	●	●	●
	15	●	●	●	●	●	●	●	●
	20	●	●	●	●	●	●	●	●
	25	●	●	●	●	●	●	●	●
	30	●	●	●	●	●	●	●	●
	35	●	●	●	●	●	●	●	●
	40	●	●	●	●	●	●	●	●
	45	●	●	●	●	●	●	●	●
	50	●	●	●	●	●	●	●	●
	75			●	●	●	●	●	●
	100			●	●	●	●	●	●
Min. stroke (mm) *1	1								
Max. stroke (mm)	50		100						
Custom stroke *2	In 1 mm increments								

\*1: Less than 5 mm for 1-color LED switch and less than 10 mm for the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch are not available.

Refer to page 992 for the min. stroke with switch.

\*2: The total length when using a custom stroke is the same as that when using the next longer standard stroke.

### How to order switch



Switch model No.  
(Item ㊞ on page 994)

### How to order mounting bracket

Bore size (mm)	ø20	ø25	ø32	ø40	ø50	ø63	ø80
<b>Mounting bracket</b>							
Foot (LB)	SSD2-LB-20	SSD2-LB-25	SSD2-LB-32	SSD2-LB-40	SSD2-LB-50	SSD2-LB-63	SSD2-LB-80
Flange (FA/FB)	SSD2-FA-20	SSD2-FA-25	SSD2-FA-32	SSD2-FA-40	SSD2-FA-50	SSD2-FA-63	SSD2-FA-80
Clevis bracket (CB)	SSD2-CB-20	SSD2-CB-25	SSD2-CB-32	SSD2-CB-40	SSD2-CB-50	SSD2-CB-63	SSD2-CB-80
<b>Bore size (mm)</b>	<b>ø100</b>						
<b>Mounting bracket</b>							
Foot (LB)	SSD2-LB-100						
Flange (FA/FB)	SSD2-FA-100						
Clevis bracket (CB)	SSD2-CB-100						

\*1: The foot mounting bracket is provided as 2 pcs./set.


SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/ COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/ MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending

# SSD2-G5 Series


SCP\*3  
CMK2  
CMA2  
SCM  
SCG  
SCA2  
SCS2  
CKV2  
CAV2/  
COVPIN2  
**SSD2**  
SSG  
SSD  
CAT  
MDC2  
MVC  
SMG  
MSD/  
MSDG  
FC\*  
STK  
SRL3  
SRG3  
SRM3  
SRT3  
MRL2  
MRG2  
SM-25  
ShkAbs  
FJ  
FK  
Spd  
Contr  
Ending

## Internal structure and parts list

● SSD2-G5L-20, 25  
(double acting/environmentally-resistant scraper/with switch)

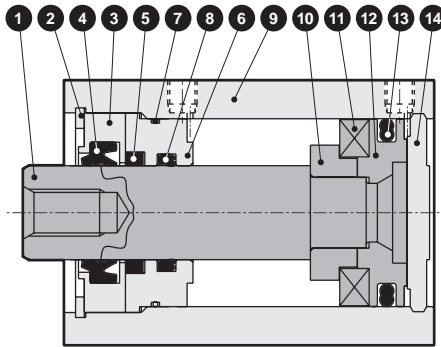

● SSD2-G5-20, 25  
(double acting/environmentally-resistant scraper)

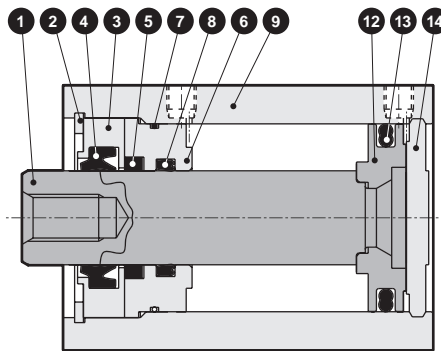

## Main parts list


Part No.	Part name	Material	Remarks	Part No.	Part name	Material	Remarks
1	Piston rod	Stainless steel	Industrial chrome plating	9	Body	Aluminum alloy	Hard alumite
2	C-snap ring	Steel	Zinc phosphate	10	Spacer	Aluminum alloy	Chromate
3	Rod metal 1	Special aluminum	Alumite	11	Magnet	Plastic	
4	Scraper	Nitrile rubber		12	Piston	Aluminum alloy	Chromate
5	Lube keeping structure	Special rubber		13	Piston packing	Nitrile rubber	
6	Rod metal	Special aluminum	Alumite	14	Cover	Stainless steel	
7	Rod metal gasket	Nitrile rubber					
8	Rod packing	Nitrile rubber					

## Consumable parts list


Part name	Kit No.	Consumable parts No.
Bore size (mm)		
ø20	<b>SSD2-G5-20K</b>	4 5 7 8 13
ø25	<b>SSD2-G5-25K</b>	

## Internal structure and parts list


- SSD2-G5L-32 to 50  
(double acting/environmentally-resistant scraper/with switch)

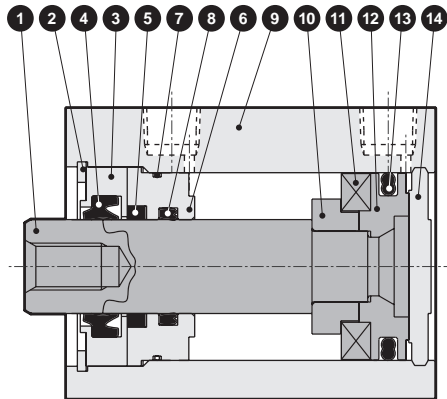


- SSD2-G5L-63 to 100  
(double acting/environmentally-resistant scraper/with switch)

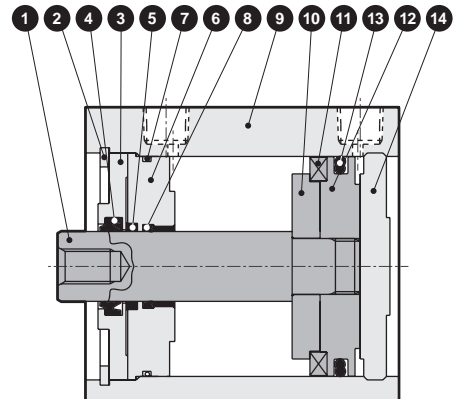

- SSD2-G5-32 to 50  
(double acting/environmentally-resistant scraper)

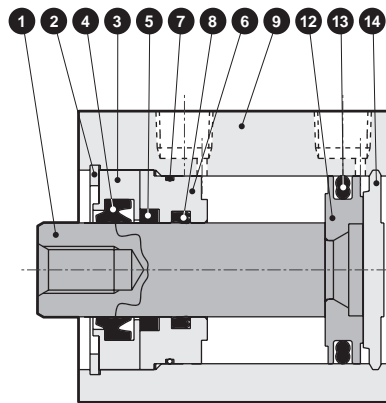


50 st or less

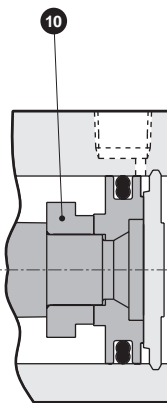


Over 50 st

- SSD2-G5-63 to 100  
(double acting/environmentally-resistant scraper)

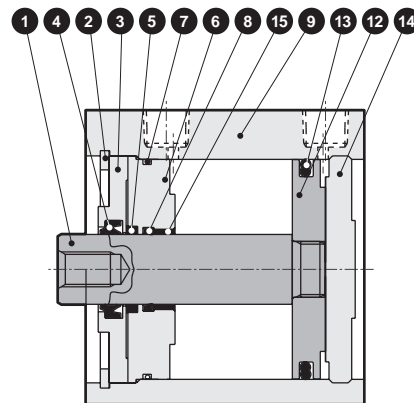

50 st or less

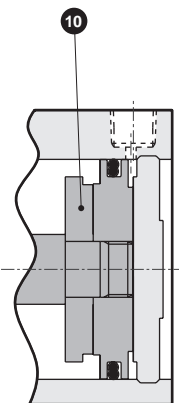

Over 50 st

## Main parts list

Part No.	Part name	Material	Remarks	Part No.	Part name	Material	Remarks
1	Piston rod	Steel	Industrial chrome plating	8	Rod packing	Nitrile rubber	
2	C-snap ring	Steel	Zinc phosphate	9	Body	Aluminum alloy	Hard alumite
3	Rod metal 1	ø32 to ø50: Special aluminum ø63 to ø100: Aluminum alloy	ø32 to ø50: Alumite ø63 to ø100: Chromate	10	Spacer	Aluminum alloy	Chromate
4	Scraper	Nitrile rubber		11	Magnet	Plastic	
5	Lube keeping structure	Special rubber		12	Piston	Aluminum alloy	Chromate
6	Rod metal	ø32 to ø50: Special aluminum ø63 to ø100: Aluminum alloy	ø32 to ø50: Alumite ø63 to ø100: Chromate	13	Piston packing	Nitrile rubber	
7	Rod metal gasket	Nitrile rubber		14	Cover	Aluminum alloy	Alumite
				15	Bush	Oiles drymet	

## Consumable parts list

Part name	Kit No.	Consumable parts No.
Bore size (mm)		
ø32	SSD2-G5-32K	4 5 7 8 13
ø40	SSD2-G5-40K	
ø50	SSD2-G5-50K	
ø63	SSD2-G5-63K	
ø80	SSD2-G5-80K	
ø100	SSD2-G5-100K	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending




# SSD2-G5 Series

## dimensions



● SSD2-G5L-20, 25 (with switch, TOH/V, T5H/V, T2H/V, T3H/V)

● Rod end male thread

ø20/ø25

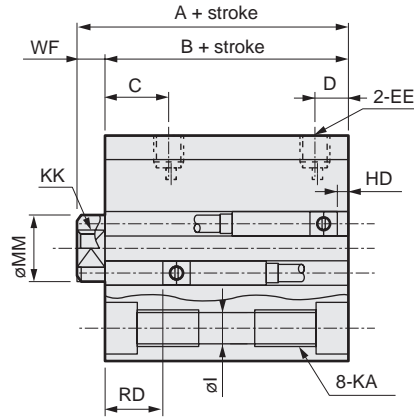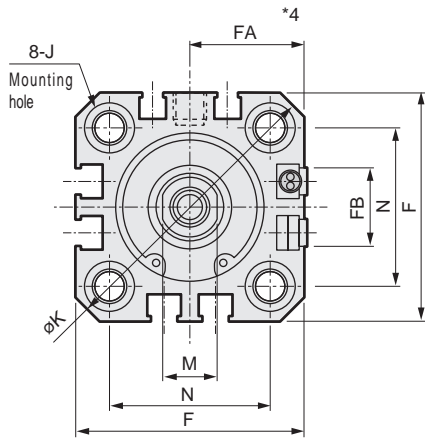

● SSD2-G5-20, 25 (without switch)

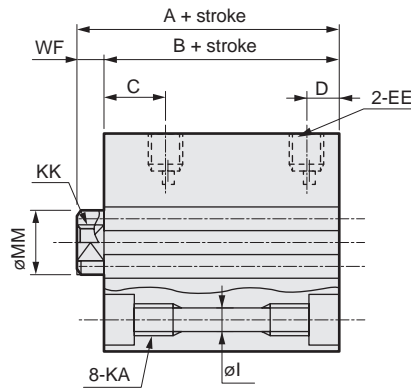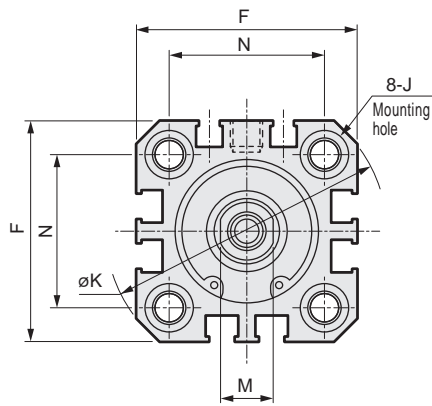

Code	No switch		Common dimensions with switch							
	A <sup>*1</sup>	B <sup>*1</sup>	A <sup>*1</sup>	B <sup>*1</sup>	C	D	EE	F	FA <sup>*4</sup>	FB
ø20	34	29.5	44	39.5	18	5.5	M5	36	18.5(22)	12.5
ø25	37.5	32.5	47.5	42.5	21	6	M5	40	20.5(24)	13.5

Code	Common dimensions with switch									
	I	J	K	KA	KK	M	MM	N	WF	
ø20	5.5	9 spot face depth 5.5	47	M6 depth 11	M5 depth 7	8	10	25.5	4.5	
ø25	5.5	9 spot face depth 5.5	51	M6 depth 11	M6 depth 12	10	12	28	5	

Switch dimensions	Reed TOH/T0V, T5H/T5V		Proximity T2H/T2V, T3H/T3V		Proximity T2WH, T2WV, T3WH/T3WV		Proximity F2H/F2V, F3H/F3V, F2YH/F2YV, F3YH/F3YV		Proximity F2S/F3S	
	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD
ø20	3	17.5	3	17.5	5	19.5	7.5	22	6.5	21
ø25	4	19.5	4	19.5	6	21.5	8.5	24	7.5	23

\*1: To calculate A + stroke or B + stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value. (Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

\*2: HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.

\*3: Refer to page 1044 for HD, RD and protruding dimensions of the 2-color LED, off-delay, AC magnetic field proof, T1\* and T8\* switches.

\*4: Dimensions in ( ) of FA are for the L-shaped lead wire.


\*5: For dimensions with individual accessories, refer to pages 1046 to 1049.

Rod end male thread


Code	a'	c'	H	kk'	M	MM	T	wf
	ø20	14	12	13	M8	8	10	5
ø25	17.5	15	17	M 10 x 1.25	10	12	6	5

## Dimensions


● SSD2-G5L-32 to 100 (with switch, TOH/V, T5H/V, T2H/V, T3H/V)

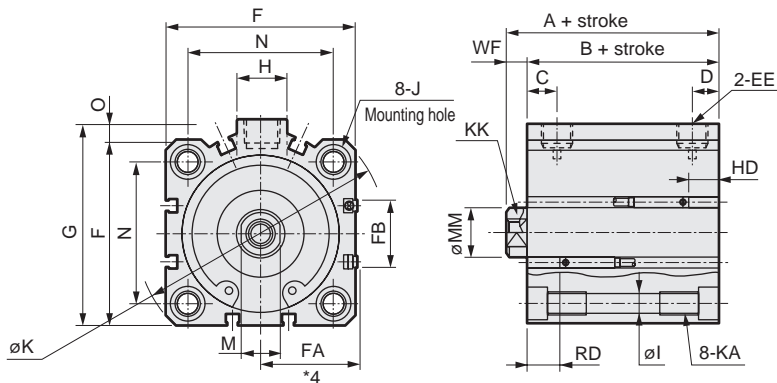

● Rod end male thread



● SSD2-G5-32 to 100 (without switch)

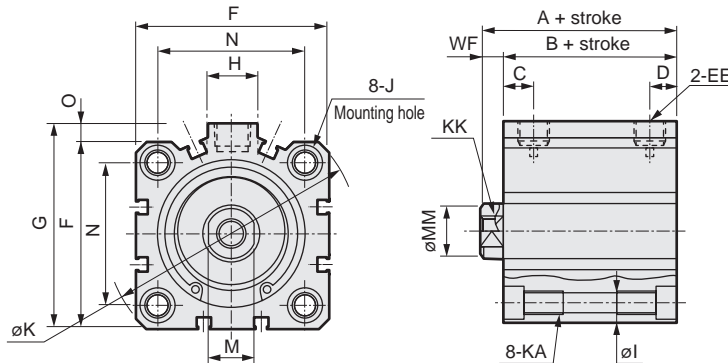

Code	No switch		Common dimensions with switch									
	A <sup>*1</sup>	B <sup>*1</sup>	A <sup>*1</sup>	B <sup>*1</sup>	C <sup>*7</sup>	D <sup>*7</sup>	EE <sup>*8</sup>	F	FA <sup>*4</sup>	FB	G	H
ø32	40(50)	33(43)	50	43	18(20)	8(5.5)	Rc1/8	45	23(26.5)	20.5	49.5	12.5
ø40	46.5(56.5)	39.5(49.5)	56.5	49.5	22(21.5)	8.5(8)	Rc1/8	52	26.5(30)	27.5	57	15
ø50	48.5(58.5)	40.5(50.5)	58.5	50.5	20.5	10.5	Rc1/4	64	32.5(36)	28.5	71	18
ø63	54(64)	46(56)	64	56	23	11	Rc1/4	77	39(42.5)	28.5	84	23
ø80	63.5(73.5)	53.5(63.5)	73.5	63.5	26	13	Rc3/8	98	49.5(53)	28.5	104	31
ø100	75(85)	63(73)	85	73	33	15	Rc3/8	117	59(62.5)	28.5	123.5	38

Code	Common dimensions with switch									
	I	J	K	KA	KK	M	MM	N	O	WF
ø32	5.5	9 spot face depth 5.5	60	M6 depth 11	M8 depth 13	14	16	34	4.5	7
ø40	5.5	9 spot face depth 5.5	69	M6 depth 11	M8 depth 13	14	16	40	5	7
ø50	6.9	11 spot face depth 6.5	86	M8 depth 13	M10 depth 15	17	20	50	7	8
ø63	8.7	14 spot face depth 9	103	M10 depth 25	M10 depth 15	17	20	60	7	8
ø80	10.5	17.5 spot face depth 11	132	M12 depth 28	M16 depth 21	22	25	77	6	10
ø100	10.5	17.5 spot face depth 11	156	M12 depth 28	M20 depth 27	27	30	94	6.5	12

Switch dimensions	Reed T0H/T0V, T5H/T5V		Proximity T2H/T2V, T3H/T3V		Proximity T2WH/T2WV, T3WH/T3WV	
	HD	RD	HD	RD	HD	RD
ø32	4	19.5	4	19.5	6	21.5
ø40	7	22	7	22	8.5	23.5
ø50	7.5	22.5	7.5	22.5	9	24
ø63	12.5	23	12.5	23	14	24.5
ø80	17.5	25.5	17.5	25.5	19	27
ø100	23	29.5	23	29.5	24.5	31

\*1 : To calculate A+ stroke or B+ stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value. (Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

\*2 : HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.

\*3 : Refer to page 1044 for HD, RD and protruding dimensions of the 2-color LED, off-delay, AC magnetic field proof, T1\* and T8\* switches.

\*4 : Dimensions in ( ) of FA are for the L-shaped lead wire.

\*5 : For dimensions of individual accessories, refer to pages 1046 to 1049.

\*6 : Dimensions in ( ) of codes A and B are for strokes of more than 50 mm.

\*7 : Dimensions in ( ) of codes C and D are when the value is for a 5 mm stroke without switch.

\*8 : The ø32 bore size with a 5 mm stroke and without a switch has a port size of M5.

### Rod end male thread

Code	Bore size	a'	c'	H	kk'	M	MM	T	wf
		ø32	23.5	20.5	22	M14x1.5	14	16	8
ø40	23.5	20.5	22	M14x1.5	14	16	8	5	
ø50	28.5	26	27	M18x1.5	17	20	11	5	
ø63	28.5	26	27	M18x1.5	17	20	11	5	
ø80	35.5	32.5	32	M22x1.5	22	25	13	8	
ø100	35.5	32.5	41	M26x1.5	27	30	16	8	




# SSD2-G5 Series

## Dimensions with mounting bracket

- Axial foot (LB)
- SSD2-G5(L)-20 to 100 -LB
- $\phi 20/\phi 25$


•  $\phi 32$  to  $\phi 100$

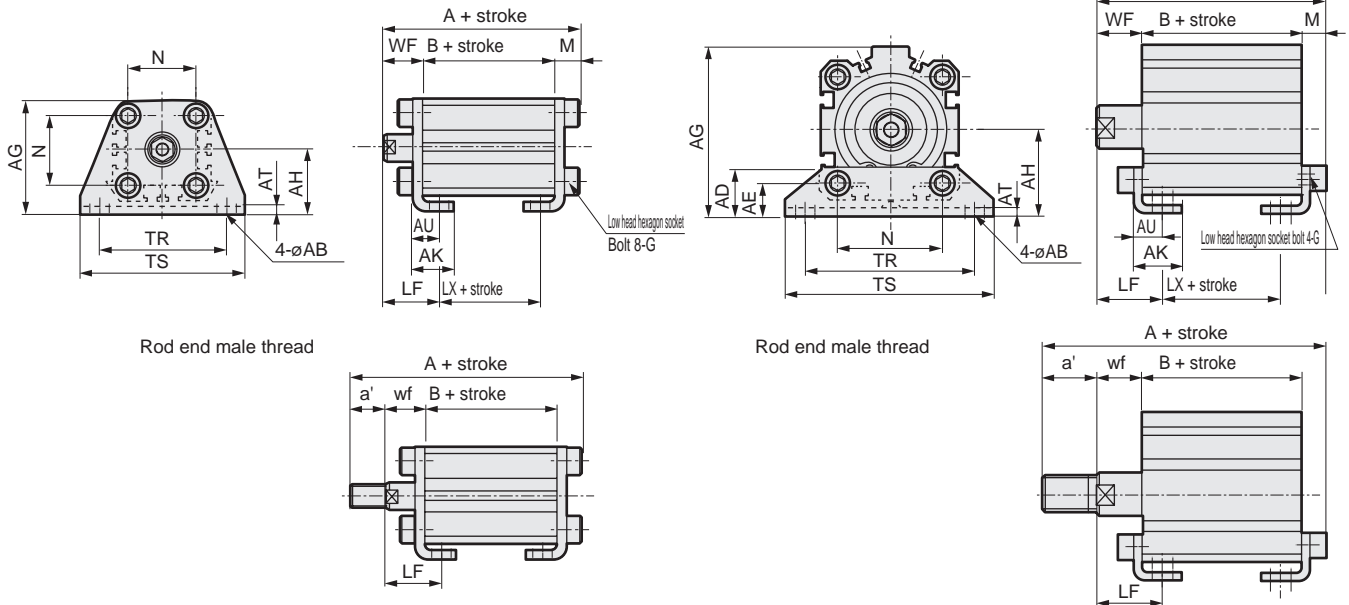

Code	Common dimensions														Female thread						Male thread									
	Bore size(mm)	AB	AD	AE	AG	AH	AK	AT	AU	G	N	TR	TS	M	LF	WF	No switch			With switch			a'	wf	No switch			With switch		
		A	B	CJ	A	B	CJ	a'	wf	A	B	CJ	A	B	CJ															
ø20	7	-	-	42	24	15	3.2	9.2	M 6 x 16	25.5	48	62	7.2	20.5	14.5	51.2	29.5	17.5	61.2	39.5	27.5	14	14.5	65.2	29.5	17.5	75.2	39.5	27.5	
ø25	7	-	-	46	26	16.5	3.2	10.7	M 6 x 16	28	52	66	7.2	22.5	15	54.7	32.5	17.5	64.7	42.5	27.5	17.5	15	72.2	32.5	17.5	82.2	42.5	27.5	
ø32	7	18.5	13	57	30	17	3.2	11.2	M 6 x 16	34	57	71	7.2	25	17	57.2	33	17	67.2	43	27	23.5	15	78.7	33	17	88.7	43	27	
ø40	7	18	13	64	33	18.2	3.2	11.2	M 6 x 16	40	64	78	7.2	25	17	63.7	39.5	23.5	73.7	49.5	33.5	23.5	15	85.2	39.5	23.5	95.2	49.5	33.5	
ø50	9	22	14	78	39	22.7	3.2	14.7	M 8 x 20	50	79	95	8.2	29.5	18	66.7	40.5	17.5	76.7	50.5	27.5	28.5	15	92.2	40.5	17.5	102.2	50.5	27.5	
ø63	11	26	16	91.5	46	25.2	3.2	16.2	M 10 x 25	60	95	113	9.2	31	18	73.2	46	20	83.2	56	30	28.5	15	98.7	46	20	108.7	56	30	
ø80	13	31.5	20.5	114	59	30.5	4.5	19.5	M 12 x 40	77	118	140	11.5	35	20	85	53.5	23.5	95	63.5	33.5	35.5	18	118.5	53.5	23.5	128.5	63.5	33.5	
ø100	13	35	24	136	71	35.5	6	23	M 12 x 40	94	137	162	13	39	22	98	63	29	108	73	39	35.5	18	129.5	63	29	139.5	73	39	

- Clevis bracket (CB)
- SSD2-G5(L)-20 to 100 -CB
- $\phi 20/\phi 25$


•  $\phi 32$  to  $\phi 100$

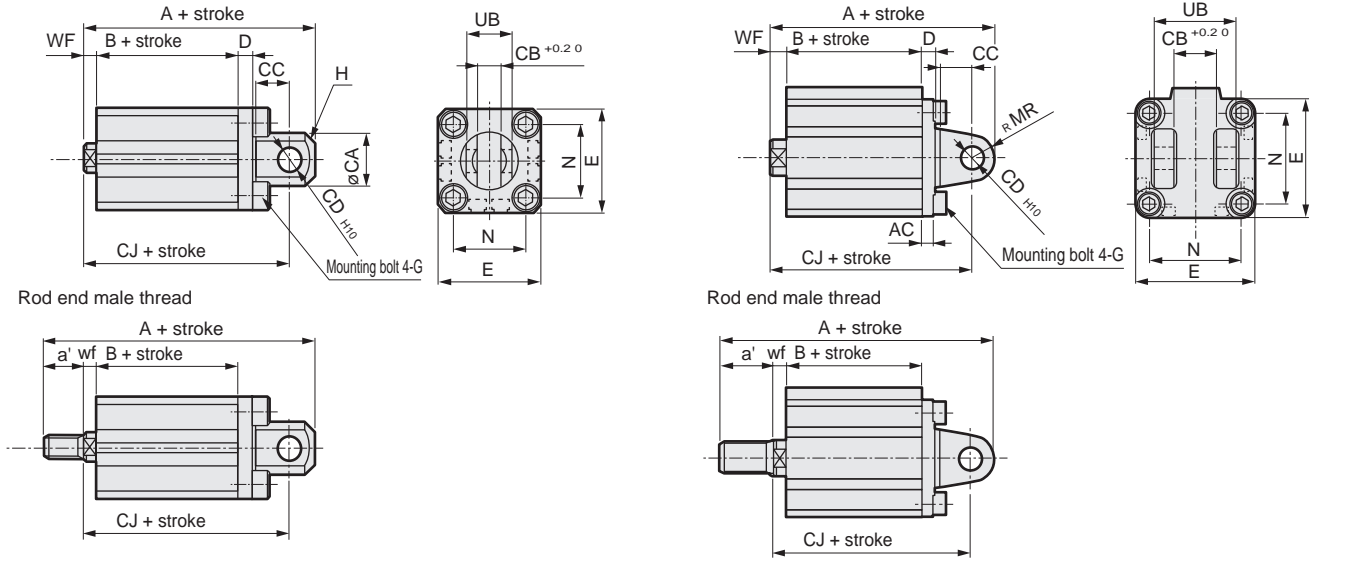


Code	Common dimensions														Female thread						Male thread							
	Bore size(mm)	AC	CA	CB	CC	CD	D	E	G	H	MR	N	UB	WF	No switch			With switch			a'	wf	No switch			With switch		
		A	B	CJ	A	B	CJ	a'	wf	A	B	CJ	A	B	CJ													
ø20	-	20	8.2	12	8	5	36	M 6 x 16	C4	-	25.5	16	4.5	61	29.5	52	71	39.5	62	14	4.5	75	29.5	52	85	39.5	62	
ø25	-	24	10.2	14	10	5	40	M 6 x 16	C5	-	28	20	5	67.5	32.5	57.5	77.5	42.5	67.5	17.5	5	85	32.5	57.5	95	42.5	67.5	
ø32	4.5	-	18.2	14	10	5	45	M 6 x 16	-	10	34	36	7	70	33	60	80	43	70	23.5	5	91.5	33	58	101.5	43	68	
ø40	5	-	18.2	14	10	6	52	M 6 x 16	-	10	40	36	7	78.5	39.5	68.5	88.5	49.5	78.5	23.5	5	100	39.5	66.5	110	49.5	76.5	
ø50	6	-	22.2	20	14	7	64	M 8 x 20	-	14	50	44	8	90.5	40.5	76.5	100.5	50.5	86.5	28.5	5	116	40.5	73.5	126	50.5	83.5	
ø63	7	-	22.2	20	14	8	77	M 10 x 25	-	14	60	44	8	98	46	84	108	56	94	28.5	5	123.5	46	81	133.5	56	91	
ø80	9	-	28.2	27	18	10	98	M 12 x 40	-	18	77	56	10	119.5	53.5	101.5	129.5	63.5	111.5	35.5	8	153	53.5	99.5	163	63.5	109.5	
ø100	12	-	32.2	31	22	13	117	M 12 x 40	-	22	94	64	12	142	63	120	152	73	130	35.5	8	173.5	63	116	183.5	73	126	

### Dimensions with mounting bracket

- Rod side flange (FA)  
SSD2-G5(L)-20 to 100 -FA  
·  $\phi 20/\phi 25$

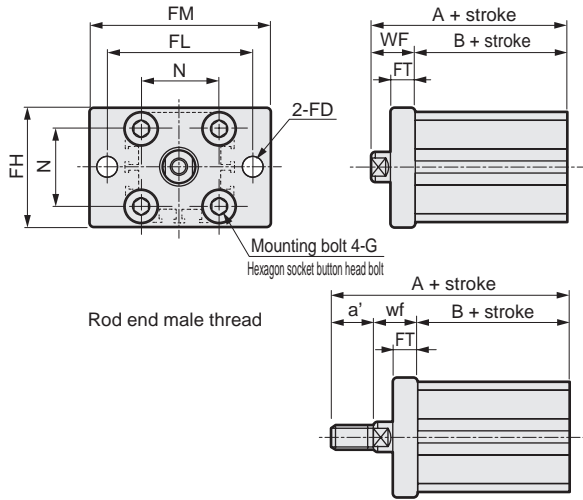


- $\phi 32$  to  $\phi 100$

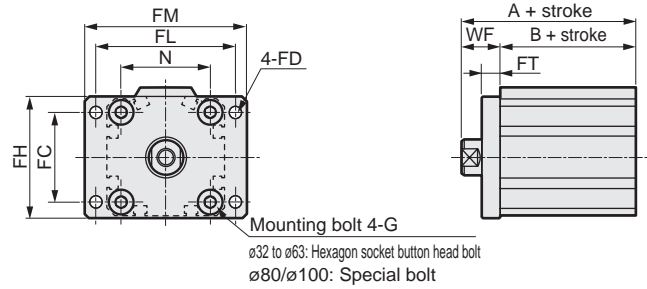


Code	Common dimensions								Female thread				Male thread							
	Bore size (mm)	FC	FD	FH	FL	FM	FT	N	G	WF	No switch		With switch		a'	wf	No switch		With switch	
											A	B	A	B			A	B	A	B
$\phi 20$	-	6.6	39	48	60	8	25.5	M6x16	14.5	44	29.5	54	39.5	14	14.5	58	29.5	68	39.5	
$\phi 25$	-	6.6	42	52	64	8	28	M6x16	15	47.5	32.5	57.5	42.5	17.5	15	65	32.5	75	42.5	
$\phi 32$	34	5.5	48	56	65	8	34	M6x16	17	50	33	60	43	23.5	15	71.5	33	81.5	43	
$\phi 40$	40	5.5	54	62	72	8	40	M6x16	17	56.5	39.5	66.5	49.5	23.5	15	78	39.5	88	49.5	
$\phi 50$	50	6.6	67	76	89	9	50	M8x20	18	58.5	40.5	68.5	50.5	28.5	15	84	40.5	94	50.5	
$\phi 63$	60	9	80	92	108	9	60	M10x25	18	64	46	74	56	28.5	15	89.5	46	99.5	56	
$\phi 80$	77	11	99	116	134	11	77	M12x40	20	73.5	53.5	83.5	63.5	35.5	18	107	53.5	117	63.5	
$\phi 100$	94	11	117	136	154	11	94	M12x40	22	85	63	95	73	35.5	18	116.5	63	126.5	73	

- Head side flange (FB)  
SSD2-G5(L)-20 to 100 -FB  
·  $\phi 20/\phi 25$

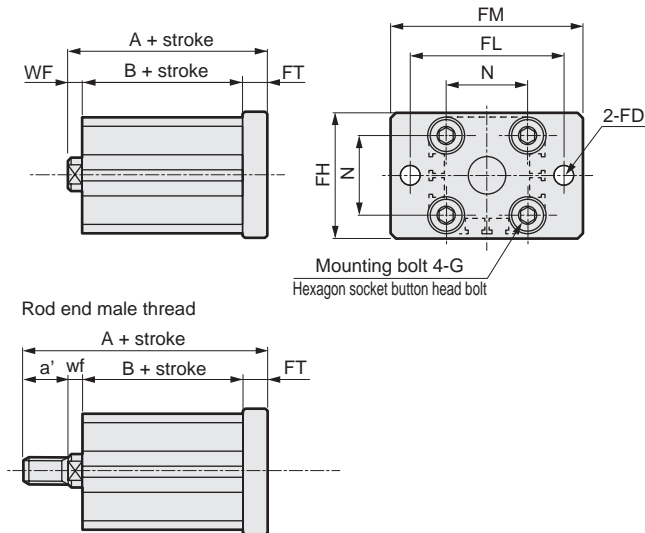


- $\phi 32$  to  $\phi 100$

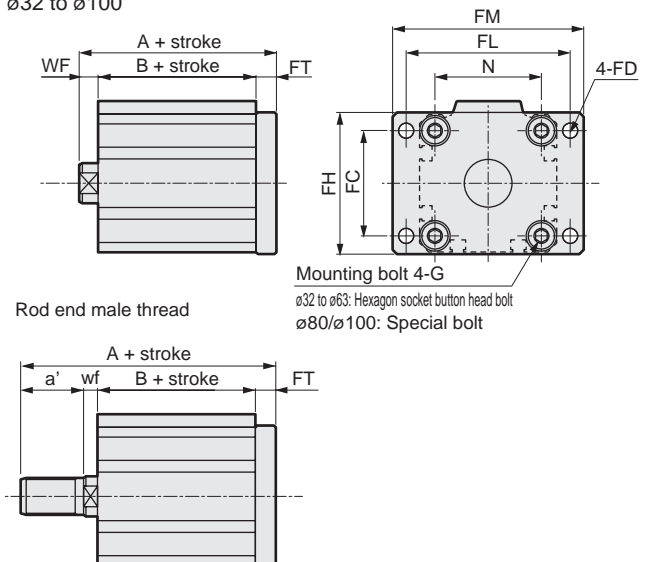

Code	Common dimensions								Female thread				Male thread							
	Bore size (mm)	FC	FD	FH	FL	FM	FT	N	G	WF	No switch		With switch		a'	wf	No switch		With switch	
											A	B	A	B			A	B	A	B
$\phi 20$	-	6.6	39	48	60	8	25.5	M6x16	4.5	42	29.5	52	39.5	14	4.5	56	29.5	66	39.5	
$\phi 25$	-	6.6	42	52	64	8	28	M6x16	5	45.5	32.5	55.5	42.5	17.5	5	63	32.5	73	42.5	
$\phi 32$	34	5.5	48	56	65	8	34	M6x16	7	48	33	58	43	23.5	5	69.5	33	79.5	43	
$\phi 40$	40	5.5	54	62	72	8	40	M6x16	7	54.5	39.5	64.5	49.5	23.5	5	76	39.5	86	49.5	
$\phi 50$	50	6.6	67	76	89	9	50	M8x20	8	57.5	40.5	67.5	50.5	28.5	5	83	40.5	93	50.5	
$\phi 63$	60	9	80	92	108	9	60	M10x25	8	63	46	73	56	28.5	5	88.5	46	98.5	56	
$\phi 80$	77	11	99	116	134	11	77	M12x40	10	74.5	53.5	84.5	63.5	35.5	8	108	53.5	118	63.5	
$\phi 100$	94	11	117	136	154	11	94	M12x40	12	86	63	96	73	35.5	8	117.5	63	127.5	73	

- SCP\*3
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS2
- CKV2
- CAV2/COVP/N2
- SSD2**
- SSG
- SSD
- CAT
- MDC2
- MVC
- SMG
- MSD/MSDG
- FC\*
- STK
- SRL3
- SRG3
- SRM3
- SRT3
- MRL2
- MRG2
- SM-25
- ShkAbs
- FJ
- FK
- Spd Contr
- Ending



Compact cylinder double acting/single rod/high load/environment-resistant scraper

# SSD2-KG5 Series

● Bore size:  $\varnothing 20/\varnothing 25/\varnothing 32/\varnothing 40/\varnothing 50/\varnothing 63/\varnothing 80/\varnothing 100$



## Specifications

Item	SSD2-KG5 SSD2-KG5L (with switch)									
	mm		$\varnothing 20$	$\varnothing 25$	$\varnothing 32$	$\varnothing 40$	$\varnothing 50$	$\varnothing 63$	$\varnothing 80$	$\varnothing 100$
Bore size	mm		$\varnothing 20$	$\varnothing 25$	$\varnothing 32$	$\varnothing 40$	$\varnothing 50$	$\varnothing 63$	$\varnothing 80$	$\varnothing 100$
Actuation	Double acting									
Working fluid	Compressed air									
Max. working pressure	MPa	1.0 ( $\approx 150$ psi, 10 bar)								
Min. working pressure	MPa	0.2 ( $\approx 29$ psi, 2 bar)					0.15 ( $\approx 22$ psi, 2 bar)			
Proof pressure	MPa	1.6 ( $\approx 230$ psi, 16 bar)								
Ambient temperature	$^{\circ}\text{C}$	-10 ( $14^{\circ}\text{F}$ ) to 60 ( $140^{\circ}\text{F}$ ) (no freezing)								
Port size		M5			Rc1/8		Rc1/4		Rc3/8	
Stroke tolerance	mm	$+2.0$ 0								
Working piston speed	mm/s	50 to 500					50 to 300			
Cushion		Rubber cushion								
Lubrication		Not required (use turbine oil class 1 ISO VG32 if necessary for lubrication)								
Allowable absorbed energy	J	0.16	0.16	0.40	0.63	0.98	1.56	2.51	3.92	

## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\varnothing 20$	5/10/15/20/25/ 30/35/40/45/50	50	1
$\varnothing 25$			
$\varnothing 32$	5/10/15/20/25/30/35/40/ 45/50/75/100	100	
$\varnothing 40$			
$\varnothing 50$	10/15/20/25/30/35/40/45 /50/75/100	100	
$\varnothing 63$			
$\varnothing 80$			
$\varnothing 100$			

## Min. stroke with switch (2 switches)

Bore size (mm)	T0H/V / T5H/V	T2H/V / T3H/V
$\varnothing 20$	5	5
$\varnothing 25$		
$\varnothing 32$		
$\varnothing 40$		
$\varnothing 50$		
$\varnothing 63$		
$\varnothing 80$		
$\varnothing 100$		


\*1 : Less than 10 mm with the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch is not available.

\*4 : When using the type with switch, refer to the table of the min. stroke with switch.

## Custom stroke

### ● SSD2-KG5 Series

Item	Standard products	
	Standard stroke body with spacer	
Model No.	Refer to How to order.	
Description	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.	
Stroke range	Bore size	Stroke range
	20 to 25	1 to 49
	32 to 100	1 to 99
Example of model No.	Model No.: SSD2-KG5-32-38 A +2 mm spacer is added to the SSD2-KG5-32-40 standard cylinder to create 38 mm stroke. B + stroke is 83mm.	

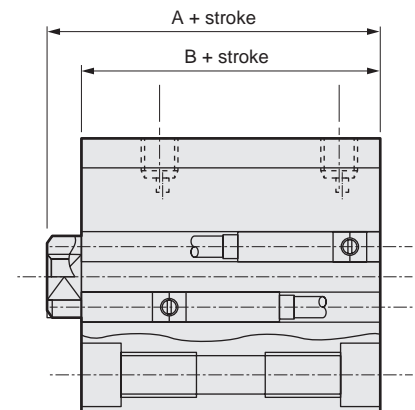

## Switch specifications (F-switch)

● 1-color/2-color LED

Item	2-wire proximity		3-wire proximity		2-wire proximity		3-wire proximity		
	F2S		F3S		F2H/F2V		F2YH/ F2YV	F3H/F3V	F3PH/F3PV (made to order)
Applications	Dedicated for programmable controller		For programmable controller, relay		Dedicated for programmable controller		For programmable controller, relay		
Output method	-		NPN output		-		NPN output	PNP output	NPN output
Power supply voltage	-		10 to 28 VDC		-		10 to 28 VDC	4.5 to 28 VDC	10 to 28 VDC
Load voltage	10 to 30 VDC		30 VDC or less		10 to 30 VDC	24 VDC ±10%	30 VDC or less		
Load current	5 to 20 mA		50 mA or less		5 to 20 mA		50 mA or less		
Indicator	LED (Lit when ON)				Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Yellow LED (Lit when ON)		Red/green LED (Lit when ON)
Leakage current	1 mA or less		10 µA or less		1 mA or less		10 µA or less		
Weight	g		1 m:10 3 m:29						

## Switch specifications (T-switch)

● 1-color/2-color LED/for AC magnetic field proof

Item	2-wire proximity		2-wire proximity		3-wire proximity				2-wire reed				2-wire proximity			
	T1H/ T1V	T2H/T2V/ T2JH/T2JV	T2YH/ T2YV	T2WH/ T2WV	T3H/ T3V	T3PH/ T3PV	T3YH/ T3YV	T3WH/ T3WV	T0H/T0V		T5H/T5V		T8H/T8V		T2YD(*4) T2YDT	
Applications	For programmable controller, relay, compact solenoid valve	Dedicated for programmable controller		For programmable controller, relay				For programmable controller, relay		For programmable controller, relay, IC circuit (no indicator lamp), serial connection		For programmable controller, relay		Dedicated for programmable controller		
Output method	-		-		NPN output	PNP output	NPN output	NPN output	-				-			
Pwr. supp. V.	-		-		10 to 28 VDC				-				-			
Load voltage	85 to 265 VAC	10 to 30 VDC	24 VDC ±10%	30 VDC or less				12/24 VDC	100/110 VAC	5/12/24 VDC	100/110 VAC	12/24 VDC	110 VAC	220 VAC	24 VDC ±10%	
Load current	5 to 100 mA	5 to 20 mA (*3)			100 mA or less		50 mA or less		5 to 50 mA	7 to 20 mA	50 mA or less	20 mA or less	5 to 50 mA	7 to 20 mA	7 to 10 mA	5 to 20 mA
Indicator	LED (Lit when ON)	LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)		No indicator lamp		LED (Lit when ON)		Red/green LED (Lit when ON)	
Leakage current	≤1 mA at 100 VAC, ≤2 mA at 200 VAC	1 mA or less			10 µA or less				0 mA				1 mA or less			
Weight	g	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80			1 m:33 3 m:87 5 m:142		1 m:61 3 m:166 5 m:272		

\*1: Refer to Ending Page 1 for detailed switch specifications and dimensions.

\*2: Switches other than the above models, such as switches with connectors, are also available. Refer to Ending Page 1.

\*3: The max. load current is 20 mA at 25°C. The current is lower than 20 mA if the operating ambient temperature around the switch is higher than 25°C. (5 to 10 mA at 60°C)

\*4: Switch for AC magnetic field (T2YD/T2YDT) cannot be used in DC magnetic field.

\*5: The F-switch uses a bend-resistant lead wire.

## Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa									
		0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø20	Push	-	62.8	94.2	1.26x10 <sup>2</sup>	1.57x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.20x10 <sup>2</sup>	2.51x10 <sup>2</sup>	2.83x10 <sup>2</sup>	3.14x10 <sup>2</sup>
	Pull	-	47.1	70.7	94.2	1.18x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.65x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.12x10 <sup>2</sup>	2.36x10 <sup>2</sup>
ø25	Push	-	98.2	1.47x10 <sup>2</sup>	1.96x10 <sup>2</sup>	2.45x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.44x10 <sup>2</sup>	3.93x10 <sup>2</sup>	4.42x10 <sup>2</sup>	4.91x10 <sup>2</sup>
	Pull	-	75.6	1.13x10 <sup>2</sup>	1.51x10 <sup>2</sup>	1.89x10 <sup>2</sup>	2.27x10 <sup>2</sup>	2.64x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.40x10 <sup>2</sup>	3.78x10 <sup>2</sup>
ø32	Push	-	1.61x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.22x10 <sup>2</sup>	4.02x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.63x10 <sup>2</sup>	6.43x10 <sup>2</sup>	7.24x10 <sup>2</sup>	8.04x10 <sup>2</sup>
	Pull	-	1.21x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.62x10 <sup>2</sup>	4.22x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.43x10 <sup>2</sup>	6.03x10 <sup>2</sup>
ø40	Push	-	2.51x10 <sup>2</sup>	3.77x10 <sup>2</sup>	5.03x10 <sup>2</sup>	6.28x10 <sup>2</sup>	7.54x10 <sup>2</sup>	8.80x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.13x10 <sup>3</sup>	1.26x10 <sup>3</sup>
	Pull	-	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>
ø50	Push	-	3.93x10 <sup>2</sup>	5.89x10 <sup>2</sup>	7.85x10 <sup>2</sup>	9.82x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.37x10 <sup>3</sup>	1.57x10 <sup>3</sup>	1.77x10 <sup>3</sup>	1.96x10 <sup>3</sup>
	Pull	-	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>
ø63	Push	4.68x10 <sup>2</sup>	6.23x10 <sup>2</sup>	9.35x10 <sup>2</sup>	1.25x10 <sup>3</sup>	1.56x10 <sup>3</sup>	1.87x10 <sup>3</sup>	2.18x10 <sup>3</sup>	2.49x10 <sup>3</sup>	2.81x10 <sup>3</sup>	3.12x10 <sup>3</sup>
	Pull	4.20x10 <sup>2</sup>	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>	2.24x10 <sup>3</sup>	2.52x10 <sup>3</sup>	2.80x10 <sup>3</sup>
ø80	Push	7.54x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.51x10 <sup>3</sup>	2.01x10 <sup>3</sup>	2.51x10 <sup>3</sup>	3.02x10 <sup>3</sup>	3.52x10 <sup>3</sup>	4.02x10 <sup>3</sup>	4.52x10 <sup>3</sup>	5.03x10 <sup>3</sup>
	Pull	6.80x10 <sup>2</sup>	9.07x10 <sup>2</sup>	1.36x10 <sup>3</sup>	1.81x10 <sup>3</sup>	2.27x10 <sup>3</sup>	2.72x10 <sup>3</sup>	3.17x10 <sup>3</sup>	3.63x10 <sup>3</sup>	4.08x10 <sup>3</sup>	4.54x10 <sup>3</sup>
ø100	Push	1.18x10 <sup>3</sup>	1.57x10 <sup>3</sup>	2.36x10 <sup>3</sup>	3.14x10 <sup>3</sup>	3.93x10 <sup>3</sup>	4.71x10 <sup>3</sup>	5.50x10 <sup>3</sup>	6.28x10 <sup>3</sup>	7.07x10 <sup>3</sup>	7.85x10 <sup>3</sup>
	Pull	1.07x10 <sup>3</sup>	1.43x10 <sup>3</sup>	2.14x10 <sup>3</sup>	2.86x10 <sup>3</sup>	3.57x10 <sup>3</sup>	4.29x10 <sup>3</sup>	5.00x10 <sup>3</sup>	5.72x10 <sup>3</sup>	6.43x10 <sup>3</sup>	7.15x10 <sup>3</sup>

# SSD2-KG5 Series


## How to order

No switch (without magnet for switch)

**SSD2-KG5** - **20** - **5** - **N** - **LB** - **I**

With switch (built-in magnet for switch)

**SSD2-KG5L** - **20** - **5** - **T0H** - **R** - **N** - **LB** - **I**

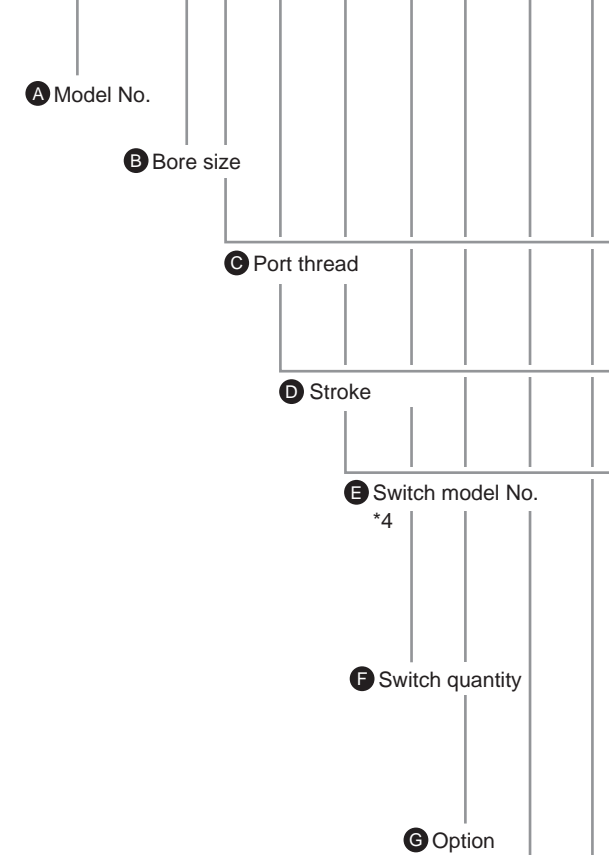

## ⚠ Precautions for model No. selection

- \*1 : The mounting bracket is included at shipment.
- \*2 : "I" and "Y" cannot be selected together. The WF/wf dimension of the cylinder for "LB" and "FA" is set 10 mm longer than that of standard products. The number of the specified protruding dimension will be added at the end of the model No. printed on the metal plate on the body.
- \*3 : "I" and "Y" cannot be selected together.
- \*4 : Switches are shipped with the product.  
Contact CKD if assembling before shipment is necessary.
- \*5 : F-switch cannot be selected.

[Example of model No.]

**SSD2-KG5L-32-5-T0H-R-N**

Model: Compact cylinder  
Double acting/single rod/high load/environment-resistant scraper

- B** Bore size :  $\phi 32$  mm
- C** Port thread : Rc thread
- D** Stroke : 5 mm
- E** Switch model No.: Reed T0H switch  
Lead wire 1 m
- F** Switch quantity : 1 on rod side
- G** Option : Rod end male thread

**H** Mounting bracket

- \*1
- \*2

**I** Accessory  
\*3

Code	Description																
<b>A Model No.</b>																	
<b>SSD2-KG5</b>	Double acting/single rod/high load/environment-resistant scraper (made-to-order product)																
<b>SSD2-KG5L</b>	Double acting/single rod/high load/environment-resistant scraper/switch (MTO)																
<b>B Bore size (mm)</b>																	
<b>20</b>	$\phi 20$																
<b>25</b>	$\phi 25$																
<b>32</b>	$\phi 32$																
<b>40</b>	$\phi 40$																
<b>50</b>	$\phi 50$																
<b>63</b>	$\phi 63$																
<b>80</b>	$\phi 80$																
<b>100</b>	$\phi 100$																
<b>C Port thread</b>																	
<b>Blank</b>	Rc thread/M5 thread																
<b>N</b>	NPT thread ( $\phi 32$ and over)																
<b>G</b>	G thread ( $\phi 32$ and over)																
<b>D Stroke (mm)</b>																	
Refer to the stroke table on the following page.																	
<b>E Switch model No.</b>																	
Lead wire	Lead wire	Contact	Voltage		Indicator	Lead wire	Bore size										
			AC	DC			20	25	32	40	50	63	80	100			
-	F2S*	Proximity	●	●	1-color LED	2-wire	●	●									
-	F3S*					3-wire	●	●									
F2H*	F2V*					2-wire	●	●									
F3H*	F3V*					3-wire	●	●									
F3PH*	F3PV*					3-wire	●	●	1-color LED (PNP output) (custom)	●	●						
F2YH*	F2YV*					2-wire	●	●	2-color LED	●	●						
F3YH*	F3YV*	3-wire	●	●	●	●											
T0H*	T0V*	Reed	●	●	1-color LED	2-wire	●	●	●	●	●	●	●	●	●		
T5H*	T5V*				No indicator lamp		●	●	●	●	●	●	●	●	●	●	
T8H*	T8V*				1-color LED		●	●	●	●	●	●	●	●	●	●	
T1H*	T1V*	Proximity	●	●	1-color LED	2-wire	●	●	●	●	●	●	●	●	●		
T2H*	T2V*						●	●	●	●	●	●	●	●	●	●	●
T3H*	T3V*						●	●	●	●	●	●	●	●	●	●	●
T3PH*	T3PV*				●	●	●	1-color LED (PNP output)	3-wire	●	●	●	●	●	●	●	●
T2WH*	T2WV*				●	●	●	2-color LED	2-wire	●	●	●	●	●	●	●	●
T2YH*	T2YV*				●	●	●			●	●	●	●	●	●	●	●
T3WH*	T3WV*	●	●	●	●	●	●			●	●	●	●	●			
T3YH*	T3YV*	●	●	●	2-color LED	3-wire	●	●	●	●	●	●	●	●			
T2YD*	-	●	●	●			●	●	●	●	●	●	●	●			
T2YDT*	-	●	●	●	AC magnetic field	2-wire	●	●	●	●	●	●	●	●			
T2JH*	T2JV*	●	●	●	1-color LED off-delay	2-wire	●	●	●	●	●	●	●	●			
<b>* Lead wire length</b>																	
<b>Blank</b>	1 m (standard)																
<b>3</b>	3 m (option)																
<b>5</b>	5 m (option) <span style="float: right;">*5</span>																
<b>F Switch quantity</b>																	
<b>R</b>	1 on rod side																
<b>H</b>	1 on head side																
<b>D</b>	2																
<b>G Option</b>																	
<b>Blank</b>	Rod end female thread																
<b>N</b>	Rod end male thread																
<b>H Mounting bracket</b>																	
<b>Blank</b>	Without mounting bracket																
<b>LB</b>	Axial foot																
<b>CB</b>	Clevis bracket (pin and snap ring included)																
<b>FA</b>	Rod side flange																
<b>FB</b>	Head side flange																
<b>I Accessory (available when rod end male thread "N" is selected)</b>																	
<b>I</b>	Rod eye																
<b>Y</b>	Rod clevis (pin and snap ring included)																

### [Stroke table]


Stroke (mm)	Applicable bore size							
	20	25	32	40	50	63	80	100
5	●	●	●	●				
10	●	●	●	●	●	●	●	●
15	●	●	●	●	●	●	●	●
20	●	●	●	●	●	●	●	●
25	●	●	●	●	●	●	●	●
30	●	●	●	●	●	●	●	●
35	●	●	●	●	●	●	●	●
40	●	●	●	●	●	●	●	●
45	●	●	●	●	●	●	●	●
50	●	●	●	●	●	●	●	●
75			●	●	●	●	●	●
100			●	●	●	●	●	●
Min. stroke (mm) *1	1							
Max. stroke (mm)	50			100				
Custom stroke *2	In 1 mm increments							

\*1: Less than 5 mm for 1-color LED switch and less than 10 mm for the 2-color LED, off-delay, AC magnetic field proof, T1\* or T8\* switch are not available.

Refer to page 1002 for the number of installed switches and the min. stroke.

\*2: The total length is the same as that of the next longer standard stroke.

### How to order switch



Switch model No.  
(Item ㊦ on page 1004)

### Cylinder weight table (the weight of the switches is when there are 2 cylinder switches.)

(Unit: g)

Stroke (mm)	5		10		15		20		25		30		35		40		45		50		75		100	
	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch	No switch	Switch
ø20	107	182	120	195	133	208	145	220	158	233	170	245	182	257	195	270	206	281	220	295	-	-	-	-
ø25	146	237	162	253	178	269	194	285	209	300	226	317	242	333	258	349	274	365	290	381	-	-	-	-
ø32	230	344	251	365	272	386	294	408	316	430	338	452	360	474	381	495	403	517	424	538	597	646	705	753
ø40	323	466	349	492	376	519	402	545	428	571	455	598	482	625	508	651	535	678	561	704	779	837	911	969
ø50	-	-	560	754	602	796	645	839	688	882	729	923	771	965	813	1007	855	1049	897	1091	1244	1301	1454	1511
ø63	-	-	813	1092	868	1147	923	1202	979	1258	1034	1313	1089	1368	1144	1423	1199	1478	1254	1533	1744	1808	2019	2083
ø80	-	-	1413	1826	1500	1913	1586	1999	1673	2086	1760	2173	1847	2260	1933	2346	2020	2433	2106	2519	2886	2952	3318	3384
ø100	-	-	2106	2673	2220	2787	2334	2901	2448	3015	2561	3128	2675	3242	2789	3356	2903	3470	3017	3584	4082	4154	4652	4724

### How to order mounting bracket

Bore size (mm)	ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100
Foot (LB)	SSD2-LB-20	SSD2-LB-25	SSD2-LB-32	SSD2-LB-40	SSD2-LB-50	SSD2-LB-63	SSD2-LB-80	SSD2-LB-100
Flange (FA/FB)	SSD2-FA-20	SSD2-FA-25	SSD2-FA-32	SSD2-FA-40	SSD2-FA-50	SSD2-FA-63	SSD2-FA-80	SSD2-FA-100
Clevis bracket (CB)	SSD2-CB-20	SSD2-CB-25	SSD2-CB-32	SSD2-CB-40	SSD2-CB-50	SSD2-CB-63	SSD2-CB-80	SSD2-CB-100

\*1: The foot mounting bracket is provided as 2 pcs./set.

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK


Spd  
Contr

Ending


# SSD2-KG5 Series

## Internal structure and parts list


● SSD2-KG5L-20□25  
(double acting/high load/environment-resistant scraper/with switch)

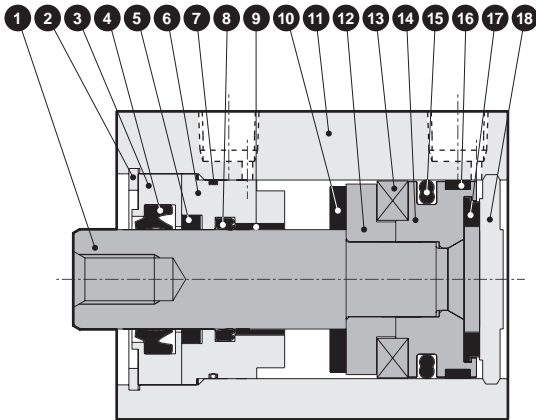


● SSD2-KG5L-32 to 50  
(double acting/high load/environment-resistant scraper/with switch)

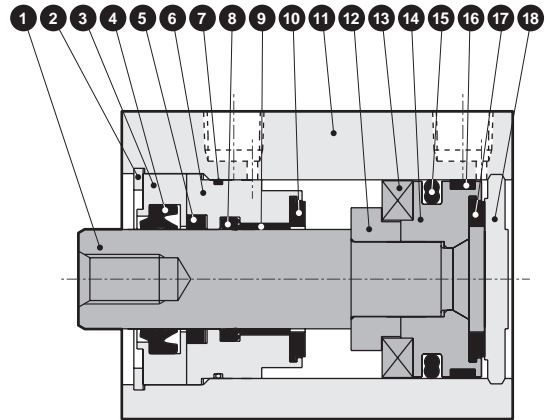

● SSD2-KG5-20□25  
(double acting/high load/environment-resistant scraper)

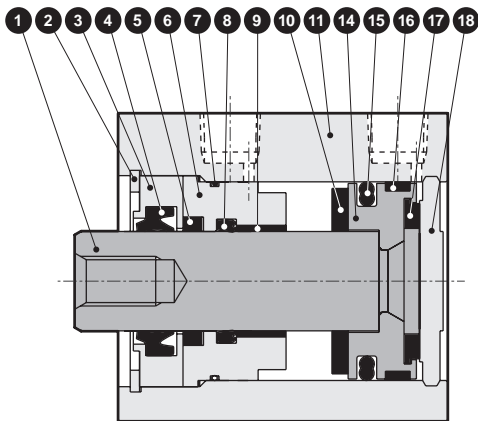

● SSD2-KG5-32 to 50  
(double acting/high load/environment-resistant scraper)

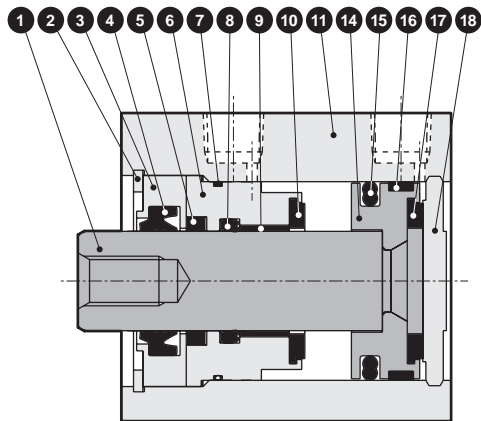

## Main parts list


Part No.	Part name	Material	Remarks	Part No.	Part name	Material	Remarks
1	Piston rod	ø20/ø25: Stainless steel ø32 to ø50: Steel	Industrial chrome plating	11	Body	Aluminum alloy	Hard alumite
2	C-snap ring	Steel	Zinc phosphate	12	Spacer	Special resin	
3	Rod metal 1	Special aluminum	Chromate	13	Magnet	Plastic	
4	Scraper	Nitrile rubber		14	Piston	Aluminum alloy	Chromate
5	Lube keeping structure	Special rubber		15	Piston packing	Nitrile rubber	
6	Rod metal 2	Special aluminum	Alumite	16	Wear ring	Polyacetal resin	
7	Rod metal gasket	Nitrile rubber		17	Cushion rubber H	Urethane rubber	
8	Rod packing	Nitrile rubber		18	Cover	ø20/ø25: Stainless steel ø32 to ø50: Aluminum alloy	ø32 to ø50: Alumite
9	Bush	Oiles drymet					
10	Cushion rubber R	Urethane rubber					

## Consumable parts list


Part name	Kit No.	Consumable parts No.
Bore size (mm)		
ø20	SSD2-KG5-20K	
ø25	SSD2-KG5-25K	
ø32	SSD2-KG5-32K	
ø40	SSD2-KG5-40K	
ø50	SSD2-KG5-50K	

## Internal structure and parts list

● SSD2-KG5L-63 to 100 (double acting/high load/environment-resistant scraper/with switch)

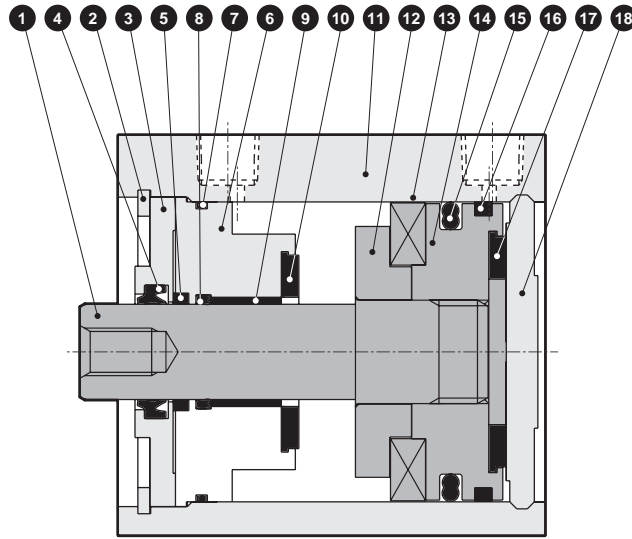

● SSD2-KG5-63 to 100 (double acting/high load/environment-resistant scraper)

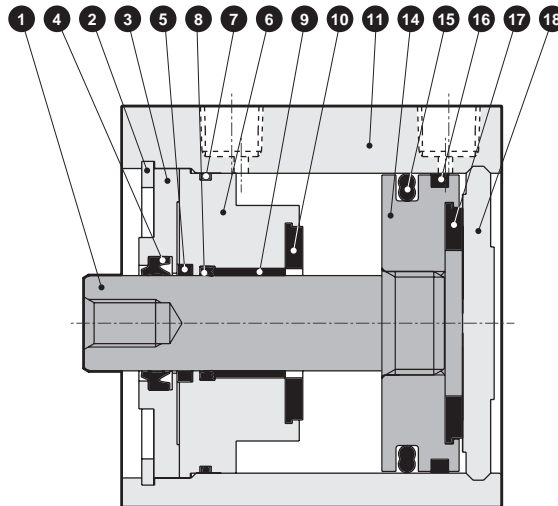

## Main parts list

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	Steel	Industrial chrome plating	10	Cushion rubber R	Urethane rubber	
2	C-snap ring	Steel	Zinc phosphate	11	Body	Aluminum alloy	Hard alumite
3	Rod metal 1	Aluminum alloy	Chromate	12	Spacer	Aluminum alloy	Chromate
4	Scraper	Nitrile rubber		13	Magnet	Plastic	
5	Lube keeping structure	Special rubber		14	Piston	Aluminum alloy	Chromate
6	Rod metal 2	Aluminum alloy	Chromate	15	Piston packing	Nitrile rubber	
7	Rod metal gasket	Nitrile rubber		16	Wear ring	Polyacetal resin	
8	Rod packing	Nitrile rubber		17	Cushion rubber H	Urethane rubber	
9	Bush	Oiles drymet		18	Cover	Aluminum alloy	Alumite

## Repair parts list

Part name	Kit No.	Repair parts No.
Bore size (mm)		
ø63	SSD2-KG5-63K	4 5 7 8
ø80	SSD2-KG5-80K	10 15 16 17
ø100	SSD2-KG5-100K	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending






# SSD2-KG5 Series



## dimensions

● SSD2-KG5L-20, 25 (with switch, TOH/V, T5H/V, T2H/V, T3H/V)

● Rod end male thread

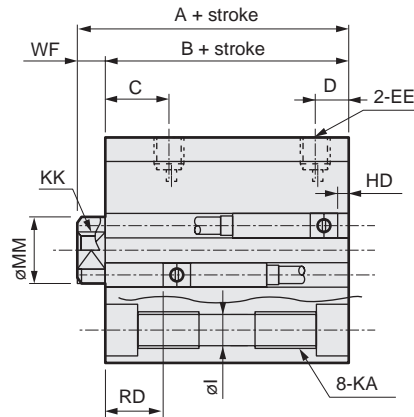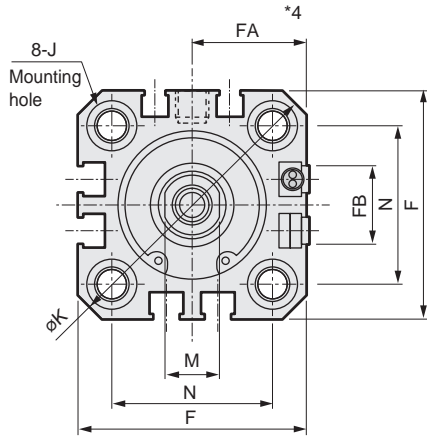

● SSD2-KG5-20, 25 (without switch)

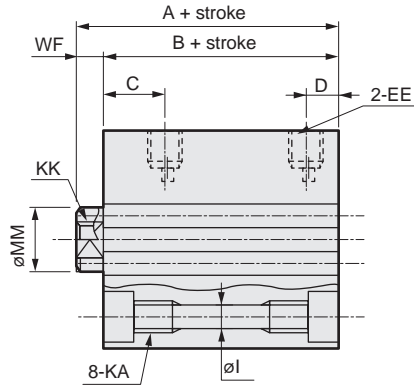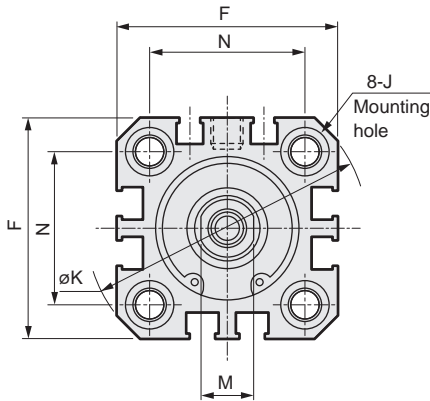

Code	No switch		Common dimensions with switch							
	A <sup>*1</sup>	B <sup>*1</sup>	A <sup>*1</sup>	B <sup>*1</sup>	C	D	EE	F	FA <sup>*4</sup>	FB
Bore size	ø20	39	49	44.5	18	5.5	M5	36	18.5(22)	12.5
	ø25	42.5	52.5	47.5	21	6	M5	40	20.5(24)	13.5

Code	Common dimensions with switch									
	I	J	K	KA	KK	M	MM	N	WF	
Bore size	ø20	5.5	9 spot face depth 5.5	47	M6 depth 11	M5 depth 7	8	10	25.5	4.5
	ø25	5.5	9 spot face depth 5.5	51	M6 depth 11	M6 depth 12	10	12	28	5

Switch dimensions	Reed/proximity 1-color		Proximity 2-color		
	HD	RD	HD	RD	
Bore size	ø20	6	18.5	4.5	18.5
	ø25	5.5	22	4	22

Switch dimensions	Proximity F2H/V, F3H/V F2YH/V/F3YH/V		Proximity F2S/F3S		
	HD	RD	HD	RD	
Bore size	ø20	10.5	23	9	23
	ø25	10	26.5	8.5	26.5

\*1: To calculate A+ stroke or B+ stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value. (Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

\*2: HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.

\*3: Refer to page 1044 for HD, RD and protruding dimensions of the 2-color LED, off-delay, AC magnetic field proof, T1\* and T8\* switches.

\*4: Dimensions in ( ) of FA are for the L-shaped lead wire type.



\*5: For dimensions of individual accessories, refer to pages 1046 to 1049.

## Rod end male thread


Code	a'	c'	H	kk'	M	MM	T	wf
	Bore size							
ø20	14	12	13	M8	8	10	5	4.5
ø25	17.5	15	17	M 10 x 1.25	10	12	6	5

### Dimensions



● SSD2-KG5L-32 to 100 (with switch, TOH/V, T5H/V, T2H/V, T3H/V)

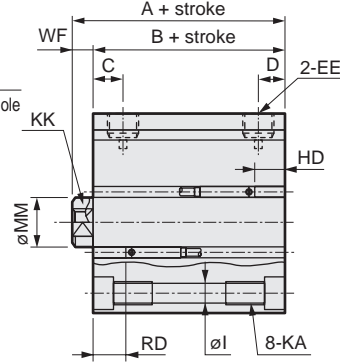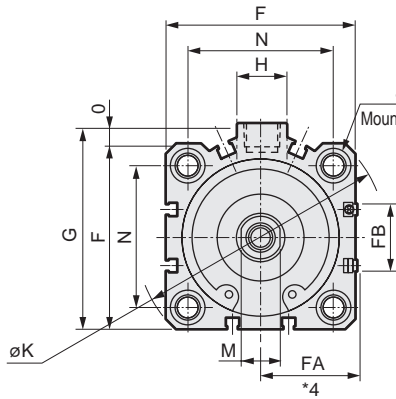

● Rod end male thread



● SSD2-32 to 100 (without switch)

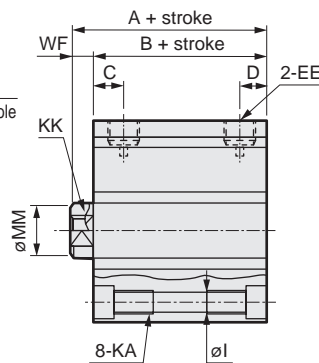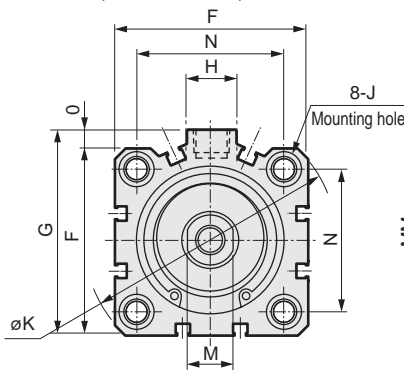

Code	No switch		Common dimensions with switch									
	A <sup>*1</sup>	B <sup>*1</sup>	A <sup>*1</sup>	B <sup>*1</sup>	C	D	EE	F	FA <sup>*3</sup>	FB	G	H
ø32	50(60)	43(53)	60	53	18	8	Rc1/8	45	23(26.5)	20.5	49.5	12.5
ø40	56.5(66.5)	49.5(59.5)	66.5	59.5	22	8.5	Rc1/8	52	26.5(30)	27.5	57	15
ø50	58.5(68.5)	50.5(60.5)	68.5	60.5	20.5	10.5	Rc1/4	64	32.5(36)	28.5	71	18
ø63	64(74)	56(66)	74	66	23	11	Rc1/4	77	39(42.5)	28.5	84	23
ø80	73.5(83.5)	63.5(73.5)	83.5	73.5	26	13	Rc3/8	98	49.5(53)	28.5	104	31
ø100	85(95)	73(83)	95	83	33	15	Rc3/8	117	59(62.5)	28.5	123.5	38

Code	Common dimensions with switch										
	I	J	K	KA	KK	M	MM	N	O	WF	
ø32	5.5	9 spot face depth 5.5	60	M6 depth 11	M8 depth 13	14	16	34	4.5	7	
ø40	5.5	9 spot face depth 5.5	69	M6 depth 11	M8 depth 13	14	16	40	5	7	
ø50	6.9	11 spot face depth 6.5	86	M8 depth 13	M10 depth 15	17	20	50	7	8	
ø63	8.7	14 spot face depth 9	103	M10 depth 25	M10 depth 15	17	20	60	7	8	
ø80	10.5	17.5 spot face depth 11	132	M12 depth 28	M16 depth 21	22	25	77	6	10	
ø100	10.5	17.5 spot face depth 11	156	M12 depth 28	M20 depth 27	27	30	94	6.5	12	

Switch dimensions	Reed/proximity 1-color		Proximity 2-color		T8H/V switch	
	HD	RD	HD	RD	HD	RD
ø32	8.5	24	7	22.5	-	-
ø40	9.5	29.5	8	28	3.5	23.5
ø50	10	30	8.5	28.5	4	24
ø63	17.5	28	16	26.5	11.5	22
ø80	22	30.5	20.5	29	16	24.5
ø100	28	34.5	26.5	33	22	28.5

\*1 : To calculate A+ stroke or B+ stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value. (Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

\*2 : HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.

\*3 : Dimensions in ( ) of FA are for the L-shaped lead wire.

\*4 : For dimensions of individual accessories, refer to pages 1046 to 1049.

\*5 : Dimensions in ( ) of codes A and B are for strokes of more than 50 mm.

### Rod end male thread


Code	a'	c'	H	kk'	M	MM	T	wf
ø32	23.5	20.5	22	M14x1.5	14	16	8	5
ø40	23.5	20.5	22	M14x1.5	14	16	8	5
ø50	28.5	26	27	M18x1.5	17	20	11	5
ø63	28.5	26	27	M18x1.5	17	20	11	5
ø80	35.5	32.5	32	M22x1.5	22	25	13	8
ø100	35.5	32.5	41	M26x1.5	27	30	16	8

SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending

# SSD2-KG5 Series


## Dimensions with mounting bracket

- Axial foot (LB)  
SSD2-KG5(L)-20 to 100 -LB  
•  $\phi 20/\phi 25$

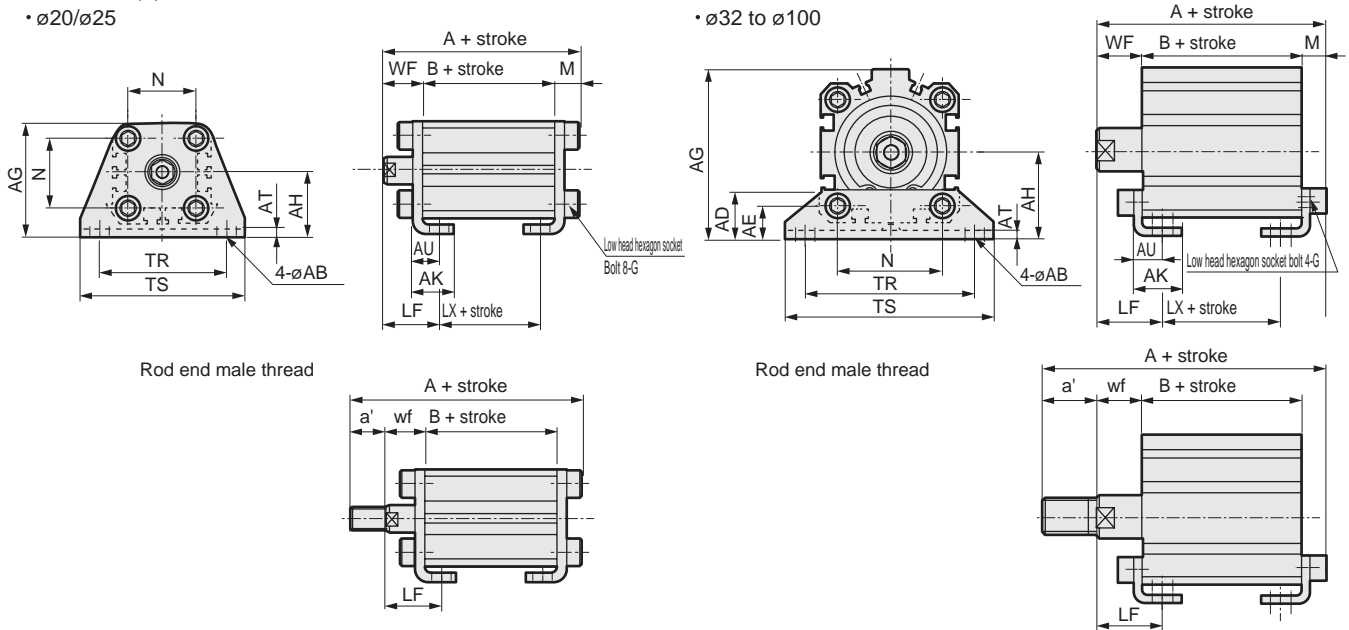

Code	Common dimensions														Female thread						Male thread											
	Bore size (mm)	AB	AD	AE	AG	AH	AK	AT	AU	G	N	TR	TS	M	LF	WF	No switch			With switch			a'		wf		No switch			With switch		
		A	B	LX	A	B	LX	a'	wf	A	B	LX	A	B	LX																	
MDC2	$\phi 20$	7	-	-	42	24	15	3.2	9.2	M 6 x 16	25.5	48	62	7.2	20.5	14.5	56.2	34.5	22.5	66.2	44.5	32.5	14	14.5	70.2	34.5	22.5	80.2	44.5	32.5		
	$\phi 25$	7	-	-	46	26	16.5	3.2	10.7	M 6 x 16	28	52	66	7.2	22.5	15	59.7	37.5	22.5	69.7	47.5	32.5	17.5	15	77.2	37.5	22.5	87.2	47.5	32.5		
	$\phi 32$	7	18.5	13	57	30	17	3.2	11.2	M 6 x 16	34	57	71	7.2	25	17	67.2	43	27	77.2	53	37	23.5	15	88.7	43	27	98.7	53	37		
MVC	$\phi 40$	7	18	13	64	33	18.2	3.2	11.2	M 6 x 16	40	64	78	7.2	25	17	73.7	49.5	33.5	83.7	59.5	43.5	23.5	15	95.2	49.5	33.5	105.2	59.5	43.5		
	$\phi 50$	9	22	14	78	39	22.7	3.2	14.7	M 8 x 20	50	79	95	8.2	29.5	18	76.7	50.5	27.5	86.7	60.5	37.5	28.5	15	102.2	50.5	27.5	112.2	60.5	37.5		
SMG	$\phi 63$	11	26	16	91.5	46	25.2	3.2	16.2	M 10 x 25	60	95	113	9.2	31	18	83.2	56	30	93.2	66	40	28.5	15	108.7	56	30	118.7	66	40		
	$\phi 80$	13	31.5	20.5	114	59	30.5	4.5	19.5	M 12 x 40	77	118	140	11.5	35	20	95	63.5	33.5	105	73.5	43.5	35.5	18	128.5	63.5	33.5	138.5	73.5	43.5		
	$\phi 100$	13	35	24	136	71	35.5	6	23	M 12 x 40	94	137	162	13	39	22	108	73	39	118	83	49	35.5	18	139.5	73	39	149.5	83	49		


- Clevis bracket (CB)  
SSD2-KG5(L)-20 to 100 -CB  
•  $\phi 20/\phi 25$

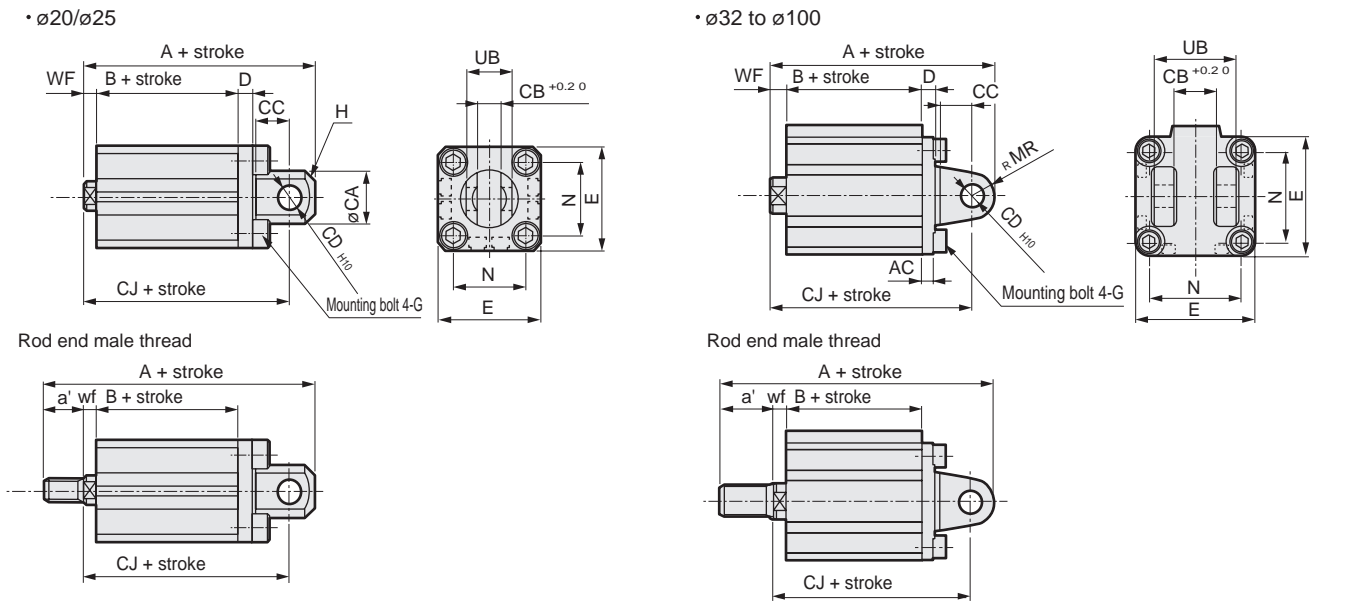


Code	Common dimensions														Female thread						Male thread									
	Bore size (mm)	AC	CA	CB	CC	CD	D	E	G	H	MR	N	UB	WF	No switch			With switch			a'		wf		No switch			With switch		
		A	B	CJ	A	B	CJ	a'	wf	A	B	CJ	A	B	CJ															
FJ	$\phi 20$	-	20	8.2	12	8	5	36	M 6 x 16	C4	-	25.5	16	4.5	66	34.5	57	76	44.5	67	14	4.5	80	34.5	57	90	44.5	67		
	$\phi 25$	-	24	10.2	14	10	5	40	M 6 x 16	C5	-	28	20	5	72.5	37.5	62.5	82.5	47.5	72.5	17.5	5	90	37.5	62.5	100	47.5	72.5		
	$\phi 32$	4.5	-	18.2	14	10	5	45	M 6 x 16	-	10	34	36	7	80	43	70	90	53	80	23.5	5	101.5	43	68	111.5	53	78		
Spd Contr	$\phi 40$	5	-	18.2	14	10	6	52	M 6 x 16	-	10	40	36	7	88.5	49.5	78.5	98.5	59.5	88.5	23.5	5	110	49.5	76.5	120	59.5	86.5		
	$\phi 50$	6	-	22.2	20	14	7	64	M 8 x 20	-	14	50	44	8	100.5	50.5	86.5	110.5	60.5	96.5	28.5	5	126	50.5	83.5	136	60.5	93.5		
	$\phi 63$	7	-	22.2	20	14	8	77	M 10 x 25	-	14	60	44	8	108	56	94	118	66	104	28.5	5	133.5	56	91	143.5	66	101		
	$\phi 80$	9	-	28.2	27	18	10	98	M 12 x 40	-	18	77	56	10	129.5	63.5	111.5	139.5	73.5	121.5	35.5	8	163	63.5	109.5	173	73.5	119.5		
Ending	$\phi 100$	12	-	32.2	31	22	13	117	M 12 x 40	-	22	94	64	12	152	73	130	162	83	140	35.5	8	183.5	73	126	193.5	83	136		

## Dimensions with mounting bracket


- Rod side flange (FA)
  - SSD2-KG5(L)-20 to 100 -FA
  - $\phi 20/\phi 25$

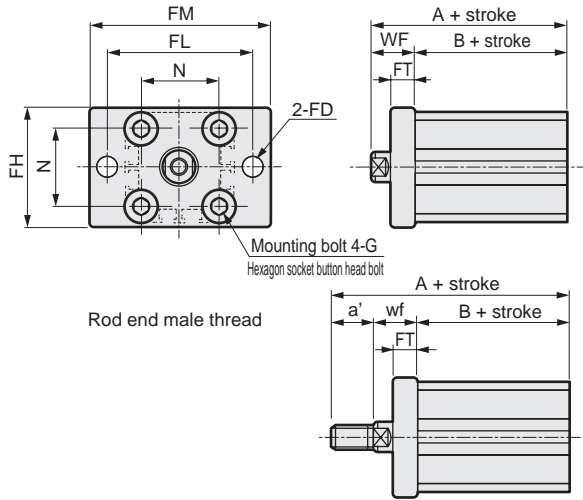

·  $\phi 32$  to  $\phi 100$

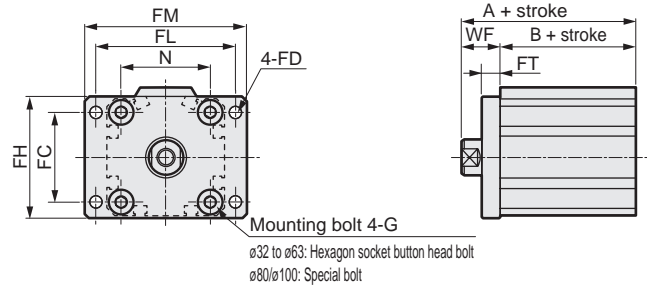


Rod end male thread




Code	Common dimensions								Female thread				Male thread							
	Bore size (mm)	FC	FD	FH	FL	FM	FT	N	G	WF	No switch		With switch		a'	wf	No switch		With switch	
											A	B	A	B			A	B	A	B
$\phi 20$	-	6.6	39	48	60	8	25.5	M6x16	14.5	49	34.5	59	44.5	14	14.5	63	34.5	73	44.5	
$\phi 25$	-	6.6	42	52	64	8	28	M6x16	15	52.5	37.5	62.5	47.5	17.5	15	70	37.5	80	47.5	
$\phi 32$	34	5.5	48	56	65	8	34	M6x16	17	60	43	70	53	23.5	15	81.5	43	91.5	53	
$\phi 40$	40	5.5	54	62	72	8	40	M6x16	17	66.5	49.5	76.5	59.5	23.5	15	88	49.5	98	59.5	
$\phi 50$	50	6.6	67	76	89	9	50	M8x20	18	68.5	50.5	78.5	60.5	28.5	15	94	50.5	104	60.5	
$\phi 63$	60	9	80	92	108	9	60	M10x25	18	74	56	84	66	28.5	15	99.5	56	109.5	66	
$\phi 80$	77	11	99	116	134	11	77	M12x40	20	83.5	63.5	93.5	73.5	35.5	18	117	63.5	127	73.5	
$\phi 100$	94	11	117	136	154	11	94	M12x40	22	95	73	105	83	35.5	18	126.5	73	136.5	83	


- Head side flange (FB)
  - SSD2-KG5(L)-20 to 100 -FB
  - $\phi 20/\phi 25$

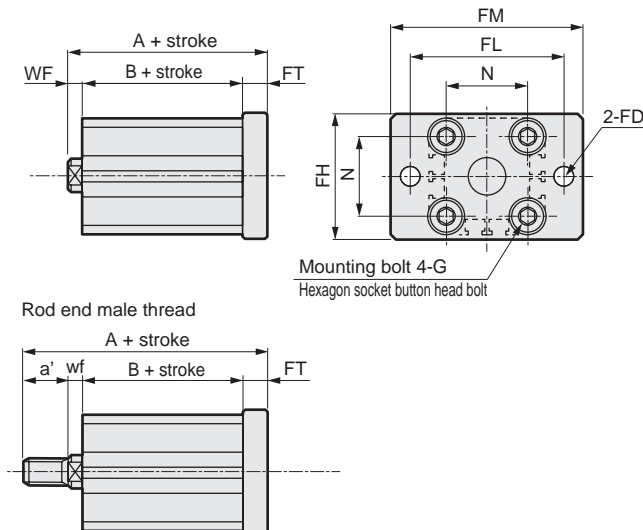

·  $\phi 32$  to  $\phi 100$

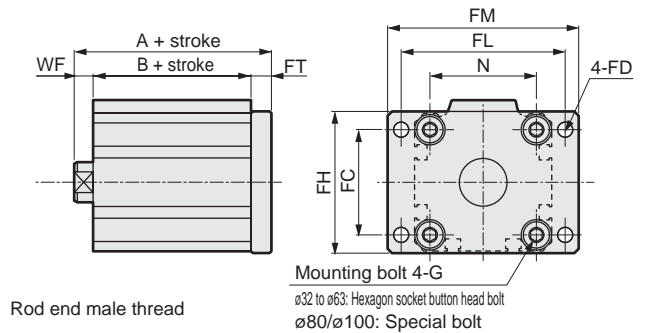

Rod end male thread



Code	Common dimensions								Female thread				Male thread							
	Bore size (mm)	FC	FD	FH	FL	FM	FT	N	G	WF	No switch		With switch		a'	wf	No switch		With switch	
											A	B	A	B			A	B	A	B
$\phi 20$	-	6.6	39	48	60	8	25.5	M6x16	4.5	47	34.5	57	44.5	14	4.5	61	34.5	71	44.5	
$\phi 25$	-	6.6	42	52	64	8	28	M6x16	5	50.5	37.5	60.5	47.5	17.5	5	68	37.5	78	47.5	
$\phi 32$	34	5.5	48	56	65	8	34	M6x16	7	58	43	68	53	23.5	5	79.5	43	89.5	53	
$\phi 40$	40	5.5	54	62	72	8	40	M6x16	7	64.5	49.5	74.5	59.5	23.5	5	86	49.5	96	59.5	
$\phi 50$	50	6.6	67	76	89	9	50	M8x20	8	67.5	50.5	77.5	60.5	28.5	5	93	50.5	103	60.5	
$\phi 63$	60	9	80	92	108	9	60	M10x25	8	73	56	83	66	28.5	5	98.5	56	108.5	66	
$\phi 80$	77	11	99	116	134	11	77	M12x40	10	84.5	63.5	94.5	73.5	35.5	8	118	63.5	128	73.5	
$\phi 100$	94	11	117	136	154	11	94	M12x40	12	96	73	106	83	35.5	8	127.5	73	137.5	83	


- SCP\*3
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS2
- CKV2
- CAV2/COVP/N2
- SSD2**
- SSG
- SSD
- CAT
- MDC2
- MVC
- SMG
- MSD/MSDG
- FC\*
- STK
- SRL3
- SRG3
- SRM3
- SRT3
- MRL2
- MRG2
- SM-25
- ShkAbs
- FJ
- FK
- Spd Contr
- Ending



Compact cylinder double acting/single rod/with strong magnetic field proof switch

# SSD2-L4 Series

● Bore size:  $\varnothing 40/\varnothing 50/\varnothing 63/\varnothing 80/\varnothing 100$



## Specifications

Item	SSD2-L4					
Bore size mm	$\varnothing 40$	$\varnothing 50$	$\varnothing 63$	$\varnothing 80$	$\varnothing 100$	
Actuation	Double acting					
Working fluid	Compressed air					
Max. working pressure MPa	1.0 ( $\approx 150$ psi, 10 bar)					
Min. working pressure MPa	0.1 ( $\approx 15$ psi, 1 bar)			0.05 ( $\approx 7.3$ psi, 0.5 bar)		
Proof pressure MPa	1.6 ( $\approx 230$ psi, 16 bar)					
Ambient temperature $^{\circ}\text{C}$	-10 ( $14^{\circ}\text{F}$ ) to 60 ( $140^{\circ}\text{F}$ ) (no freezing)					
Port size	Rc1/8	Rc1/4			Rc3/8	
Stroke tolerance mm	$^{+1.0}_0$					
Working piston speed mm/s	50 to 500			50 to 300		
Cushion	None					
Lubrication	Not required (use turbine oil class 1 ISO VG32 if necessary for lubrication)					
Allowable absorbed energy J	0.092	0.1	0.12	0.27	0.56	

## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\varnothing 40$	20/25/30/35 40/45/50/75/100	100	20
$\varnothing 50$			
$\varnothing 63$			
$\varnothing 80$			
$\varnothing 100$			

\*1: The custom stroke is available in 1 mm increments. However, the total length is the same as that of the next longer standard stroke.


## Number of installed switches and min. stroke (mm)

Switch quantity	1	2
Switch model No.	V0	
Bore size (mm)		
$\varnothing 40$	20	20
$\varnothing 50$	20	20
$\varnothing 63$	20	20
$\varnothing 80$	20	20
$\varnothing 100$	20	20

## Custom stroke

### ● SSD2-L4 Series

Item	Standard products	
	Standard stroke body with spacer	
Model No.	Refer to How to order.	
Description	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.	
Stroke range	Bore size	Stroke range
	40 to 100	1 to 99
Example of model No.	Model No.: SSD2-L4-40-38	
	A +2 mm spacer is added to the SSD2-L4-40-40 standard cylinder to create 38 mm stroke. B + stroke is 89.5mm.	

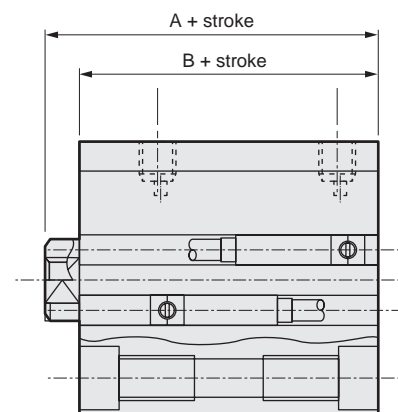

## Switch specifications

Item	2-wire reed	
	V0	
Applications	For relay, programmable controller	
Load voltage	12/24 VDC	110 VAC
Load current	5 to 50 mA	7 to 20 mA
Internal voltage drop	3.0 V or less (with 40 mA load current)	
Indicator	LED (Lit when ON)	
Leakage current	0 mA	
Weight	g 1 m:63 3 m:170 5 m:277	

## Cylinder weight table (the weight of the switches is when there are 2 cylinder switches.)

(Unit: g)

Stroke (mm)	20	25	30	35	40	45	50	75	100
ø40	493	520	546	573	599	626	652	785	917
ø50	757	799	841	883	925	967	1009	1219	1429
ø63	1089	1145	1200	1256	1311	1367	1422	1700	1977
ø80	1822	1909	1996	2083	2170	2257	2344	2779	3214
ø100	2665	2779	2892	3006	3119	3233	3346	3914	4481

## Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa											
		0.05	0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø40	Push	-	1.26x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.51x10 <sup>2</sup>	3.77x10 <sup>2</sup>	5.03x10 <sup>2</sup>	6.28x10 <sup>2</sup>	7.54x10 <sup>2</sup>	8.80x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.13x10 <sup>3</sup>	1.26x10 <sup>3</sup>
	Pull	-	1.06x10 <sup>2</sup>	1.58x10 <sup>2</sup>	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>
ø50	Push	-	1.96x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.93x10 <sup>2</sup>	5.89x10 <sup>2</sup>	7.85x10 <sup>2</sup>	9.82x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.37x10 <sup>3</sup>	1.57x10 <sup>3</sup>	1.77x10 <sup>3</sup>	1.96x10 <sup>3</sup>
	Pull	-	1.65x10 <sup>2</sup>	2.47x10 <sup>2</sup>	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>
ø63	Push	1.56x10 <sup>2</sup>	3.12x10 <sup>2</sup>	4.68x10 <sup>2</sup>	6.23x10 <sup>2</sup>	9.35x10 <sup>2</sup>	1.25x10 <sup>3</sup>	1.56x10 <sup>3</sup>	1.87x10 <sup>3</sup>	2.18x10 <sup>3</sup>	2.49x10 <sup>3</sup>	2.81x10 <sup>3</sup>	3.12x10 <sup>3</sup>
	Pull	1.40x10 <sup>2</sup>	2.80x10 <sup>2</sup>	4.20x10 <sup>2</sup>	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>	2.24x10 <sup>3</sup>	2.52x10 <sup>3</sup>	2.80x10 <sup>3</sup>
ø80	Push	2.51x10 <sup>2</sup>	5.03x10 <sup>2</sup>	7.54x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.51x10 <sup>3</sup>	2.01x10 <sup>3</sup>	2.51x10 <sup>3</sup>	3.02x10 <sup>3</sup>	3.52x10 <sup>3</sup>	4.02x10 <sup>3</sup>	4.52x10 <sup>3</sup>	5.03x10 <sup>3</sup>
	Pull	2.27x10 <sup>2</sup>	4.54x10 <sup>2</sup>	6.80x10 <sup>2</sup>	9.07x10 <sup>2</sup>	1.36x10 <sup>3</sup>	1.81x10 <sup>3</sup>	2.27x10 <sup>3</sup>	2.72x10 <sup>3</sup>	3.17x10 <sup>3</sup>	3.63x10 <sup>3</sup>	4.08x10 <sup>3</sup>	4.54x10 <sup>3</sup>
ø100	Push	3.93x10 <sup>2</sup>	7.85x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.57x10 <sup>3</sup>	2.36x10 <sup>3</sup>	3.14x10 <sup>3</sup>	3.93x10 <sup>3</sup>	4.71x10 <sup>3</sup>	5.50x10 <sup>3</sup>	6.28x10 <sup>3</sup>	7.07x10 <sup>3</sup>	7.85x10 <sup>3</sup>
	Pull	3.57x10 <sup>2</sup>	7.15x10 <sup>2</sup>	1.07x10 <sup>3</sup>	1.43x10 <sup>3</sup>	2.14x10 <sup>3</sup>	2.86x10 <sup>3</sup>	3.57x10 <sup>3</sup>	4.29x10 <sup>3</sup>	5.00x10 <sup>3</sup>	5.72x10 <sup>3</sup>	6.43x10 <sup>3</sup>	7.15x10 <sup>3</sup>

SCP\*3  
CMK2  
CMA2  
SCM  
SCG  
SCA2  
SCS2  
CKV2  
CAV2/  
COVP/N2  
SSD2  
SSG  
SSD  
CAT  
MDC2  
MVC  
SMG  
MSD/  
MSDG  
FC\*  
STK  
SRL3  
SRG3  
SRM3  
SRT3  
MRL2  
MRG2  
SM-25  
ShkAbs  
FJ  
FK  
Spd  
Contr  
Ending

# SSD2-L4 Series

## How to order

SSD2-L4 - 50 - 40 - V0 - D - N - LB - I

Model No.

**A** Bore size

**B** Stroke

**C** Switch model No.

**D** Switch quantity

**E** Option

**F** Mounting bracket

**G** Accessory  
\*3

### ⚠ Precautions for model No. selection

- \*1 : The mounting bracket is included at shipment.
- \*2 : The projection dimension of piston rod WF when LB or FA is selected is different from that of the standard. Refer to the dimensions on page 1017. The number of the specified protruding dimension will be added at the end of the model No. printed on the metal plate on the body.
- \*3 : "I" and "Y" cannot be selected together.

### [Example of model No.]

**SSD2-L4-50-40-V0-D-N-LB-I**

Model: Compact cylinder

Double acting/single rod/with strong magnetic field proof switch

- A** Bore size :  $\phi 50$  mm
- B** Stroke : 40 mm
- C** Switch model No.: Reed V0 switch,  
Lead wire length 1 m
- D** Switch quantity : 2 pcs. included
- E** Option : Rod end male thread
- F** Mounting bracket: Axial foot
- G** Accessory : Rod eye

### How to order mounting bracket

Bore size (mm)	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$
<b>Mounting bracket</b>					
Foot (LB)	SSD2-LB-40	SSD2-LB-50	SSD2-LB-63	SSD2-LB-80	SSD2-LB-100
Flange (FA/FB)	SSD2-FA-40	SSD2-FA-50	SSD2-FA-63	SSD2-FA-80	SSD2-FA-100
Clevis bracket (CB)	SSD2-CB-40	SSD2-CB-50	SSD2-CB-63	SSD2-CB-80	SSD2-CB-100

\*1: The foot mounting bracket is provided as 2 pcs./set.

Code	Description
<b>A Bore size (mm)</b>	
40	$\phi 40$
50	$\phi 50$
63	$\phi 63$
80	$\phi 80$
100	$\phi 100$

<b>B Stroke (mm)</b>		
Bore size	Stroke *1	Custom stroke *2
$\phi 40$ to $\phi 100$	20 to 100	In 1 mm increments

\*1 : Refer to page 1012 for the number of installed switches and the min. stroke.  
\*2 : The total length when using a custom stroke is the same as that when using the next longer standard stroke.

<b>C Switch model No.</b>					
Lead wire Straight	Contact	Voltage		Indicator	Lead wire
		AC	DC		
V0*	Reed	●	●	1-color LED	2-wire

<b>* Lead wire length</b>	
Blank	1 m (standard)
3	3 m (option)
5	5 m (option)

<b>D Switch quantity</b>	
R	1 on rod side
H	1 on head side
D	2
T	3

<b>E Option</b>	
Blank	Rod end female thread
N	Rod end male thread

<b>F Mounting bracket</b>	
Blank	Without mounting bracket
LB	Axial foot
CB	Clevis bracket (pin and snap ring included)
FA	Rod side flange
FB	Head side flange

<b>G Accessory (available when rod end male thread "N" is selected)</b>	
I	Rod eye
Y	Rod clevis (pin and snap ring included)


### How to order switch

SW - V0


Switch model No.  
(Item © above)

### Internal structure and parts list

● SSD2-L4-40, 50

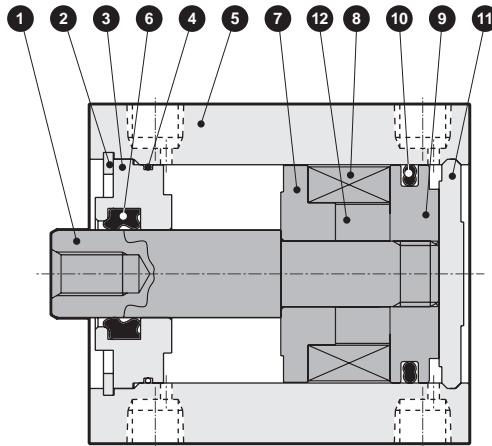

● SSD2-L4-63 to 100

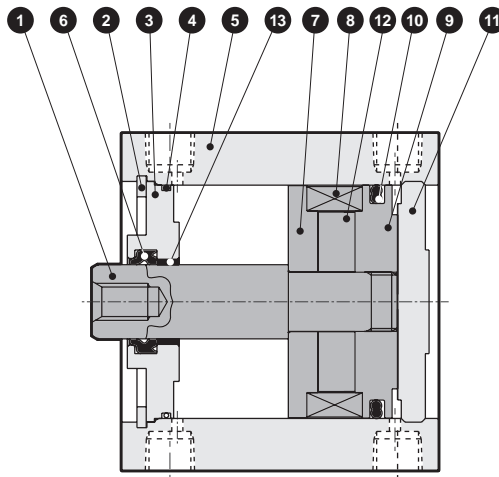

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	Steel	Industrial chrome plating	7	Spacer	Aluminum alloy	Chromate
2	C-snap ring	Stainless steel		8	Magnet	Plastic	
3	Rod metal	ø40, ø50: Special aluminum ø63 to ø100: Aluminum alloy	ø40, ø50: Alumite ø63 to ø100: Chromate	9	Piston	Aluminum alloy	Chromate
4	Rod metal gasket	Nitrile rubber		10	Piston packing	Nitrile rubber	
5	Body	Aluminum alloy	Hard alumite	11	Cover	Aluminum alloy	Alumite
6	Rod packing	Nitrile rubber		12	Collar	Aluminum alloy	
				13	Bush	Oiles drymet	ø63 to ø100 only

### Repair parts list

Bore size (mm)	Kit No.	Repair parts No.
ø40	SSD2-40K	● 4 ● 6 ● 10
ø50	SSD2-50K	
ø63	SSD2-63K	
ø80	SSD2-80K	
ø100	SSD2-100K	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending




# SSD2-L4 Series

## Dimensions

● SSD2-L4-40 to 100

● Rod end male thread

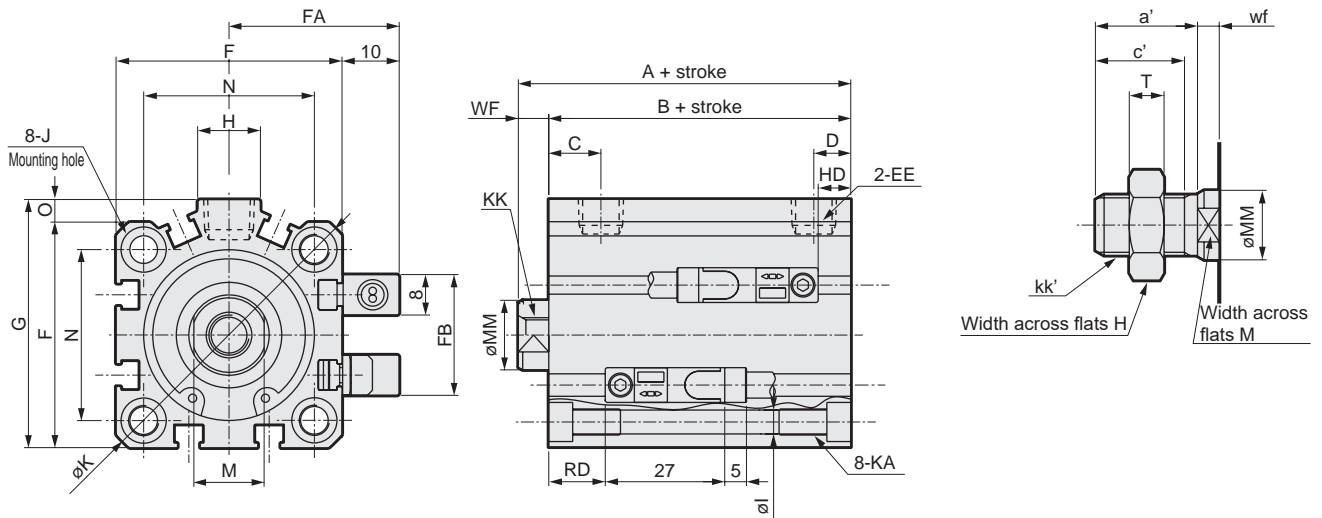

Code	A	B	C	D	EE	F	FA	FB	G	H	I	J
Code												
Bore size (mm)												
ø40	56.5	49.5	12	8.5	Rc1/8	52	36	31	57	15	5.5	Spot face ø9 depth 5.5
ø50	58.5	50.5	10.5	10.5	Rc1/4	64	42	32	71	18	6.9	Spot face ø11 depth 6.5
ø63	64	56	13	11	Rc1/4	77	48.5	32	84	23	8.7	Spot face ø14 depth 9
ø80	73.5	63.5	16	13	Rc3/8	98	59	32	104	31	10.5	Spot face ø17.5 depth 11
ø100	85	73	23	15	Rc3/8	117	68.5	32	123.5	38	10.5	Spot face ø17.5 depth 11

Code	K	KA	KK	M	MM	N	O	WF	HD	RD
Code										
Bore size (mm)										
ø40	69	M6 depth 11	M8 depth 13	14	16	40	5	7	7.5	13
ø50	86	M8 depth 13	M10 depth 15	17	20	50	7	8	8.5	13
ø63	103	M10 depth 25	M10 depth 15	17	20	60	7	8	13.5	13.5
ø80	132	M12 depth 28	M16 depth 21	22	25	77	6	10	18.5	16
ø100	156	M12 depth 28	M20 depth 27	27	30	94	6.5	12	24	20

\*1 : To calculate A+ stroke or B+ stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value.

(Example) If the custom stroke is 23 mm, apply the standard stroke 25 mm.


\*2 : For dimensions of individual accessories, refer to pages 1046 to 1049.

● Rod end male thread


Code	a'	c'	H	kk'	M	MM	T	wf
Code								
Bore size (mm)								
ø40	23.5	20.5	22	M14x1.5	14	16	8	5
ø50	28.5	26	27	M18x1.5	17	20	11	5
ø63	28.5	26	27	M18x1.5	17	20	11	5
ø80	35.5	32.5	32	M22x1.5	22	25	13	8
ø100	35.5	32.5	41	M26x1.5	27	30	16	8

### Dimensions with mounting bracket

- Axial foot (LB)  
SSD2-L4-40 to 100 -LB

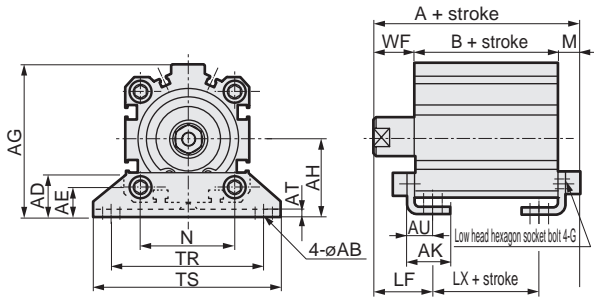

Rod end male thread




Code	Common dimensions													
Bore size (mm)	AB	AD	AE	AG	AH	AK	AT	AU	G	N	TR	TS	M	LF
ø40	7	18	13	64	33	18.2	3.2	11.2	M6x16	40	64	78	7.2	25
ø50	9	22	14	78	39	22.7	3.2	14.7	M8x20	50	79	95	8.2	29.5
ø63	11	26	16	91.5	46	25.2	3.2	16.2	M10x25	60	95	113	9.2	31
ø80	13	31.5	20.5	114	59	30.5	4.5	19.5	M12x40	77	118	140	11.5	35
ø100	13	35	24	136	71	35.5	6	23	M12x40	94	137	162	13	39


  

Code	Female thread						Male thread		
Bore size (mm)	WF	A	B	CJ	a'	wf	A	B	CJ
ø40	17	73.7	49.5	33.5	23.5	15	95.2	49.5	33.5
ø50	18	76.7	50.5	27.5	28.5	15	102.7	50.5	27.5
ø63	18	83.2	56	30	28.5	15	108.7	56	30
ø80	20	95	63.5	33.5	35.5	18	128.5	63.5	33.5
ø100	22	108	73	39	35.5	18	139.5	73	39

- Rod side flange (FA)  
SSD2-L4-40 to 100 -FA

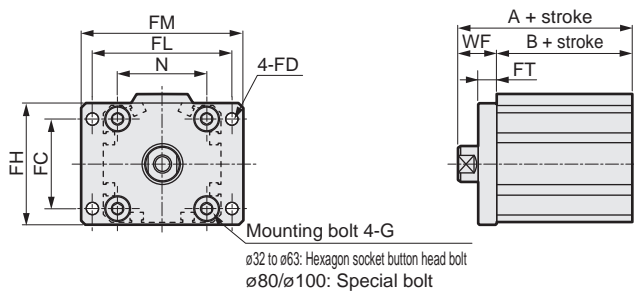


Rod end male thread




Code	Common dimensions								Female thread		Male thread				
Bore size (mm)	FC	FD	FH	FL	FM	FT	N	G	WF	A	B	a'	wf	A	B
ø40	40	5.5	54	62	72	8	40	M6x16	17	66.5	49.5	23.5	15	88	49.5
ø50	50	6.6	67	76	89	9	50	M8x20	18	68.5	50.5	28.5	15	94	50.5
ø63	60	9	80	92	108	9	60	M10x25	18	74	56	28.5	15	99.5	56
ø80	77	11	99	116	134	11	77	M12x40	20	83.5	63.5	35.5	18	117	63.5
ø100	94	11	117	136	154	11	94	M12x40	22	95	73	35.5	18	126.5	73

- Clevis bracket (CB)  
SSD2-L4-40 to 100 -CB

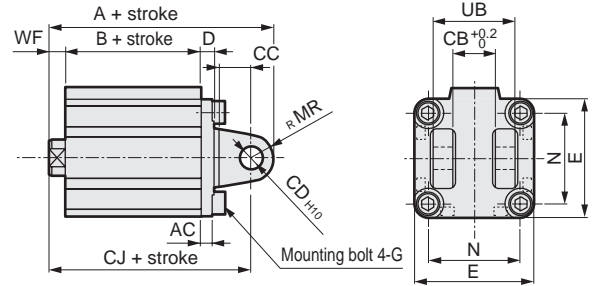

Rod end male thread




Code	Common dimensions									
Bore size (mm)	AC	CB	CC	CD	D	E	G	MR	N	UB
ø40	5	18.2	14	10	6	52	M6x16	10	40	36
ø50	6	22.2	20	14	7	64	M8x20	14	50	44
ø63	7	22.2	20	14	8	77	M10x25	14	60	44
ø80	9	28.2	27	18	10	98	M12x40	18	77	56
ø100	12	32.2	31	22	13	117	M12x40	22	94	64


  

Code	Female thread				Male thread				
Bore size (mm)	WF	A	B	CJ	a'	wf	A	B	CJ
ø40	7	88.5	49.5	78.5	23.5	5	110	49.5	76.5
ø50	8	100.5	50.5	86.5	28.5	5	126	50.5	83.5
ø63	8	108	56	94	28.5	5	133.5	56	91
ø80	10	129.5	63.5	111.5	35.5	8	163	63.5	109.5
ø100	12	152	73	130	35.5	8	183.5	73	126

- Head side flange (FB)  
SSD2-L4-40 to 100 -FB

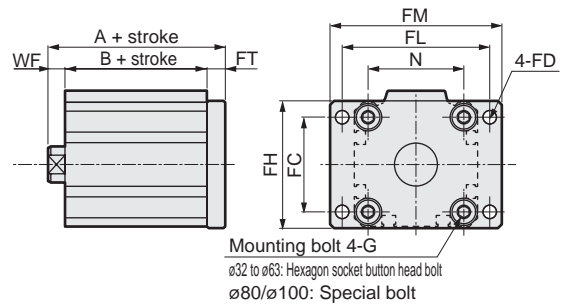


Rod end male thread



Code	Common dimensions								Female thread		Male thread				
Bore size (mm)	FC	FD	FH	FL	FM	FT	N	G	WF	A	B	a'	wf	A	B
ø40	40	5.5	54	62	72	8	40	M6x16	7	64.5	49.5	23.5	5	86	49.5
ø50	50	6.6	67	76	89	9	50	M8x20	8	67.5	50.5	28.5	5	93	50.5
ø63	60	9	80	92	108	9	60	M10x25	8	73	56	28.5	5	98.5	56
ø80	77	11	99	116	134	11	77	M12x40	10	84.5	63.5	35.5	8	118	63.5
ø100	94	11	117	136	154	11	94	M12x40	12	96	73	35.5	8	127.5	73

SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending



Compact cylinder double acting/single rod  
with strong magnetic field proof switch/coil scraper

# SSD2-G1L4 Series

● Bore size:  $\phi 40/\phi 50/\phi 63/\phi 80/\phi 100$

JIS symbol



## Specifications

Item	SSD2-G1L4					
Bore size mm	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$	
Actuation	Double acting					
Working fluid	Compressed air					
Max. working pressure MPa	1.0 ( $\approx 150$ psi, 10 bar)					
Min. working pressure MPa	0.15 ( $\approx 22$ psi, 1.5 bar)			0.1 ( $\approx 15$ psi, 1 bar)		
Proof pressure MPa	1.6 ( $\approx 230$ psi, 16 bar)					
Ambient temperature $^{\circ}\text{C}$	-10 ( $14^{\circ}\text{F}$ ) to 60 ( $140^{\circ}\text{F}$ ) (no freezing)					
Port size	Rc1/8	Rc1/4			Rc3/8	
Stroke tolerance mm	$^{+1.0}_0$					
Working piston speed mm/s	50 to 500			50 to 300		
Cushion	None					
Lubrication	Not required (use turbine oil class 1 ISO VG32 if necessary for lubrication)					
Allowable absorbed energy J	0.092	0.1	0.12	0.27	0.56	

## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\phi 40$	20/25/30/35/ 40/45/50/75/100	100	20
$\phi 50$			
$\phi 63$			
$\phi 80$			
$\phi 100$			

\*1: The custom stroke is available in 1 mm increments. However, the total length is the same as that of the next longer standard stroke.


## Number of installed switches and min. stroke (mm)

Switch quantity	1	2	3
Switch model No.	V0		
Bore size (mm)			
$\phi 40$	20	20	35
$\phi 50$	20	20	35
$\phi 63$	20	20	35
$\phi 80$	20	20	35
$\phi 100$	20	20	35

## Custom stroke

### ● SSD2-G1L4 Series

Item	Standard products	
	Standard stroke body with spacer	
Model No.	Refer to How to order.	
Description	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.	
Stroke range	Bore size	Stroke range
	40 to 100	1 to 99
Example of model No.	Model No.: SSD2-G1L4-40-38 A +2 mm spacer is added to the SSD2-G1L4-40-40 standard cylinder to create 38 mm stroke. B + stroke is 89.5mm.	

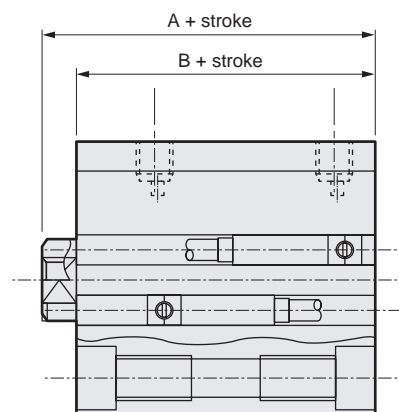

### Switch specifications

Item	2-wire reed	
	V0	
Applications	For relay, programmable controller	
Load voltage	12/24 VDC	110 VAC
Load current	5 to 50 mA	7 to 20 mA
Internal voltage drop	3.0 V or less (with 40 mA load current)	
Indicator	LED (Lit when ON)	
Leakage current	0 mA	
Weight	g 1 m:63 3 m:170 5 m:277	

### Cylinder weight table

(the weight of the switches is when there are 2 cylinder switches.)

(Unit: g)

Stroke (mm)	20	25	30	35	40	45	50	75	100
ø40	575	602	628	655	681	708	734	867	999
ø50	876	918	960	1002	1044	1086	1128	1338	1548
ø63	1240	1296	1351	1407	1462	1518	1573	1851	2128
ø80	2074	2161	2248	2335	2422	2509	2596	3031	3466
ø100	3000	3114	3227	3341	3454	3568	3681	4249	4816

### Theoretical thrust table

(Unit: N)


Bore size (mm)	Operating direction	Working pressure MPa										
		0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø40	Push	-	1.88x10 <sup>2</sup>	2.51x10 <sup>2</sup>	3.77x10 <sup>2</sup>	5.03x10 <sup>2</sup>	6.28x10 <sup>2</sup>	7.54x10 <sup>2</sup>	8.80x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.13x10 <sup>3</sup>	1.26x10 <sup>3</sup>
	Pull	-	1.58x10 <sup>2</sup>	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>
ø50	Push	-	2.95x10 <sup>2</sup>	3.93x10 <sup>2</sup>	5.89x10 <sup>2</sup>	7.85x10 <sup>2</sup>	9.82x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.37x10 <sup>3</sup>	1.57x10 <sup>3</sup>	1.77x10 <sup>3</sup>	1.96x10 <sup>3</sup>
	Pull	-	2.47x10 <sup>2</sup>	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>
ø63	Push	3.12x10 <sup>2</sup>	4.68x10 <sup>2</sup>	6.23x10 <sup>2</sup>	9.35x10 <sup>2</sup>	1.25x10 <sup>3</sup>	1.56x10 <sup>3</sup>	1.87x10 <sup>3</sup>	2.18x10 <sup>3</sup>	2.49x10 <sup>3</sup>	2.81x10 <sup>3</sup>	3.12x10 <sup>3</sup>
	Pull	2.80x10 <sup>2</sup>	4.20x10 <sup>2</sup>	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>	2.24x10 <sup>3</sup>	2.52x10 <sup>3</sup>	2.80x10 <sup>3</sup>
ø80	Push	5.03x10 <sup>2</sup>	7.54x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.51x10 <sup>3</sup>	2.01x10 <sup>3</sup>	2.51x10 <sup>3</sup>	3.02x10 <sup>3</sup>	3.52x10 <sup>3</sup>	4.02x10 <sup>3</sup>	4.52x10 <sup>3</sup>	5.03x10 <sup>3</sup>
	Pull	4.54x10 <sup>2</sup>	6.80x10 <sup>2</sup>	9.07x10 <sup>2</sup>	1.36x10 <sup>3</sup>	1.81x10 <sup>3</sup>	2.27x10 <sup>3</sup>	2.72x10 <sup>3</sup>	3.17x10 <sup>3</sup>	3.63x10 <sup>3</sup>	4.08x10 <sup>3</sup>	4.54x10 <sup>3</sup>
ø100	Push	7.85x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.57x10 <sup>3</sup>	2.36x10 <sup>3</sup>	3.14x10 <sup>3</sup>	3.93x10 <sup>3</sup>	4.71x10 <sup>3</sup>	5.50x10 <sup>3</sup>	6.28x10 <sup>3</sup>	7.07x10 <sup>3</sup>	7.85x10 <sup>3</sup>
	Pull	7.15x10 <sup>2</sup>	1.07x10 <sup>3</sup>	1.43x10 <sup>3</sup>	2.14x10 <sup>3</sup>	2.86x10 <sup>3</sup>	3.57x10 <sup>3</sup>	4.29x10 <sup>3</sup>	5.00x10 <sup>3</sup>	5.72x10 <sup>3</sup>	6.43x10 <sup>3</sup>	7.15x10 <sup>3</sup>

- SCP\*3
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS2
- CKV2
- CAV2/COVP/N2
- SSD2**
- SSG
- SSD
- CAT
- MDC2
- MVC
- SMG
- MSD/MSDG
- FC\*
- STK
- SRL3
- SRG3
- SRM3
- SRT3
- MRL2
- MRG2
- SM-25
- ShkAbs
- FJ
- FK
- Spd Contr
- Ending

# SSD2-G1L4 Series

## How to order

Model No. **SSD2-G1L4-50-40-V0-D-N-LB-I**

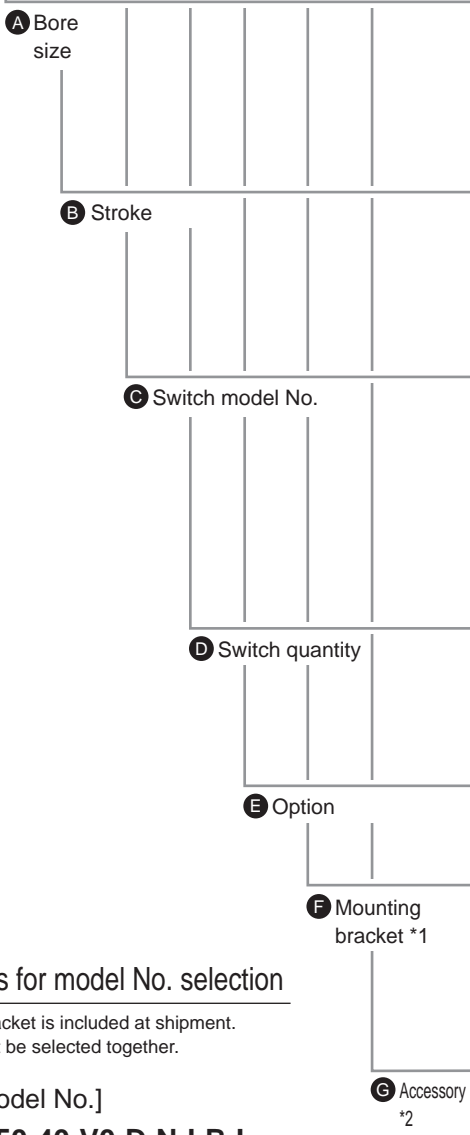

Code	Description
<b>A Bore size (mm)</b>	
40	ø40
50	ø50
63	ø63
80	ø80
100	ø100

<b>B Stroke (mm)</b>		
Bore size	Stroke *1	Custom stroke *2
ø40 to ø100	20 to 100	In 1 mm increments

\*1 : Refer to page 1018 for the number of installed switches and the min. stroke.  
\*2 : The total length is the same as that of the next longer standard stroke.

<b>C Switch model No.</b>					
Lead wire Straight	Contact	Voltage		Indicator	Lead wire
		AC	DC		
V0*	Reed	●	●	1-color LED	2-wire

<b>* Lead wire length</b>	
Blank	1 m (standard)
3	3 m (option)
5	5 m (option)

<b>D Switch quantity</b>	
R	1 on rod side
H	1 on head side
D	2
T	3

<b>E Option</b>	
Blank	Rod end female thread
N	Rod end male thread

<b>F Mounting bracket</b>	
Blank	Without mounting bracket
LB	Axial foot (made-to-order product)
CB	Clevis bracket (pin and snap ring included)
FA	Rod side flange (made-to-order product)
FB	Head side flange

<b>G Accessory (available when rod end male thread "N" is selected)</b>	
I	Rod eye
Y	Rod clevis (pin and snap ring included)

### ⚠ Precautions for model No. selection

- \*1 : The mounting bracket is included at shipment.
- \*2 : "I" and "Y" cannot be selected together.

### [Example of model No.]

**SSD2-G1L4-50-40-V0-D-N-LB-I**

Model: Compact cylinder  
Double acting/with coil scraper/with strong magnetic field proof switch

- A** Bore size : ø50 mm
- B** Stroke : 40 mm
- C** Switch model No. : Reed V0 switch, Lead wire length 1 m
- D** Switch quantity : 2 pcs. included
- E** Option : Rod end male thread
- F** Mounting bracket : Axial foot
- G** Accessory : Rod eye

## How to order switch

**SW - V0**

Switch model No.  
(Item C above)

## How to order mounting bracket

Bore size (mm)	ø40	ø50	ø63	ø80	ø100
<b>Mounting bracket</b>					
Flange (FB)	SSD2-FA-40	SSD2-FA-50	SSD2-FA-63	SSD2-FA-80	SSD2-FA-100
Clevis bracket (CB)	SSD2-CB-40	SSD2-CB-50	SSD2-CB-63	SSD2-CB-80	SSD2-CB-100


\*1: The foot mounting bracket is provided as 2 pcs./set.

# SSD2-G1L4 Series


Double acting/single rod with strong magnetic field proof switch/coil scraper

## Internal structure and parts list

● SSD2-G1L4-40, 50

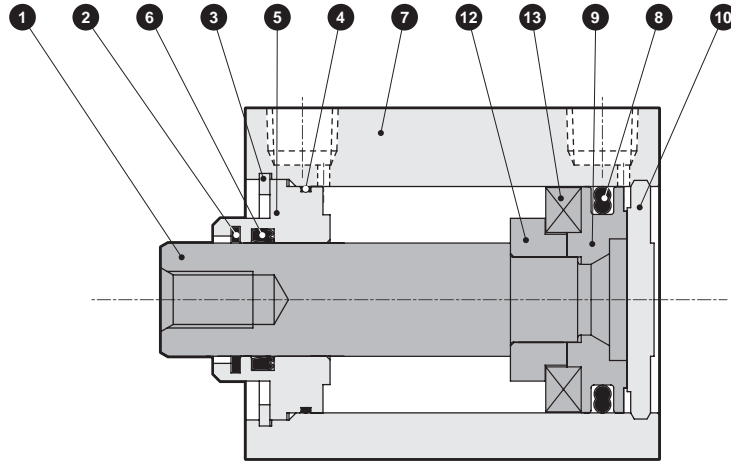

● SSD2-G1L4-63 to 100

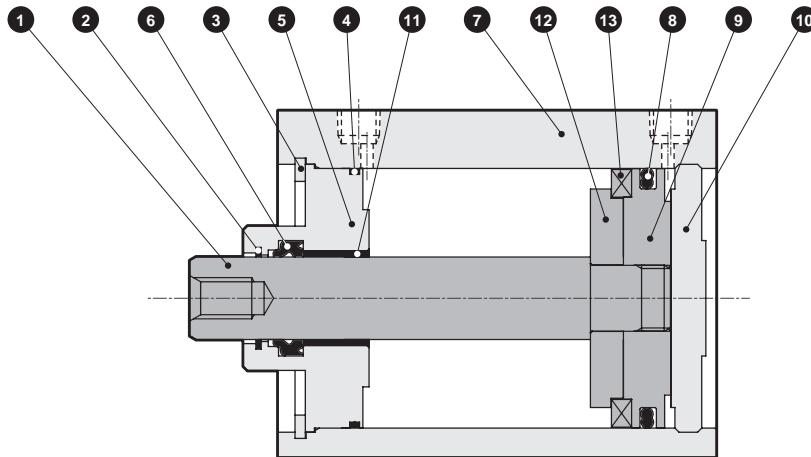

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	Steel	Industrial chrome plating	8	Piston packing	Nitrile rubber	
2	Coil scraper	Phosphor bronze		9	Piston	Aluminum alloy	Chromate
3	C-snap ring for hole	Steel	Zinc phosphate	10	Cover	Aluminum alloy	Chromate
4	Rod metal gasket	Nitrile rubber		11	Bush	Oiles drymet	ø63 to ø100
5	Rod metal	Aluminum alloy	Chromate	12	Spacer	Aluminum alloy	
6	Rod packing	Nitrile rubber		13	Magnet	Plastic	
7	Body	Aluminum alloy	Hard alumite				

## Repair parts list

Part name	Kit No.	Repair parts No.
Bore size (mm)		
ø40	SSD2-G1-40K	2 4 6 8
ø50	SSD2-G1-50K	
ø63	SSD2-G1-63K	
ø80	SSD2-G1-80K	
ø100	SSD2-G1-100K	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr


Ending

# SSD2-G1L4 Series

## Dimensions

● SSD2-G1L4-40 to 100

● Rod end male thread

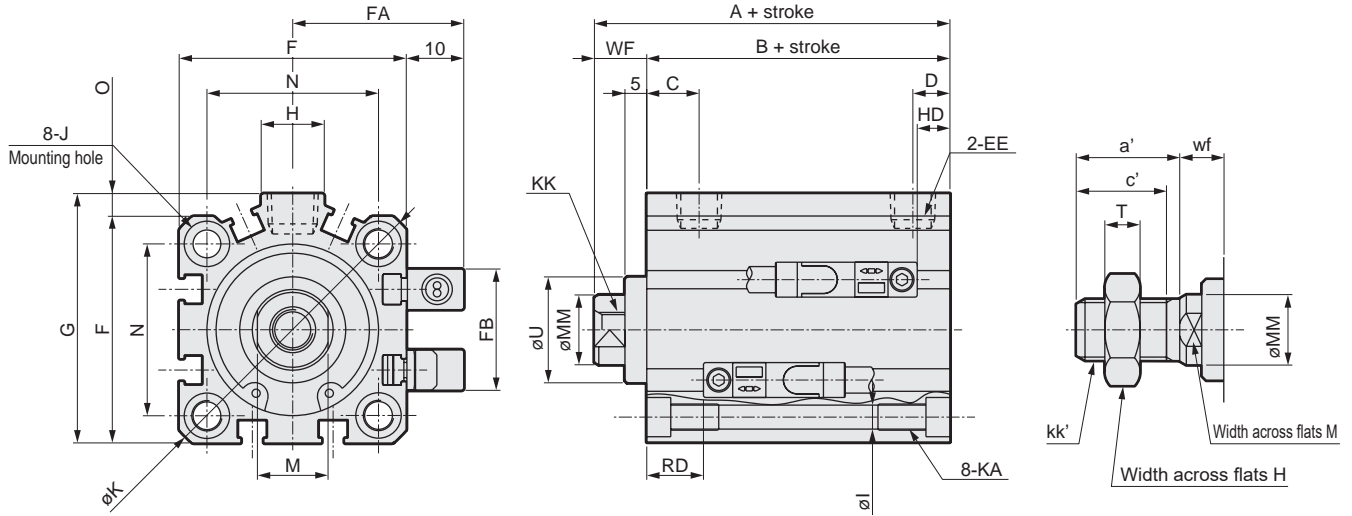

Code	A	B	C	D	EE	F	FA	FB	G	H	I	J
Code												
Bore size (mm)												
ø40	61.5	49.5	12	8.5	Rc1/8	52	36	31	57	15	5.5	9 spot face depth 5.5
ø50	63.5	50.5	10.5	10.5	Rc1/4	64	42	32	71	18	6.9	11 spot face depth 6.5
ø63	69	56	13	11	Rc1/4	77	48.5	32	84	23	8.7	14 spot face depth 9
ø80	78.5	63.5	16	13	Rc3/8	98	59	32	104	31	10.5	17.5 spot face depth 11
ø100	90	73	23	15	Rc3/8	117	68.5	32	123.5	38	10.5	17.5 spot face depth 11

Code	K	KA	KK	M	MM	N	O	U	WF	HD	RD
Code											
Bore size (mm)											
ø40	69	M6 depth 11	M8 depth 13	14	16	40	5	28 h9	12	7.5	13
ø50	86	M8 depth 13	M10 depth 15	17	20	50	7	35 h9	13	8.5	13
ø63	103	M10 depth 25	M10 depth 15	17	20	60	7	35 h9	13	13.5	13.5
ø80	132	M12 depth 28	M16 depth 21	22	25	77	6	43 h9	15	18.5	16
ø100	156	M12 depth 28	M20 depth 27	27	30	94	6.5	59 h9	17	24	20

\*1 : The A + stroke and B + stroke when using a custom stroke are the same as those when using the next longer standard stroke.


\*2: For dimensions of individual accessories, refer to pages 1046 to 1049.

● Rod end male thread

Code	a'	c'	H	kk'	M	MM	T	wf
Code								
Bore size (mm)								
ø40	23.5	20.5	22	M14x1.5	14	16	8	10
ø50	28.5	26	27	M18x1.5	17	20	11	10
ø63	28.5	26	27	M18x1.5	17	20	11	10
ø80	35.5	32.5	32	M22x1.5	22	25	13	13
ø100	35.5	32.5	41	M26x1.5	27	30	16	13


### Dimensions with mounting bracket

- Clevis bracket (CB)  
SSD2-G1L4-40 to 100 -CB

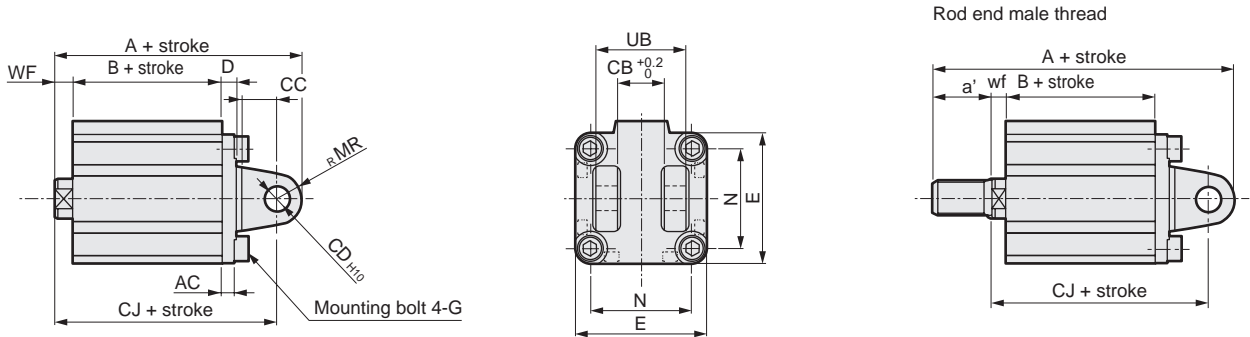

Code	Common dimensions										Female thread			Male thread					
	AC	CB	CC	CD	D	E	G	MR	N	UB	WF	A	B	CJ	a'	wf	A	B	CJ
ø40	5	18.2	14	10	6	52	M6x16	10	40	36	7	93.5	49.5	83.5	23.5	5	115	49.5	81.5
ø50	6	22.2	20	14	7	64	M8x20	14	50	44	8	105.5	50.5	91.5	28.5	5	131	50.5	88.5
ø63	7	22.2	20	14	8	77	M10x25	14	60	44	8	113	56	99	28.5	5	138.5	56	96
ø80	9	28.2	27	18	10	98	M12x40	18	77	56	10	134.5	63.5	116.5	35.5	8	168	63.5	114.5
ø100	12	32.2	31	22	13	117	M12x40	22	94	64	12	157	73	135	35.5	8	188.5	73	131

- Head side flange (FB)  
SSD2-G1L4-40 to 100 -FB

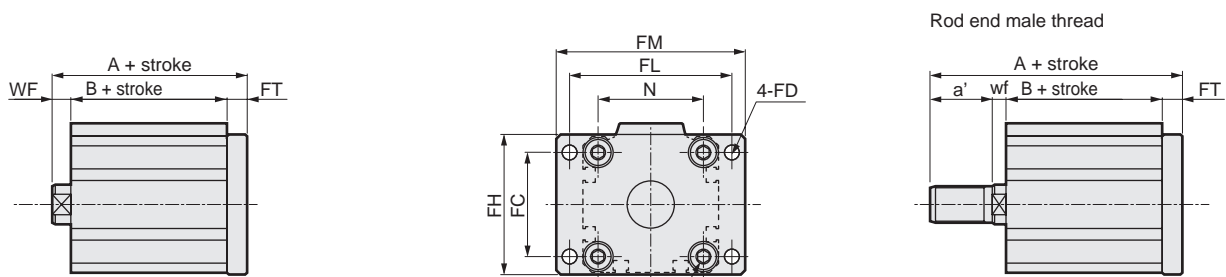

Mounting bolt 4-G  
ø32 to ø63: Hexagon socket button head bolt  
ø80/ø100: Special bolt

Code	Common dimensions								Female thread			Male thread			
	FC	FD	FH	FL	FM	FT	N	G	WF	A	B	a'	wf	A	B
ø40	40	5.5	54	62	72	8	40	M6x16	7	69.5	49.5	23.5	5	91	49.5
ø50	50	6.6	67	76	89	9	50	M8x20	8	72.5	50.5	28.5	5	98	50.5
ø63	60	9	80	92	108	9	60	M10x25	8	78	56	28.5	5	103.5	56
ø80	77	11	99	116	134	11	77	M12x40	10	89.5	63.5	35.5	8	123	63.5
ø100	94	11	117	136	154	11	94	M12x40	12	101	73	35.5	8	132.5	73

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

SSD2

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs


FJ

FK

Spd  
Contr

Ending





Compact cylinder double acting/high load/  
with strong magnetic field proof switch

# SSD2-KL4 Series

● Bore size:  $\phi 40/\phi 50/\phi 63/\phi 80/\phi 100$

JIS symbol



## Specifications

Item	SSD2-KL4					
Bore size mm	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$	
Actuation	Double acting					
Working fluid	Compressed air					
Max. working pressure MPa	1.0 ( $\approx 150$ psi, 10 bar)					
Min. working pressure MPa	0.1 ( $\approx 15$ psi, 1 bar)			0.05 ( $\approx 7.3$ psi, 0.5 bar)		
Proof pressure MPa	1.6 ( $\approx 230$ psi, 16 bar)					
Ambient temperature $^{\circ}\text{C}$	-10 ( $14^{\circ}\text{F}$ ) to 60 ( $140^{\circ}\text{F}$ ) (no freezing)					
Port size	Rc1/8	Rc1/4			Rc3/8	
Stroke tolerance mm	$^{+2.0}_0$					
Working piston speed mm/s	50 to 500			50 to 300		
Cushion	Rubber cushion					
Lubrication	Not required (use turbine oil class 1 ISO VG32 if necessary for lubrication)					
Allowable absorbed energy J	0.63	0.98	1.56	2.51	3.92	

## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\phi 40$	20/25/30/35/40 45/50/75/100	100	20
$\phi 50$			
$\phi 63$			
$\phi 80$			
$\phi 100$			

\*1: The custom stroke is available in 1 mm increments. However, the total length is the same as that of the next longer standard stroke.


## Number of installed switches and min. stroke (mm)

Switch quantity	1	2	3
Switch model No.	V0		
Bore size (mm)			
$\phi 40$	20	20	35
$\phi 50$	20	20	35
$\phi 63$	20	20	35
$\phi 80$	20	20	35
$\phi 100$	20	20	35

## Custom stroke

### ● SSD2-KL4 Series

Item	Standard products	
	Standard stroke body with spacer	
Model No.	Refer to How to order.	
Description	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.	
Stroke range	Bore size	Stroke range
	40 to 100	1 to 99
Example of model No.	Model No.: SSD2-KL4-40-38	
	A +2 mm spacer is added to the SSD2-KL4-40-40 standard cylinder to create 38 mm stroke. B + stroke is 99.5mm.	

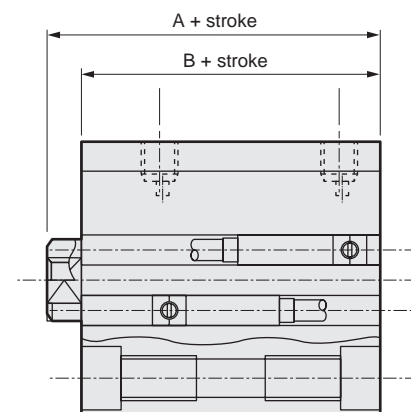

### Switch specifications

Item	2-wire reed	
	V0	
Applications	For relay, programmable controller	
Load voltage	12/24 VDC	110 VAC
Load current	5 to 50 mA	7 to 20 mA
Internal voltage drop	3.0 V or less (with 40 mA load current)	
Indicator	LED (Lit when ON)	
Leakage current	0 mA	
Weight	g 1 m:63 3 m:170 5 m:277	

### Cylinder weight table

(the weight of the switches is when there are 2 cylinder switches.)

(Unit: g)

Stroke (mm)	20	25	30	35	40	45	50	75	100
ø40	546	573	599	626	652	679	705	838	970
ø50	841	883	925	967	1009	1051	1093	1303	1513
ø63	1199	1254	1309	1364	1419	1474	1529	1804	2079
ø80	1995	2082	2169	2256	2343	2430	2517	2952	3387
ø100	2893	3007	3120	3234	3347	3461	3574	4142	4709

### Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa											
		0.05	0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø40	Push	-	1.26x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.51x10 <sup>2</sup>	3.77x10 <sup>2</sup>	5.03x10 <sup>2</sup>	6.28x10 <sup>2</sup>	7.54x10 <sup>2</sup>	8.80x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.13x10 <sup>3</sup>	1.26x10 <sup>3</sup>
	Pull	-	1.06x10 <sup>2</sup>	1.58x10 <sup>2</sup>	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>
ø50	Push	-	1.96x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.93x10 <sup>2</sup>	5.89x10 <sup>2</sup>	7.85x10 <sup>2</sup>	9.82x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.37x10 <sup>3</sup>	1.57x10 <sup>3</sup>	1.77x10 <sup>3</sup>	1.96x10 <sup>3</sup>
	Pull	-	1.65x10 <sup>2</sup>	2.47x10 <sup>2</sup>	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>
ø63	Push	1.56x10 <sup>2</sup>	3.12x10 <sup>2</sup>	4.68x10 <sup>2</sup>	6.23x10 <sup>2</sup>	9.35x10 <sup>2</sup>	1.25x10 <sup>3</sup>	1.56x10 <sup>3</sup>	1.87x10 <sup>3</sup>	2.18x10 <sup>3</sup>	2.49x10 <sup>3</sup>	2.81x10 <sup>3</sup>	3.12x10 <sup>3</sup>
	Pull	1.40x10 <sup>2</sup>	2.80x10 <sup>2</sup>	4.20x10 <sup>2</sup>	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>	2.24x10 <sup>3</sup>	2.52x10 <sup>3</sup>	2.80x10 <sup>3</sup>
ø80	Push	2.51x10 <sup>2</sup>	5.03x10 <sup>2</sup>	7.54x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.51x10 <sup>3</sup>	2.01x10 <sup>3</sup>	2.51x10 <sup>3</sup>	3.02x10 <sup>3</sup>	3.52x10 <sup>3</sup>	4.02x10 <sup>3</sup>	4.52x10 <sup>3</sup>	5.03x10 <sup>3</sup>
	Pull	2.27x10 <sup>2</sup>	4.54x10 <sup>2</sup>	6.80x10 <sup>2</sup>	9.07x10 <sup>2</sup>	1.36x10 <sup>3</sup>	1.81x10 <sup>3</sup>	2.27x10 <sup>3</sup>	2.72x10 <sup>3</sup>	3.17x10 <sup>3</sup>	3.63x10 <sup>3</sup>	4.08x10 <sup>3</sup>	4.54x10 <sup>3</sup>
ø100	Push	3.93x10 <sup>2</sup>	7.85x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.57x10 <sup>3</sup>	2.36x10 <sup>3</sup>	3.14x10 <sup>3</sup>	3.93x10 <sup>3</sup>	4.71x10 <sup>3</sup>	5.50x10 <sup>3</sup>	6.28x10 <sup>3</sup>	7.07x10 <sup>3</sup>	7.85x10 <sup>3</sup>
	Pull	3.57x10 <sup>2</sup>	7.15x10 <sup>2</sup>	1.07x10 <sup>3</sup>	1.43x10 <sup>3</sup>	2.14x10 <sup>3</sup>	2.86x10 <sup>3</sup>	3.57x10 <sup>3</sup>	4.29x10 <sup>3</sup>	5.00x10 <sup>3</sup>	5.72x10 <sup>3</sup>	6.43x10 <sup>3</sup>	7.15x10 <sup>3</sup>

- SCP\*3
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS2
- CKV2
- CAV2/COVP/N2
- SSD2
- SSG
- SSD
- CAT
- MDC2
- MVC
- SMG
- MSD/MSDG
- FC\*
- STK
- SRL3
- SRG3
- SRM3
- SRT3
- MRL2
- MRG2
- SM-25
- ShkAbs
- FJ
- FK
- Spd Contr
- Ending

# SSD2-KL4 Series

## How to order

SSD2-KL4-50-40-V0-D-N-LB-I

Model No.

A Bore size

B Stroke

C Switch model No.

D Switch quantity

E Option

F Mounting bracket

G Accessory

### ⚠ Precautions for model No. selection

- \*1 : The mounting bracket is included at shipment.
- \*2 : The projection dimension of piston rod WF when LB or FA is selected is different from that of the standard. Refer to the dimensions on page 1029. The number of the specified protruding dimension will be added at the end of the model No. printed on the metal plate on the body.
- \*3 : "I" and "Y" cannot be selected together.

### [Example of model No.]

**SSD2-KL4-50-40-V0-D-N-LB-I**

Model: Compact cylinder  
Double acting/single high load/  
with strong magnetic field proof switch

- A Bore size : ø50 mm
- B Stroke : 40 mm
- C Switch model No. : Reed V0 switch,  
Lead wire length 1 m
- D Switch quantity : 2 pcs. included
- E Option : Rod end male thread
- F Mounting bracket : Axial foot
- G Accessory : Rod eye

## How to order mounting bracket

Bore size (mm)	ø40	ø50	ø63	ø80	ø100
<b>Mounting bracket</b>					
Foot (LB)	SSD2-LB-40	SSD2-LB-50	SSD2-LB-63	SSD2-LB-80	SSD2-LB-100
Flange (FA/FB)	SSD2-FA-40	SSD2-FA-50	SSD2-FA-63	SSD2-FA-80	SSD2-FA-100
Clevis bracket (CB)	SSD2-CB-40	SSD2-CB-50	SSD2-CB-63	SSD2-CB-80	SSD2-CB-100

\*1: The foot mounting bracket is provided as 2 pcs./set.

Code	Description				
<b>A Bore size (mm)</b>					
40	ø40				
50	ø50				
63	ø63				
80	ø80				
100	ø100				
<b>B Stroke (mm)</b>					
<b>Bore size</b>		<b>Stroke *1</b>	<b>Custom stroke *2</b>		
ø40 to ø100		20 to 100	In 1 mm increments		
*1 : Refer to page 1024 for the number of installed switches and the min. stroke.					
*2 : The total length is the same as that of the next longer standard stroke.					
<b>C Switch model No.</b>					
<b>Lead wire</b> Straight	<b>Contact</b>	<b>Voltage</b>		<b>Indicator</b>	<b>Lead wire</b>
		AC	DC		
V0*	Reed	●	●	1-color LED	2-wire
<b>* Lead wire length</b>					
<b>Blank</b>	1 m (standard)				
3	3 m (option)				
5	5 m (option)				
<b>D Switch quantity</b>					
R	1 on rod side				
H	1 on head side				
D	2				
T	3				
<b>E Option</b>					
<b>Blank</b>	Rod end female thread				
N	Rod end male thread				
<b>F Mounting bracket</b>					
<b>Blank</b>	Without mounting bracket				
LB	Axial foot				
CB	Clevis bracket (pin and snap ring included)				
FA	Rod side flange				
FB	Head side flange				
<b>G Accessory (available when rod end male thread "N" is selected)</b>					
I	Rod eye				
Y	Rod clevis (pin and snap ring included)				


## How to order switch

SW - V0


Switch model No.  
(Item C above)

### Internal structure and parts list

● SSD2-KL4-40, 50

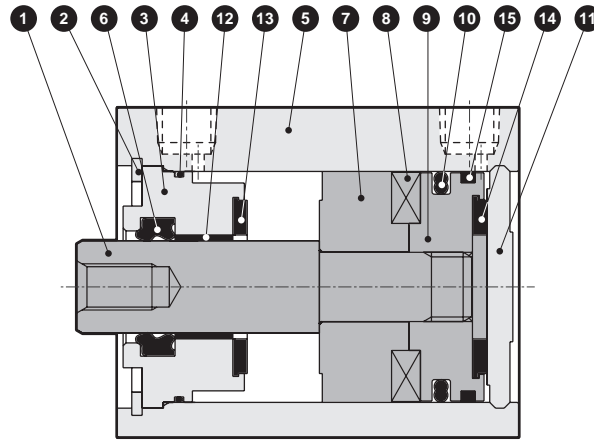

● SSD2-KL4-63 to 100

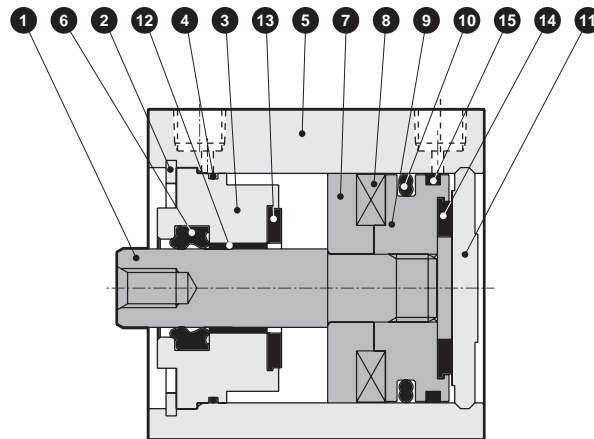

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	Steel	Industrial chrome plating	8	Magnet	Plastic	
2	C-snap ring	Steel	Zinc phosphate	9	Piston	Aluminum alloy	
3	Rod metal	ø40, ø50: Special aluminum ø63 to ø100: Aluminum alloy	ø40, ø50: Alumite ø63 to ø100: Chromate	10	Piston packing	Nitrile rubber	
4	Rod metal gasket	Nitrile rubber		11	Cover	Aluminum alloy	Alumite
5	Body	Aluminum alloy	Hard alumite	12	Bush	Oiles drymet	
6	Rod packing	Nitrile rubber		13	Cushion rubber (R)	Urethane rubber	
7	Spacer	ø40, ø50: Special resin ø63 to ø100: Aluminum alloy	ø63 to ø100: Chromate	14	Cushion rubber (H)	Urethane rubber	
				15	Wear ring	Polyacetal resin	

### Repair parts list

Bore size (mm)	Kit No.	Repair parts No.
ø40	SSD2-K-40K	
ø50	SSD2-K-50K	
ø63	SSD2-K-63K	
ø80	SSD2-K-80K	
ø100	SSD2-K-100K	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr




Ending

# SSD2-KL4 Series

## Dimensions

● SSD2-KL4-40 to 100

● Rod end male thread

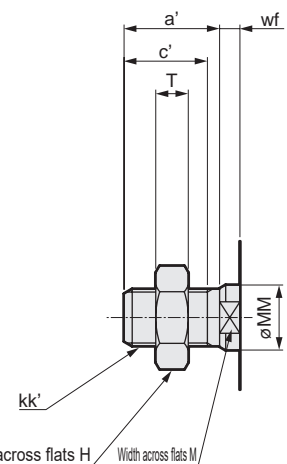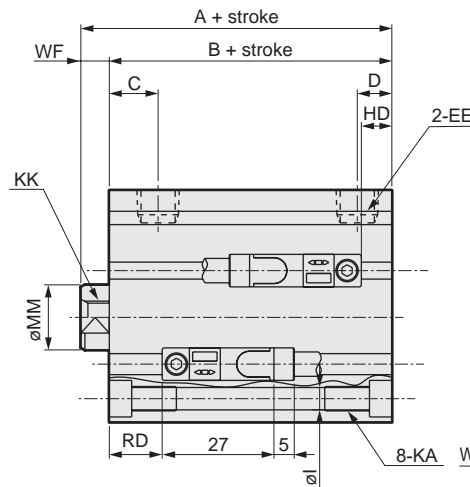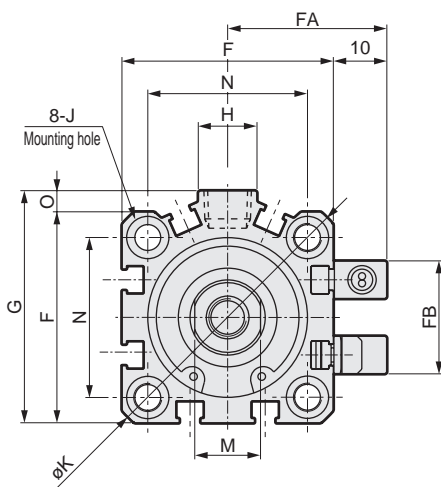

Code	A	B	C	D	EE	F	FA	FB	G	H	I	J
Code												
Bore size (mm)												
ø40	66.5	59.5	12	8.5	Rc1/8	52	36	31	57	15	5.5	Spot face ø9 depth 5.5
ø50	68.5	60.5	10.5	10.5	Rc1/4	64	42	32	71	18	6.9	Spot face ø11 depth 6.5
ø63	74	66	13	11	Rc1/4	77	48.5	32	84	23	8.7	Spot face ø14 depth 9
ø80	83.5	73.5	16	13	Rc3/8	98	59	32	104	31	10.5	Spot face ø17.5 depth 11
ø100	95	83	23	15	Rc3/8	117	68.5	32	123.5	38	10.5	Spot face ø17.5 depth 11

Code	K	KA	KK	M	MM	N	O	WF	HD	RD
Code										
Bore size (mm)										
ø40	69	M6 depth 11	M8 depth 13	14	16	40	5	7	12.5	18
ø50	86	M8 depth 13	M10 depth 15	17	20	50	7	8	13.5	18
ø63	103	M10 depth 25	M10 depth 15	17	20	60	7	8	18.5	18.5
ø80	132	M12 depth 28	M16 depth 21	22	25	77	6	10	23.5	21
ø100	156	M12 depth 28	M20 depth 27	27	30	94	6.5	12	29	25

\*1 : The A + stroke and B + stroke when using a custom stroke are the same as those when using the next longer standard stroke.


\*2 : For dimensions of individual accessories, refer to pages 1046 to 1049.

● Rod end male thread


Code	a'	c'	H	kk'	M	MM	T	wf
Code								
Bore size (mm)								
ø40	23.5	20.5	22	M14x1.5	14	16	8	5
ø50	28.5	26	27	M18x1.5	17	20	11	5
ø63	28.5	26	27	M18x1.5	17	20	11	5
ø80	35.5	32.5	32	M22x1.5	22	25	13	8
ø100	35.5	32.5	41	M26x1.5	27	30	16	8

### Dimensions with mounting bracket

- Axial foot (LB)  
SSD2-KL4-40 to 100 -LB

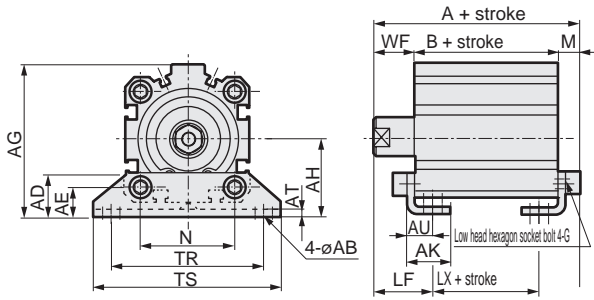

Rod end male thread




Code	Common dimensions													
Bore size (mm)	AB	AD	AE	AG	AH	AK	AT	AU	G	N	TR	TS	M	LF
ø40	7	18	13	64	33	18.2	3.2	11.2	M6x16	40	64	78	7.2	25
ø50	9	22	14	78	39	22.7	3.2	14.7	M8x20	50	79	95	8.2	29.5
ø63	11	26	16	91.5	46	25.2	3.2	16.2	M10x25	60	95	113	9.2	31
ø80	13	31.5	20.5	114	59	30.5	4.5	19.5	M12x40	77	118	140	11.5	35
ø100	13	35	24	136	71	35.5	6	23	M12x40	94	137	162	13	39


  

Code	Female thread				Male thread				
Bore size (mm)	WF	A	B	LX	a'	wf	A	B	LX
ø40	17	83.7	59.5	43.5	23.5	15	105.2	59.5	43.5
ø50	18	86.7	60.5	37.5	28.5	15	112.2	60.5	37.5
ø63	18	93.2	66	40	28.5	15	118.7	66	40
ø80	20	105	73.5	43.5	35.5	18	138.5	73.5	43.5
ø100	22	118	83	49	35.5	18	149.5	83	49

- Rod side flange (FA)  
SSD2-KL4-40 to 100 -FA

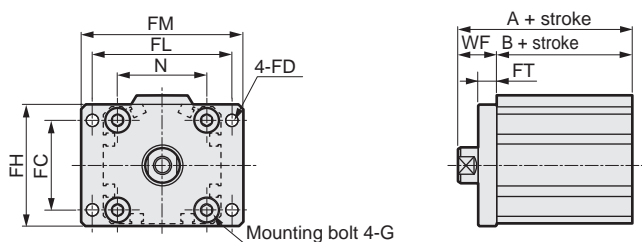


Rod end male thread




Code	Common dimensions								Female thread		Male thread				
Bore size (mm)	FC	FD	FH	FL	FM	FT	N	G	WF	A	B	a'	wf	A	B
ø40	40	5.5	54	62	72	8	40	M6x16	17	76.5	59.5	23.5	15	98	59.5
ø50	50	6.6	67	76	89	9	50	M8x20	18	78.5	60.5	28.5	15	104	60.5
ø63	60	9	80	92	108	9	60	M10x25	18	84	66	28.5	15	108.5	66
ø80	77	11	99	116	134	11	77	M12x40	20	93.5	73.5	35.5	18	127	73.5
ø100	94	11	117	136	154	11	94	M12x40	22	105	83	35.5	18	136.5	83

- Clevis bracket (CB)  
SSD2-KL4-40 to 100 -CB

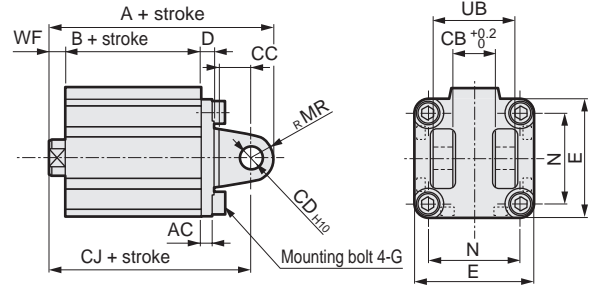

Rod end male thread




Code	Common dimensions									
Bore size (mm)	AC	CB	CC	CD	D	E	G	MR	N	UB
ø40	5	18.2	14	10	6	52	M6x16	10	40	36
ø50	6	22.2	20	14	7	64	M8x20	14	50	44
ø63	7	22.2	20	14	8	77	M10x25	14	60	44
ø80	9	28.2	27	18	10	98	M12x40	18	77	56
ø100	12	32.2	31	22	13	117	M12x40	22	94	64


  

Code	Female thread				Male thread				
Bore size (mm)	WF	A	B	CJ	a'	wf	A	B	CJ
ø40	7	98.5	59.5	88.5	23.5	5	120	59.5	86.5
ø50	8	110.5	60.5	96.5	28.5	5	136	60.5	93.5
ø63	8	118	66	104	28.5	5	143.5	66	101
ø80	10	139.5	73.5	121.5	35.5	8	173	73.5	119.5
ø100	12	162	83	140	35.5	8	193.5	83	136

- Head side flange (FB)  
SSD2-KL4-40 to 100 -FB

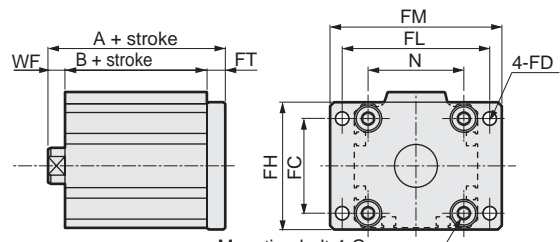


Rod end male thread



Code	Common dimensions								Female thread		Male thread				
Bore size (mm)	FC	FD	FH	FL	FM	FT	N	G	WF	A	B	a'	wf	A	B
ø40	40	5.5	54	62	72	8	40	M6x16	7	74.5	59.5	23.5	5	96	59.5
ø50	50	6.6	67	76	89	9	50	M8x20	8	77.5	60.5	28.5	5	103	60.5
ø63	60	9	80	92	108	9	60	M10x25	8	83	66	28.5	5	108.5	66
ø80	77	11	99	116	134	11	77	M12x40	10	94.5	73.5	35.5	8	128	73.5
ø100	94	11	117	136	154	11	94	M12x40	12	106	83	35.5	8	137.5	83

- SCP\*3
- CMK2
- CMA2
- SCM
- SCG
- SCA2
- SCS2
- CKV2
- CAV2/COVP/N2
- SSD2**
- SSG
- SSD
- CAT
- MDC2
- MVC
- SMG
- MSD/MSDG
- FC\*
- STK
- SRL3
- SRG3
- SRM3
- SRT3
- MRL2
- MRG2
- SM-25
- ShkAbs
- FJ
- FK
- Spd Contr
- Ending



Compact cylinder double acting/high load/  
with strong magnetic field proof switch/with coil scraper

# SSD2-KG1L4 Series

● Bore size:  $\varnothing 40/\varnothing 50/\varnothing 63/\varnothing 80/\varnothing 100$

JIS symbol



## Specifications

Item	SSD2-KG1L4					
Bore size mm	$\varnothing 40$	$\varnothing 50$	$\varnothing 63$	$\varnothing 80$	$\varnothing 100$	
Actuation	Double acting					
Working fluid	Compressed air					
Max. working pressure MPa	1.0 ( $\approx 150$ psi, 10 bar)					
Min. working pressure MPa	0.15 ( $\approx 22$ psi, 1.5 bar)			0.1 ( $\approx 15$ psi, 1 bar)		
Proof pressure MPa	1.6 ( $\approx 230$ psi, 16 bar)					
Ambient temperature $^{\circ}\text{C}$	-10 ( $14^{\circ}\text{F}$ ) to 60 ( $140^{\circ}\text{F}$ ) (no freezing)					
Port size	Rc1/8	Rc1/4			Rc3/8	
Stroke tolerance mm	$^{+2.0}_0$					
Working piston speed mm/s	50 to 500			50 to 300		
Cushion	Rubber cushion					
Lubrication	Not required (use turbine oil class 1 ISO VG32 if necessary for lubrication)					
Allowable absorbed energy J	0.63	0.98	1.56	2.51	3.92	

## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\varnothing 40$	20/25/30/35/40 45/50/75/100	100	20
$\varnothing 50$			
$\varnothing 63$			
$\varnothing 80$			
$\varnothing 100$			

\*1: The custom stroke is available in 1 mm increments. However, the total length is the same as that of the next longer standard stroke.


## Number of installed switches and min. stroke (mm)

Switch quantity	1	2	3
Switch model No.	V0		
Bore size (mm)			
$\varnothing 40$	20	20	35
$\varnothing 50$	20	20	35
$\varnothing 63$	20	20	35
$\varnothing 80$	20	20	35
$\varnothing 100$	20	20	35

## Custom stroke

### ● SSD2-KG1L4 Series

Item	Standard products	
	Standard stroke body with spacer	
Model No.	Refer to How to order.	
Description	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.	
Stroke range	Bore size	Stroke range
	40 to 100	1 to 99
Example of model No.	Model No.: SSD2-KG1L4-40-38 A +2 mm spacer is added to the SSD2-KG1L4-40-40 standard cylinder to create 38 mm stroke. B + stroke is 99.5mm.	

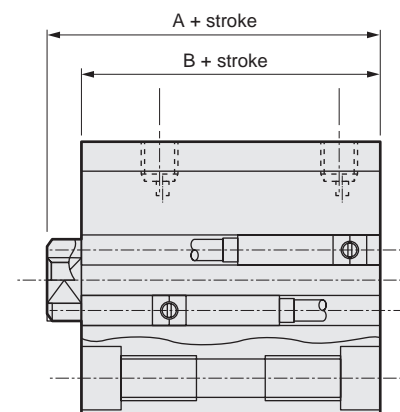

### Switch specifications

Item	2-wire reed	
	V0	
Applications	For relay, programmable controller	
Load voltage	12/24 VDC	110 VAC
Load current	5 to 50 mA	7 to 20 mA
Internal voltage drop	3.0 V or less (with 40 mA load current)	
Indicator	LED (Lit when ON)	
Leakage current	0 mA	
Weight	g 1 m:63 3 m:170 5 m:277	

### Cylinder weight table

(the weight of the switches is when there are 2 cylinder switches.)

(Unit: g)

Stroke (mm)	20	25	30	35	40	45	50	75	100
ø40	628	655	681	708	734	761	787	920	1052
ø50	960	1002	1044	1086	1128	1170	1212	1422	1632
ø63	1350	1406	1461	1517	1572	1628	1683	1961	2238
ø80	2247	2334	2421	2508	2595	2682	2769	3204	3639
ø100	3228	3342	3455	3569	3682	3796	3909	4477	5044

### Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa										
		0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø40	Push	-	1.88x10 <sup>2</sup>	2.51x10 <sup>2</sup>	3.77x10 <sup>2</sup>	5.03x10 <sup>2</sup>	6.28x10 <sup>2</sup>	7.54x10 <sup>2</sup>	8.80x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.13x10 <sup>3</sup>	1.26x10 <sup>3</sup>
	Pull	-	1.58x10 <sup>2</sup>	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>
ø50	Push	-	2.95x10 <sup>2</sup>	3.93x10 <sup>2</sup>	5.89x10 <sup>2</sup>	7.85x10 <sup>2</sup>	9.82x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.37x10 <sup>3</sup>	1.57x10 <sup>3</sup>	1.77x10 <sup>3</sup>	1.96x10 <sup>3</sup>
	Pull	-	2.47x10 <sup>2</sup>	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>
ø63	Push	3.12x10 <sup>2</sup>	4.68x10 <sup>2</sup>	6.23x10 <sup>2</sup>	9.35x10 <sup>2</sup>	1.25x10 <sup>3</sup>	1.56x10 <sup>3</sup>	1.87x10 <sup>3</sup>	2.18x10 <sup>3</sup>	2.49x10 <sup>3</sup>	2.81x10 <sup>3</sup>	3.12x10 <sup>3</sup>
	Pull	2.80x10 <sup>2</sup>	4.20x10 <sup>2</sup>	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>	2.24x10 <sup>3</sup>	2.52x10 <sup>3</sup>	2.80x10 <sup>3</sup>
ø80	Push	5.03x10 <sup>2</sup>	7.54x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.51x10 <sup>3</sup>	2.01x10 <sup>3</sup>	2.51x10 <sup>3</sup>	3.02x10 <sup>3</sup>	3.52x10 <sup>3</sup>	4.02x10 <sup>3</sup>	4.52x10 <sup>3</sup>	5.03x10 <sup>3</sup>
	Pull	4.54x10 <sup>2</sup>	6.80x10 <sup>2</sup>	9.07x10 <sup>2</sup>	1.36x10 <sup>3</sup>	1.81x10 <sup>3</sup>	2.27x10 <sup>3</sup>	2.72x10 <sup>3</sup>	3.17x10 <sup>3</sup>	3.63x10 <sup>3</sup>	4.08x10 <sup>3</sup>	4.54x10 <sup>3</sup>
ø100	Push	7.85x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.57x10 <sup>3</sup>	2.36x10 <sup>3</sup>	3.14x10 <sup>3</sup>	3.93x10 <sup>3</sup>	4.71x10 <sup>3</sup>	5.50x10 <sup>3</sup>	6.28x10 <sup>3</sup>	7.07x10 <sup>3</sup>	7.85x10 <sup>3</sup>
	Pull	7.15x10 <sup>2</sup>	1.07x10 <sup>3</sup>	1.43x10 <sup>3</sup>	2.14x10 <sup>3</sup>	2.86x10 <sup>3</sup>	3.57x10 <sup>3</sup>	4.29x10 <sup>3</sup>	5.00x10 <sup>3</sup>	5.72x10 <sup>3</sup>	6.43x10 <sup>3</sup>	7.15x10 <sup>3</sup>

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

SSD2

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending



# SSD2-KG1L4 Series

## How to order

SSD2-KG1L4-50-40-V0-D-N-LB-I

Model No.

A Bore size

B Stroke

C Switch model No.

D Switch quantity

E Option

F Mounting bracket  
\*1

G Accessory  
\*2

### ⚠ Precautions for model No. selection

\*1 : The mounting bracket is included at shipment.  
\*2 : "I" and "Y" cannot be selected together.

[Example of model No.]

**SSD2-KG1L4-50-40-V0-D-N-LB-I**

Model: Compact cylinder  
Double acting/high load/with coil scraper/with strong magnetic field proof switch

- A Bore size :  $\phi 50$  mm
- B Stroke : 40 mm
- C Switch model No. : Reed V0 switch,  
Lead wire length 1 m
- D Switch quantity : 2 pcs. included
- E Option : Rod end male thread
- F Mounting bracket : Axial foot
- G Accessory : Rod eye

## How to order mounting bracket

Bore size (mm)	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$
Mounting bracket					
Flange (FB)	SSD2-FA-40	SSD2-FA-50	SSD2-FA-63	SSD2-FA-80	SSD2-FA-100
Clevis bracket (CB)	SSD2-CB-40	SSD2-CB-50	SSD2-CB-63	SSD2-CB-80	SSD2-CB-100

\*1: The foot mounting bracket is provided as 2 pcs./set.

Code	Description				
<b>A Bore size (mm)</b>					
40	$\phi 40$				
50	$\phi 50$				
63	$\phi 63$				
80	$\phi 80$				
100	$\phi 100$				
<b>B Stroke (mm)</b>					
Bore size		Stroke *1	Custom stroke *2		
$\phi 40$ to $\phi 100$		20 to 100	In 1 mm increments		
*1: Refer to page 1030 for the number of installed switches and the min. stroke. *2: The total length is the same as that of the next longer standard stroke.					
<b>C Switch model No.</b>					
Lead wire Straight	Contact	Voltage		Indicator	Lead wire
		AC	DC		
V0*	Reed	●	●	1-color LED	2-wire
* Lead wire length					
Blank	1 m (standard)				
3	3 m (option)				
5	5 m (option)				
<b>D Switch quantity</b>					
R	1 on rod side				
H	1 on head side				
D	2				
T	3				
<b>E Option</b>					
Blank	Rod end female thread				
N	Rod end male thread				
<b>F Mounting bracket</b>					
Blank	Without mounting bracket				
LB	Axial foot (made-to-order product)				
CB	Clevis bracket (pin and snap ring included)				
FA	Rod side flange (made-to-order product)				
FB	Head side flange				
<b>G Accessory (available when rod end male thread "N" is selected)</b>					
I	Rod eye				
Y	Rod clevis (pin and snap ring included)				

## How to order switch

SW - V0


Switch model No.  
(Item C above)

# SSD2-KG1L4 Series

Double acting/high load/with strong magnetic field proof switch/coil scraper

## Internal structure and parts list

● SSD2-KG1L4-40 to 100

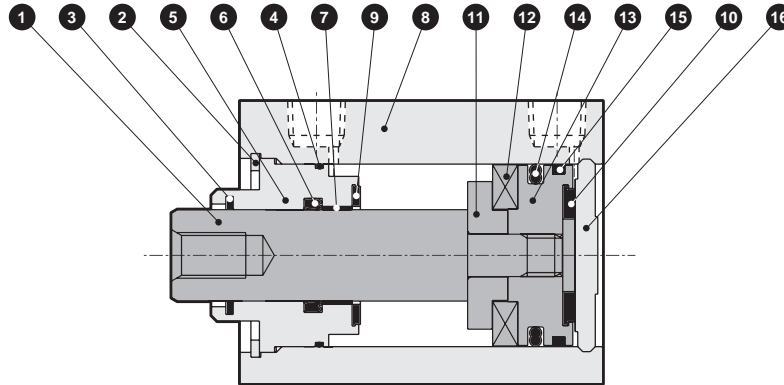

No.	Part name	Material	Remarks	No.	Part name	Material	Remarks
1	Piston rod	Steel	Industrial chrome plating	9	Cushion rubber R	Urethane rubber	
2	C-snap ring for hole	Steel	Zinc phosphate	10	Cushion rubber H	Urethane rubber	
3	Coil scraper	Phosphor bronze		11	Spacer	Aluminum alloy	
4	Rod metal gasket	Nitrile rubber		12	Magnet	Plastic	
5	Rod metal	ø40, ø50: Special aluminum ø63 to ø100: Aluminum alloy	ø40, ø50: Alumite ø63 to ø100: Chromate	13	Piston	Aluminum alloy	Chromate
6	Rod packing	Nitrile rubber		14	Piston packing	Nitrile rubber	
7	Bush	Oiles drymet		15	Wear ring	Polyacetal resin	
8	Body	Aluminum alloy	Hard alumite	16	Cover	Aluminum alloy	Alumite

## Repair parts list

Part name	Kit No.	Repair parts No.
Bore size (mm)		
ø40	SSD2-KG1-40K	
ø50	SSD2-KG1-50K	
ø63	SSD2-KG1-63K	
ø80	SSD2-KG1-80K	
ø100	SSD2-KG1-100K	

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr


Ending

# SSD2-KG1L4 Series

## Dimensions

● SSD2-KG1L4-40 to 100

● Rod end male thread

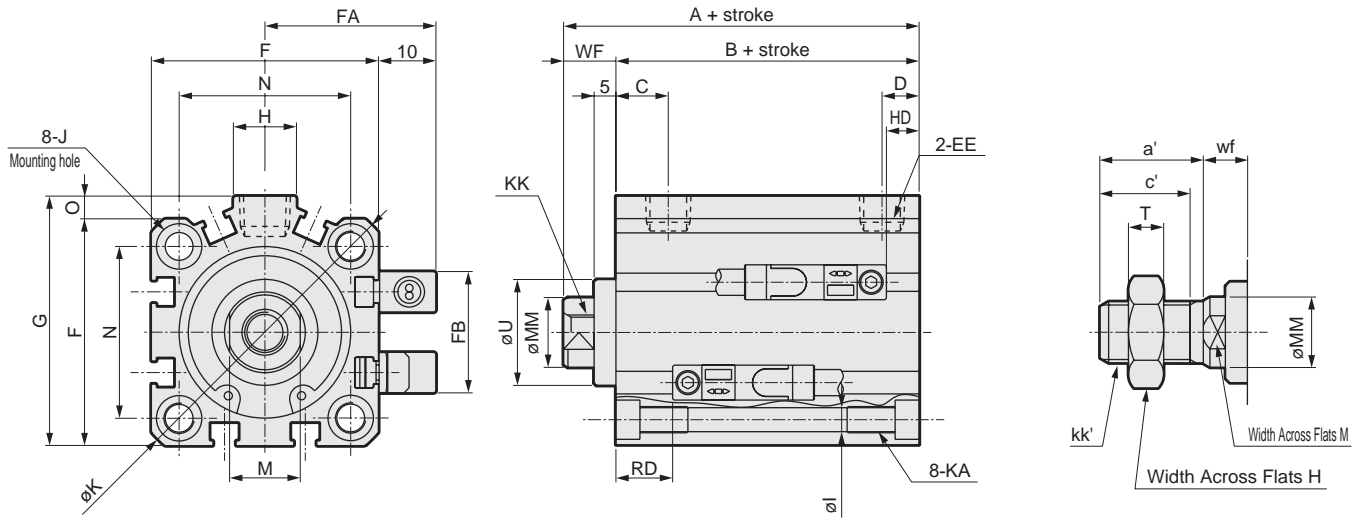

Code	A	B	C	D	EE	F	FA	FB	G	H	I	J
Code												
Bore size (mm)												
ø40	71.5	59.5	12	8.5	Rc1/8	52	36	31	57	15	5.5	Spot face ø9 depth 5.5
ø50	73.5	60.5	10.5	10.5	Rc1/4	64	42	32	71	18	6.9	Spot face ø11 depth 6.5
ø63	79	66	13	11	Rc1/4	77	48.5	32	84	23	8.7	Spot face ø14 depth 9
ø80	88.5	73.5	16	13	Rc3/8	98	59	32	104	31	10.5	Spot face ø17.5 depth 11
ø100	100	83	23	15	Rc3/8	117	68.5	32	123.5	38	10.5	Spot face ø17.5 depth 11

Code	K	KA	KK	M	MM	N	O	U	WF	HD	RD
Code											
Bore size (mm)											
ø40	69	M6 depth 11	M8 depth 13	14	16	40	5	28 h9	12	12.5	18
ø50	86	M8 depth 13	M10 depth 15	17	20	50	7	35 h9	13	13.5	18
ø63	103	M10 depth 25	M10 depth 15	17	20	60	7	35 h9	13	18.5	18.5
ø80	132	M12 depth 28	M16 depth 21	22	25	77	6	43 h9	15	23.5	21
ø100	156	M12 depth 28	M20 depth 27	27	30	94	6.5	59 h9	17	29	25

\*1: The A + stroke and B + stroke when using a custom stroke are the same as those when using the next longer standard stroke.

\*2: For dimensions of individual accessories, refer to pages 1046 to 1049.

● Rod end male thread



Code	a'	c'	H	kk'	M	MM	T	wf
Code								
Bore size (mm)								
ø40	23.5	20.5	22	M 14 x 1.5	14	16	8	10
ø50	28.5	26	27	M 18 x 1.5	17	20	11	10
ø63	28.5	26	27	M 18 x 1.5	17	20	11	10
ø80	35.5	32.5	32	M 22 x 1.5	22	25	13	13
ø100	35.5	32.5	41	M 26 x 1.5	27	30	16	13

# SSD2-KG1L4 Series


Double acting/high load/with AC magnetic field proof switch/coil scraper

## Dimensions with mounting bracket

- Clevis bracket (CB)  
SSD2-KG1L4-40 to 100 -CB


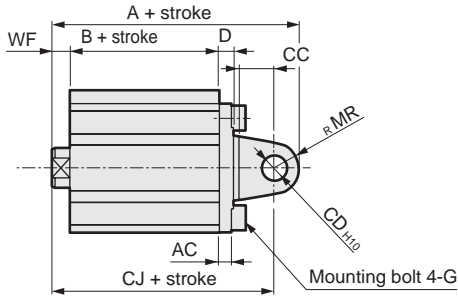


Rod end male thread




Code	Common dimensions										Female thread			Male thread					
	AC	CB	CC	CD	D	E	G	MR	N	UB	WF	A	B	CJ	a'	wf	A	B	CJ
ø40	5	18.2	14	10	6	52	M6x16	10	40	36	7	103.5	59.5	93.5	23.5	5	125	59.5	91.5
ø50	6	22.2	20	14	7	64	M8x20	14	50	44	8	115.5	60.5	101.5	28.5	5	141	60.5	98.5
ø63	7	22.2	20	14	8	77	M10x25	14	60	44	8	123	66	109	28.5	5	148.5	66	106
ø80	9	28.2	27	18	10	98	M12x40	18	77	56	10	144.5	73.5	126.5	35.5	8	178	73.5	124.5
ø100	12	32.2	31	22	13	117	M12x40	22	94	64	12	167	83	145	35.5	8	198.5	83	141

- Head side flange (FB)  
SSD2-KG1L4-40 to 100 -FB




Mounting bolt 4-G  
ø32 to ø63: Hexagon socket button head bolt  
ø80/ø100: Special bolt

Rod end male thread



Code	Common dimensions								Female thread			Male thread			
	FC	FD	FH	FL	FM	FT	N	G	WF	A	B	a'	wf	A	B
ø40	40	5.5	54	62	72	8	40	M6x16	7	79.5	59.5	23.5	5	101	59.5
ø50	50	6.6	67	76	89	9	50	M8x20	8	82.5	60.5	28.5	5	108	60.5
ø63	60	9	80	92	108	9	60	M10x25	8	88	66	28.5	5	113.5	66
ø80	77	11	99	116	134	11	77	M12x40	10	99.5	73.5	35.5	8	133	73.5
ø100	94	11	117	136	154	11	94	M12x40	12	111	83	35.5	8	142.5	83



Compact cylinder double acting/single rod

# SSD2-P7\*/P5\* Series

● Bore size:  $\phi 12/\phi 16/\phi 20/\phi 25/\phi 32/\phi 40/\phi 50/\phi 63/\phi 80/\phi 100/\phi 125/\phi 140/\phi 160$

JIS symbol



## Specifications

Item	SSD2-P7*/P5* SSD2-L-P7*/P5* (with switch)														
	mm	$\phi 12$	$\phi 16$	$\phi 20$	$\phi 25$	$\phi 32$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$	$\phi 125$	$\phi 140$	$\phi 160$	
Bore size	mm	$\phi 12$	$\phi 16$	$\phi 20$	$\phi 25$	$\phi 32$	$\phi 40$	$\phi 50$	$\phi 63$	$\phi 80$	$\phi 100$	$\phi 125$	$\phi 140$	$\phi 160$	
Actuation		Double acting													
Working fluid		Compressed air													
Max. working pressure	MPa	1.0 ( $\approx 150$ psi, 10 bar)													
Min. working pressure	MPa	0.15 ( $\approx 22$ psi, 1.5 bar)						0.1 ( $\approx 15$ psi, 1 bar)							
Proof pressure	MPa	1.6 ( $\approx 230$ psi, 16 bar)													
Ambient temperature	$^{\circ}\text{C}$	-10 ( $14^{\circ}\text{F}$ ) to 60 ( $140^{\circ}\text{F}$ ) (no freezing)													
Port size		M5				Rc1/8 *1			Rc1/4			Rc3/8			
Pressure relief port size								M5			Rc3/8				
Stroke tolerance	mm							$^{+1.0}$ 0			$^{+2.0}$ 0				
Working piston speed	mm/s	50 to 500						50 to 300							
Cushion		None													
Lubrication		Not available													
Allowable absorbed energy	J	0.004	0.01	0.016	0.021	0.025	0.092	0.1	0.12	0.27	0.56	6.52	6.52	7.78	

\*1: The  $\phi 32$  bore size with a 5 mm stroke and without a switch has a port size of M5.

## Stroke

Bore size (mm)	Standard stroke (mm)	Max. stroke (mm)	Min. stroke (mm)
$\phi 12$	5/10/15/20	30	1(5) The value in ( ) is for types with one or two switches.
$\phi 16$	25/30		
$\phi 20$	5/10/15/20/25	50	
$\phi 25$	30/35/40/45/50		
$\phi 32$	5/10/15/20/25/30	100	
$\phi 40$	35/40/45/50/75/100		
$\phi 50$	10/15/20		
$\phi 63$	25/30/35		
$\phi 80$	40/45/50	300	
$\phi 100$	75/100		
$\phi 125$	10/20/30/40/50	300	
$\phi 140$	75/100/125/150		
$\phi 160$	175/200/250/300		

\*1: Availability of custom stroke

Custom stroke is available in 1 mm increments. Total length when using a custom stroke is different between  $\phi 12$  to  $\phi 100$  and  $\phi 125$  to  $\phi 160$ . Please be careful.

( $\phi 12$  to  $\phi 100$ ) The dimensions of the total length with the custom stroke are the same as the next longer standard stroke.

( $\phi 125$  to  $\phi 160$ ) Total length dimension with custom stroke is handled as custom stroke dedicated length.

\*2: Less than 5 mm with 1-color LED switch and less than 10 mm with 2-color LED, off-delay, T1\* or T8\* switch are not available.

## Switch specifications (F-switch)


● 1-color/2-color LED

Item	2-wire proximity		3-wire proximity		2-wire proximity		3-wire proximity		
	F2S	F3S	F2H/F2V	F2YH/F2YV	F3H/F3V	F3PH/F3PV (made to order)	F3YH/F3YV		
Applications	Dedicated for programmable controller		For programmable controller, relay		Dedicated for programmable controller		For programmable controller, relay		
Output method	-		NPN output		-		NPN output	PNP output	NPN output
Power supply voltage	-		10 to 28 VDC		-		10 to 28 VDC	4.5 to 28 VDC	10 to 28 VDC
Load voltage	10 to 30 VDC		30 VDC or less		10 to 30 VDC		24 VDC $\pm 10\%$		30 VDC or less
Load current	5 to 20 mA		50 mA or less		5 to 20 mA		50 mA or less		
Indicator	LED (Lit when ON)				Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Yellow LED (Lit when ON)		Red/green LED (Lit when ON)
Leakage current	1 mA or less		10 $\mu\text{A}$ or less		1 mA or less		10 $\mu\text{A}$ or less		
Weight	g				1 m:10	3 m:29			

## Custom stroke

● SSD2-P7\*, P5\* Series

Item	Standard products	
	Standard stroke body with spacer	
Model No.	Refer to How to order.	
Description	A spacer is added to the standard stroke body to adjust the stroke in 1 mm increments.	
Stroke range	Bore size	Stroke range
	12/16	1 to 29
	20 to 25	1 to 49
	32 to 100	1 to 99
Example of model No.	Model No.: SSD2-32-38-P7 A +2 mm spacer is added to the SSD2-32-40-P7 standard cylinder to create 38 mm stroke. B + stroke is 73mm.	

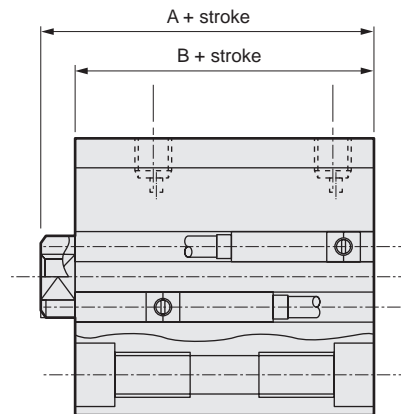

### Switch specifications (T-switch)

- 1-color/2-color LED/for AC magnetic field proof

Item	2-wire proximity		2-wire proximity				3-wire proximity				2-wire reed						2-wire proximity	
	T1H/T1V	T2H/T2V	T2YH/ T2YV	T2WH/ T2WV	T3H/ T3V	T3PH/ T3PV	T3YH/ T3YV	T3WH/ T3WV	T0H/T0V	T5H/T5V		T8H/T8V		T2YD(*4)	T2YDT			
Applications	For programmable controller, relay, compact solenoid valve		Dedicated for programmable controller				For programmable controller, relay				For programmable controller, relay		For programmable controller, relay, IC circuit (no indicator lamp), serial connection		For programmable controller, relay		Dedicated for programmable controller	
Output method	-				NPN output	PNP output	NPN output	NPN output	-									
Pwr. supp. V.	-				10 to 28 VDC				-									
Load voltage	85 to 265 VAC		10 to 30 VDC		24 VDC ±10%		30 VDC or less				12/24 VDC	100/110 VAC	5/12/24 VDC	100/110 VAC	12/24 VDC	110 VAC	220 VAC	24 VDC ±10%
Load current	5 to 100 mA		5 to 20 mA (*3)				100 mA or less		50 mA or less		5 to 50 mA	7 to 20 mA	50 mA or less	20 mA or less	5 to 50 mA	7 to 20 mA	7 to 10 mA	5 to 20 mA
Indicator	LED (Lit when ON)	LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)	Yellow LED (Lit when ON)	Red/green LED (Lit when ON)	Red/green LED (Lit when ON)	LED (Lit when ON)		No indicator lamp		LED (Lit when ON)		Red/green LED (Lit when ON)			
Leakage current	≤ 1 mA at 100 VAC, ≤ 2 mA at 200 VAC		1 mA or less				10 µA or less				0 mA						1 mA or less	
Weight g	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:33 3 m:87 5 m:142	1 m:18 3 m:49 5 m:80	1 m:18 3 m:49 5 m:80		1 m:33 3 m:87 5 m:142		1 m:18 3 m:49 5 m:80		1 m:18 3 m:49 5 m:80			1 m:33 3 m:87 5 m:142		1 m:61 3 m:166 5 m:272		

\*1: Refer to Ending Page 1 for detailed switch specifications and dimensions.

\*2: Switches other than the above models, such as switches with connectors, are also available. Refer to Ending Page 1.

\*3: The max. load current is 20 mA at 25°C. The current is lower than 20 mA if the operating ambient temperature around the switch is higher than 25°C. (5 to 10 mA at 60°C)

\*4: Switch for AC magnetic field (T2YD/T2YDT) cannot be used in DC magnetic field.

\*5: The F-switch uses a bend-resistant lead wire.

### Cylinder weight table (the weight of the switches is when there are 2 cylinder switches.)

- ø12 to ø100

(Unit: g)

Stroke (mm)	5		10		15		20		25		30		35	
	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch
ø12	66	107	74	116	83	125	91	133	100	142	108	150	-	-
ø16	92	138	103	148	113	158	124	169	135	180	146	191	-	-
ø20	130	185	142	217	155	230	168	243	180	255	193	268	206	281
ø25	181	272	196	287	212	303	228	319	244	335	259	350	275	366
ø32	254	368	276	390	298	412	320	434	341	455	363	477	385	499
ø40	373	516	400	543	426	569	453	596	480	623	506	649	533	676
ø50	-	-	691	885	733	927	775	969	817	1011	860	1054	902	1096
ø63	-	-	939	1218	994	1273	1049	1328	1104	1383	1159	1438	1215	1494
ø80	-	-	1911	2324	1998	2411	2084	2497	2171	2584	2257	2670	2344	2757
ø100	-	-	2625	3192	2739	3306	2852	3419	2966	3533	3080	3647	3194	3761

Stroke (mm)	40		45		50		75		100	
	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch
ø12	-	-	-	-	-	-	-	-	-	-
ø16	-	-	-	-	-	-	-	-	-	-
ø20	219	294	232	307	245	320	-	-	-	-
ø25	291	382	307	398	322	413	-	-	-	-
ø32	407	521	429	543	450	564	558	672	665	779
ø40	559	702	586	729	612	755	745	888	877	1020
ø50	944	1138	986	1180	1028	1222	1238	1432	1448	1642
ø63	1270	1549	1325	1604	1380	1659	1655	1934	1930	2209
ø80	2431	2844	2518	2931	2604	3017	3037	3450	3469	3882
ø100	3307	3874	3421	3988	3535	4102	4105	4672	4675	5242

- ø125 to ø160

(Unit: kg)

Stroke (mm)	10		20		30		40		50		75		100	
	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch
ø125	6.12	6.22	6.39	6.49	6.65	6.75	6.92	7.02	7.18	7.28	7.90	8.25	8.51	8.61
ø140	8.50	8.61	8.80	8.91	9.11	9.22	9.41	9.52	9.72	9.83	10.54	10.94	11.24	11.35
ø160	11.86	11.98	12.24	12.36	12.62	12.74	13.00	13.12	13.38	13.50	14.39	14.90	15.28	15.40

Stroke (mm)	125		150		175		200		250		300	
	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch	No switch	With switch
ø125	9.18	9.28	9.84	9.94	10.51	10.61	11.17	11.27	12.50	12.60	13.83	13.93
ø140	12.00	12.11	12.76	12.87	13.52	13.63	14.28	14.39	15.80	15.91	17.32	17.43
ø160	16.23	16.35	17.18	17.30	18.13	18.25	19.08	19.20	20.98	21.10	22.88	23.00

Note: Refer to Ending Pages 16 and 22 for weight of switches with 3 m and 5 m switch lead wire lengths.

# SSD2-P7\*/P5\* Series

## How to order

No switch (without magnet for switch)

**SSD2-12-5-N-P7**

With switch (built-in magnet for switch)

**SSD2-L-12-5-T0H-R-N-P7**

**A** Model No.

**B** Bore size

**C** Stroke

\*1

**D** Switch

\* indicates the lead wire length.

\*2

\*3

\*4

\*5

**E** Switch quantity

**F** Option

**G** Clean-room specifications  
\*6

## ⚠ Precautions for model No. selection

\*1 : Availability of custom stroke

Custom stroke is available in 1 mm increments. (Less than 5 mm with switch is not available.) Total length when using a custom stroke is different between  $\phi 12$  to  $\phi 100$  and  $\phi 125$  to  $\phi 160$ . Please be careful.

[ $\phi 12$  to  $\phi 100$ ]

The dimensions of the total length with the custom stroke are the same as the next longer standard stroke.

[ $\phi 125$  to  $\phi 160$ ]

Dedicated custom stroke.

\*2 : The T2YD\* switch cannot be mounted on the  $\phi 12$  and  $\phi 16$  bore sizes.

\*3 : The T8\* switch cannot be mounted on the  $\phi 12$  to  $\phi 32$  bore sizes.

\*4 : The F-switch can only be mounted on the piping port surface of bore sizes  $\phi 20$  and  $\phi 25$ .

\*5 : The F-switch with L type lead wire on  $\phi 20$  models cannot be selected on strokes of 15 mm or under.

\*6 : "P5" and "P51" are made-to-order products.

\*7 : Refer to pages 750 and 751 for combinations of variations/options.

\*8 : F-switch cannot be selected.

## [Example of model No.]

### SSD2-L-12-5-T0H-R-NP7

- A** Model : Compact cylinder, standard
- B** Bore size :  $\phi 12$  mm
- C** Stroke : 5 mm
- D** Switch model No. : Reed switch T0H, lead wire length 1 m
- E** Switch quantity : 1 on rod side
- F** Option : Rod end male thread
- G** Clean-room specifications : Exhaust port

Code	Description
<b>A Model No.</b>	
SSD2	Double acting/single rod
SSD2-L	Double acting/single rod/with switch

<b>B Bore size (mm)</b>	
12	$\phi 12$
16	$\phi 16$
20	$\phi 20$
25	$\phi 25$
32	$\phi 32$
40	$\phi 40$
50	$\phi 50$
63	$\phi 63$
80	$\phi 80$
100	$\phi 100$
125	$\phi 125$
140	$\phi 140$
160	$\phi 160$

<b>C Stroke (mm)</b>
Refer to the stroke table on the following page.

<b>D Switch model No.</b>		Voltage	Indicator	Lead wire	Bore size													
Lead wire Straight	Lead wire L-shaped				Contact	ACDC	12	16	20	25	32	40	50	63	80	100	125	140
-	F2S	Proximity	●	1-color LED	2-wire			●	●									
-	F3S					3-wire			●	●								
F2H*	F2V*	Proximity	●	1-color LED (PNP output)	2-wire			●	●									
F3H*	F3V*					3-wire			●	●								
F3PH*	F3PV*	Proximity	●	2-color LED	3-wire			●	●									
F2YH*	F2YV*					2-wire			●	●								
F3YH*	F3YV*	Proximity	●	1-color LED	2-wire			●	●									
T0H*	T0V*					3-wire			●	●								
T5H*	T5V*	Reed	●	No indicator lamp	2-wire			●	●									
T8H*	T8V*					1-color LED												
T1H*	T1V*	Proximity	●	1-color LED	2-wire			●	●									
T2H*	T2V*					3-wire			●	●								
T3H*	T3V*	Proximity	●	1-color LED (PNP output) (custom)	3-wire			●	●									
T3PH*	T3PV*					2-wire			●	●								
T2WH*	T2WV*	Proximity	●	2-color LED	2-wire			●	●									
T2YH*	T2YV*					3-wire			●	●								
T3WH*	T3WV*	Proximity	●	2-color LED	3-wire			●	●									
T3YH*	T3YV*					2-wire			●	●								
T2YD*	-	Proximity	●	2-color LED	2-wire			●	●									
T2YDT*	-					AC magnetic field			●	●								
T2JH*	T2JV*	Proximity	●	1-color LED off-delay	2-wire			●	●									

<b>* Lead wire length</b>	
Blank	1 m (standard)
3	3 m (option)
5	5 m (option)

<b>E Switch quantity</b>	
R	1 on rod side
H	1 on head side
D	2

<b>F Option</b>	
Blank	Rod end female thread
N	Rod end male thread

<b>G Clean-room specifications</b>		
	Structure	Material limitations
P7	Exhaust port	-
P71	Vacuum treatment	-
P5	Exhaust port	Copper/silicon/halogen-based materials (fluorine, chlorine, bromine) prohibited (custom)
P51	Vacuum treatment	Copper/silicon/halogen-based materials (fluorine, chlorine, bromine) prohibited (custom)

[Stroke table]

Stroke (mm)	Applicable bore size													
	ø12	ø16	ø20	ø25	ø32	ø40	ø50	ø63	ø80	ø100	ø125	ø140	ø160	
Standard stroke	5	●	●	●	●	●	●							
	10	●	●	●	●	●	●	●	●	●	●	●	●	●
	15	●	●	●	●	●	●	●	●	●	●			
	20	●	●	●	●	●	●	●	●	●	●	●	●	●
	25	●	●	●	●	●	●	●	●	●	●			
	30	●	●	●	●	●	●	●	●	●	●	●	●	●
	35			●	●	●	●	●	●	●	●			
	40			●	●	●	●	●	●	●	●	●	●	●
	45			●	●	●	●	●	●	●	●			
	50			●	●	●	●	●	●	●	●	●	●	●
	75					●	●	●	●	●	●	●	●	●
	100					●	●	●	●	●	●	●	●	●
	125										●	●	●	●
	150										●	●	●	●
	175										●	●	●	●
	200										●	●	●	●
	250										●	●	●	●
300										●	●	●	●	
Min. stroke (mm)	1													
Max. stroke (mm)	30		50		100						300			
Custom stroke *1	In 1 mm increments													

Theoretical thrust table

(Unit: N)

Bore size (mm)	Operating direction	Working pressure MPa										
		0.1	0.15	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0
ø12	Push	-	17.0	22.6	33.9	45.2	56.5	67.9	79.2	90.5	1.02x10 <sup>2</sup>	1.13x10 <sup>2</sup>
	Pull	-	12.7	17.0	25.4	33.9	42.4	50.9	59.4	67.9	76.3	84.8
ø16	Push	-	30.2	40.2	60.3	80.4	1.01x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.61x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.01x10 <sup>2</sup>
	Pull	-	22.6	30.2	45.2	60.3	75.4	90.5	1.06x10 <sup>2</sup>	1.21x10 <sup>2</sup>	1.36x10 <sup>2</sup>	1.51x10 <sup>2</sup>
ø20	Push	-	47.1	62.8	94.2	1.26x10 <sup>2</sup>	1.57x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.20x10 <sup>2</sup>	2.51x10 <sup>2</sup>	2.83x10 <sup>2</sup>	3.14x10 <sup>2</sup>
	Pull	-	35.3	47.1	70.7	94.2	1.18x10 <sup>2</sup>	1.41x10 <sup>2</sup>	1.65x10 <sup>2</sup>	1.88x10 <sup>2</sup>	2.12x10 <sup>2</sup>	2.36x10 <sup>2</sup>
ø25	Push	-	73.6	98.2	1.47x10 <sup>2</sup>	1.96x10 <sup>2</sup>	2.45x10 <sup>2</sup>	2.95x10 <sup>2</sup>	3.44x10 <sup>2</sup>	3.93x10 <sup>2</sup>	4.42x10 <sup>2</sup>	4.91x10 <sup>2</sup>
	Pull	-	56.7	75.6	1.13x10 <sup>2</sup>	1.51x10 <sup>2</sup>	1.89x10 <sup>2</sup>	2.27x10 <sup>2</sup>	2.64x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.40x10 <sup>2</sup>	3.78x10 <sup>2</sup>
ø32	Push	-	1.21x10 <sup>2</sup>	1.61x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.22x10 <sup>2</sup>	4.02x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.63x10 <sup>2</sup>	6.43x10 <sup>2</sup>	7.24x10 <sup>2</sup>	8.04x10 <sup>2</sup>
	Pull	-	90.5	1.21x10 <sup>2</sup>	1.81x10 <sup>2</sup>	2.41x10 <sup>2</sup>	3.02x10 <sup>2</sup>	3.62x10 <sup>2</sup>	4.22x10 <sup>2</sup>	4.83x10 <sup>2</sup>	5.43x10 <sup>2</sup>	6.03x10 <sup>2</sup>
ø40	Push	-	1.88x10 <sup>2</sup>	2.51x10 <sup>2</sup>	3.77x10 <sup>2</sup>	5.03x10 <sup>2</sup>	6.28x10 <sup>2</sup>	7.54x10 <sup>2</sup>	8.80x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.13x10 <sup>3</sup>	1.26x10 <sup>3</sup>
	Pull	-	1.58x10 <sup>2</sup>	2.11x10 <sup>2</sup>	3.17x10 <sup>2</sup>	4.22x10 <sup>2</sup>	5.28x10 <sup>2</sup>	6.33x10 <sup>2</sup>	7.39x10 <sup>2</sup>	8.44x10 <sup>2</sup>	9.50x10 <sup>2</sup>	1.06x10 <sup>3</sup>
ø50	Push	-	2.95x10 <sup>2</sup>	3.93x10 <sup>2</sup>	5.89x10 <sup>2</sup>	7.85x10 <sup>2</sup>	9.82x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.37x10 <sup>3</sup>	1.57x10 <sup>3</sup>	1.77x10 <sup>3</sup>	1.96x10 <sup>3</sup>
	Pull	-	2.47x10 <sup>2</sup>	3.30x10 <sup>2</sup>	4.95x10 <sup>2</sup>	6.60x10 <sup>2</sup>	8.25x10 <sup>2</sup>	9.90x10 <sup>2</sup>	1.15x10 <sup>3</sup>	1.32x10 <sup>3</sup>	1.48x10 <sup>3</sup>	1.65x10 <sup>3</sup>
ø63	Push	3.12x10 <sup>2</sup>	4.68x10 <sup>2</sup>	6.23x10 <sup>2</sup>	9.35x10 <sup>2</sup>	1.25x10 <sup>3</sup>	1.56x10 <sup>3</sup>	1.87x10 <sup>3</sup>	2.18x10 <sup>3</sup>	2.49x10 <sup>3</sup>	2.81x10 <sup>3</sup>	3.12x10 <sup>3</sup>
	Pull	2.80x10 <sup>2</sup>	4.20x10 <sup>2</sup>	5.61x10 <sup>2</sup>	8.41x10 <sup>2</sup>	1.12x10 <sup>3</sup>	1.40x10 <sup>3</sup>	1.68x10 <sup>3</sup>	1.96x10 <sup>3</sup>	2.24x10 <sup>3</sup>	2.52x10 <sup>3</sup>	2.80x10 <sup>3</sup>
ø80	Push	5.03x10 <sup>2</sup>	7.54x10 <sup>2</sup>	1.01x10 <sup>3</sup>	1.51x10 <sup>3</sup>	2.01x10 <sup>3</sup>	2.51x10 <sup>3</sup>	3.02x10 <sup>3</sup>	3.52x10 <sup>3</sup>	4.02x10 <sup>3</sup>	4.52x10 <sup>3</sup>	5.03x10 <sup>3</sup>
	Pull	4.54x10 <sup>2</sup>	6.80x10 <sup>2</sup>	9.07x10 <sup>2</sup>	1.36x10 <sup>3</sup>	1.81x10 <sup>3</sup>	2.27x10 <sup>3</sup>	2.72x10 <sup>3</sup>	3.17x10 <sup>3</sup>	3.63x10 <sup>3</sup>	4.08x10 <sup>3</sup>	4.54x10 <sup>3</sup>
ø100	Push	7.85x10 <sup>2</sup>	1.18x10 <sup>3</sup>	1.57x10 <sup>3</sup>	2.36x10 <sup>3</sup>	3.14x10 <sup>3</sup>	3.93x10 <sup>3</sup>	4.71x10 <sup>3</sup>	5.50x10 <sup>3</sup>	6.28x10 <sup>3</sup>	7.07x10 <sup>3</sup>	7.85x10 <sup>3</sup>
	Pull	7.15x10 <sup>2</sup>	1.07x10 <sup>3</sup>	1.43x10 <sup>3</sup>	2.14x10 <sup>3</sup>	2.86x10 <sup>3</sup>	3.57x10 <sup>3</sup>	4.29x10 <sup>3</sup>	5.00x10 <sup>3</sup>	5.72x10 <sup>3</sup>	6.43x10 <sup>3</sup>	7.15x10 <sup>3</sup>
ø125	Push	1.23x10 <sup>3</sup>	1.84x10 <sup>3</sup>	2.45x10 <sup>3</sup>	3.68x10 <sup>3</sup>	4.91x10 <sup>3</sup>	6.14x10 <sup>3</sup>	7.36x10 <sup>3</sup>	8.59x10 <sup>3</sup>	9.82x10 <sup>3</sup>	1.10x10 <sup>4</sup>	1.23x10 <sup>4</sup>
	Pull	1.13x10 <sup>3</sup>	1.70x10 <sup>3</sup>	2.26x10 <sup>3</sup>	3.39x10 <sup>3</sup>	4.52x10 <sup>3</sup>	5.65x10 <sup>3</sup>	6.79x10 <sup>3</sup>	7.92x10 <sup>3</sup>	9.05x10 <sup>3</sup>	1.02x10 <sup>4</sup>	1.13x10 <sup>4</sup>
ø140	Push	1.54x10 <sup>3</sup>	2.31x10 <sup>3</sup>	3.08x10 <sup>3</sup>	4.62x10 <sup>3</sup>	6.16x10 <sup>3</sup>	7.70x10 <sup>3</sup>	9.24x10 <sup>3</sup>	1.08x10 <sup>4</sup>	1.23x10 <sup>4</sup>	1.39x10 <sup>4</sup>	1.54x10 <sup>4</sup>
	Pull	1.44x10 <sup>3</sup>	2.16x10 <sup>3</sup>	2.89x10 <sup>3</sup>	4.33x10 <sup>3</sup>	5.77x10 <sup>3</sup>	7.22x10 <sup>3</sup>	8.66x10 <sup>3</sup>	1.01x10 <sup>4</sup>	1.15x10 <sup>4</sup>	1.30x10 <sup>4</sup>	1.44x10 <sup>4</sup>
ø160	Push	2.01x10 <sup>3</sup>	3.02x10 <sup>3</sup>	4.02x10 <sup>3</sup>	6.03x10 <sup>3</sup>	8.04x10 <sup>3</sup>	1.01x10 <sup>4</sup>	1.21x10 <sup>4</sup>	1.41x10 <sup>4</sup>	1.61x10 <sup>4</sup>	1.81x10 <sup>4</sup>	2.01x10 <sup>4</sup>
	Pull	1.88x10 <sup>3</sup>	2.83x10 <sup>3</sup>	3.77x10 <sup>3</sup>	5.65x10 <sup>3</sup>	7.54x10 <sup>3</sup>	9.42x10 <sup>3</sup>	1.13x10 <sup>4</sup>	1.32x10 <sup>4</sup>	1.51x10 <sup>4</sup>	1.70x10 <sup>4</sup>	1.88x10 <sup>4</sup>

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/COVP/N2

**SSD2**

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd Contr

Ending



# SSD2-P7\*/P5\* Series



## Dimensions

● SSD2-L-12 to 25-P7\*/P5\* (with switch, TOH/V, T5H/V, T2H/V, T3H/V)

● Rod end male thread


ø12/ø16

5 mm stroke

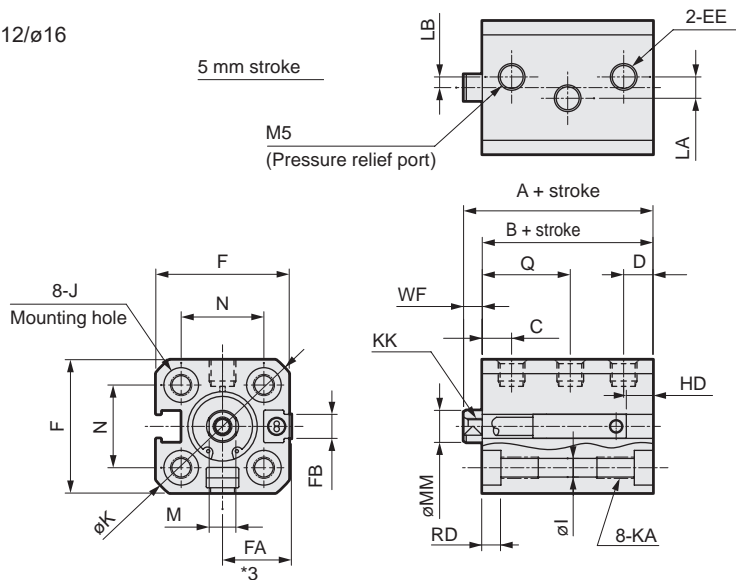

● SSD2-12 to 25-P7\*/P5\* (without switch)

ø20/ø25

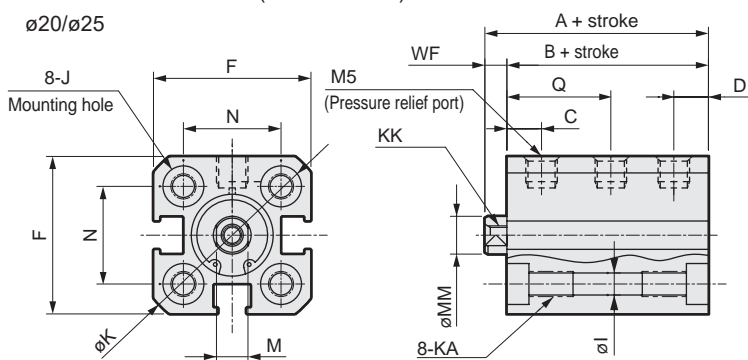

Code	No switch		Common dimensions with switch																		
	A <sup>*1</sup>	B <sup>*1</sup>	A	B	C	D	LA		LB		Q <sup>*4</sup>	EE	F	FA <sup>*3</sup>	FB	I	J	K	KA	KK	
	≤5 St	Over 5 st	≤5 St	Over 5 st	Q <sup>*4</sup>	EE	F	FA <sup>*3</sup>	FB	I	J	K	KA	KK							
SRL3	ø12	30.5	27	35.5	32	5.5	5.5	4	0	2	0	16.5(16)	M5	25	13(16.5)	4.5	3.5	6.5 spot face depth 3.5	32	M4 depth 7	M3 depth 6
	ø16	30.5	27	35.5	32	5.5	5.5	6	0	0	0	16.5	M5	29	15(18.5)	4.5	3.5	6.5 spot face depth 3.5	38	M4 depth 7	M4 depth 8
SRG3	ø20	34	29.5	44	39.5	5.5	7	-	-	-	-	16.5	M5	36	18.5(22)	12.5	5.5	9 spot face depth 5.5	47	M6 depth 11	M6 depth 7
	ø25	37.5	32.5	47.5	42.5	7	8.5	-	-	-	-	18	M5	40	20.5(24)	13.5	5.5	9 spot face depth 5.5	51	M6 depth 11	M6 depth 12

Code	Common dimensions with switch				Reed T0H/T0V, T5H/T5V		Proximity T2H/T2V, T3H/T3V		Proximity T2WH/T2WV, T3WH/T3WV		Proximity F2H/F2V, F3H/F3V, F2YH/F2YV, F3YH/F3YV		Proximity F2S/F3S		
	M	MM	N	WF	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD	
SRT3	ø12	5	6	15.5	3.5	4	9	4	9	6	11	-	-	-	
	ø16	6	8	20	3.5	2	11.5	2	11.5	3	13.5	-	-	-	
MRL2	ø20	8	10	25.5	4.5	6	14.5	6	14.5	8	16.5	10.5	19	9.5	18
	ø25	10	12	28	5	8	16	8	16	10	18	12.5	20	11.5	19

\*1 : To calculate A+ stroke or B+ stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value.

(Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.

\*2 : HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.

\*3 : Dimensions in ( ) of FA are for the L-shaped lead wire.

\*4 : Dimensions in ( ) of code Q are when the value is for a 5 mm stroke without switch.


\*5 : Only F-switch is available for the ø20 or ø25 piping port surface.

● Rod end male thread


Code	a'	c'	H	kk'	M	MM	T	wf	
Spd Contr	ø12	10.5	9	8	M5	5	6	3.2	3.5
	ø16	12	10	10	M6	6	8	3.6	3.5
	ø20	14	12	13	M8	8	10	5	4.5
Ending	ø25	17.5	15	17	M10x1.25	10	12	6	5

### Dimensions


● SSD2-L-32 to 100-P7\*/P5\* (with switch, TOH/V, T5H/V, T2H/V, T3H/V)

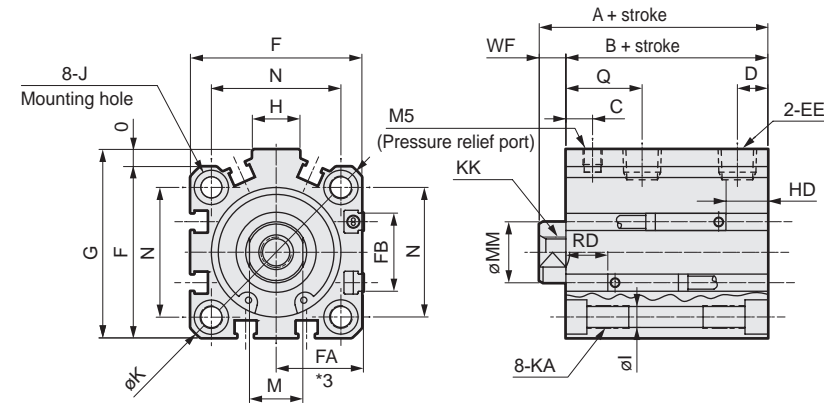

● Rod end male thread



● SSD2-32 to 100-P7\*/P5\* (without switch)

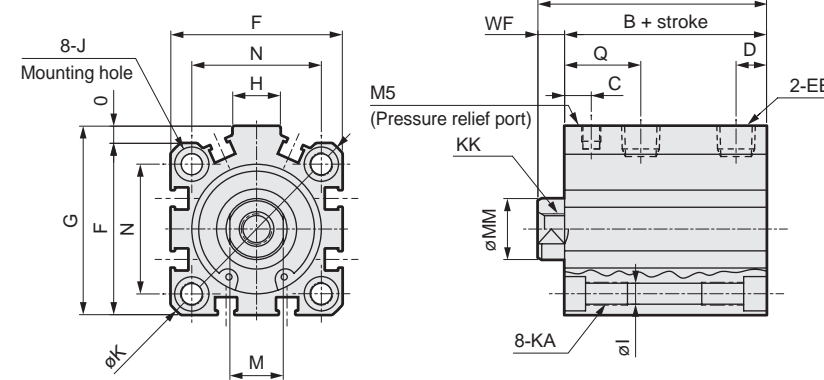

Code	No switch		Common dimensions with switch													
	A <sup>*1, *4</sup>	B <sup>*1, *4</sup>	A <sup>*1</sup>	B <sup>*1</sup>	C	D <sup>*6</sup>	Q	EE	F	FA <sup>*3</sup>	FB	G	H	I	J	K
ø32	40(50)	33(43)	50	43	7	8(5.5)	20	Rc1/8 <sup>*5</sup>	45	23(26.5)	20.5	49.5	12.5	5.5	9 spot face depth 5.5	60
ø40	46.5(56.5)	39.5(49.5)	56.5	49.5	8.5	8	21.5	Rc1/8	52	26.5(30)	27.5	57	15	5.5	9 spot face depth 5.5	69
ø50	48.5(58.5)	40.5(50.5)	58.5	50.5	9.5	10.5(9.5)	25	Rc1/4 <sup>*5</sup>	64	32.5(36)	28.5	71	18	6.9	11 spot face depth 6.5	86
ø63	54(64)	46(56)	64	56	10	11	25.5	Rc1/4	77	39(42.5)	28.5	84	23	8.7	14 spot face depth 9	103
ø80	68.5(78.5)	58.5(68.5)	78.5	68.5	11.5	13	30	Rc3/8	98	49.5(53)	28.5	104	31	10.5	17.5 spot face depth 11	132
ø100	80(90)	68(78)	90	78	15.5	15	35	Rc3/8	117	59(62.5)	28.5	123.5	38	10.5	17.5 spot face depth 11	156

Code	Common dimensions with switch								Reed TOH/TOV, T5H/T5V		Proximity T2H/T2V, T3H/T3V		Proximity T2WH/T2WV, T3WH/T3WV	
	KA	KK	M	MM	N	O	WF	HD	RD	HD	RD	HD	RD	
ø32	M6 depth 11	M8 depth 13	14	16	34	4.5	7	4	19.5	4	19.5	6	21.5	
ø40	M6 depth 11	M8 depth 13	14	16	40	5	7	7	22	7	22	8.5	23.5	
ø50	M8 depth 13	M10 depth 15	17	20	50	7	8	7.5	22.5	7.5	22.5	9	24	
ø63	M10 depth 25	M10 depth 15	17	20	60	7	8	12.5	23	12.5	23	14	24.5	
ø80	M12 depth 28	M16 depth 21	22	25	77	6	10	17.5	25.5	17.5	25.5	19	27	
ø100	M12 depth 28	M20 depth 27	27	30	94	6.5	12	23	29.5	23	29.5	24.5	31	

Code	Proximity T2YH/T2YV, T3YH/T3YV, T2JH/T2JV		Reed T8H/T8V		AC magnetic field proof T2YD, T2YD/T1H/T1V	
	HD	RD	HD	RD	HD	RD
ø32	3.5	18.5	-	-	3.5	18.5
ø40	5.5	20.5	1	16	5.5	20.5
ø50	6	21	1.5	16.5	6	21
ø63	11	21.5	6.5	17	11	21.5
ø80	16	24	11.5	19.5	16	24
ø100	21.5	28	17	23.5	21.5	28

● Rod end male thread

Code	a'	c'	H	kk'	M	MM	T	wf
ø32	23.5	20.5	22	M14x1.5	14	16	8	5
ø40	23.5	20.5	22	M14x1.5	14	16	8	5
ø50	28.5	26	27	M18x1.5	17	20	11	5
ø63	28.5	26	27	M18x1.5	17	20	11	5
ø80	35.5	32.5	32	M22x1.5	22	25	13	8
ø100	35.5	32.5	41	M26x1.5	27	30	16	8


- \*1 : To calculate A+ stroke or B+ stroke when using custom stroke, apply the next longer standard stroke (instead of the custom stroke) to the stroke value. (Example) If the custom stroke is 7 mm, apply the standard stroke of 10 mm.
- \*2 : HD and RD dimensions for 5 mm stroke differ from these dimensions according to the setting.
- \*3 : Dimensions in ( ) of FA are for the L-shaped lead wire.
- \*4 : Dimensions in ( ) of codes A and B are for strokes of more than 50 mm.
- \*5 : The ø32 bore size with a 5 mm stroke and without a switch has a port size of Rc1/8.
- \*6 : Dimensions in ( ) of codes C and D are when the value is for a 5 mm stroke without switch.

SCP*3
CMK2
CMA2
SCM
SCG
SCA2
SCS2
CKV2
CAV2/COVP/N2
<b>SSD2</b>
SSG
SSD
CAT
MDC2
MVC
SMG
MSD/MSDG
FC*
STK
SRL3
SRG3
SRM3
SRT3
MRL2
MRG2
SM-25
ShkAbs
FJ
FK
Spd Contr
Ending


# SSD2-P7\*/P5\* Series

## Dimensions (ø125 to ø160)

### ● SSD2-L-125 to 160-P7\*/P5\* (with switch)

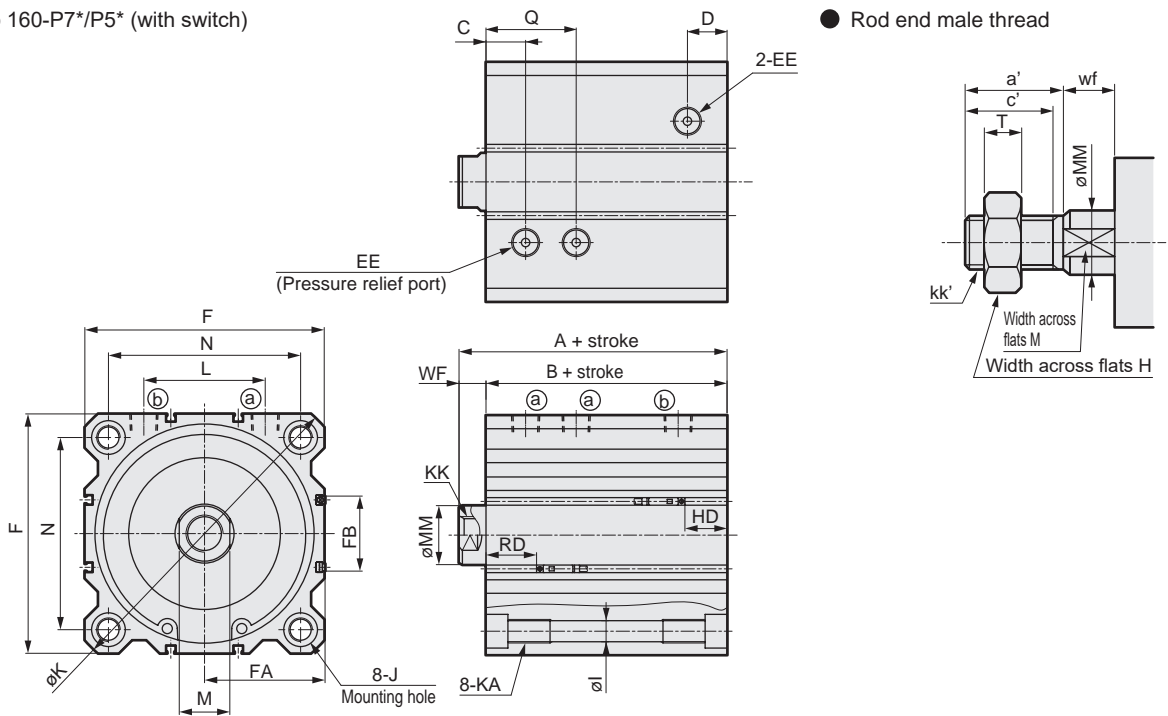

### ● SSD2-125 to 160-P7\*/P5\* (without switch)

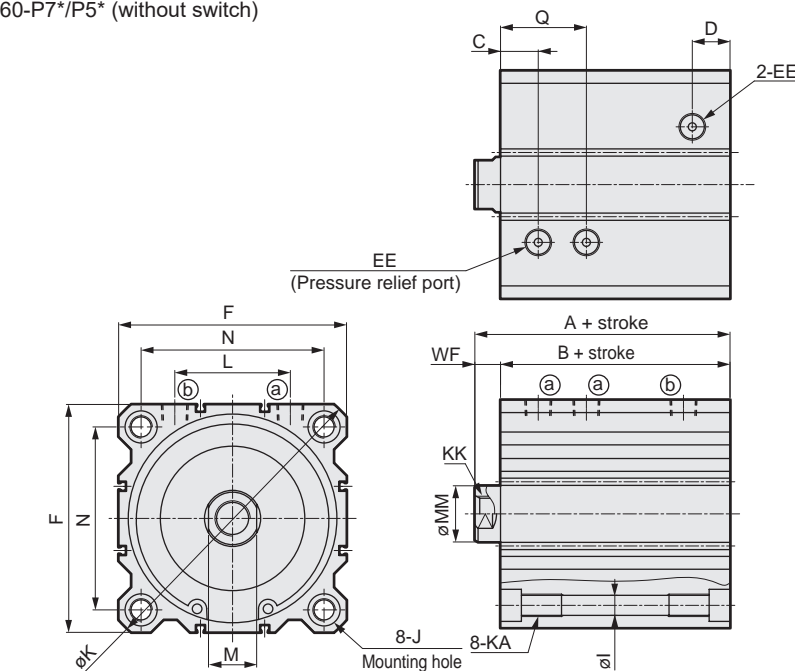

Code	Common dimensions for types with/without switch																		
Bore size (mm)	A	B	C	D	EE	F	FA *2	FB	I	J	K	KA	KK	L	M	MM	N	Q	WF
ø125	118	102	23.5	23.5	Rc3/8	142	71.5(75)	44.5	12.5	20 spot face depth 13	190	M14 depth 25	M22 depth 30	72	30	35	114	53.5	16
ø140	128	112	27	27	Rc3/8	158	79.5(83)	44.5	12.5	20 spot face depth 13	210	M14 depth 25	M22 depth 30	80	30	35	128	57	16
ø160	143	126	30	30	Rc3/8	178	89.5(93)	48.5	14.7	23 spot face depth 15.2	238	M16 depth 28	M24 depth 33	90	36	40	144	65	17
Code	Reed T0H/T0V, T5H/T5V				Proximity T2H/T2V, T3H/T3V				Proximity T2YH/T2YV, T3YH/T3YV										
Bore size (mm)	HD		RD		HD		RD		HD		RD								
ø125	24.5		59.5		24.5		59.5		23		58								
ø140	31		63		31		63		29.5		61.5								
ø160	34		74		34		74		32.5		72.5								

● \*1 : Refer to page 1044 for HD , RD, and protruding dimensions of the 2-color LED switches.

● \*2 : Dimensions in ( ) of FA are for the L-shaped lead wire.

### Dimensions of rod end male thread

Code	a'	c'	H	kk'	M	MM	T	wf
Bore size (mm)								
ø125	45	42	46	M30x1.5	30	35	18	13
ø140	45	42	46	M30x1.5	30	35	18	13
ø160	50	47	55	M36x1.5	36	40	21	14

---

# MEMO

---

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

**SSD2**

**SSG**

**SSD**

**CAT**

**MDC2**

**MVC**

**SMG**

MSD/  
MSDG

**FC\***

**STK**

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK


Spd  
Contr

Ending

# SSD2 Series


## SSD2 Series common dimensions (with 2-color LED, off-delay, AC magnetic field, T1\* and T8\* switches)

● SSD2-L-12 to 100 (with 2-color LED, off-delay, T8\* switches/T2YH/V, T3YH/V, T2JH/V, T8H/V)

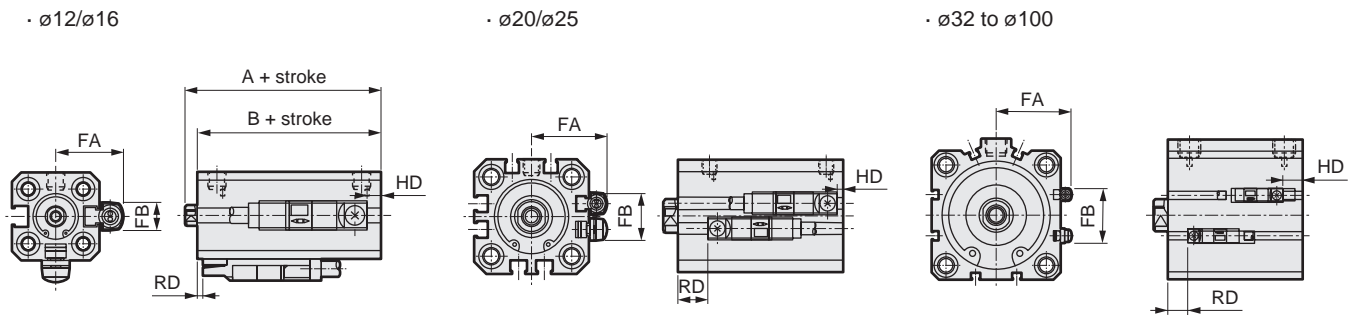

Code	FA	FB	T2YH/V, T3YH/V, T2JH/V												T8H/V										
			SSD2-L, XL, YL		SSD2-DL <sup>*1</sup>		SSD2 (Long)-L <sup>*2</sup>		SSD2-ML		SSD2-GL		SSD2-G5L		SSD2-L, XL, YL, GL		SSD2-DL <sup>*1</sup>		SSD2-ML		SSD2 (Long)-L <sup>*2</sup>		SSD2-G5L		
			RD	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD	HD	
SSG	ø12	18.8	8	-	-	1	3.5	3	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
	ø16	20.8	8	-	-	0.5	3.5	2.5	1.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
SSD	ø20	24.3	16	6.5	2	5	8	14(8.5)	5.5(11)	10	1.5	16.5	2	-	-	-	-	0.5	3.5	-	-	9.5(4)	0(6.5)	-	-
	ø25	26.3	17	8.5	3	8	10	17.5(10.5)	5(12.5)	13	1.5	18.5	3	-	-	-	-	1.5	5.5	-	-	13(6)	0(8)	-	-
CAT	ø32	28.8	24	8.5	3.5	7.5	9.5	16(8)	8(14.5)	17.5	2	18.5	3.5	19.5	3.5	-	-	3	5	-	-	11.5(4)	2.5(10)	-	-
	ø40	32.3	31	10.5	5.5	10.5	15	24.5(15)	8(17.5)	10.5	5.5	10.5	5.5	20.5	5.5	6	1	6	10.5	6	1	20(10.5)	3.5(13)	16	1
MDC2	ø50	38.3	32	11	6	11	15	24.5(16)	8.5(17.5)	11	6	11	6	21	6	6.5	1.5	6.5	10.5	6.5	1.5	19.5(11)	4(13)	16.5	1.5
	ø63	44.8	32	11.5	11	11.5	16.5	18.5(13.5)	16(21.5)	11.5	11	11.5	11	21.5	11	7	6.5	7	12	7	6.5	13.5(8.5)	11.5(17)	17	6.5
MVC	ø80	55.3	32	14	16	14	21.5	22.5(17.5)	20.5(26.5)	-	-	14	16	28	16	9.5	11.5	9.5	17	-	-	17.5(12.5)	16(22)	23.5	11.5
	ø100	64.8	32	18	21.5	18	27	26.5(21.5)	26.5(32)	-	-	18	21.5	33.5	21.5	13.5	17	13.5	22.5	-	-	21.5(16.5)	22(27.5)	29	17

● SSD2-L-12 to 100 (for AC magnetic field, with T1\* switch, T2YD, T2YDT, T1H/V)

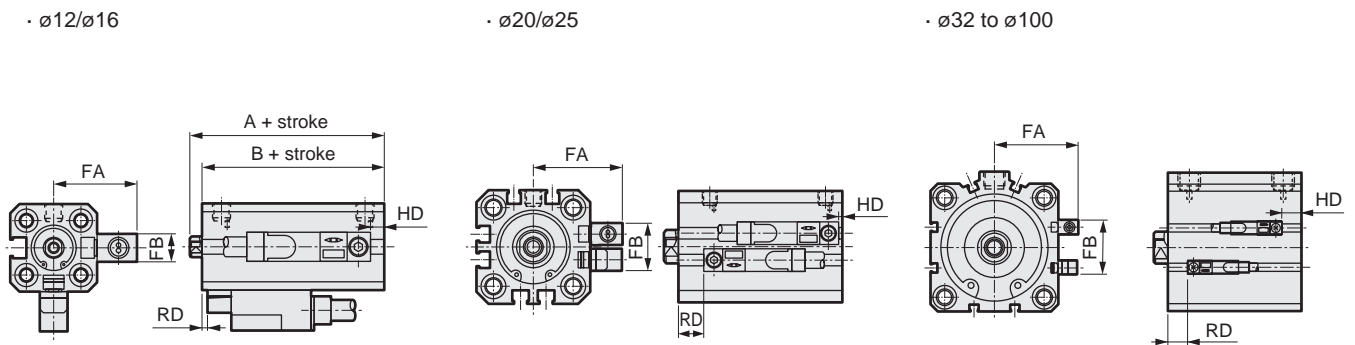

Code	FA	FB	SSD2-L, XL, YL		SSD2-DL <sup>*1</sup>		SSD2 (Long stroke)-L <sup>*2</sup>		SSD2-ML		SSD2-GL		SSD2-G5L	
			RD	HD	RD	HD	RD	HD	RD	HD	RD	HD	RD	HD
SM-25	ø12	23.8	8	-	-	1.5	4	3	1	-	-	-	-	-
	ø16	25.8	8	-	-	0.5	3.5	2.5	1.5	-	-	-	-	-
ShkAbs	ø20	29.3	16	6.5	2	5	8	14(8.5)	5.5(11)	10	1.5	16.5	2	-
	ø25	31.3	17	8.5	3	8	10	17.5(10.5)	5(12.5)	13	1.5	18.5	3	-
FJ	ø32	33.8	24	8.5	3.5	7.5	9.5	16(8)	8(14.5)	17.5	2	18.5	3.5	19.5
	ø40	37.3	31	10.5	5.5	10.5	15	24.5(15)	8(17.5)	10.5	5.5	10.5	5.5	20.5
FK	ø50	43.3	32	11	6	11	15	24.5(16)	8.5(17.5)	11	6	11	6	21
	ø63	49.8	32	11.5	11	11.5	16.5	18.5(13.5)	16(21.5)	11.5	11	11.5	11	21.5
Spd Contr	ø80	60.3	32	14	16	14	21.5	22.5(17.5)	20.5(26.5)	-	-	14	16	28
	ø100	69.8	32	18	21.5	18	27	26.5(21.5)	26.5(32)	-	-	18	21.5	33.5

\*1: The port surface with the mark is the "RD side".


\*2: Dimensions in ( ) are for stroke over 100 for ø20, stroke over 150 for ø25 to ø50, and stroke over 200 for ø63 to ø100.

### SSD2-K Series common dimensions (with 2-color LED, off-delay, AC magnetic field, T1\* and T8\* switches)

- SSD2-KL-20 to 100 (with 2-color LED, off-delay, T8\* switches/T2YH/V, T3YH/V, T2JH/V, T8H/V)

·  $\varnothing 20/\varnothing 25$

·  $\varnothing 32$  to  $\varnothing 100$

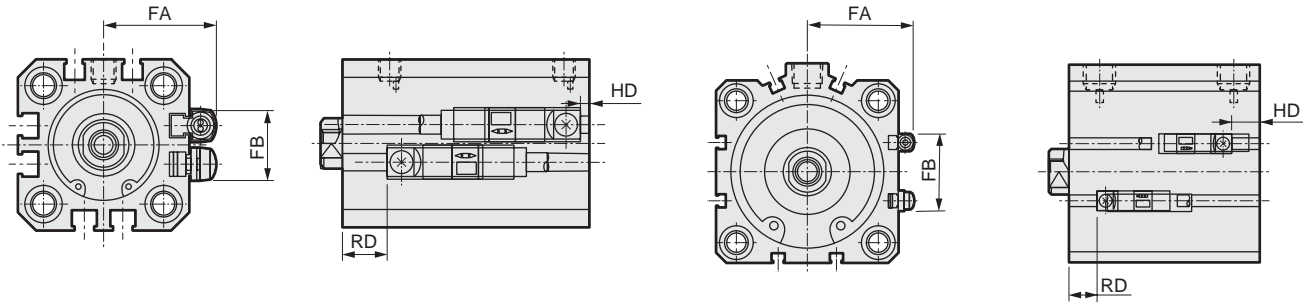


Code	FA	FB	T2YH/V, T3YH/V, T2JH/V		T8H/V	
			RD	HD	RD	HD
$\varnothing 20$	24.3	16	8	5.5	-	-
$\varnothing 25$	26.3	17	11.5	5	-	-
$\varnothing 32$	28.8	24	14	8	-	-
$\varnothing 40$	32.3	31	18	8	13.5	3.5
$\varnothing 50$	38.3	32	18.5	8.5	14	4
$\varnothing 63$	44.8	32	16.5	16	12	11.5
$\varnothing 80$	55.3	32	19	20.5	14.5	16
$\varnothing 100$	64.8	32	23	26.5	18.5	22

- SSD2-KL-20 to 100 (for AC magnetic field, with T1\* switch, T2YD, T2YDT, T1H/V)

·  $\varnothing 20/\varnothing 25$

·  $\varnothing 32$  to  $\varnothing 100$

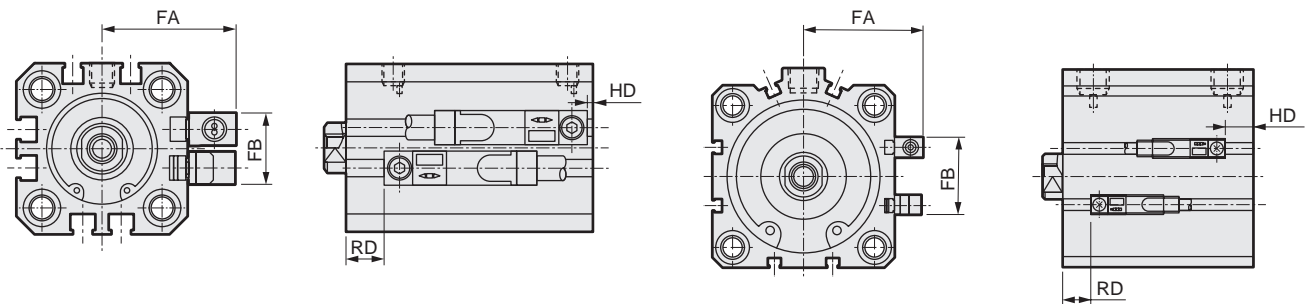

Code	FA	FB	RD	HD
$\varnothing 20$	29.3	16	8	5.5
$\varnothing 25$	31.3	17	11.5	5
$\varnothing 32$	33.8	24	14	8
$\varnothing 40$	37.3	31	18	8
$\varnothing 50$	43.3	32	18.5	8.5
$\varnothing 63$	49.8	32	16.5	16
$\varnothing 80$	60.3	32	19	20.5
$\varnothing 100$	60.8	32	23	26.5

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

SSD2

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending





## Dimensions (Mounting bracket: LB)

### ● Axial foot (LB)

·  $\phi 12$  to  $\phi 25$

·  $\phi 32$  to  $\phi 100$

Material: Steel  
Zinc  
chromate  
treatment

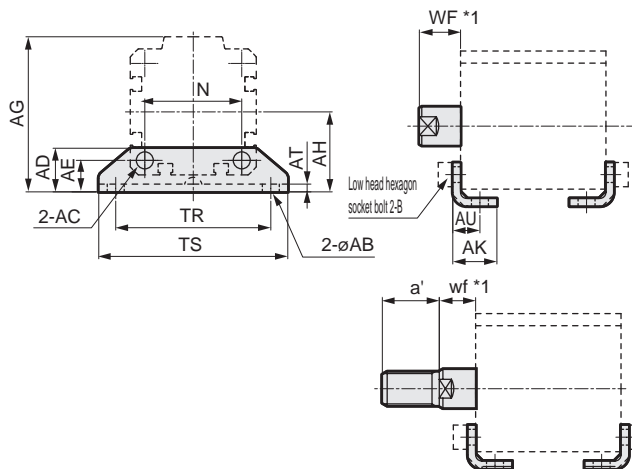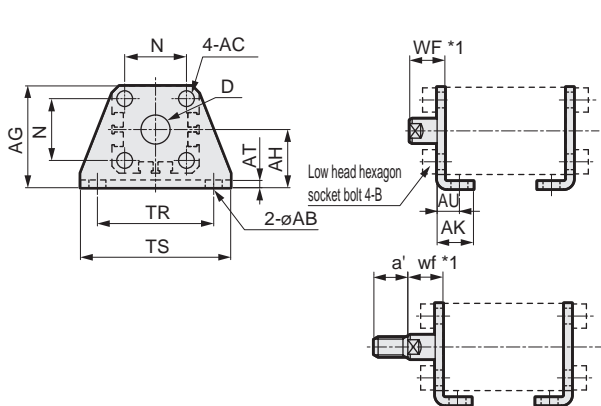

\*1: Hex socket mounting bolts are included.

Model No.	Bore size	AB	AC	AD	AE	AG	AH	AK	AT	AU	B	D	N	TR	TS	WF	wf	a'	Weight (g)
SSD2-LB-12	$\phi 12$	5	4.5	-	-	29.5	17	12.5	2	8	M4x10	8	15.5	34	44	13.5	13.5	10.5	51
SSD2-LB-16	$\phi 16$	5	4.5	-	-	33.5	19	13	2	8	M4x10	10	20	38	48	13.5	13.5	12	61
SSD2-LB-20	$\phi 20$	7	6.5	-	-	42	24	15	3.2	9.2	M6x16	12	25.5	48	62	14.5	14.5	14	161
SSD2-LB-25	$\phi 25$	7	6.5	-	-	46	26	16.5	3.2	10.7	M6x16	14	28	52	66	15	15	17.5	176
SSD2-LB-32	$\phi 32$	7	7	18.5	13	57	30	17	3.2	11.2	M6x16	-	34	57	71	17	15	23.5	107
SSD2-LB-40	$\phi 40$	7	7	18	13	64	33	18.2	3.2	11.2	M6x16	-	40	64	78	17	15	23.5	121
SSD2-LB-50	$\phi 50$	9	9	22	14	78	39	22.7	3.2	14.7	M8x20	-	50	79	95	18	15	28.5	201
SSD2-LB-63	$\phi 63$	11	11	26	16	91.5	46	25.2	3.2	16.2	M10x25	-	60	95	113	18	15	28.5	314
SSD2-LB-80	$\phi 80$	13	13	31.5	20.5	114	59	30.5	4.5	19.5	M12x40	-	77	118	140	20	18	35.5	678
SSD2-LB-100	$\phi 100$	13	13	35	24	136	71	35.5	6	23	M12x40	-	94	137	162	22	18	35.5	1198

\*1: The WF/wf dimension of the cylinder for LB is set 10 mm longer than that of standard products. Contact CKD for the cylinder model No. when ordering individual cylinders and LB brackets.



\*2: The mounting brackets for SSD2 are the same dimensions as the compact mounting brackets for SSD.

Check the General Catalog (CB-029SA) in order to avoid mistakes.

(Example: SSD2-LB-32 is the same dimensions as SSD-LB2-32.)

## Dimensions (Mounting bracket: FA, FB)

- Rod side flange (FA)
  - $\phi 12$  to  $\phi 25$

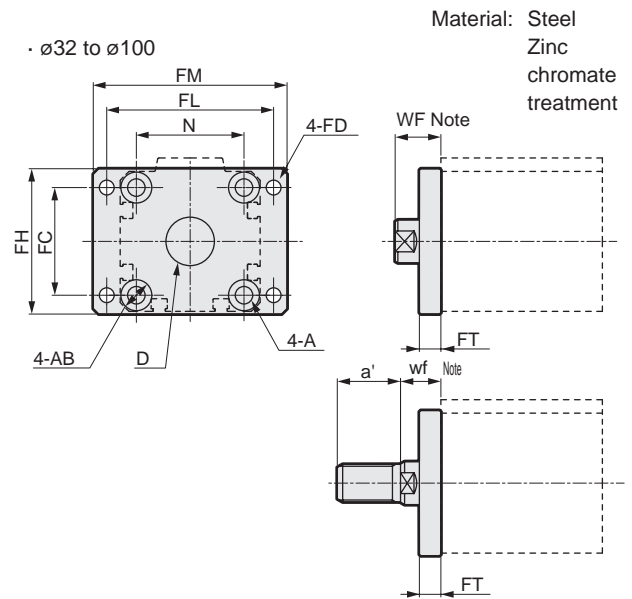
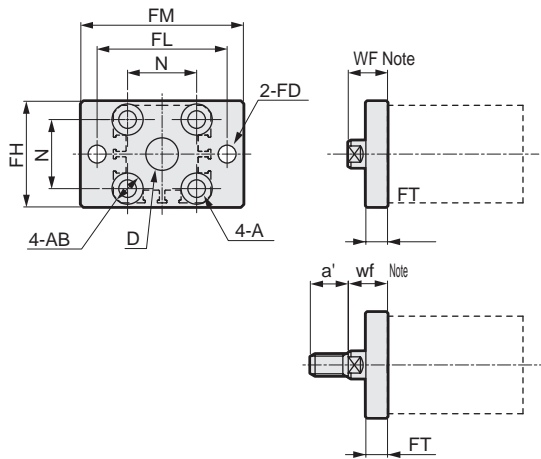


\*1: Mounting bolts are included.

Model No.	Bore size	FC	FD	FH	FL	FM	FT	A	AB	D	N	WF	wf	a'	Weight (g)
SSD2-FA-12	$\phi 12$	-	4.5	25	45	55	5.5	4.5	8.5 spot face depth 2.7	8	15.5	13.5	13.5	10.5	54
SSD2-FA-16	$\phi 16$	-	4.5	30	45	55	5.5	4.5	8.5 spot face depth 2.7	10	20	13.5	13.5	12	64
SSD2-FA-20	$\phi 20$	-	6.6	39	48	60	8	6.5	11.5 spot face depth 3.8	12	25.5	14.5	14.5	14	129
SSD2-FA-25	$\phi 25$	-	6.6	42	52	64	8	6.5	11.5 spot face depth 3.8	14	28	15	15	17.5	148
SSD2-FA-32	$\phi 32$	34	5.5	48	56	65	8	6.5	11.5 spot face depth 3.8	22	34	17	15	23.5	167
SSD2-FA-40	$\phi 40$	40	5.5	54	62	72	8	6.5	11.5 spot face depth 3.8	28	40	17	15	23.5	215
SSD2-FA-50	$\phi 50$	50	6.6	67	76	89	9	9	15 spot face depth 5	35	50	18	15	28.5	387
SSD2-FA-63	$\phi 63$	60	9	80	92	108	9	11	18 spot face depth 6	35	60	18	15	28.5	573
SSD2-FA-80	$\phi 80$	77	11	99	116	134	11	13	19 spot face depth 7.5	43	77	20	18	35.5	1132
SSD2-FA-100	$\phi 100$	94	11	117	136	154	11	13	19 spot face depth 7.5	59	94	22	18	35.5	1522

Note: The WF/wf dimension of the cylinder for FA is set 10 mm longer than that of standard products. Contact CKD for the cylinder model No. when ordering individual cylinders and FA brackets.

- Head side flange (FB)
  - $\phi 12$  to  $\phi 25$

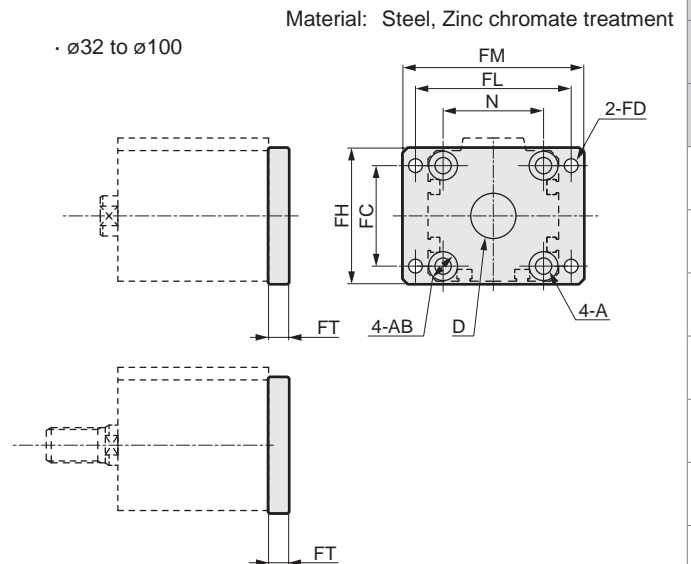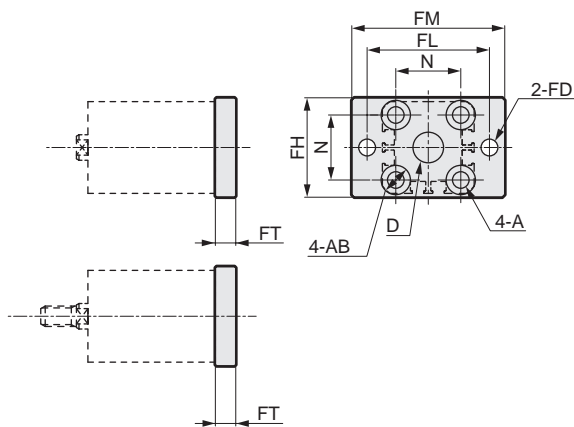

\*1: Mounting bolts are included.

Model No.	Bore size	FC	FD	FH	FL	FM	FT	A	AB	D	N	Weight (g)
SSD2-FB-12	$\phi 12$	-	4.5	25	45	55	5.5	4.5	8.5 spot face depth 2.7	8	15.5	54
SSD2-FB-16	$\phi 16$	-	4.5	30	45	55	5.5	4.5	8.5 spot face depth 2.7	10	20	64
SSD2-FB-20	$\phi 20$	-	6.6	39	48	60	8	6.5	11.5 spot face depth 3.8	12	25.5	129
SSD2-FB-25	$\phi 25$	-	6.6	42	52	64	8	6.5	11.5 spot face depth 3.8	14	28	148
SSD2-FB-32	$\phi 32$	34	5.5	48	56	65	8	6.5	11.5 spot face depth 3.8	22	34	167
SSD2-FB-40	$\phi 40$	40	5.5	54	62	72	8	6.5	11.5 spot face depth 3.8	28	40	215
SSD2-FB-50	$\phi 50$	50	6.6	67	76	89	9	9	15 spot face depth 5	35	50	387
SSD2-FB-63	$\phi 63$	60	9	80	92	108	9	11	18 spot face depth 6	35	60	573
SSD2-FB-80	$\phi 80$	77	11	99	116	134	11	13	19 spot face depth 7.5	43	77	1132
SSD2-FB-100	$\phi 100$	94	11	117	136	154	11	13	19 spot face depth 7.5	59	94	1522


SCP\*3  
CMK2  
CMA2  
SCM  
SCG  
SCA2  
SCS2  
CKV2  
CAV2/  
COVP/N2  
**SSD2**  
SSG  
SSD  
CAT  
MDC2  
MVC  
SMG  
MSD/  
MSDG  
FC\*  
STK  
SRL3  
SRG3  
SRM3  
SRT3  
MRL2  
MRG2  
SM-25  
ShkAbs  
FJ  
FK  
Spd  
Contr  
Ending



## Dimensions (Mounting bracket: CB)

- Clevis bracket (CB)

Material: Cast iron  
Painted

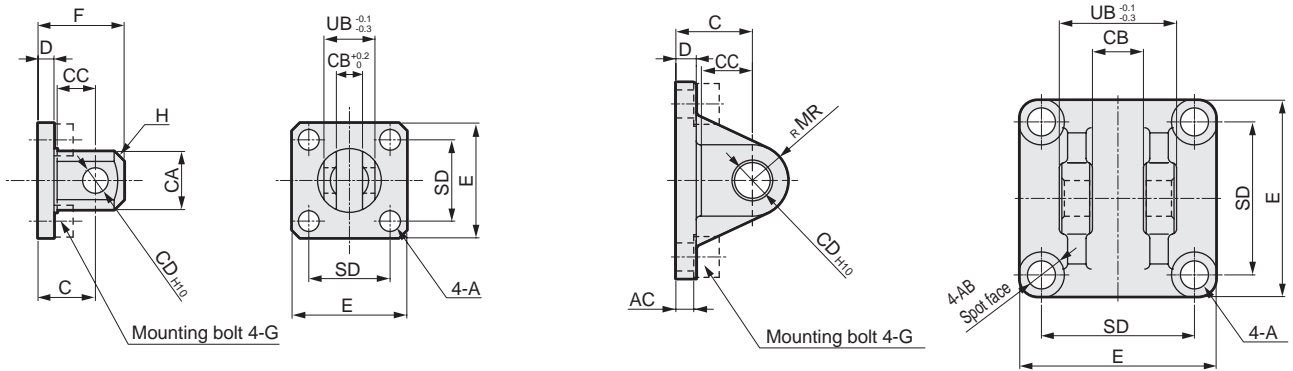

\*1: Hex socket mounting bolts, pins, and snap rings are included.


SSD2	Model No.	Bore size	A	AB	AC	C	CA	CB	CC	CD	D	E	F	G	H	MR	SD	UB	Weight (g)
	SSD2-CB-12	ø12	4.5	-	-	14	12	5.2 <sup>+0.2</sup> <sub>0</sub>	7	5	4	25	20	M4x12	C1.5	-	15.5	10	28
	SSD2-CB-16	ø16	4.5	-	-	15	15	6.6 <sup>+0.3</sup> <sub>0</sub>	8	5	5	29	21	M4x12	C2	-	20	12	43
	SSD2-CB-20	ø20	6.5	-	-	18	20	8.2 <sup>+0.2</sup> <sub>0</sub>	12	8	5	36	27	M6x16	C4	-	25.5	16	84
	SSD2-CB-25	ø25	6.5	-	-	20	24	10.2 <sup>+0.2</sup> <sub>0</sub>	14	10	5	40	30	M6x16	C5	-	28	20	110
	SSD2-CB-32	ø32	6.6	13	4.5	20	-	18.2 <sup>+0.2</sup> <sub>0</sub>	14	10	5	45	30	M6x16	-	10	34	36	159
	SSD2-CB-40	ø40	6.6	14	5	22	-	18.2 <sup>+0.2</sup> <sub>0</sub>	14	10	6	52	32	M6x16	-	10	40	36	207
	SSD2-CB-50	ø50	9	16	6	28	-	22.2 <sup>+0.2</sup> <sub>0</sub>	20	14	7	64	42	M8x20	-	14	50	44	420
	SSD2-CB-63	ø63	11	18	7	30	-	22.2 <sup>+0.2</sup> <sub>0</sub>	20	14	8	77	44	M10x25	-	14	60	44	605
	SSD2-CB-80	ø80	13.5	23	9	38	-	28.2 <sup>+0.2</sup> <sub>0</sub>	27	18	10	98	56	M12x40	-	18	77	56	1222
	SSD2-CB-100	ø100	13.5	20	12	45	-	32.2 <sup>+0.2</sup> <sub>0</sub>	31	22	13	117	67	M12x40	-	22	94	64	2031

\*1: The mounting brackets for SSD2 are the same dimensions as the compact mounting brackets for SSD.

Check the General Catalog (CB-029SA) in order to avoid mistakes.  
(Example: SSD2-CB-32 is the same dimensions as SSD-CB2-32.)

- Clevis bracket (CB) included pin dimensions table (P)

Material: Steel  
Zinc  
chromate  
treatment



Model No.	Applicable bore size	I	J	CD	Applicable snap ring	Weight (g)
SSD2-P-12	ø12	15.2	10.2	5 <sup>-0.01</sup> <sub>-0.028</sub>	E type 4	2.4
SSD2-P-16	ø16	18	13	5 <sup>-0.01</sup> <sub>-0.028</sub>	E type 4	2.8
SSD2-P-20	ø20	21	16.2	8 <sup>-0.025</sup> <sub>-0.047</sub>	C type for shaft 8	8.2
SSD2-P-25	ø25	25.6	20.2	10 <sup>-0.025</sup> <sub>-0.047</sub>	C type for shaft 10	16
SSD2-P-32	ø32/ø40	41.6	36.2	10 <sup>-0.025</sup> <sub>-0.047</sub>	C type for shaft 10	25
SSD2-P-50	ø50/ø63	50.6	44.2	14 <sup>-0.032</sup> <sub>-0.059</sub>	C type for shaft 14	60
SSD2-P-80	ø80	64	56.2	18 <sup>-0.032</sup> <sub>-0.059</sub>	C type for shaft 18	124
SSD2-P-100	ø100	72	64.2	22 <sup>-0.040</sup> <sub>-0.083</sub>	C type for shaft 22	213


## Dimensions (Accessory: I, Y)



- Rod eye (I)
  - $\phi 12$  to  $\phi 25$

Material: Steel  
Zinc chromate treatment ·  $\phi 32$  to  $\phi 100$

Material: Cast iron  
Painted

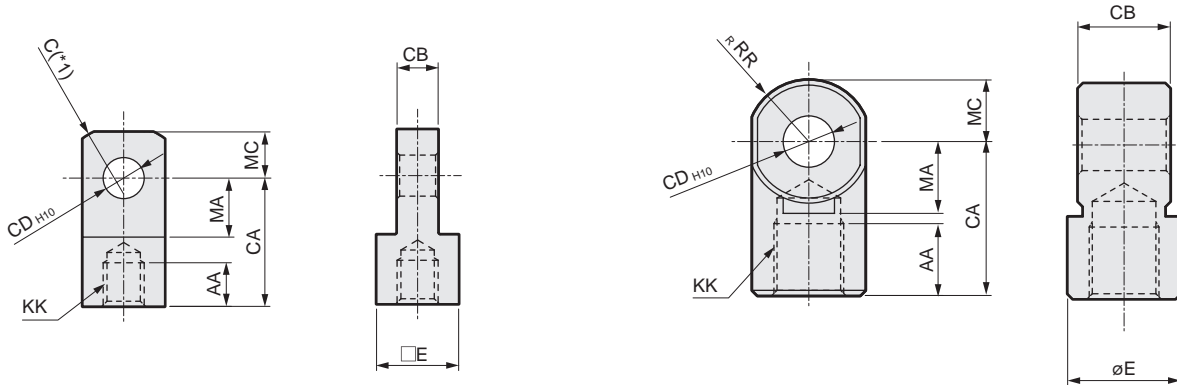

\*1:  $\phi 20/25$  are SR RR

Model No.	Bore size	AA	CA	CB	CD	E	KK	MA	C	RR	MC	Weight (g)
SSD2-I-12	$\phi 12$	6	16	$5^{+0.2}_{-0.4}$	5	$\square 10$	M5x0.8	7	2	-	5.5	9
SSD2-I-16	$\phi 16$	8	25	$6.5^{+0.2}_{-0.4}$	5	$\square 12$	M6x1	14	2	-	7	21
SSD2-I-20	$\phi 20$	8.5	25	$8^{+0.2}_{-0.4}$	8	$\square 16$	M8x1.25	11.5	-	13.4	9	38
SSD2-I-25	$\phi 25$	10.5	30	$10^{+0.2}_{-0.4}$	10	$\square 20$	M10x1.25	14	-	17.1	11	71
SSD2-I-32	$\phi 32/\phi 40$	14	30	$18^{+0.3}_{-0.5}$	10	$\phi 22$	M14x1.5	14	-	12	12	74
SSD2-I-50	$\phi 50/\phi 63$	18	40	$22^{+0.3}_{-0.5}$	14	$\phi 28$	M18x1.5	20	-	16	16	155
SSD2-I-80	$\phi 80$	21	50	$28^{+0.3}_{-0.5}$	18	$\phi 38$	M22x1.5	27	-	21	21	380
SSD2-I-100	$\phi 100$	21	55	$32^{+0.3}_{-0.5}$	22	$\phi 44$	M26x1.5	31	-	24	24	550


\*1: The accessories for SSD2 are the same dimensions as the compact accessories for SSD.

Check the General Catalog (CB-029SA) in order to avoid mistakes.  
(Example: SSD2-I-32 is the same dimensions as SSD-I2-32.)

- Rod clevis (Y)
  - $\phi 12$  to  $\phi 25$

Material: Steel  
Zinc chromate treatment ·  $\phi 32$  to  $\phi 100$

Material: Cast iron  
Painted

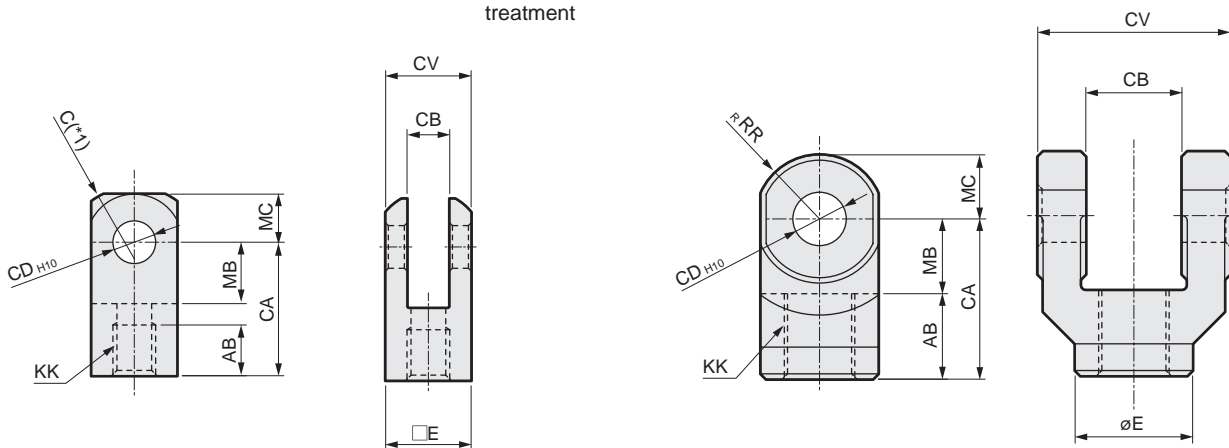

\*1:  $\phi 20/25$  are SR RR

\*2: A pin (including C-ring) is included.

\*3: The pins for the rod clevis are common with the pins for the clevis brackets.

Model No.	Bore size	AB	CA	CB	CD	CV	E	KK	MB	C	RR	MC	Weight (g)
SSD2-Y-12	$\phi 12$	6	16	$5^{+0.4}_{+0.2}$	5	10	$\square 10$	M5x0.8	7	2	-	5.5	12
SSD2-Y-16	$\phi 16$	11	21	$6.5^{+0.4}_{+0.2}$	5	12	$\square 12$	M6x1	10	2	-	7	20
SSD2-Y-20	$\phi 20$	13.5	25	$8^{+0.4}_{+0.2}$	8	16	$\square 16$	M8x1.25	11.5	-	13.4	9	45
SSD2-Y-25	$\phi 25$	16	30	$10^{+0.4}_{+0.2}$	10	20	$\square 20$	M10x1.25	14	-	17.1	11	84
SSD2-Y-32	$\phi 32/\phi 40$	16	30	$18^{+0.5}_{+0.3}$	10	36	$\phi 22$	M14x1.5	14	-	12	12	120
SSD2-Y-50	$\phi 50/\phi 63$	20	40	$22^{+0.5}_{+0.3}$	14	44	$\phi 28$	M18x1.5	20	-	16	16	257
SSD2-Y-80	$\phi 80$	23	50	$28^{+0.5}_{+0.3}$	18	56	$\phi 38$	M22x1.5	27	-	21	21	589
SSD2-Y-100	$\phi 100$	24	55	$32^{+0.5}_{+0.3}$	22	64	$\phi 44$	M26x1.5	31	-	24	24	933

\*1: The accessories for SSD2 are the same dimensions as the compact accessories for SSD.

Check the General Catalog (CB-029SA) in order to avoid mistakes.  
(Example: SSD2-Y-32 is the same dimensions as SSD-Y2-32.)

SCP\*3

CMK2

CMA2

SCM

SCG

SCA2

SCS2

CKV2

CAV2/  
COVP/N2

SSD2

SSG

SSD

CAT

MDC2

MVC

SMG

MSD/  
MSDG

FC\*

STK

SRL3

SRG3

SRM3

SRT3

MRL2

MRG2

SM-25

ShkAbs

FJ

FK

Spd  
Contr

Ending