


T SERIES™

BUILT FOR ANY SEASON

- Sturdy 3/4 in axle
- Infinite speed control for precise handling
- Maintenance-free design for ease of use
- Optional full-locking differential on T3 HD

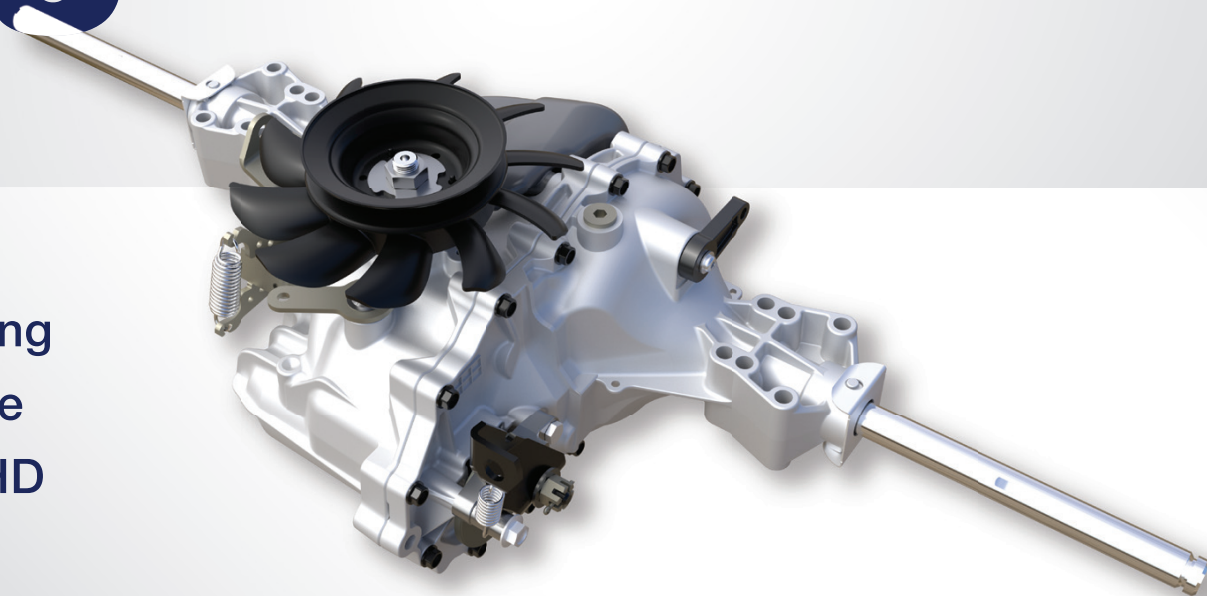

T3 HD w/ Full-Locking Differential model shown

T1™ / T2® / T2-HP™ / T3 HD™

©2021 Hydro-Gear | www.hydro-gear.com

 **HYDRO GEAR®**

BIBUS

BIBUS s.r.o.
+420 547 125 300
www.bibus.cz

T SERIES™

Specifications subject to change without notice

SPECIFICATIONS

	T1	T2		T2-HP	T3 HD		
Overall Transaxle Reduction	25.328:1	20.63:1	22.68:1	25.42:1	24.27:1	26.70:1	29.91:1
Input Speeds Max Hi-idle (No Load) Min (Loaded)	3000 rpm 1800 rpm			3000 rpm 1800 rpm			
Output Torque Continuous Intermittent	85 lb-ft 115 Nm 160 lb-ft 217 Nm	105 lb-ft 142 Nm 195 lb-ft 264 Nm	115 lb-ft 156 Nm 215 lb-ft 291 Nm	145 lb-ft 197 Nm 285 lb-ft 386 Nm	140 lb-ft 189 Nm 230 lb-ft 311 Nm	150 lb-ft 203 Nm 290 lb-ft 393 Nm	160 lb-ft 216 Nm 300 lb-ft 406 Nm
Axle Shaft Diameter	3/4 in - 19.05 mm						
Axle Shaft End Options	Keyed	Keyed or DD					
Parking Brake Type	Internal Wet Disc	External Disc					
Weight of Unit	21lbs - 9.5 kg	28 lbs - 12.7 kg					