



DSP5


DIRECTIONAL VALVES PILOT OPERATED, SOLENOID OR HYDRAULIC (DSC5) ACTUATED

SERIES 10

SUBPLATE MOUNTING
ISO 4401-05
CETOP P05

p max 350 bar
Q max 150 l/min

OPERATING PRINCIPLE

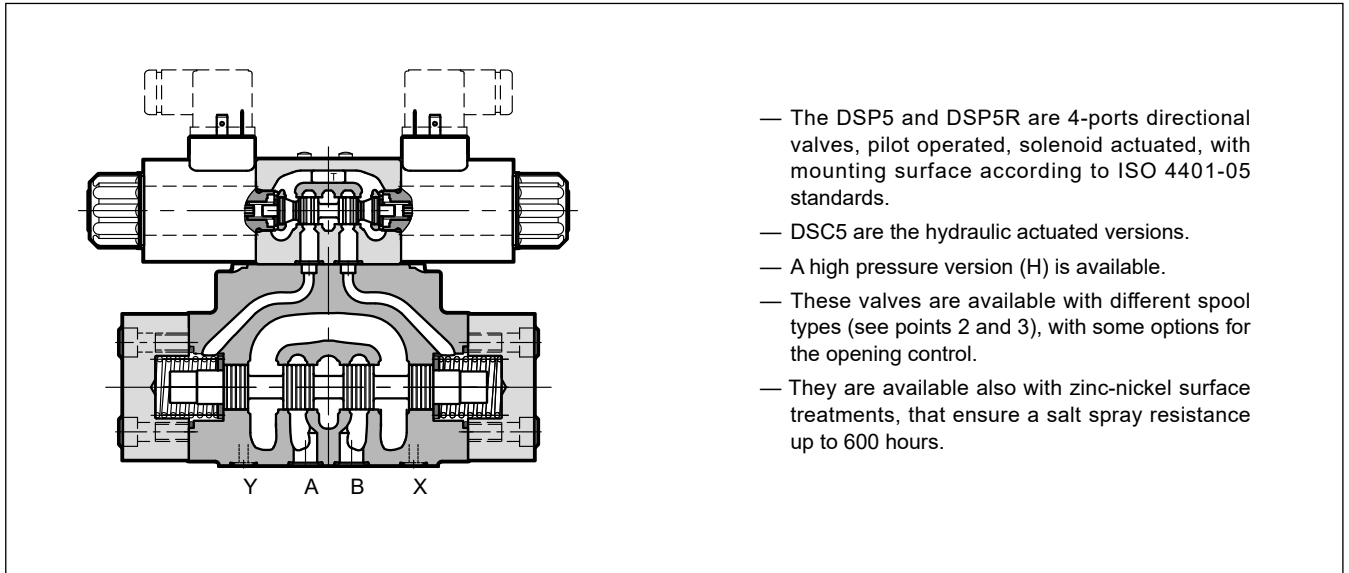

- The DSP5 and DSP5R are 4-ports directional valves, pilot operated, solenoid actuated, with mounting surface according to ISO 4401-05 standards.
- DSC5 are the hydraulic actuated versions.
- A high pressure version (H) is available.
- These valves are available with different spool types (see points 2 and 3), with some options for the opening control.
- They are available also with zinc-nickel surface treatments, that ensure a salt spray resistance up to 600 hours.

PERFORMANCES

(obtained with mineral oil of viscosity of 36 cSt at 50 °C)

		DSP5	DSP5H
Maximum operating pressure	bar	350	420
- ports P - A - B		250	350
- port T (external drainage)		210 (DC) / 160 (AC)	
- port T (internal drainage)		210 (DC) / 160 (AC)	
Maximum flow rate from port P to A - B - T	l/min	150	
Ambient temperature range	°C	-20 / +50	
Fluid temperature range	°C	-20 / +80	
Fluid viscosity range	cSt	10 ÷ 400	
Fluid contamination degree		according to ISO 4406:1999 class 20/18/15	
Recommended viscosity	cSt	25	
Mass:	kg	DSP5-S, RK	6.4
DSP5-T*, SA*, SB*		5.9	
DSC5		5.4	

1 - IDENTIFICATION CODE FOR SOLENOID ACTUATED DIRECTIONAL VALVES

D	S	P		-	/	10	-		/	/		/		
----------	----------	----------	--	---	---	-----------	---	--	---	---	--	---	--	--

Directional valve, pilot operated, solenoid actuated

Size: _____
5 = CETOP P05
5R = 4401-05-05-0-05

Option: _____
 (omit for standard version)
H = high pressure p_{max} 420 bar

Spool type (see point 2) _____
S* **SA*** **SB***
RK **TA** **TB**

Series: (the overall and mounting dimensions remain unchanged from 10 to 19) _____

Seals: _____
N = NBR seals for mineral oil (**standard**)
V = FPM seals for special fluids

Pilot supply (see points 8 and 9): _____
E = external
I = Internal (not available for spools S2 - S4 - S7 - S8 - TA02 - TB02 RK02 - S*2 - S*4)
Z = Internal pilot supply with 30 bar pressure reducing valve, fixed adjustment

Drainage (see point 9): _____
I = Internal
E = External

Control options (see point 10): _____
C = Main spool stroke control
D = Main spool switching speed control
P08 = Subplate placed under the pilot stage with restrictor of $\varnothing 0.8$ on port P
S2 = Pilot stage with S2 spool type (available only with pilot supply E)

Some combined options are also available:
C-D = Main spool stroke and switching speed control
C-P08 = Main spool stroke and subplate with restrictor
 Contact us for further needs.

Option:
/W7 = Zinc-nickel surface treatment (see **NOTE 2**)
 Not available for AC valves.
 Omit if not required

Manual override:
 Omit for override integrated in the tube (**standard**)
CM = manual override, boot protected (see point 17)

Coil electrical connection (see point 15):
K1 = plug for connector type EN 175301-803 (ex DIN 43650) (**standard**)
K2 = plug for connector type AMP JUNIOR (available on **D12** and **D24** coils only)
K7 = plug DEUTSCH DT04-2P for male connector type DEUTSCH DT06-2S (available on **D12** and **D24** coils only)

Power supply (see point 11)
 direct current
D12 = 12 V
D24 = 24 V
D48 = 48 V
D110 = 110 V
D220 = 220 V
D00 = valve without coils (see **NOTE 1**)

alternate current
A24 = 24 V - 50 Hz
A48 = 48 V - 50 Hz
A110 = 110 V - 50 Hz / 120 V - 60 Hz
A230 = 230 V - 50 Hz / 240 V - 60 Hz
A00 = valve without coils (see **NOTE 1**)
F110 = 110 V - 60 Hz
F220 = 220 V - 60 Hz

NOTE 1: Coils locking ring and related OR are supplied together with valves.


NOTE 2: The standard valve is supplied with surface treatment of phosphating black.

The zinc-nickel finishing on the valve body (both main and pilot) makes the valve suitable to ensure a salt spray resistance up to **240** hours (test operated according to UNI EN ISO 9227 standards and test evaluation operated according to UNI EN ISO 10289 standards).


For a salt spray resistance up to **600** hours refer to point 18

2 - DSP5 SPOOL TYPES


Type **S***:
2 solenoids - 3 positions
with spring centring

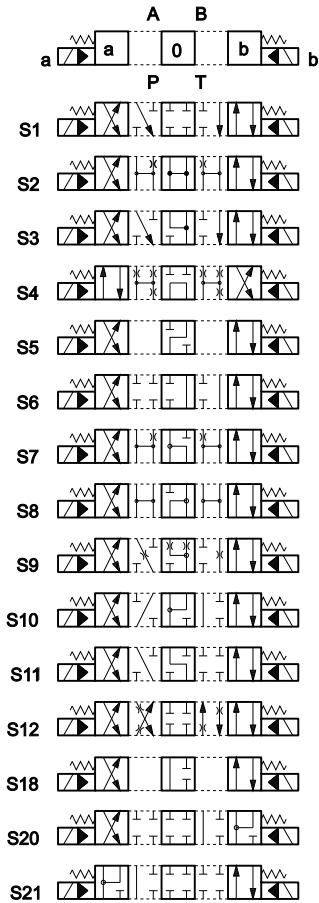


Type **SA***:
1 solenoid side A
2 positions (central + external)
with spring centring

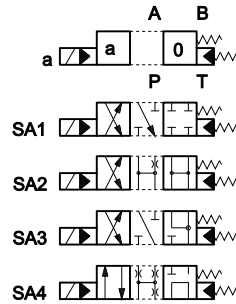


Type **SB***:
1 solenoid side B
2 positions (central + external)
with spring centring

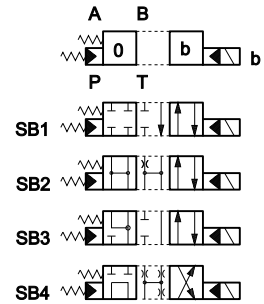


Type **TA**:
1 solenoid side A
2 external positions
with return spring



Type **TB**:
1 solenoid side B
2 external positions
with return spring

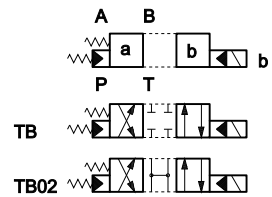

Type **RK**:
2 solenoids - 2 positions
with mechanical retention

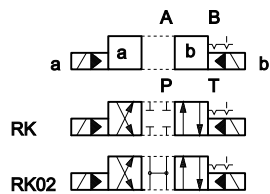

Type **23TA / 23TB**
three-way valve - 1 solenoid - 2 external positions, return spring



Special versions are available in addition to these spools : consult our technical dept. for their identification, feasibility and operating limits.

3 - IDENTIFICATION CODE FOR HYDRAULIC ACTUATED DIRECTIONAL VALVES

D	S	C		-	/	10	-	E	E		
----------	----------	----------	--	----------	----------	-----------	----------	----------	----------	--	--

Pilot operated directional valve, hydraulic actuated

Size: _____
5 = CETOP P05
5R = 4401-05-05-0-05

Option: _____
 (omit for standard version)
H = high pressure p_{max} 420 bar

Spool type (see point 2 and below)
S* **SA*** **SB***
 TA **TB**

Option:
/W7 = Zinc-nickel surface treatment (see **NOTE**)
 Omit if not required

Control option:
/C = Main spool stroke control.
 Omit if not required

External drain (see point 9)

External pilot (see point 9)

Seals:
N = NBR seals for mineral oil (**standard**)
V = FPM seals for special fluids

Series:
 (the overall and mounting dimensions remain unchanged from 10 to 19)

Spool types

DSC5 valves are delivered with short-circuit subplate.
 The hydraulic actuation take place by pressurization in X and Y ports.

S*

SA*

SB*

TA

TB

NOTE : The standard valve is supplied with surface treatment of phosphating black.
 The zinc-nickel finishing makes the valve suitable to ensure a salt spray resistance up to **600** hours. (test operated according to UNI EN ISO 9227 standards and test evaluation operated according to UNI EN ISO 10289 standards).

4 - HYDRAULIC FLUIDS


Use mineral oil-based hydraulic fluids HL or HM type, according to ISO 6743-4. For these fluids, use NBR seals (code N). For fluids HFDR type (phosphate esters) use FPM seals (code V).

For the use of other kinds of fluid such as HFA, HFB, HFC, please consult our technical department. Using fluids at temperatures higher than 80 °C causes a faster degradation of the fluid and of the seals characteristics.

The fluid must be preserved in its physical and chemical characteristics.

5 - DSP5 PRESSURE DROPS Δp -Q

(values obtained with viscosity 36 cSt at 50 °C and optional discharge port closed)

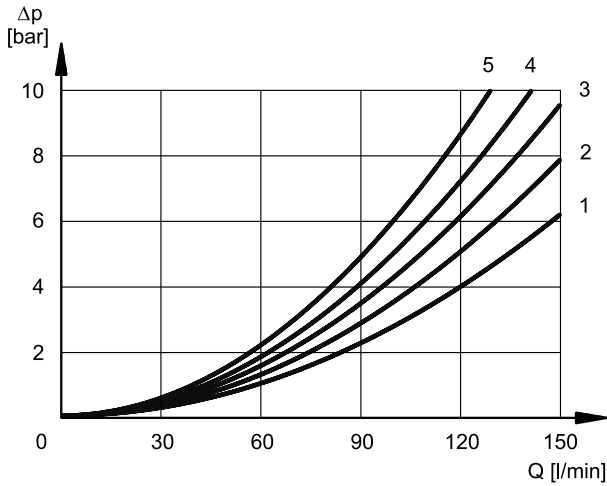

ACTUATED POSITION

SPOOL	FLOW DIRECTIONS			
	P→A	P→B	A→T	B→T
	CURVES ON GRAPH			
S1, SA1, SB1	2	2	2	3
S2, SA2, SB2	3	3	1	2
S3, SA3, SB3	2	2	1	2
S4, SA4, SB4	2	2	2	4
S6				
S7				
S8				
S9				
S10				
S11				
S12	2	2	2	3
S20				
S21				
TA, TB	3	3	3	4
TA02, TB02				
RK				

NORMAL POSITION

SPOOL	FLOW DIRECTIONS				
	P→A	P→B	A→T	B→T	P→T
	CURVES ON GRAPH				
S2, SA2, SB2	-	-	2	2	3
S3, SA3, SB3			5	5	
S4, SA4, SB4					5
S6					
S7					
S8					
S10					
S11					
TA					

6 - OPERATING LIMITS

The values have been obtained with mineral oil, viscosity 36 cSt at 50 °C, and filtration ISO 4406:1999 class 18/16/13.

MAXIMUM FLOW RATES [l/min]		
	at 210 bar	at 350 bar
S4, S7, S8	120	100
All the other spools	150	120



7 - SWITCHING TIMES

The values indicated refer to a solenoid valve working with piloting pressure of 100 bar, with mineral oil at a temperature of 50 °C, at viscosity of 36 cSt and with P→A / B→T connections.

The energizing and de-energizing times are obtained at the pressure variation which occurs on the lines.

TIMES (± 10%) [ms]	ENERGIZED		DE-ENERGIZED	
	2 Pos	3 Pos	2 Pos	3 Pos
AC solenoid	35	25	35	25
DC solenoid	60	50	50	40

8 - PERFORMANCE CHARACTERISTICS

PRESSURES [bar]	DSP5	DSP5H	DSC5	DSC5H
Max pressure in P, A, B ports	350	420	350	420
Max pressure in T line with external drain	250	350	250	350
Max pressure in T line with internal drain	210 (DC) 160 (AC)	210 (DC) 160 (AC)	-	-
Max pressure in Y line with external drain	210 (DC) 160 (AC)	210 (DC) 160 (AC)	-	-
Minimum pilot supply pressure:	5 ÷ 12 (NOTE 1)			
Maximum pilot supply pressure (NOTE 2)	210	350	210	420

NOTE 1: The minimum piloting pressure can be the lower range value at low flows rates, but with higher flow rates the higher value is needed.

NOTE 2: If the working pressure is higher than these rated limits, then provide an external pilot line with p_{max} within the rated limits and purchase the valve with E type pilot supply.


For DSP5 and DSP5H valves, if the external pilot line is not possible, you must opt for the version with Z type pilot supply (see point 9.2), providing max 350 bar at inlet pressure P.

9 - PILOT AND DRAIN

Valves with electro-hydraulic actuation (DSP) are available with both pilot supply and drain internal or external type. The version with external drain allows a higher back pressure on the return line.

The valves with hydraulic actuation (DSC) are available with both pilot supply and pilot return external only.

NOTE: The pilot supply and drainage configuration must be chosen when ordering. Subsequent modification is only permitted by authorized experienced operators or at the factory.

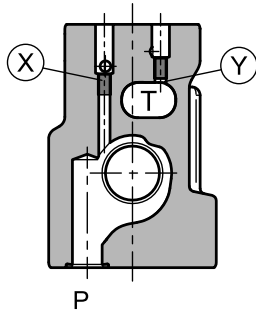


X: plug M5x6 for external pilot
Y: plug M5x6 for external drain

	TYPE OF VALVE	Plug assembly	
		X	Y
IE	internal pilot and external drain	NO	YES
II	internal pilot and internal drain	NO	NO
EE	external pilot and external drain	YES	YES
EI	external pilot and internal drain	YES	NO

9.1 - Z type pilot supply: internal pilot supply with pressure reducing valve

The Z type pilot supply consists of an arrangement with internal pilot and 30 bar supply pressure to the pilot stage by means of a fixed adjustment pressure reducing valve placed between the main stage and the pilot valve.

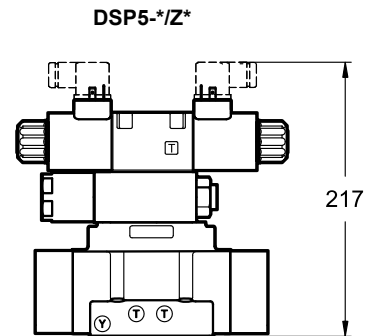

10 - OPTIONS


10.1 - Control of the main spool stroke: C

Stroke control for the main spool is possible by means of special side covers so as to vary the maximum clearance opening.

This solution allows control of the flow rate from the pump to the actuator and from the actuator to the outlet, obtaining a double adjustable control on the actuator.

Add the letter **C** in the identification code to order this version (see point 1).

DSP5-S*/C

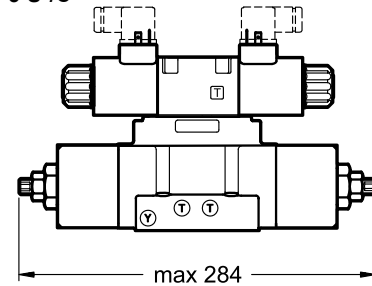


10.2 - Control of the main spool shifting speed: D

By placing a double flow control valve (QTM3 type) between the pilot solenoid valve and the main stage, the pilot supply flow can be adjusted and therefore the changeover smoothness can be varied.

Add the letter **D** in the identification code to order this version (see point 1).

DSP5-S*/D

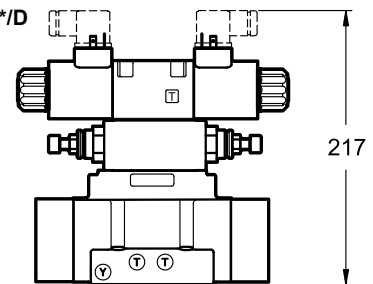


10.3 - Subplate with throttle on line P

It is possible to introduce a subplate with a restrictor of $\varnothing 0.8$ in line P between the pilot solenoid valve and the main stage. Subplate width 10 mm.

Add **P08** in the identification code to order this version (see point 1).

DSP5-S*/P08

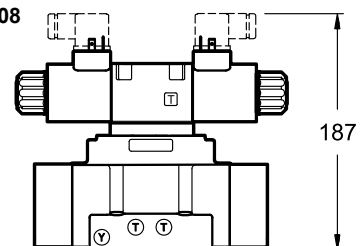

10.4 - Pilot stage with S2 spool

This version is used in association with the external type pilot to allow the pilot line to be unloaded when the valve is in the normal position.

The pilot supply must be external type (E).


Add **S2** to the identification code to order this option (see point 1).

10.5 - Control of the main spool stroke and of the shifting speed: C-D

It is possible to have the valve fitted with both the main spool stroke control (C option) and the main spool shifting speed control (D option)

Add **C-D** in the identification code to order this version (see point 1).

DSP5-S*/C-D

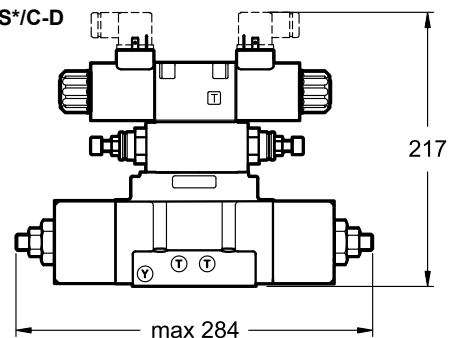

11 - ELECTRICAL FEATURES

11.1 - Solenoids

These are essentially made up of two parts: tube and coil. The tube is threaded into the valve body and includes the armature that moves immersed in oil, without wear. The inner part, in contact with the oil in the return line, ensures heat dissipation. The coil is fastened to the tube by a threaded ring, and can be rotated 360°, to suit the available space.

Protection from atmospheric agents IEC 60529

The IP protection degree is guaranteed only with both valve and connectors of an equivalent IP degree, correctly connected and installed.

electric connection	electric connection protection	whole valve protection
K1	IP65	IP65
K2	IP65/67	
K7	IP65/67	

SUPPLY VOLTAGE FLUCTUATION	± 10% V _{nom}
MAX SWITCH ON FREQUENCY	10.000 ins/hr
DUTY CYCLE	100%
ELECTROMAGNETIC COMPATIBILITY (EMC) (NOTE)	In compliance with 2014/30/EU
LOW VOLTAGE	In compliance with 2014/35/EU
CLASS OF PROTECTION Coil insulation (VDE 0580) Impregnation: DC valve AC valve	class H class F class H

NOTE: In order to further reduce the emissions, with DC supply, use of type H connectors is recommended. These prevent voltage peaks on opening of the coil supply electrical circuit (see cat. 49 000).

11.2 - Current and absorbed power for DC solenoid valve

The table shows current and power consumption values of the DC coils.

Using connectors type 'D' or 'D1' (see cat. 49 000) with embedded bridge rectifier it is possible to feed DC coils with alternating current (50 or 60 Hz), considering a reduction of the operating limits (see point 6).

Coils for direct current (values ±10%)

	Nominal voltage [V]	Resistance at 20°C [Ω]	Current consumpt. [A]	Power consumpt [W]	Coil code		
					K1	K2	K7
D12	12	4,4	2,72	32,7	1903080	1903100	1902940
D24	24	18,6	1,29	31	1903081	1903101	1902941
D48	48	78,6	0,61	29,5	1903083		
D110	110	423	0,26	28,2	1903464		
D220	220	1692	0,13	28,2	1903465		

11.3 - Current and absorbed power for AC solenoid valve



The table shows current and power consumption values at inrush and at holding, for AC coils.

Coils for alternating current (values ± 5%)


Suffix	Nominal Voltage [V]	Freq. [Hz]	Resistance at 20°C [Ω]	Current consumption at inrush [A]	Current consumption at holding [A]	Power consumption at inrush [VA]	Power consumption at holding [VA]	Coil availability K1
A24	24	50	1.69	5.81	1.32	139	32	1902830
A48	48		6.02	3.78	0.86	182	41	1902831
A110	110V-50Hz 120V-60Hz	50/60	33	1.76	0.40	194	44	1902832
				1.54	0.35	185	42	
A230	230V-50Hz 240V-60Hz		135	0.92	0.21	213	48	1902833
				0.79	0.18	190	43	
F110	110	60	28.5	1.45	0.33	160	36	1902834
F220	220		103	0.92	0.21	203	46	1902835

12 - DSP5 OVERALL AND MOUNTING DIMENSIONS

dimensions in mm

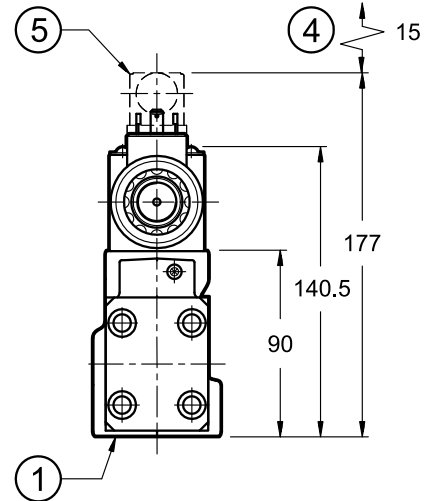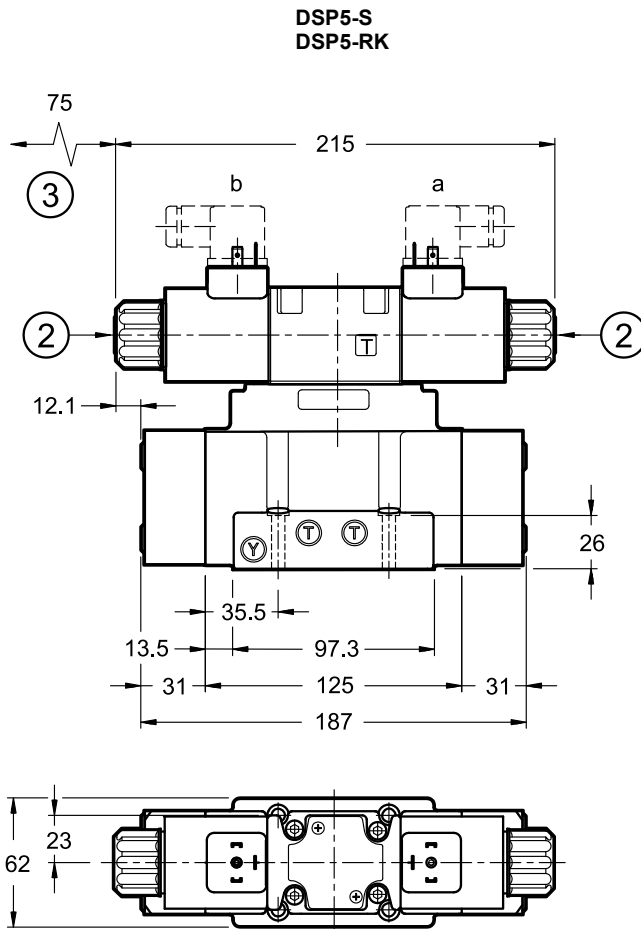

**DSP5-TA
DSP5-SA***

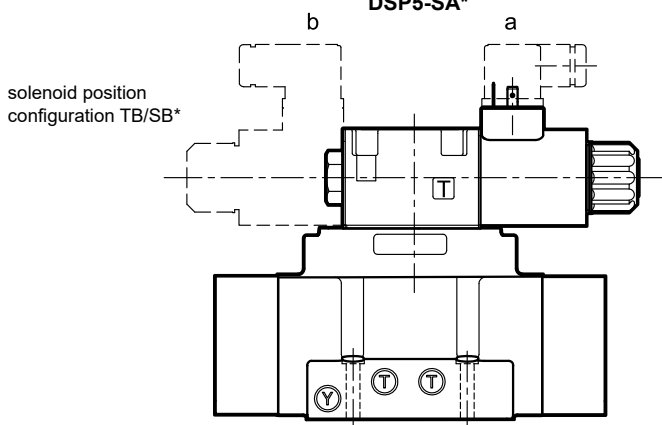


NOTE: For DS*5H valves (high pressure versions) fastening, A10.9 class screws are required.


Valve fastening: N. 4 SHC screws - ISO 4762 M6x35
Tightening torque: 8 Nm (A8.8) - 12 Nm (A10.9)
Thread of mounting holes: M6x10

1	Mounting surface with sealing rings N. 5 OR type 2050 (12.42x1.78) - 90 Shore N. 2 OR type 2037 (9.25x1.78) - 90 Shore
2	Manual override
3	Coil removal space
4	Connector removal space
5	Electric connector to be ordered separately (see cat. 49 000)

13 - DSC5 OVERALL AND MOUNTING DIMENSIONS

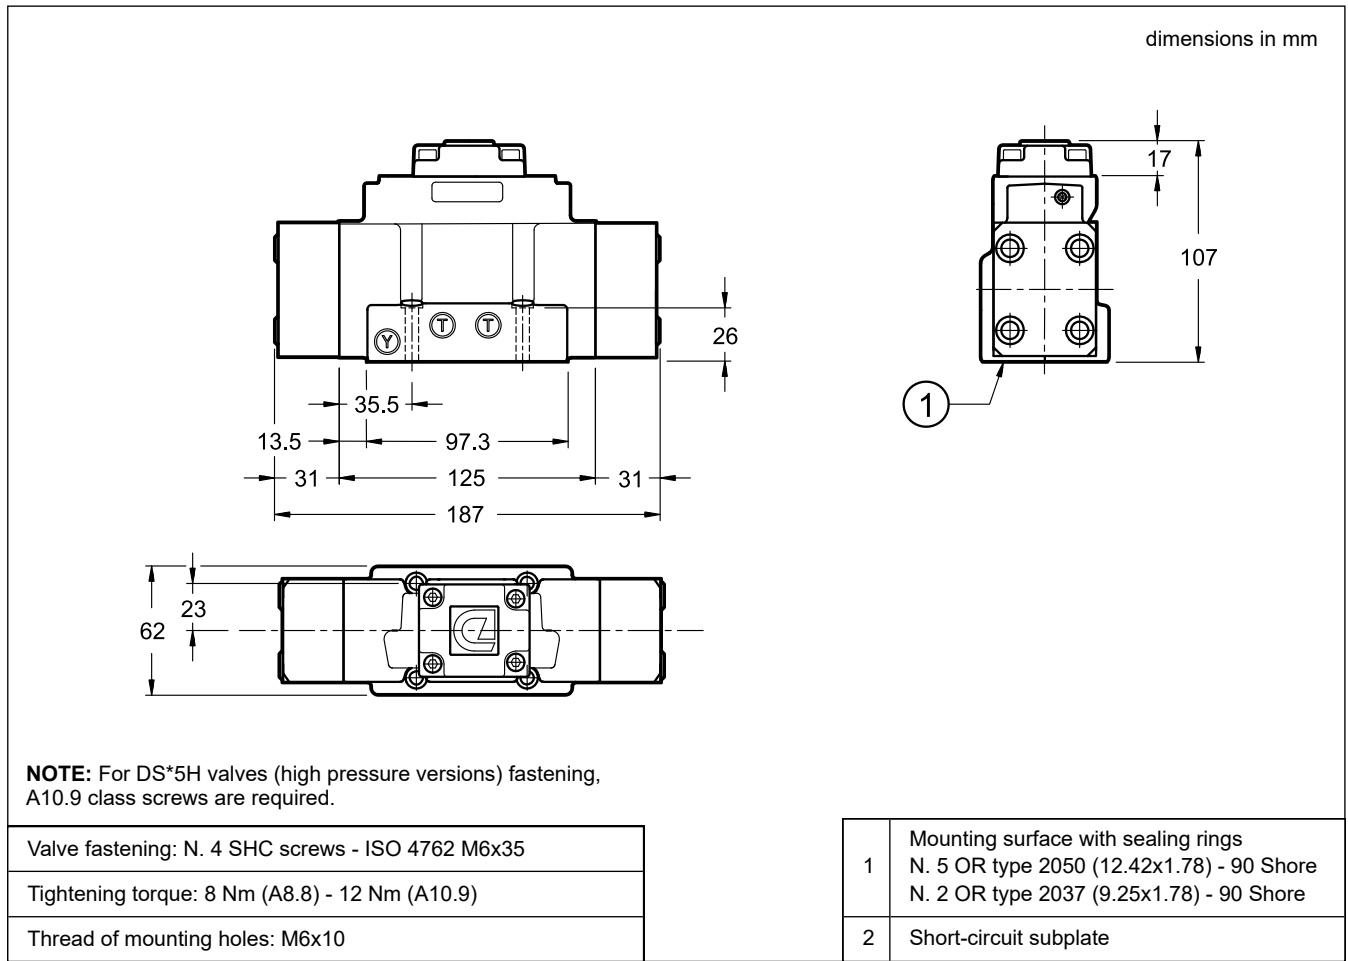

14 - MOUNTING INTERFACES

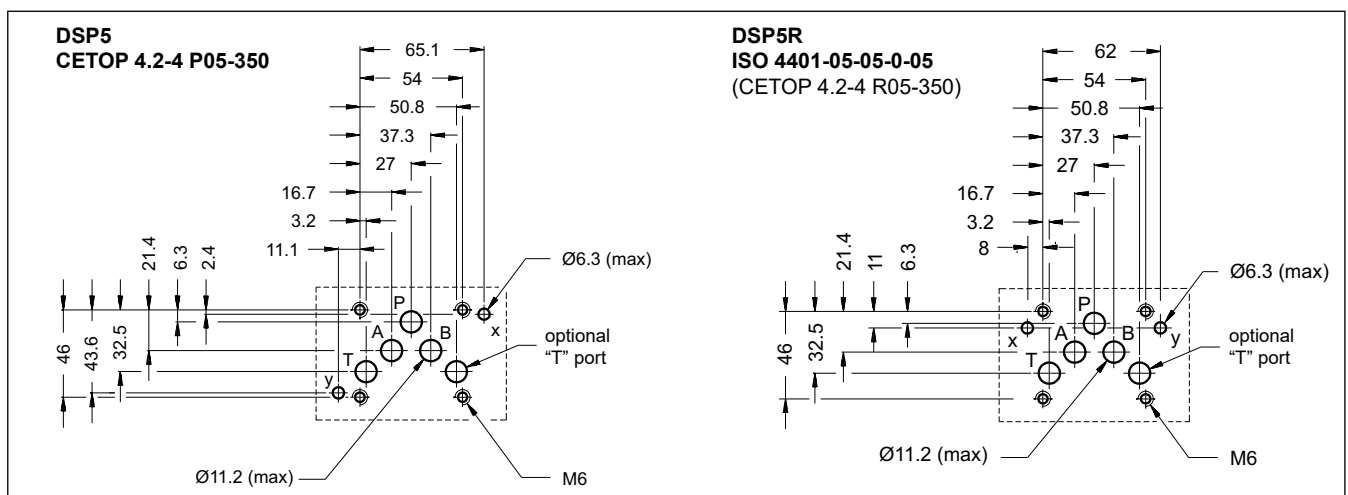


15 - INSTALLATION

Configurations with centring and recall springs can be mounted in any position; type RK valves - without springs and with mechanical detent - must be mounted with the longitudinal axis horizontal.


Valve fastening takes place by means of screws or tie rods, laying the valve on a lapped surface, with values of planarity and smoothness that are equal to or better than those indicated in the drawing. If the minimum values of planarity or smoothness are not met, fluid leakages between valve and mounting surface can easily occur.

NOTE: DS*5H valves (high pressure versions) need screws class A 10.9 for fastening.

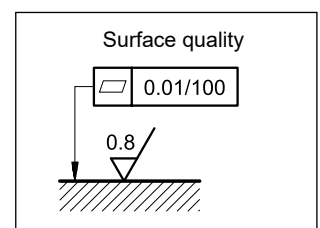


16 - ELECTRIC CONNECTIONS


connection for EN 175301-803
(ex DIN 43650) connector
code **K1 (standard)**
code **WK1** (W7 version only)

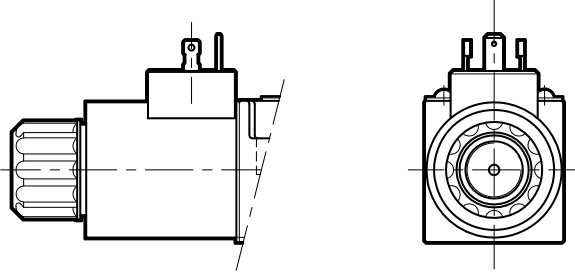


connection for AMP JUNIOR
connector
code **K2**

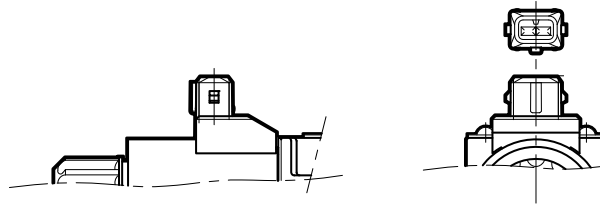

connection for
DEUTSCH DT06-2S male connector
code **K7**

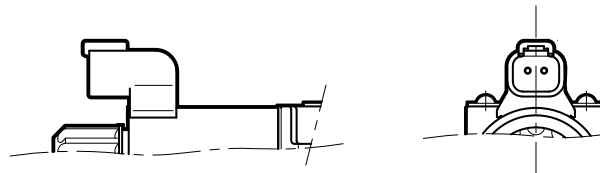

connection for
DEUTSCH DT06-2S male connector
code **WK7** (W7 version only)
code **WK7D** (W7 version only - coil
with diode)

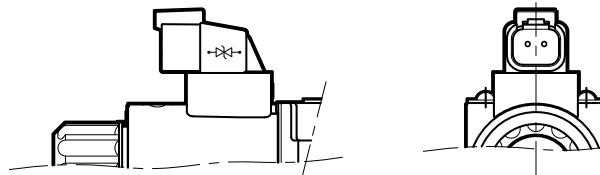


17 - ELECTRIC CONNECTORS

Solenoid operated valves are delivered without connectors. Connectors type EN 175301-803 (ex DIN 43650) for K1 connections can be ordered separately. See catalogue 49 000.

18 - MANUAL OVERRIDE

Whenever the solenoid valve installation may involve exposure to atmospheric agents or use in tropical climates, a boot protected manual override is recommended.


Add **/CM** at the end of the identification code to order this version (see point 1).

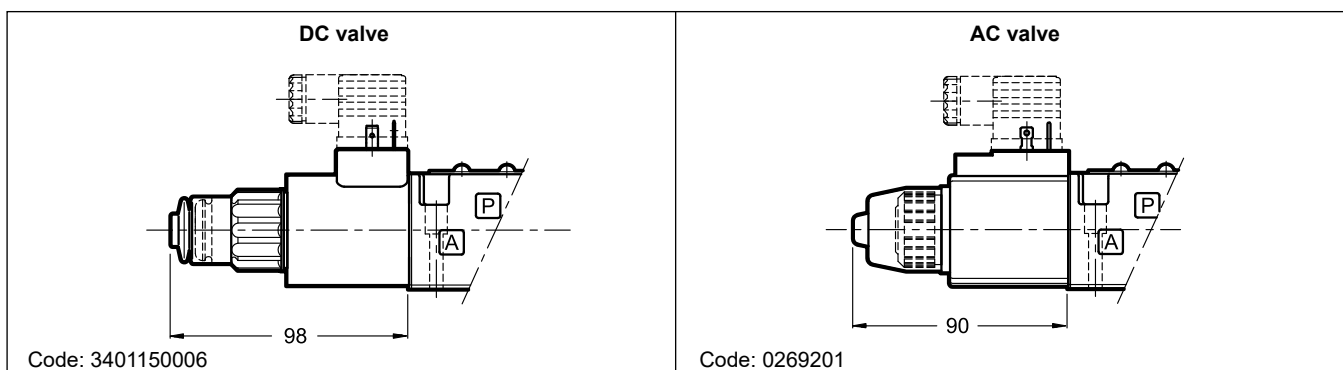

19 - HIGH IP DEGREE AND CORROSION RESISTANCE VERSION

These versions are available for the basic valve (without control options of par. 10, with the exception of S2 option) only. The boot manual override (CM) is installed as standard in order to protect the solenoid tube.

19.1 - Identification code

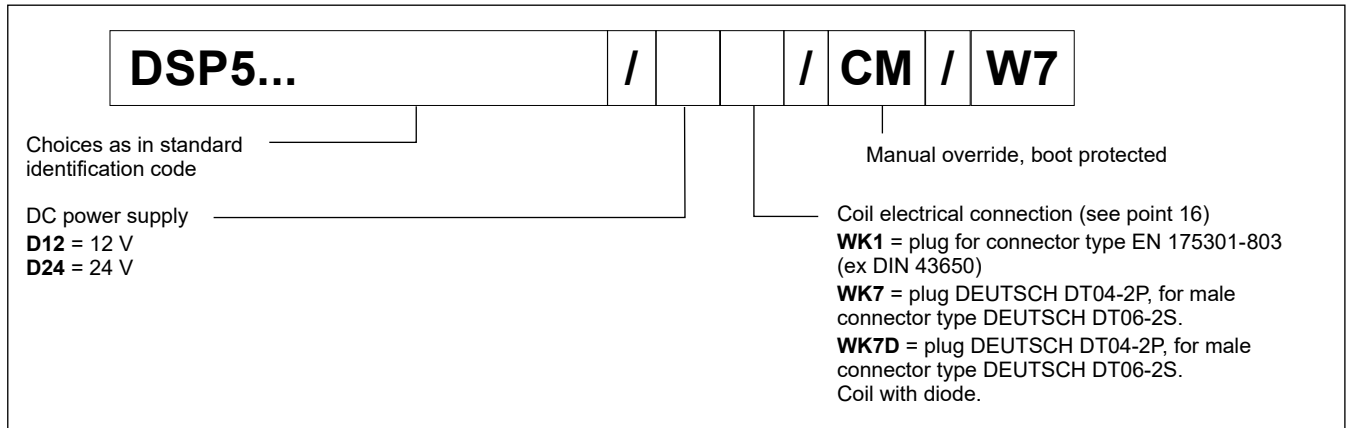

19.2 - Corrosion resistance

This version features the zinc-nickel coating on all exposed metal parts of the valve, making it resistant to exposure to the salt spray for **600** hours (test performed according to UNI EN ISO 9227 and assessment test performed according to UNI EN ISO 10289).

19.3 - DC coils

The coils feature a zinc-nickel surface treatment.

The WK7D coil includes a suppressor diode of pulses for protection from voltage peaks during switching. During the switching the diode significantly reduces the energy released by the winding, by limiting the voltage to 31.4V in the D12 coil and to 58.9 V in the D24 coil.

(values ±10%)

	Nominal voltage [V]	Resistance at 20°C [Ω]	Current consumpt. [A]	Power consumpt [W]	Coil code		
					WK1	WK7	WK7D
D12	12	4.4	2.72	32.7	3984000001	3984000101	3984000111
D24	24	18.6	1.29	31	3984000002	3984000102	3984000112

19.4 - Protection from atmospheric agents IEC 60529

The IP protection degree is guaranteed only with both valve and connectors of an equivalent IP degree, correctly connected and installed.

electric connection	electric connection protection	whole valve protection
WK1	IP66	IP66
WK7	IP66/IP68/IP69 IP69K*	IP66/IP68/IP69 IP69K*
WK7D	IP66/IP68/IP69 IP69K*	IP66/IP68/IP69 IP69K*

(*) The IP69K protection degree is not taken into account in IEC 60529 but it is included in ISO 20653.

NOTE: As regards the liquid ingress protection (second digit), there are three means of protection.

Codes from 1 to 6 are related to water jets.

Rates 7 and 8 are related to immersion.

Rate 9 is reserved for high pressure and temperature water jets.

This means that IPX6 covers all the lower steps, rate IPX8 covers IPX7 but not IPX6 and lower, instead IPX9 does not cover any of them.

Whether a device meets two types of protection requirements it must be indicated by listing both the tests separated by a slash.

(E.g. a marking of an equipment covered both by temporary immersion and water jets is IP66/IP68).



20 - SUBPLATES

(see catalogue 51 000)

Subplates are supplied with phosphating black surface treatment. These subplates are not suitable for DS*5H high pressure valves.

Type with rear ports	PME4-AI5G
Type with side ports	PME4-AL5G
P, T, A, B port dimensions	3/4" BSP
X, Y port dimensions	1/4" BSP





DSP7

DIRECTIONAL VALVES PILOT OPERATED, SOLENOID OR HYDRAULIC (DSC7) ACTUATED

**SUBPLATE MOUNTING
ISO 4401-07**

**p max 350 bar
Q max 300 l/min**

MOUNTING SURFACE

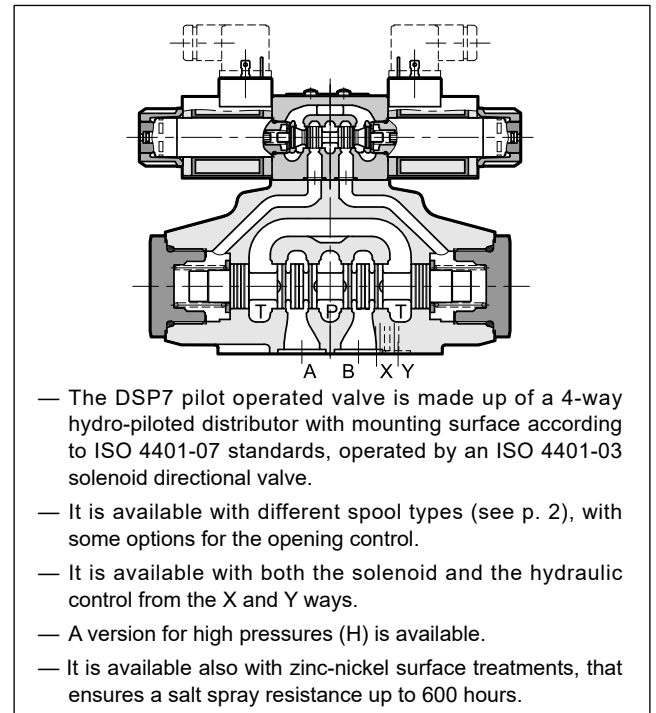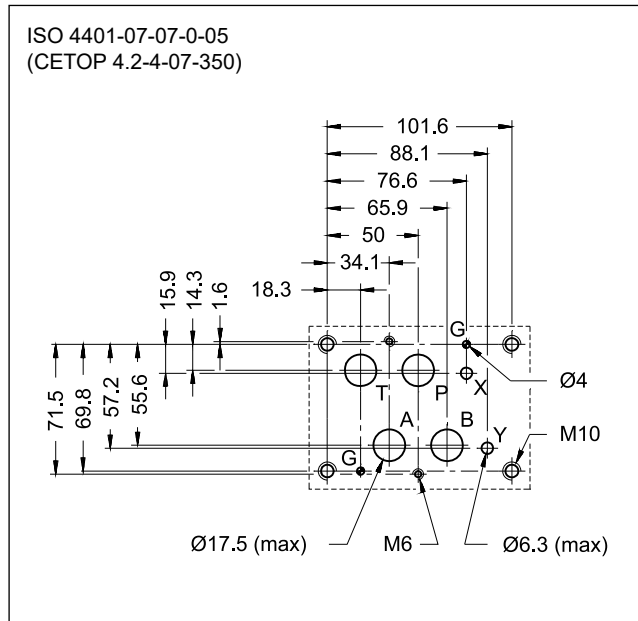


PERFORMANCES

(obtained with mineral oil of viscosity of 36 cSt at 50°C)


		DSP7	DSP7H
Maximum operating pressure			
- ports P - A - B	bar	350	420
- port T (external drainage)		250	350
- port T (internal drainage)		210 (DC) / 160 (AC)	210 (DC) / 160 (AC)
Maximum flow rate from port P to A - B - T	l/min	300	
Ambient temperature range	°C	-20 / +50	
Fluid temperature range	°C	-20 / +80	
Fluid viscosity range	cSt	10 ÷ 400	
Fluid contamination degree		according to ISO 4406:1999 class 20/18/15	
Recommended viscosity	cSt	25	
Mass:			
DSP7-S, RK	kg	8.6	
DSP7-T*, SA*, SB*		8.0	
DSC7		6.6	

2 - DSP7 SPOOL TYPES


Type S*:
2 solenoids - 3 positions
with spring centring

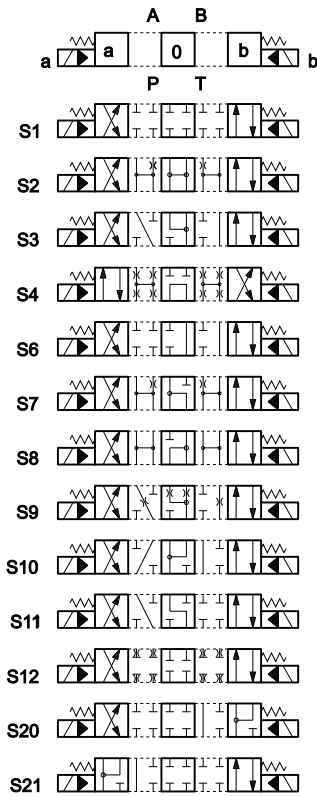


Type RK:
2 solenoids - 2 positions
with mechanical retention

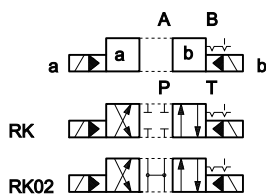


Type SA*:
1 solenoid side A
2 positions (central + external)
with spring centring

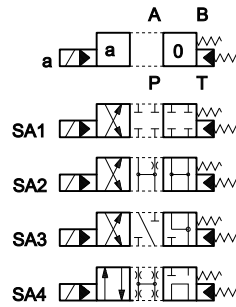


Type TA:
1 solenoid side A
2 external positions
with return spring





Type SB*:
1 solenoid side B
2 positions (central + external)
with spring centring

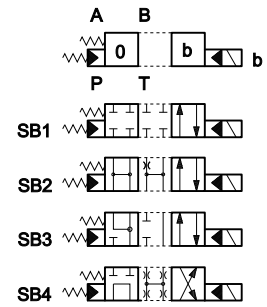

Type TB:
1 solenoid side B
2 external positions
with return spring

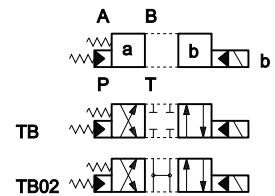

Type 23TA / 23TB
three-way valve - 1 solenoid - 2 external positions, return spring

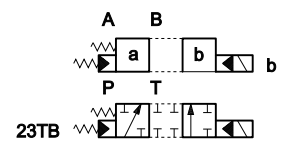

Besides the diagrams shown, special versions are available: consult our technical dept. for their identification, feasibility and operating limits.

3 - IDENTIFICATION CODE FOR DSC7 HYDRAULIC ACTUATED DIRECTIONAL VALVE

	D	S	C	7		-		/	10		-	E	E	
--	----------	----------	----------	----------	--	----------	--	----------	-----------	--	----------	----------	----------	--

Directional valve, hydraulic actuated pilot operated through X and Y ports.

Size: ISO 4401-07

Option:
(omit for standard version)
H = high pressure version
 $P_{max} = 420$ bar

Spool type (see point 2 and below)

S* **TA**
SA* **TB**
SB* **R**

Option:
/ **W7** = Zinc-nickel surface treatment (see **NOTE**)
Omit if not required

External drain (see p. 9)

External pilot (see p. 9)

Seals:
N = NBR seals for mineral oil (**standard**)
V = FPM seals for special fluids

Series: (the overall and mounting dimensions remain unchanged from 10 to 19)

Spool types

The distributor is delivered with short-circuit subplate. The X and Y ports are used for the hydraulic control of the valve.

DSC7-S*

DSC7-TA

DSC7-TB

NOTE: The standard valve is supplied with surface treatment of phosphating black.

The zinc-nickel finishing makes the valve suitable to ensure a salt spray resistance up to **600** hours. (test operated according to UNI EN ISO 9227 standards and test evaluation operated according to UNI EN ISO 10289 standards).

4 - HYDRAULIC FLUIDS


Use mineral oil-based hydraulic fluids HL or HM type, according to ISO 6743-4. For these fluids, use NBR seals (code N). For fluids HFDR type (phosphate esters) use FPM seals (code V).

For the use of other kinds of fluid such as HFA, HFB, HFC, please consult our technical department. Using fluids at temperatures higher than 80 °C causes a faster degradation of the fluid and of the seals characteristics.

The fluid must be preserved in its physical and chemical characteristics.


5 - PRESSURE DROPS ΔP -Q

(values obtained with viscosity 36 cSt at 50 °C)

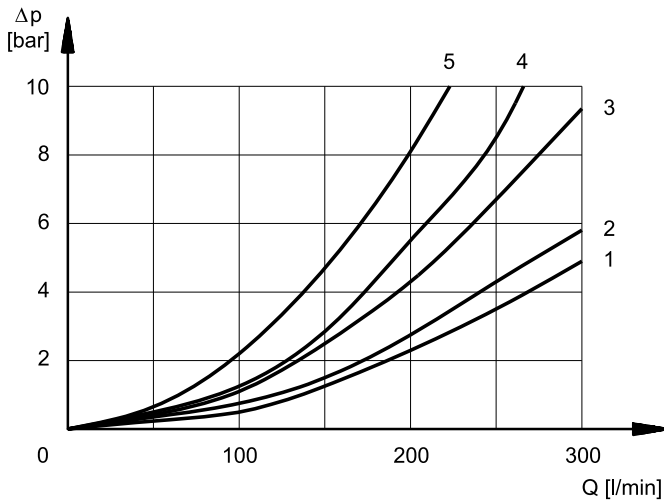

PRESSURE DROPS WITH VALVE ENERGIZED

SPOOL TYPE	FLOW DIRECTION			
	P-A	P-B	A-T	B-T
	CURVES ON GRAPH			
S1, SA1, SB1	1	1	3	4
S2, SA2, SB2	1	1	4	4
S3, SA3, SB3	1	1	4	4
S4, SA4, SB4	2	2	4	5
S6	1	1	3	4
S7	1	1	4	4
S8	1	1	3	4
S9	1	1	3	4
S10	1	1	3	4
S11	1	1	3	4
S12	1	1	3	4
S20	1	1	3	4
S21	1	1	4	4
TA, TB	1	1	3	4
TA02, TB 02	1	1	4	4
RK	1	1	3	4

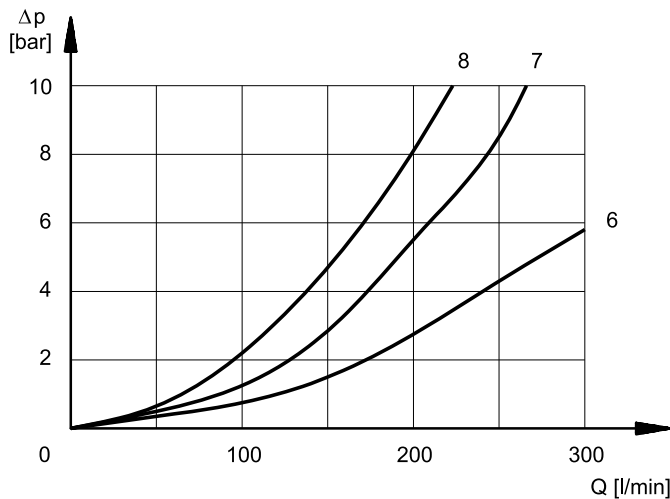

PRESSURE DROPS WITH VALVE IN DE-ENERGIZED POSITION

SPOOL TYPE	FLOW DIRECTION				
	P-A	P-B	A-T	B-T	P-T
	CURVES ON GRAPH				
S2, SA2, SB2					6
S3, SA3, SB3			7	7	
S4, SA4, SB4					7
S6				7	
S7					8
S8					8
S10			7	7	
S11			7		

6 - SWITCHING TIMES

The values indicated refer to a solenoid valve working with piloting pressure of 100 bar, with mineral oil at a temperature of 50°C, at viscosity of 36 cSt and with PA and BT connections.

The energizing and de-energizing times are obtained at the pressure variation which occurs on the lines.


TIMES ($\pm 10\%$) [ms]	ENERGIZED		DE-ENERGIZED	
	2 Pos.	3 Pos.	2 Pos.	3 Pos.
AC solenoid	45	30	45	30
DC solenoid	75	60	60	45

7 - OPERATING LIMITS

The curves define the flow rate operating fields according to the valve pressure for the different spool types.

The values have been obtained according to ISO 6403 norm with solenoids at rated temperature and supplied with voltage equal to 90% of the nominal voltage.

The values have been obtained with mineral oil, viscosity 36 cSt at 50 °C, and filtration ISO 4406:1999 class 18/16/13.

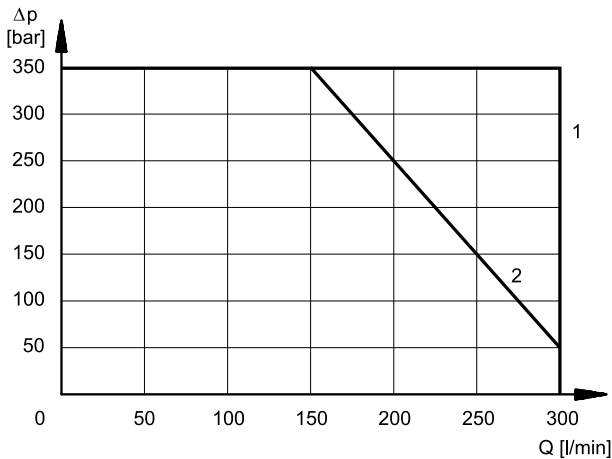

SPOOL	CURVE	
	P→A	P→B
S1,SA1,SB1	1	1
S2, SA2, SB2	1	1
S3, SA3, SB3	1	1
S4, SA4, SB4	2	2
S6	1	1
S7	2	2
S8	2	2
S9	1	1
S10	1	1
S11	1	1
S12	1	1
S20	1	1
S21	1	1

SPOOL	CURVE	
	P→A	P→B
TA, TB	1	1
TA02, TB02	1	1
23TA, 23TB	1	1
RK	1	1

8 - PERFORMANCE CHARACTERISTICS

PRESSURES [bar]	DSP7	DSP7H	DSC7	DSC7H
Max pressure in P, A, B ports	350	420	350	420
Max pressure in T line with external drainage	250	350	250	350
Max pressure in T line with internal drainage	210 (DC) 160 (AC)	210 (DC) 160 (AC)	-	-
Max pressure in Y line with external drainage	210 (DC) 160 (AC)	210 (DC) 160 (AC)	-	-
Min piloting pressure NOTE 1	5 ÷ 12			
Max piloting pressure NOTE 2	210	350	210	420

NOTE 1: minimum piloting pressure can be the lower range value at low flows rates, but with higher flow rates the higher value is needed.


NOTE 2: If the valve operates at higher pressures it is necessary to use the version with external pilot and reduced pressure. Otherwise, the valve can be ordered with internal pilot and pressure reducing valve with 30 bar fixed adjustment (pilot type Z, see identification code).

9 - PILOT AND DRAIN

Valves with electro-hydraulic actuation (DSP) are available with both pilot supply and drain internal or external type. The version with external drain allows a higher back pressure on the return line.

The valves with hydraulic actuation (DSC) are available with both pilot supply and pilot return external only.

NOTE: The pilot supply and drainage configuration must be chosen when ordering. Subsequent modification is only permitted by authorized experienced operators or at the factory.

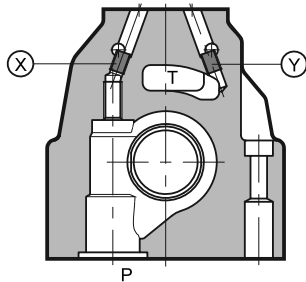

X: plug M5x6 for external pilot
Y: plug M5x6 for external drain

	TYPE OF VALVE	Plug assembly	
		X	Y
IE	internal pilot and external drain	NO	YES
II	internal pilot and internal drain	NO	NO
EE	external pilot and external drain	YES	YES
EI	external pilot and internal drain	YES	NO



9.1 - Backpressure valve incorporated on line P

Valves DSP7 are available upon request with backpressure valve incorporated on line P. This is necessary to obtain the piloting pressure when the control valve, in rest position, has the line P connected to the T port (spools S2, S4, S7, S8, S*2, S*4, TA02, TB02, RK02). The cracking pressure is of 5 bar with a minimum flow rate of 15 l/min.

Add **C** to the identification code for this request (see point 1).


In the C version the piloting is always internal.

The backpressure valve can be also delivered separately and it can be easily mounted on line P of the main control valve. Specify the code **0266577** to order the backpressure valve separately.

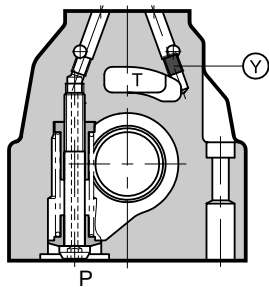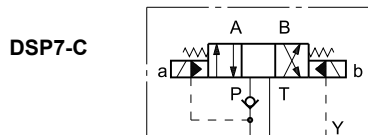

pilot always internal
Y: plug M5x6 for external drain

NOTE: the backpressure valve can't be used as check valve because it doesn't assure the seal.

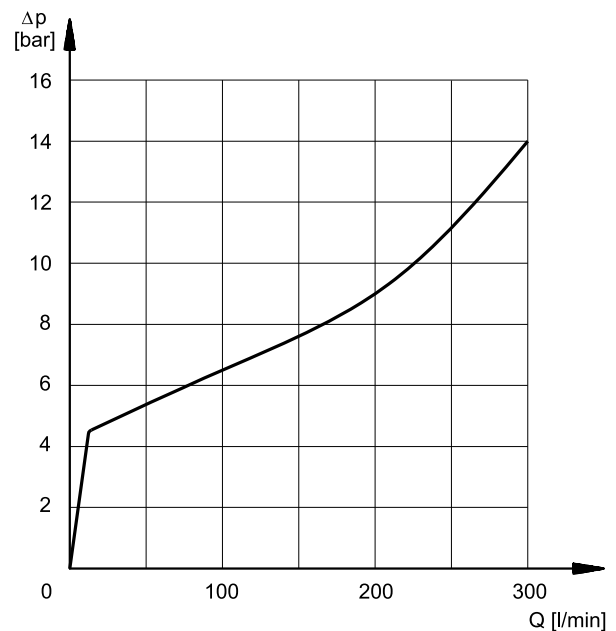

The curve refers to the pressure drop (body part only) with backpressure valve energized to which the pressure drop of the reference spool must be added. (see point 5)

10 - OPTIONS


10.1 - Control of the main spool stroke: C

Stroke control for the main spool is possible by means of special side covers so as to vary the maximum clearance opening.

This solution allows control of the flow rate from the pump to the actuator and from the actuator to the outlet, obtaining a double adjustable control on the actuator.

Add the letter **C** in the identification code to order this version (see point 1).

DSP7-S*/C

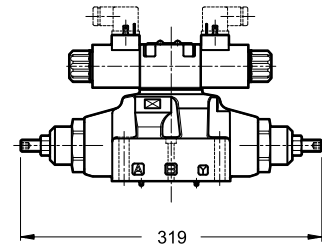


10.2 - Control of the main spool shifting speed: D

By placing a double flow control valve (QTM3 type) between the pilot solenoid valve and the main stage, the pilot supply flow can be adjusted and therefore the changeover smoothness can be varied.

Add the letter **D** in the identification code to order this version (see point 1).

DSP7-S*/D

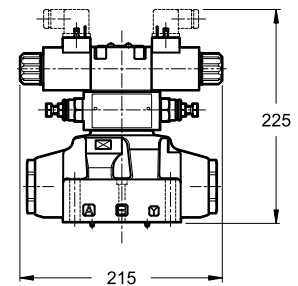


10.3 - Subplate with throttle on line P

It is possible to introduce a subplate with a restrictor of $\varnothing 0.8$ in line P between the pilot solenoid valve and the main stage. Subplate width 10 mm.

Add **P08** in the identification code to order this version (see point 1).

DSP7-S*/P08

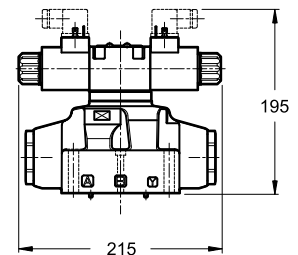

10.4 - Pilot stage with S2 spool

This version is used in association with the external type pilot to allow the pilot line to be unloaded when the valve is in the normal position.

The pilot supply must be external type (E).

Add **S2** to the identification code to order this option (see point 1).

10.5 - Control of the main spool stroke and of the shifting speed: C-D

It is possible to have the valve fitted with both the main spool stroke control (C option) and the main spool shifting speed control (D option)

Add **C-D** in the identification code to order this version (see point 1).

11 - ELECTRICAL FEATURES

11.1 - Solenoids

These are essentially made up of two parts: tube and coil. The tube is threaded into the valve body and includes the armature that moves immersed in oil, without wear. The inner part, in contact with the oil in the return line, ensures heat dissipation.

The coil is fastened to the tube by a threaded ring, and can be rotated 360°, to suit the available space.

Protection from atmospheric agents IEC 60529

The IP protection degree is guaranteed only with both valve and connectors of an equivalent IP degree, correctly connected and installed.

electric connection	electric connection protection	whole valve protection
K1	IP65	IP65
K7	IP65/67	

SUPPLY VOLTAGE FLUCTUATION	± 10% Vnom
MAX SWITCH ON FREQUENCY	10.000 ins/hour
DUTY CYCLE	100%
ELECTROMAGNETIC COMPATIBILITY (EMC) (NOTE)	In compliance with 2014/30/EU
LOW VOLTAGE	In compliance with 2014/35/EU
CLASS OF PROTECTION Coil insulation (VDE 0580) Impregnation: DC valve AC valve	class H class F class H

NOTE: In order to further reduce the emissions with DC supply, the use of type H connectors is recommended. These prevent voltage peaks on opening of the coil supply electrical circuit (see cat. 49 000).

11.2 - DC coils

In direct current energizing, current consumption stays at fairly constant values, essentially determined by Ohm's law: $V = R \times I$.

The WK1 and WK7D are coils specific for the high corrosion resistance version of the valve.

The WK7D coil includes a suppressor diode of pulses for protection from voltage peaks during switching. During the switching the diode significantly reduces the energy released by the winding, by limiting the voltage to 31.4V in the D12 coil and to 58.9 V in the D24 coil.

Using connectors type 'D' or 'D1' (see cat. 49 000) with embedded bridge rectifier it is possible to feed DC coils with alternating current (50 or 60 Hz), considering a reduction of the operating limits (see point 6).

The table shows current and power consumption values for DC coils.

(values ±10%)

	Nominal voltage [V]	Resistance at 20°C [Ω]	Current consumption [A]	Power consumption [W]	Coil code	
					K1	K7
D12	12	4,4	2,72	32,7	1903080	1902940
D24	24	18,6	1,29	31	1903081	1902941
D48	48	78,6	0,61	29,5	1903083	
D110	110	436	0,26	28,2	1903464	
D220	220	1758	0,13	28,2	1903465	


11.3 - AC coils

The table shows current and power consumption values at inrush and at holding, relevant to the different coil types for AC current.


Coils for alternating current (values ± 5%)

Suffix	Nominal Voltage [V]	Freq. [Hz]	Resistance at 20°C [Ω]	Current consumption at inrush [A]	Current consumption at holding [A]	Power consumption at inrush [VA]	Power consumption at holding [VA]	Coil availability K1
A24	24	50	1.69	5.81	1.32	139	32	1902830
A48	48		6.02	3.78	0.86	182	41	1902831
A110	110V-50Hz 120V-60Hz	50/60	33	1.76	0.40	194	44	1902832
				1.54	0.35	185	42	
A230	230V-50Hz 240V-60Hz		135	0.92	0.21	213	48	1902833
				0.79	0.18	190	43	
F110	110	60	28.5	1.45	0.33	160	36	1902834
F220	220		103	0.92	0.21	203	46	1902835

12 - DSP7 OVERALL AND MOUNTING DIMENSIONS FOR SOLENOID DISTRIBUTOR

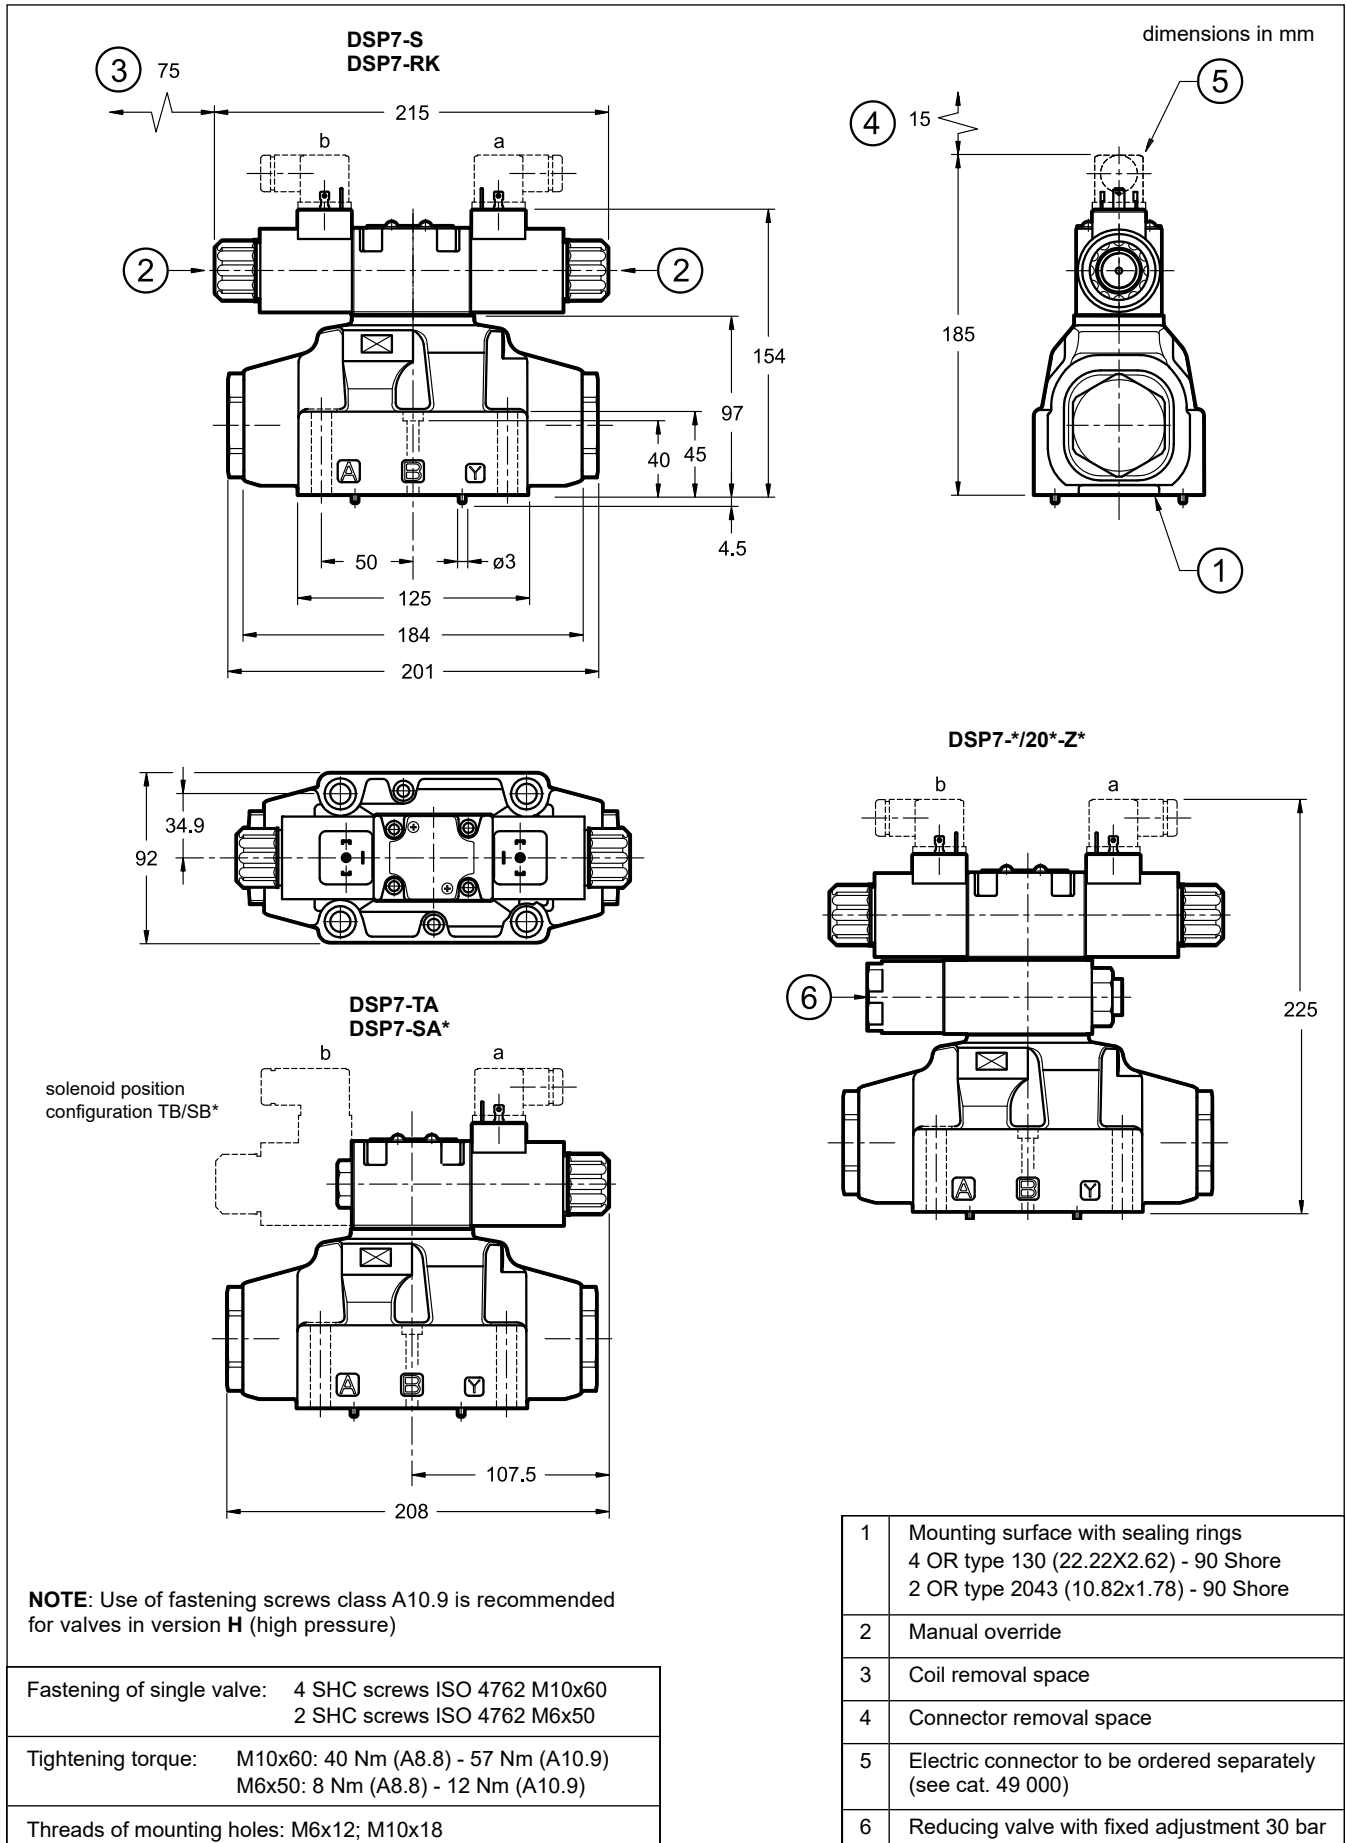

13 - DSC7 OVERALL AND MOUNTING DIMENSIONS FOR HYDRAULIC DISTRIBUTOR DSC7

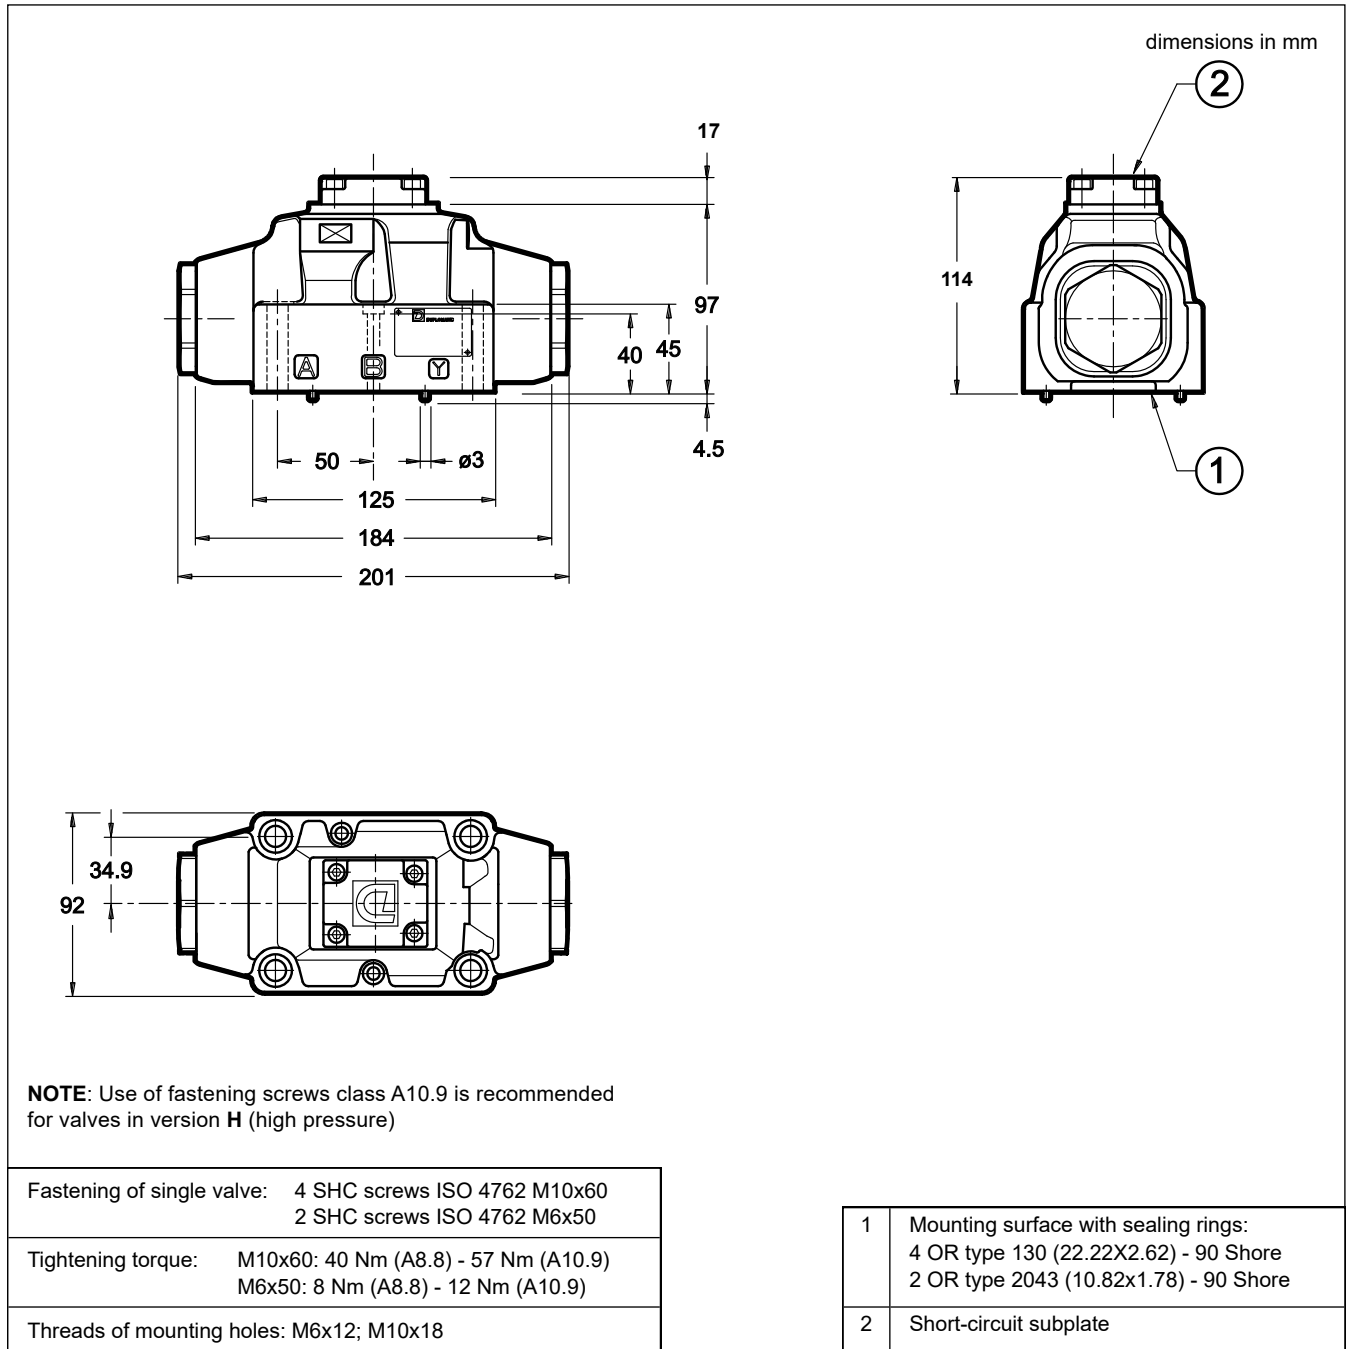


14 - INSTALLATION

Configurations with centring and recall springs can be mounted in any position; type RK valves - without springs and with mechanical detent - must be mounted with the longitudinal axis horizontal.


Valve fastening takes place by means of screws or tie rods, laying the valve on a lapped surface, with values of planarity and smoothness that are equal to or better than those indicated in the drawing. If the minimum values of planarity or smoothness are not met, fluid leakages between valve and mounting surface can easily occur.

NOTE: Use of fastening screws class 10.9 is recommended for valves in version H (high pressure).

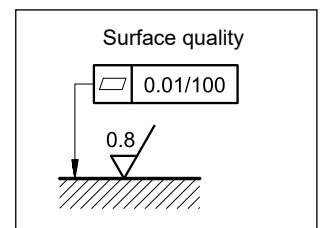


15 - ELECTRIC CONNECTIONS


connection for EN 175301-803
(ex DIN 43650) connector
code **K1 (standard)**
code **WK1** (W7 version only)

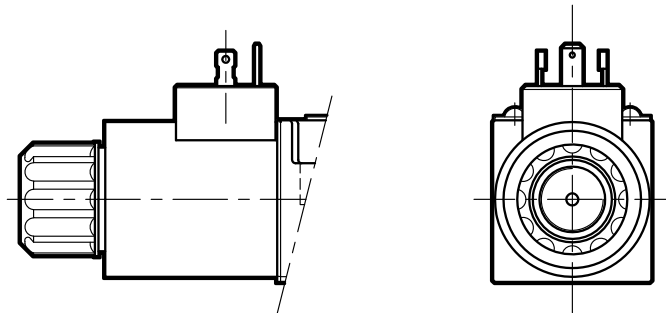

connection for
DEUTSCH DT06-2S male
connector type
code **K7**

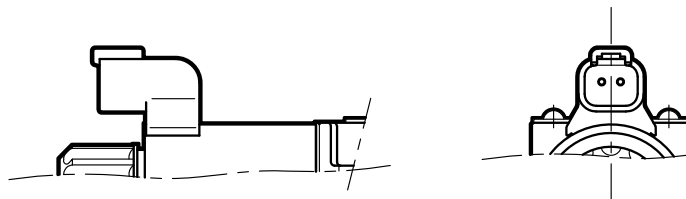

connection for
DEUTSCH DT06-2S male connector
code **WK7** (W7 version only)
code **WK7D** (W7 version only - coil
with diode)

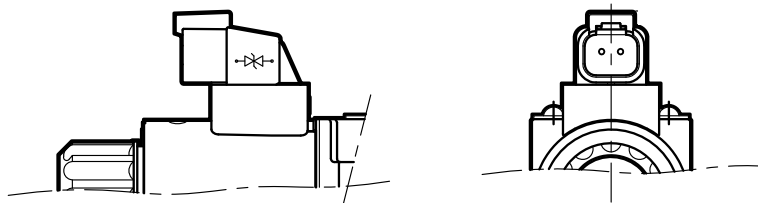


16 - ELECTRIC CONNECTORS

Solenoid valves are delivered without connectors. Connectors type EN 175301-803 (ex DIN 43650) for K1 and WK1 connections can be ordered separately. See catalogue 49 000.

17 - MANUAL OVERRIDE

Whenever the solenoid valve installation may involve exposure to atmospheric agents or use in tropical climates, the manual override, boot protection is recommended.


Add the suffix **CM** to request this device (see point 1).

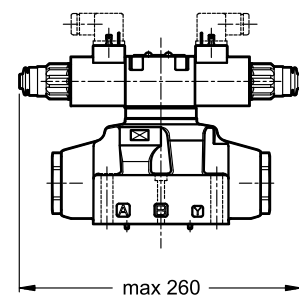

18 - HIGH IP DEGREE AND CORROSION RESISTANCE VERSION

These versions are available only for the basic valve and for the valves with D and S2 control options (see point 10). The boot manual override (CM) is installed as standard in order to protect the solenoid tube.

18.1 - Identification code

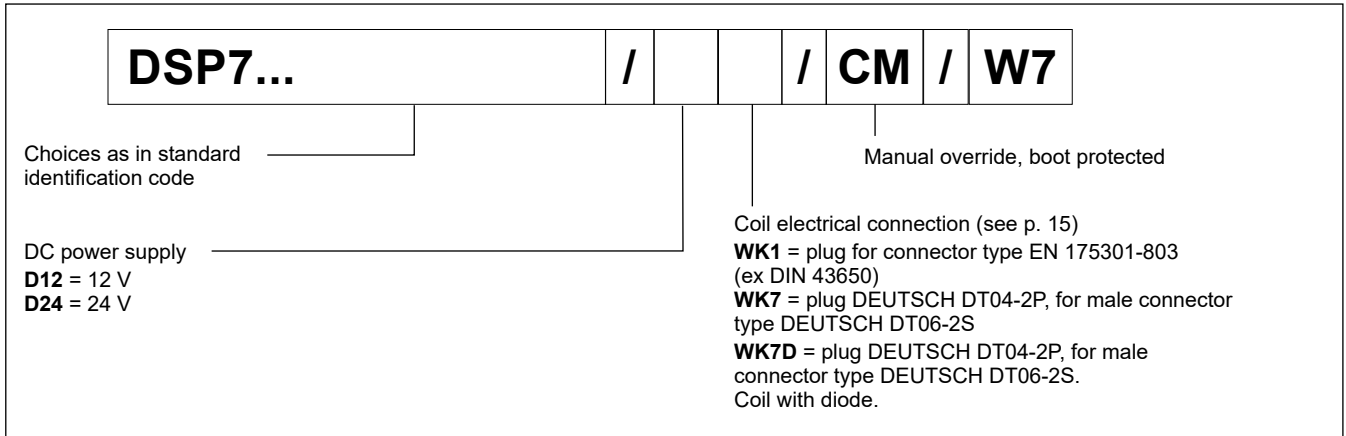

18.2 - Corrosion resistance

This version features the zinc-nickel coating on all exposed metal parts of the valve, making it resistant to exposure to the salt spray for **600** hours (test performed according to UNI EN ISO 9227 and assessment test performed according to UNI EN ISO 10289).

18.3 - DC coils

The coils feature a zinc-nickel surface treatment.

The WK7D coil includes a suppressor diode of pulses for protection from voltage peaks during switching. During the switching the diode significantly reduces the energy released by the winding, by limiting the voltage to 31.4V in the D12 coil and to 58.9 V in the D24 coil.

(values $\pm 10\%$)

	Nominal voltage [V]	Resistance at 20°C [Ω]	Current consumpt. [A]	Power consumpt [W]	Coil code		
					WK1	WK7	WK7D
D12	12	4.4	2.72	32.7	3984000001	3984000101	3984000111
D24	24	18.6	1.29	31	3984000002	3984000102	3984000112

18.4 - Protection from atmospheric agents IEC 60529

The IP protection degree is guaranteed only with both valve and connectors of an equivalent IP degree, correctly connected and installed.

electric connection	electric connection protection	whole valve protection
WK1	IP66	IP66
WK7	IP66/IP68/IP69 IP69K*	IP66/IP68/IP69 IP69K*
WK7D	IP66/IP68/IP69 IP69K*	IP66/IP68/IP69 IP69K*

(*) The IP69K protection degree is not taken into account in IEC 60529 but it is included in ISO 20653.

NOTE: As regards the liquid ingress protection (second digit), there are three means of protection.

Codes from 1 to 6 are related to water jets.

Rates 7 and 8 are related to immersion.

Rate 9 is reserved for high pressure and temperature water jets.

This means that IPX6 covers all the lower steps, rate IPX8 covers IPX7 but not IPX6 and lower, instead IPX9 does not cover any of them.

Whether a device meets two types of protection requirements it must be indicated by listing both the tests separated by a slash.

(E.g. a marking of an equipment covered both by temporary immersion and water jets is IP66/IP68).



18 - SUBPLATES

(see catalogue 51 000)


These subplates are not suitable for DS*7H high pressure valves.

Type with rear ports	PME07-AI6G
Type with side ports	PME07-AL6G
P, T, A, B, port dimensions X, Y; L port dimensions	1" BSP 1/4" BSP

DSP8

DIRECTIONAL VALVES PILOT OPERATED, SOLENOID OR HYDRAULIC (DSC8) ACTUATED



SERIES 10

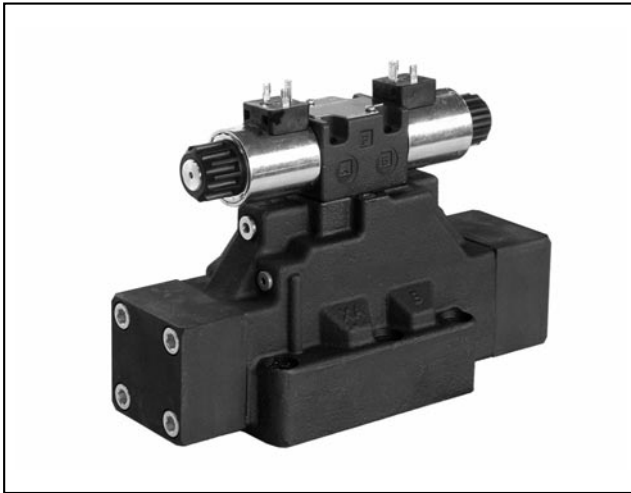

SUBPLATE MOUNTING ISO 4401-08

p max 350 bar
Q max 600 l/min

MOUNTING INTERFACE

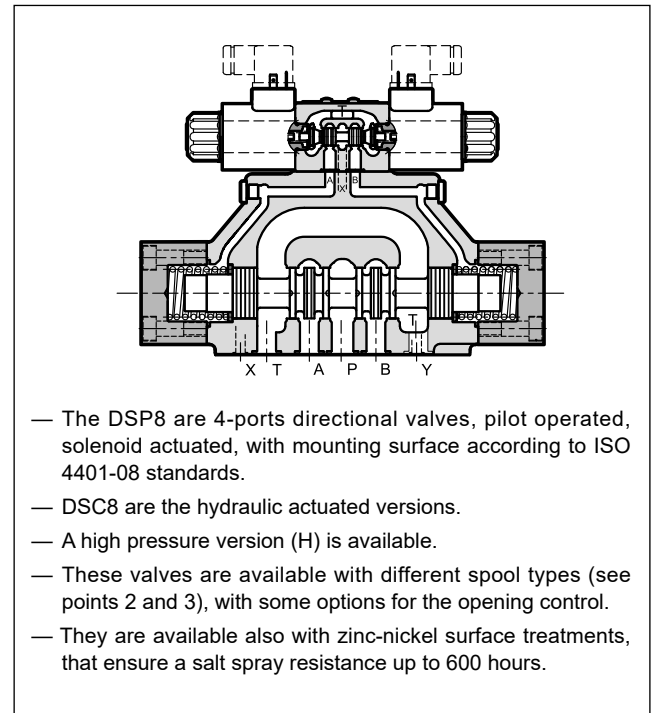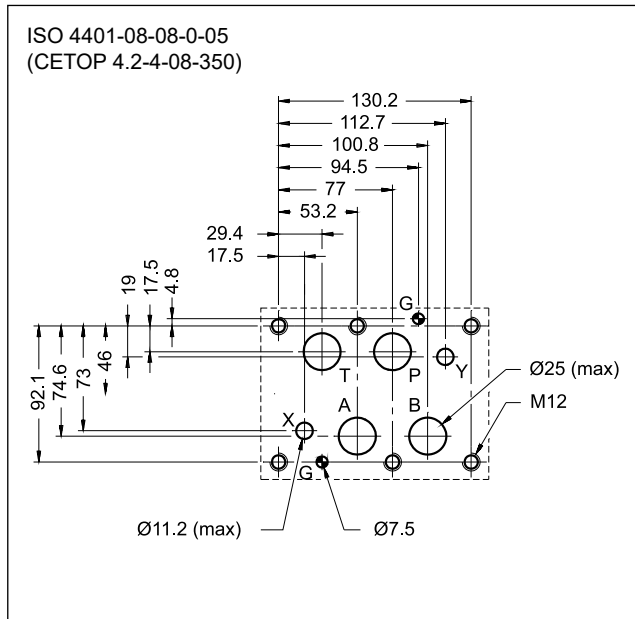


PERFORMANCES

(obtained with mineral oil of viscosity of 36 cSt at 50 °C)


		DSP8	DSP8H
Maximum operating pressure			
- ports P - A - B	bar	350	420
- port T (external drainage)		250	350
- port T (internal drainage)		210 (DC) / 160 (AC)	210 (DC) / 160 (AC)
Maximum flow rate from port P to A - B - T	l/min	600	
Ambient temperature range	°C	-20 / +50	
Fluid temperature range	°C	-20 / +80	
Fluid viscosity range	cSt	10 ÷ 400	
Fluid contamination degree		according to ISO 4406:1999 class 20/18/15	
Recommended viscosity	cSt	25	
Mass:			
DSP8-S, RK	kg	14.5	
DSP8-T*, SA*, SB*		13	
DSC8		12.5	

2 - DSP8 SPOOL TYPES


Type S*:
2 solenoids - 3 positions
with spring centring

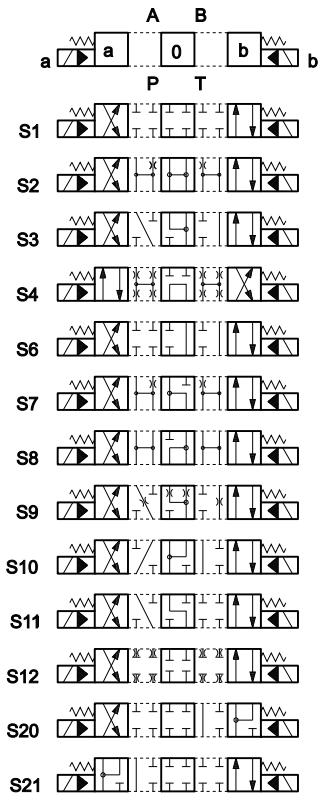


Type RK:
2 solenoids - 2 positions
with mechanical retention

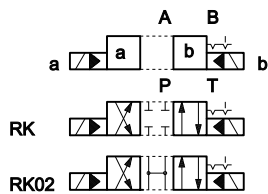


Type SA*:
1 solenoid side A
2 positions (central + external)
with spring centring

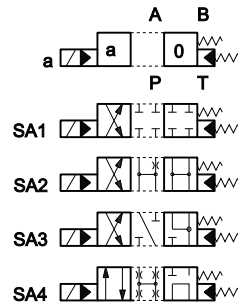


Type TA:
1 solenoid side A
2 external positions
with return spring



Type SB*:
1 solenoid side B
2 positions (central + external)
with spring centring

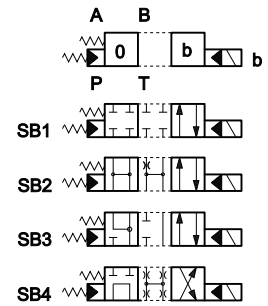

Type TB:
1 solenoid side B
2 external positions
with return spring

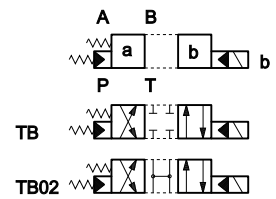

Type 23TA / 23TB

three-way valve - 1 solenoid - 2 external positions, return spring



Besides the diagrams shown, special versions are available: consult our technical dept. for their identification, feasibility and operating limits.

3 - IDENTIFICATION CODE FOR HYDRAULIC ACTUATED DIRECTIONAL VALVES

	D	S	C	8		-		/	10		-	E	E	
--	----------	----------	----------	----------	--	----------	--	----------	-----------	--	----------	----------	----------	--

Pilot operated directional valve, hydraulic actuated

Size: ISO 4401-08

Option:
(omit for standard version)
H = high pressure p_{max} 420 bar

Spool type (see point 2 and below)

S*	SA*	SB*
	TA	TB

Option:
/ W7 = Zinc-nickel surface treatment (see **NOTE**)
Omit if not required

External drain (see point 9)

External pilot (see point 9)

Seals:
N = NBR seals for mineral oil (**standard**)
V = FPM seals for special fluids

Series:
(the overall and mounting dimensions remain unchanged from 10 to 19)

Spool types

DSC8 valves are delivered with short-circuit subplate.
The hydraulic actuation take place by pressurization in X and Y ports.

S*

SA*

SB*

TA

TB

NOTE : The standard valve is supplied with surface treatment of phosphating black.
The zinc-nickel finishing makes the valve suitable to ensure a salt spray resistance up to **600** hours. (test operated according to UNI EN ISO 9227 standards and test evaluation operated according to UNI EN ISO 10289 standards).

4 - HYDRAULIC FLUIDS


Use mineral oil-based hydraulic fluids HL or HM type, according to ISO 6743-4. For these fluids, use NBR seals (code N). For fluids HFDR type (phosphate esters) use FPM seals (code V).

For the use of other kinds of fluid such as HFA, HFB, HFC, please consult our technical department. Using fluids at temperatures higher than 80 °C causes a faster degradation of the fluid and of the seals characteristics.

The fluid must be preserved in its physical and chemical characteristics.

5 - DSP8 PRESSURE DROPS Δp -Q

(values obtained with viscosity 36 cSt at 50 °C)

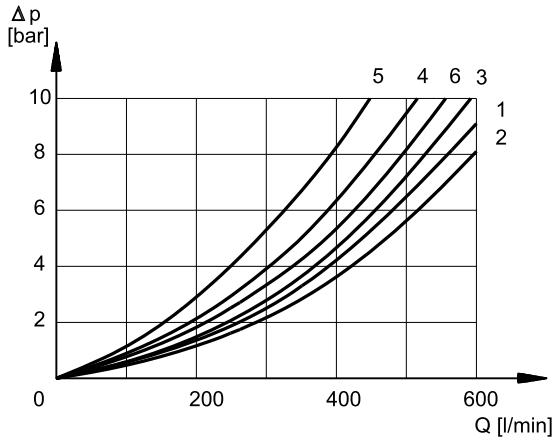

ACTUATED POSITION

SPOOL	FLOW DIRECTIONS			
	P→A	P→B	A→T	B→T
	CURVES ON GRAPH			
S1, SA1, SB1	1	1	2	3
S2, SA2, SB2	2	2	1	2
S3, SA3, SB3	1	1	1	2
S4, SA4, SB4	6	6	3	4
S6	1	1	2	2
S7	6	6	3	4
S8	6	6	4	3
S9	1	1	2	3
S10	2	2	2	3
S11	1	1	1	3
S12	1	1	2	3
S20	1	1	2	
S21	1	1		3
TA, TB	1	1	2	2
TA02, TB02	1	1	1	1
RK	1	1	2	3

NORMAL POSITION

SPOOL	FLOW DIRECTIONS				
	P→A	P→B	A→T	B→T	P→T
	CURVES ON GRAPH				
S2, SA2, SB2					6○
S3, SA3, SB3			4●	4▼	
S4, SA4, SB4					5
S6				4	
S7					5▼
S8					5●
S10	4●	4▼			
S11			3		
TA	1			3	

○ A-B closed ● B closed ▼ A closed

6 - OPERATING LIMITS

The values have been obtained with mineral oil, viscosity 36 cSt at 50 °C, and filtration ISO 4406:1999 class 18/16/13.

MAXIMUM FLOW RATES [l/min]		
	at 210 bar	at 350 bar
S4, S7, S8	500	450
All the other spools	600	500

7 - SWITCHING TIMES

The values indicated refer to a solenoid valve working with piloting pressure of 100 bar, with mineral oil at a temperature of 50 °C, at viscosity of 36 cSt and with P→A / B→T connections.

The energizing and de-energizing times are obtained at the pressure variation which occurs on the lines.

TIMES (± 10%) [ms]	ENERGIZED		DE-ENERGIZED	
	2 Pos	3 Pos	2 Pos	3 Pos
AC solenoid	70	40	70	40
DC solenoid	100	70	80	50

8 - PERFORMANCE CHARACTERISTICS

PRESSURES [bar]	DSP8	DSP8H	DSC8	DSC8H
Max pressure in P, A, B ports	350	420	350	420
Max pressure in T line with external drain	250	350	250	350
Max pressure in T line with internal drain	210 (DC) 160 (AC)	210 (DC) 160 (AC)	-	-
Max pressure in Y line with external drain	210 (DC) 160 (AC)	210 (DC) 160 (AC)	-	-
Minimum pilot supply pressure:	5 ÷ 12 (NOTE 1)			
Maximum pilot supply pressure (NOTE 2)	210	350	210	420

NOTE 1: The minimum piloting pressure can be the lower range value at low flows rates, but with higher flow rates the higher value is needed.

NOTE 2: If the working pressure is higher than these rated limits, then provide an external pilot line with p_{max} within the rated limits and purchase the valve with E type pilot supply.


For DSP8 and DSP8H valves, if the external pilot line is not possible, you must opt for the version with Z type pilot supply (see point 9.2), providing max 350 bar at inlet pressure P.

9 - PILOT AND DRAIN

Valves with electro-hydraulic actuation (DSP) are available with both pilot supply and drain internal or external type. The version with external drain allows a higher back pressure on the return line.

The valves with hydraulic actuation (DSC) are available with both pilot supply and pilot return external only.

NOTE: The pilot supply and drainage configuration must be chosen when ordering. Subsequent modification is only permitted by authorized experienced operators or at the factory.

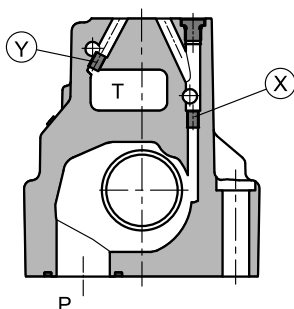

X: plug M6x8 for external pilot
Y: plug M6x8 for external drain

TYPE OF VALVE		Plug assembly	
		X	Y
IE	internal pilot and external drain	NO	YES
II	internal pilot and internal drain	NO	NO
EE	external pilot and external drain	YES	YES
EI	external pilot and internal drain	YES	NO

9.1 - C type pilot supply: internal pilot supply with backpressure valve in P port



DSP8 valves are available with incorporated backpressure valve in the P port.

This is in order to reach the minimum pilot supply pressure at normal position in valves in which the inlet port (P) and the return port (T) are connected (spools S2, S4, S7, S8, S*2, S*4, TA02, TB02, RK02).


The pressure differential of the backpressure valve is to be added to that of the main valve, showed at page 5.

The cracking pressure is approx 6 bar at 15 l/min.

NOTE: The backpressure valve doesn't assure the seal so it has not be intended as a check valve.

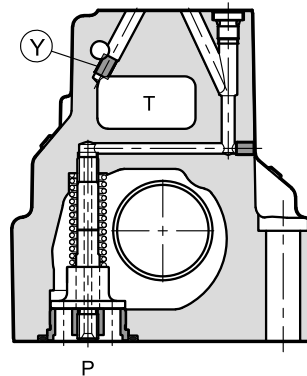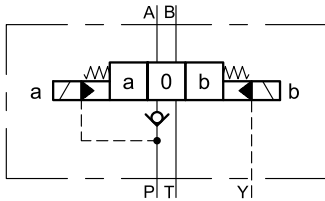


Y: plug M6x8 for external drain

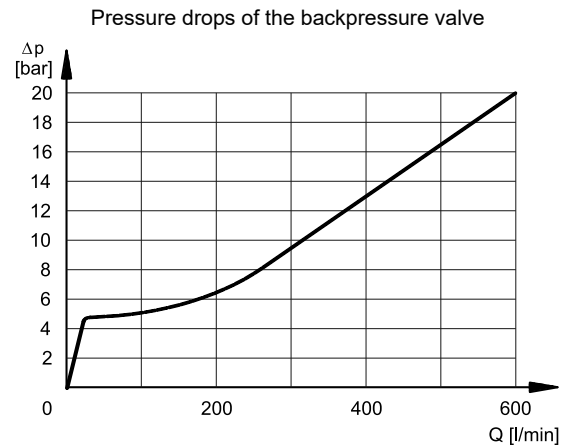

9.2 - Z type pilot supply: internal pilot supply with pressure reducing valve

The Z type pilot supply consists of an arrangement with internal pilot and 30 bar supply pressure to the pilot stage by means of a fixed adjustment pressure reducing valve placed between the main stage and the pilot valve.

DSP8-*/Z*

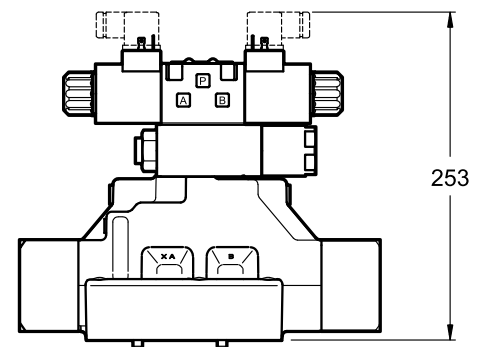


10 - OPTIONS

10.1 - Control of the main spool stroke: C

Stroke control for the main spool is possible by means of special side covers so as to vary the maximum clearance opening.

This solution allows control of the flow rate from the pump to the actuator and from the actuator to the outlet, obtaining a double adjustable control on the actuator.


Add the letter **C** in the identification code to order this version (see point 1).

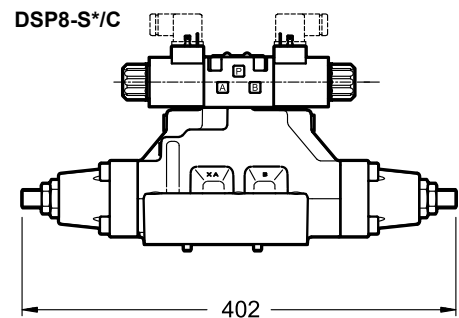

10.2 - Control of the main spool shifting speed: D

By placing a double flow control valve (QTM3 type) between the pilot solenoid valve and the main stage, the pilot supply flow can be adjusted and therefore the changeover smoothness can be varied.


Add the letter **D** in the identification code to order this version (see point 1).

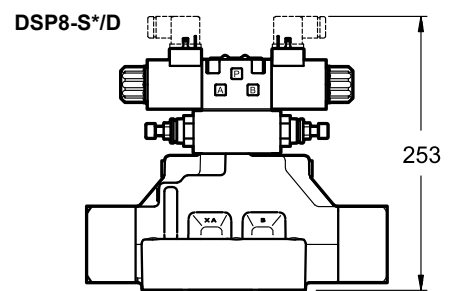

10.3 - Subplate with throttle on line P

It is possible to introduce a subplate with a restrictor of $\varnothing 0.8$ in line P between the pilot solenoid valve and the main stage. Subplate width 10 mm.

Add **P08** in the identification code to order this version (see point 1).

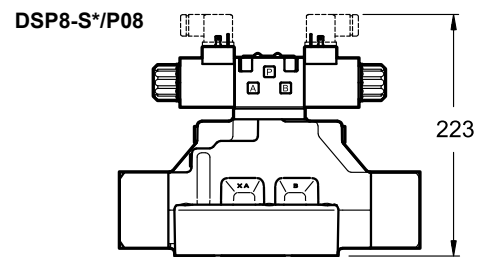

10.4 - Pilot stage with S2 spool

This version is used in association with the external type pilot to allow the pilot line to be unloaded when the valve is in the normal position.


The pilot supply must be external type (E).

Add **S2** to the identification code to order this option (see point 1).

10.5 - Control of the main spool stroke and of the shifting speed: C-D

It is possible to have the valve fitted with both the main spool stroke control (C option) and the main spool shifting speed control (D option)

Add **C-D** in the identification code to order this version (see point 1).

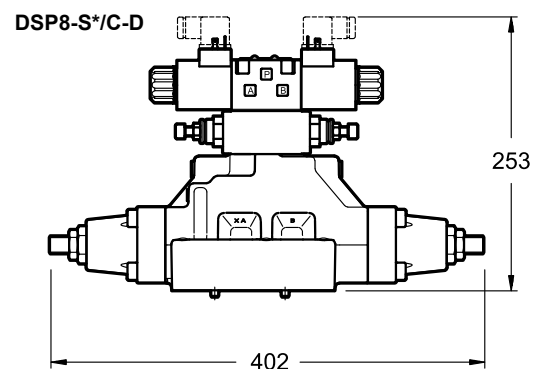

11 - ELECTRICAL FEATURES

11.1 - Solenoids

These are essentially made up of two parts: tube and coil. The tube is threaded into the valve body and includes the armature that moves immersed in oil, without wear. The inner part, in contact with the oil in the return line, ensures heat dissipation. The coil is fastened to the tube by a threaded ring, and can be rotated 360°, to suit the available space.

Protection from atmospheric agents IEC 60529

The IP protection degree is guaranteed only with both valve and connectors of an equivalent IP degree, correctly connected and installed.

electric connection	electric connection protection	whole valve protection
K1	IP65	IP65
K2	IP65/67	
K7	IP65/67	

SUPPLY VOLTAGE FLUCTUATION	± 10% V _{nom}
MAX SWITCH ON FREQUENCY	8.000 ins/hr
DUTY CYCLE	100%
ELECTROMAGNETIC COMPATIBILITY (EMC) (NOTE)	In compliance with 2014/30/EU
LOW VOLTAGE	In compliance with 2014/35/EU
CLASS OF PROTECTION Coil insulation (VDE 0580) Impregnation: DC valve AC valve	class H class F class H

NOTE: In order to further reduce the emissions with DC supply, the use of type H connectors is recommended. These prevent voltage peaks on opening of the coil supply electrical circuit (see cat. 49 000).

11.2 - Current and absorbed power for DC solenoid valve

The table shows current and power consumption values of the DC coils.

Using connectors type 'D' or 'D1' (see cat. 49 000) with embedded bridge rectifier it is possible to feed DC coils with alternating current (50 or 60 Hz), considering a reduction of the operating limits (see point 6).

Coils for direct current (values ±10%)

	Nominal voltage [V]	Resistance at 20°C [Ω]	Current consumpt. [A]	Power consumpt. [W]	Coil code		
					K1	K2	K7
D12	12	4,4	2,72	32,7	1903080	1903100	1902940
D24	24	18,6	1,29	31	1903081	1903101	1902941
D48	48	78,6	0,61	29,5	1903083		
D110	110	423	0,26	28,2	1903464		
D220	220	1692	0,13	28,2	1903465		

11.3 - Current and absorbed power for AC solenoid valve


The table shows current and power consumption values at inrush and at holding, for AC coils.

Coils for alternating current (values ± 5%)

Suffix	Nominal Voltage [V]	Freq. [Hz]	Resistance at 20°C [Ω]	Current consumption at inrush [A]	Current consumption at holding [A]	Power consumption at inrush [VA]	Power consumption at holding [VA]	Coil availability K1
A24	24	50	1.69	5.81	1.32	139	32	1902830
A48	48		6.02	3.78	0.86	182	41	1902831
A110	110V-50Hz 120V-60Hz	50/60	33	1.76	0.40	194	44	1902832
				1.54	0.35	185	42	
A230	230V-50Hz 240V-60Hz		135	0.92	0.21	213	48	1902833
				0.79	0.18	190	43	
F110	110	60	28.5	1.45	0.33	160	36	1902834
F220	220		103	0.92	0.21	203	46	1902835

12 - DSP8 OVERALL AND MOUNTING DIMENSIONS

dimensions in mm

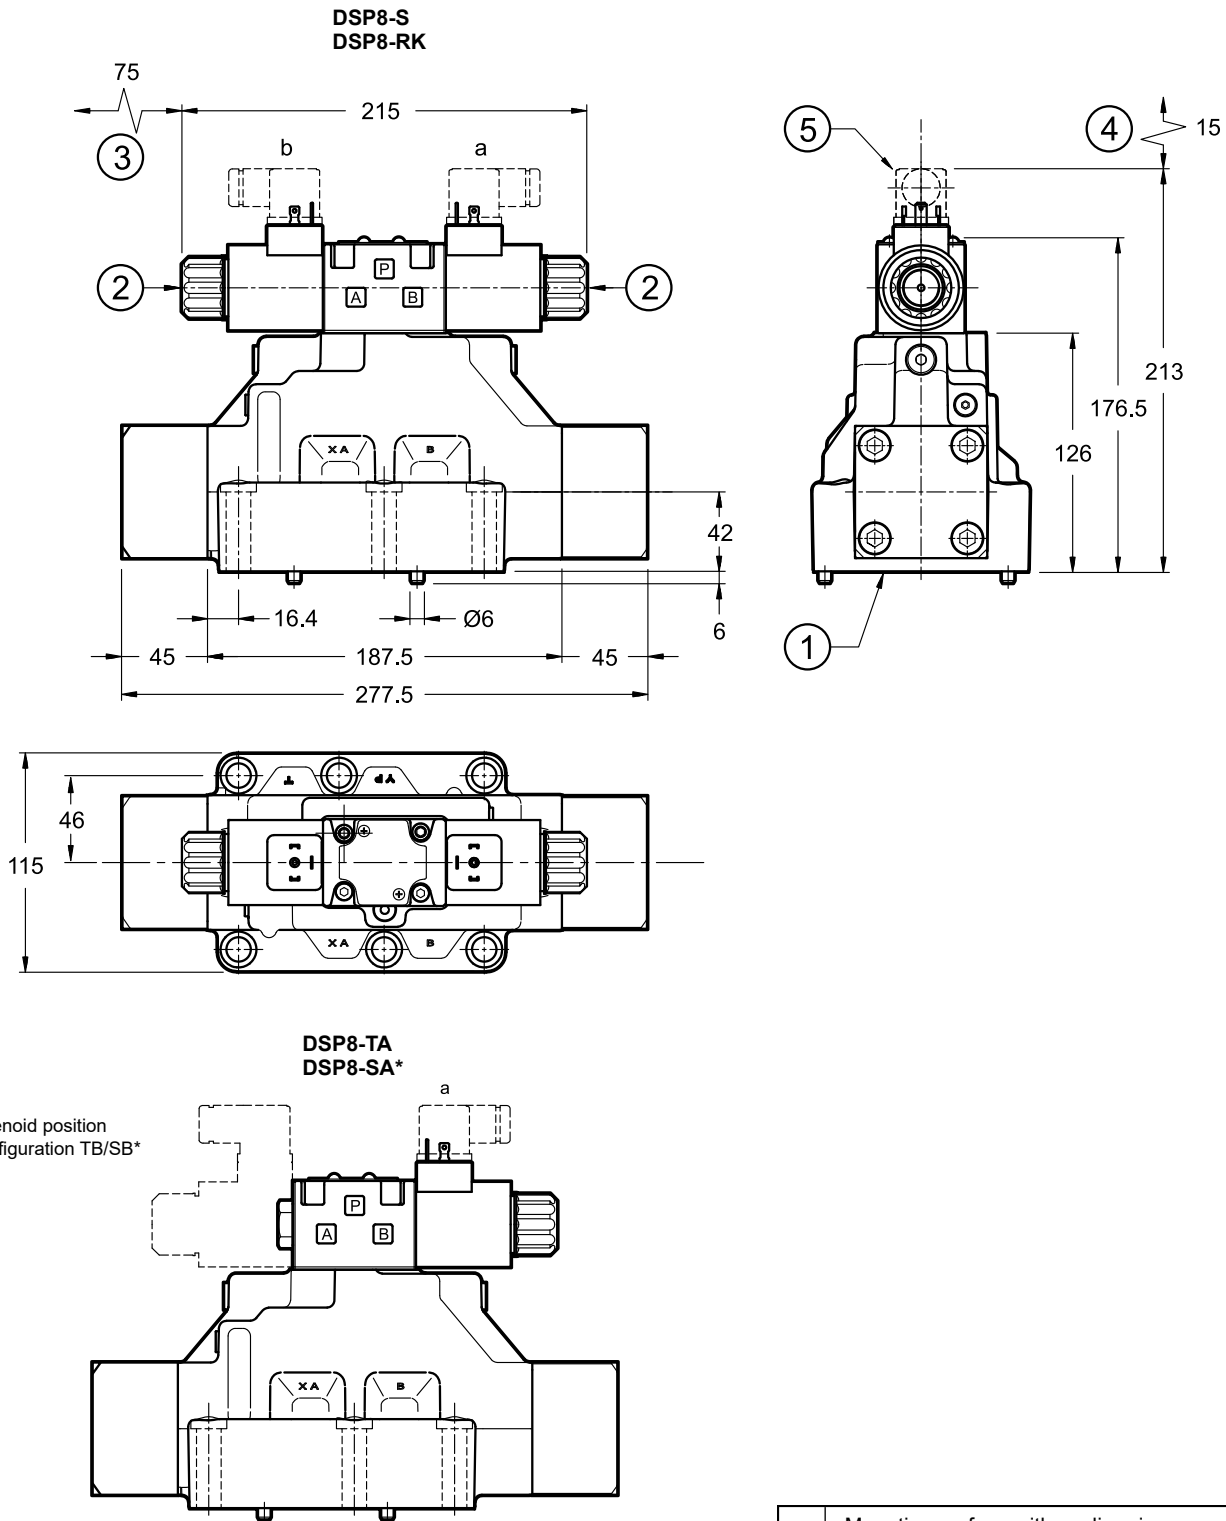


NOTE: fastening screws of class A 10.9 are prescribed for the DS*8H valves for high pressure.

Valve fastening: N. 6 SHC M12x60 bolts - ISO 4762
Tightening torque: 69 Nm (A 8.8 bolts) - 96 Nm (A 10.9 bolts)
Thread of mounting holes: M12x20

1	Mounting surface with sealing rings N. 4 OR type 3131 (32.99x2.62) - 90 Shore N. 2 OR type 3087 (21.89x2.62) - 90 Shore
2	Manual override
3	Coil removal space
4	Connector removal space
5	Electric connector to be ordered separately (see cat. 49 000)

13 - DSC8 OVERALL AND MOUNTING DIMENSIONS

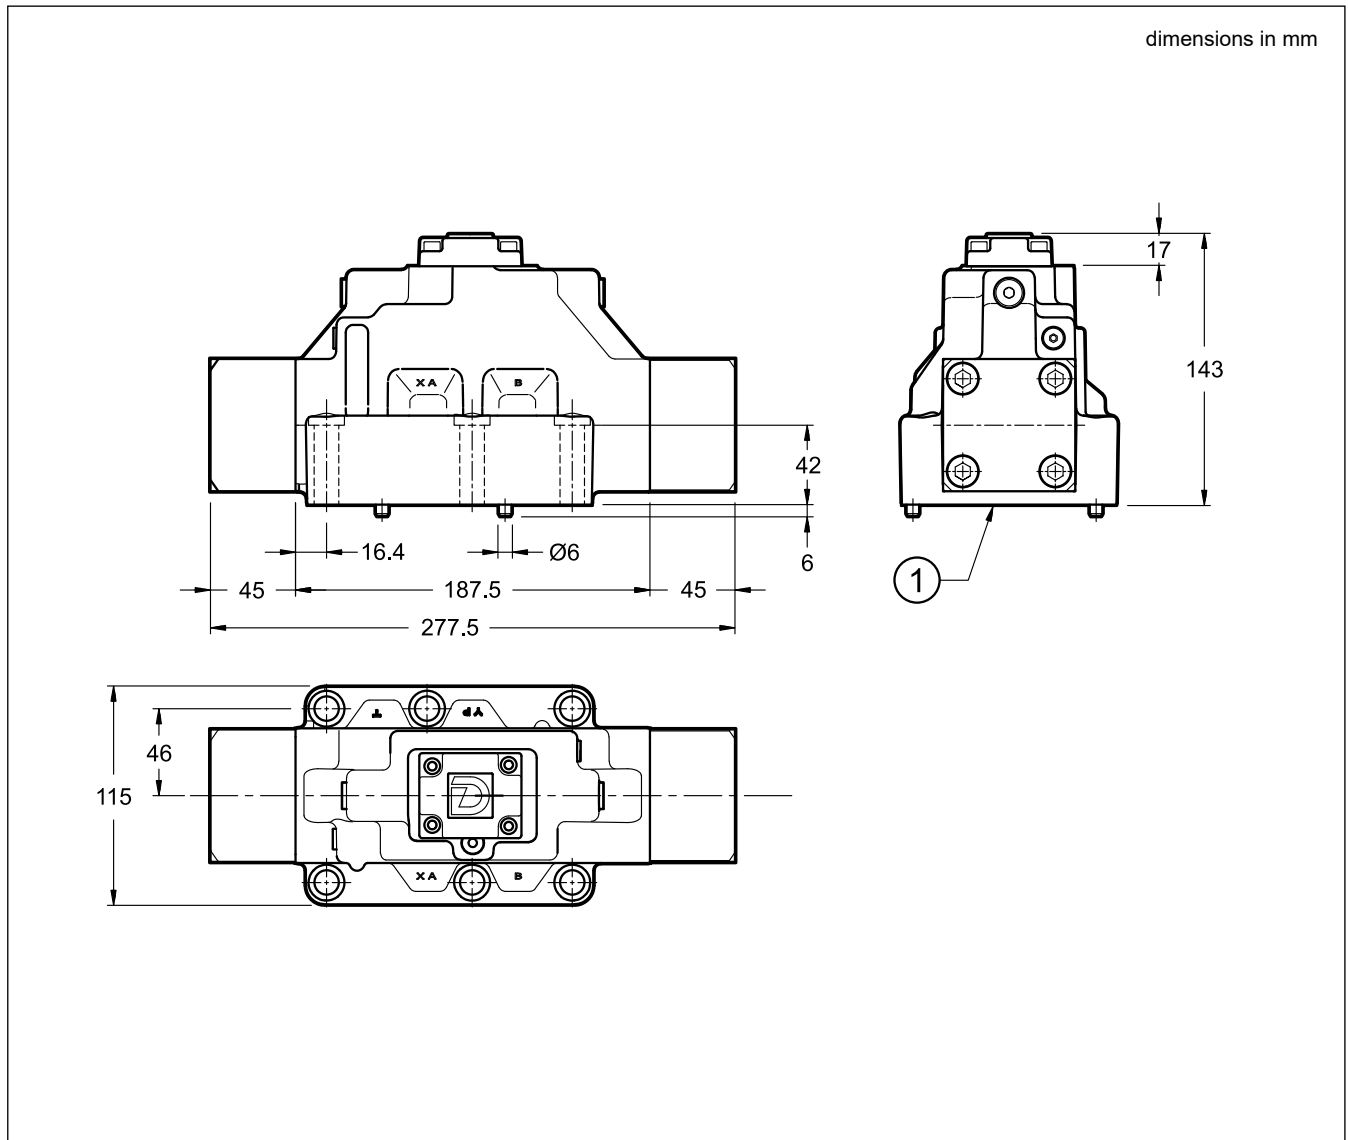

dimensions in mm

NOTE: fastening screws of class A 10.9 are prescribed for the DS*8H valves for high pressure.


Valve fastening: N. 6 SHC M12x60 bolts - ISO 4762	1	Mounting surface with sealing rings N. 4 OR type 3131 (32.99x2.62) - 90 Shore N. 2 OR type 3087 (21.89x2.62) - 90 Shore
Tightening torque: 69 Nm (A 8.8 bolts) - 96 Nm (A 10.9 bolts)		2
Thread of mounting holes: M12x20		

14 - INSTALLATION

Configurations with centring and recall springs can be mounted in any position; type RK valves - without springs and with mechanical detent - must be mounted with the longitudinal axis horizontal.


Valve fastening takes place by means of screws or tie rods, laying the valve on a lapped surface, with values of planarity and smoothness that are equal to or better than those indicated in the drawing. If the minimum values of planarity or smoothness are not met, fluid leakages between valve and mounting surface can easily occur.

NOTE: fastening screws of class A 10.9 are prescribed for the DS*8H valves for high pressure.

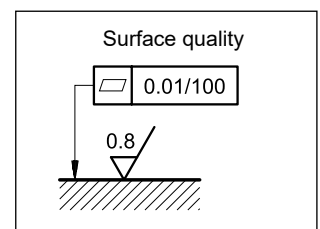


15 - ELECTRIC CONNECTIONS


connection for EN 175301-803
(ex DIN 43650) connector
code **K1 (standard)**
code **WK1** (W7 version only)

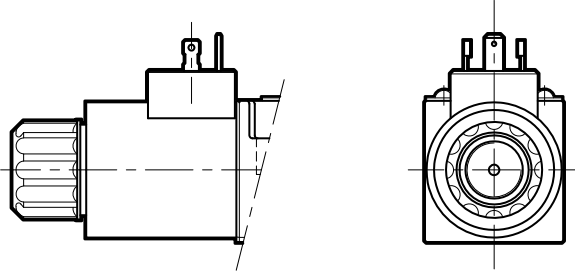


connection for AMP JUNIOR
connector
code **K2**

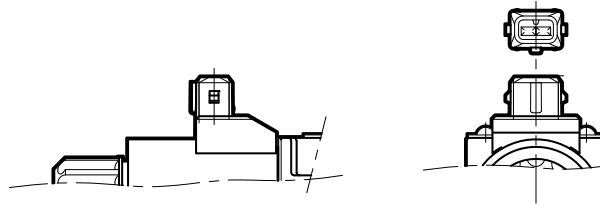

connection for
DEUTSCH DT06-2S male connector
code **K7**

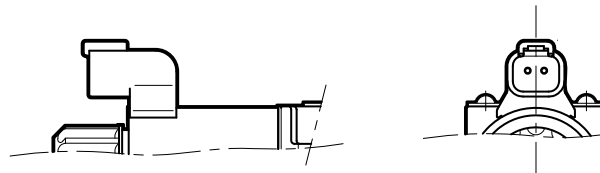

connection for
DEUTSCH DT06-2S male connector
code **WK7** (W7 version only)
code **WK7D** (W7 version only - coil
with diode)

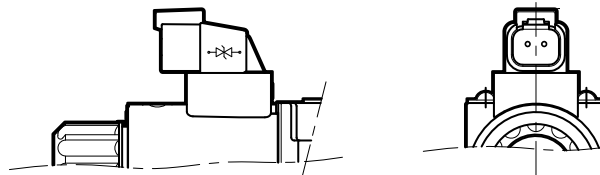


16 - ELECTRIC CONNECTORS

Solenoid operated valves are delivered without connectors. Connectors type EN 175301-803 (ex DIN 43650) for K1 connections can be ordered separately. See catalogue 49 000.

17 - MANUAL OVERRIDE

Whenever the solenoid valve installation may involve exposure to atmospheric agents or use in tropical climates, a boot protected manual override is recommended.


Add **/CM** at the end of the identification code to order this version (see point 1).

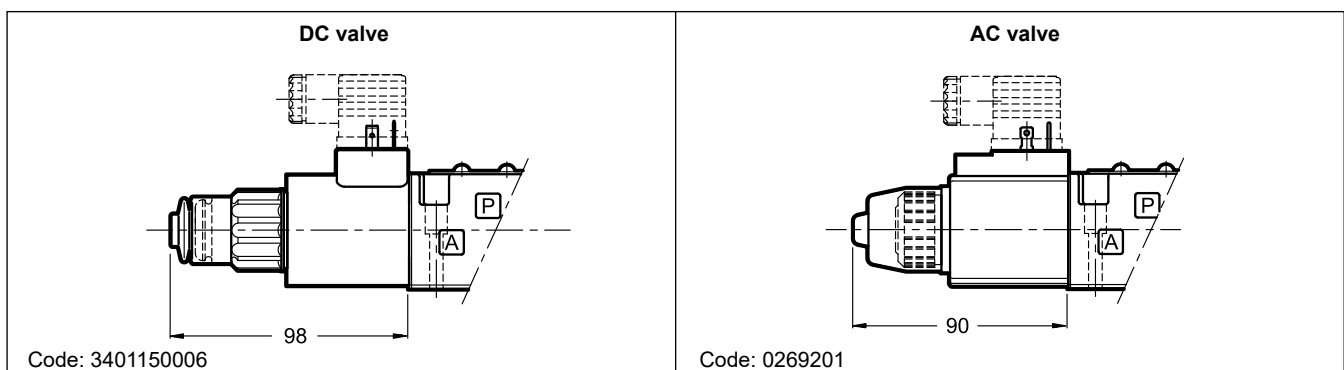

18 - HIGH IP DEGREE AND CORROSION RESISTANCE VERSION

These versions are available only for the basic valve and for the valves with D and S2 control options (see point 10). The boot manual override (CM) is installed as standard in order to protect the solenoid tube.

18.1 - Identification code

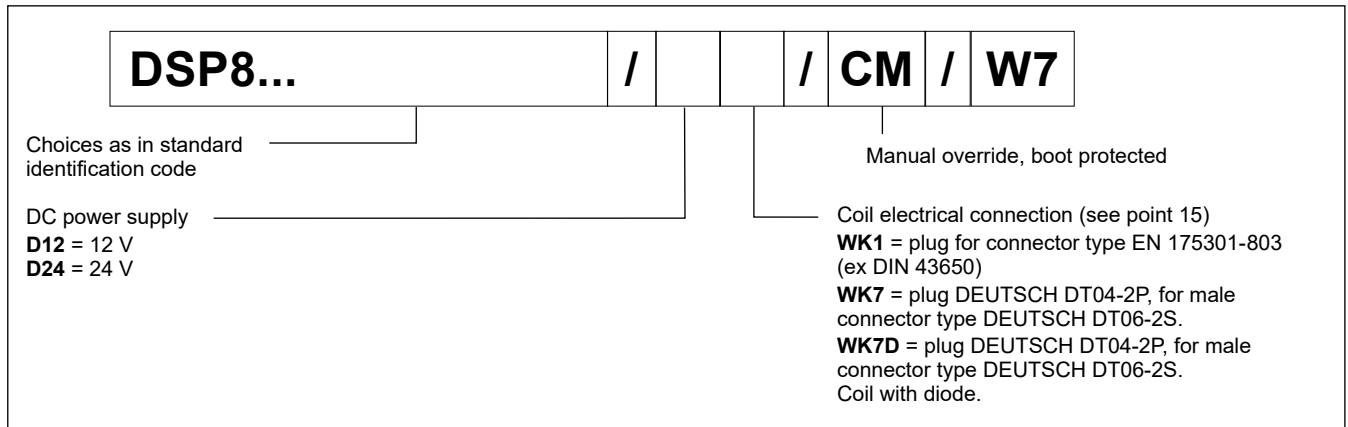

18.2 - Corrosion resistance

This version features the zinc-nickel coating on all exposed metal parts of the valve, making it resistant to exposure to the salt spray for **600** hours (test performed according to UNI EN ISO 9227 and assessment test performed according to UNI EN ISO 10289).

18.3 - DC coils

The coils feature a zinc-nickel surface treatment.

The WK7D coil includes a suppressor diode of pulses for protection from voltage peaks during switching. During the switching the diode significantly reduces the energy released by the winding, by limiting the voltage to 31.4V in the D12 coil and to 58.9 V in the D24 coil.

(values ±10%)

	Nominal voltage [V]	Resistance at 20°C [Ω]	Current consumpt. [A]	Power consumpt [W]	Coil code		
					WK1	WK7	WK7D
D12	12	4.4	2.72	32.7	3984000001	3984000101	3984000111
D24	24	18.6	1.29	31	3984000002	3984000102	3984000112

18.4 - Protection from atmospheric agents IEC 60529

The IP protection degree is guaranteed only with both valve and connectors of an equivalent IP degree, correctly connected and installed.

electric connection	electric connection protection	whole valve protection
WK1	IP66	IP66
WK7	IP66/IP68/IP69 IP69K*	IP66/IP68/IP69 IP69K*
WK7D	IP66/IP68/IP69 IP69K*	IP66/IP68/IP69 IP69K*

(*) The IP69K protection degree is not taken into account in IEC 60529 but it is included in ISO 20653.

NOTE: As regards the liquid ingress protection (second digit), there are three means of protection.

Codes from 1 to 6 are related to water jets.

Rates 7 and 8 are related to immersion.

Rate 9 is reserved for high pressure and temperature water jets.

This means that IPX6 covers all the lower steps, rate IPX8 covers IPX7 but not IPX6 and lower, instead IPX9 does not cover any of them.

Whether a device meets two types of protection requirements it must be indicated by listing both the tests separated by a slash.

(E.g. a marking of an equipment covered both by temporary immersion and water jets is IP66/IP68).




19 - SUBPLATES

(see catalogue 51 000)

Subplates are supplied with phosphating black surface treatment. The subplate is not suitable for DS*8H high pressure valves.

Type with rear ports	-
Type with side ports	PME5-AL8G
P, T, A, B port dimensions	1 1/2" BSP
X, Y port dimensions	1/4" BSP

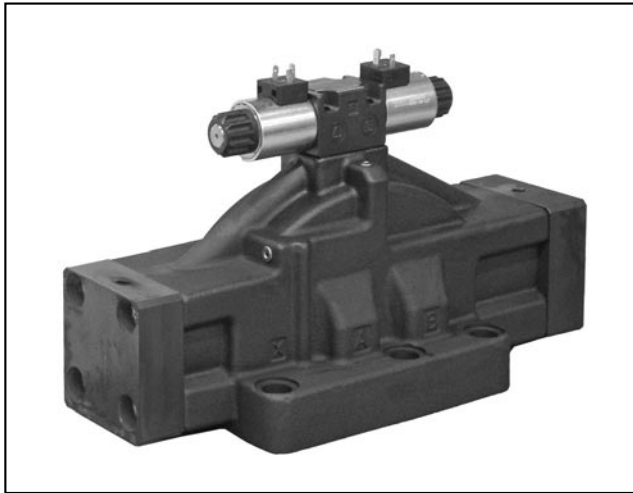

DSP1*

DIRECTIONAL VALVES, PILOT OPERATED, SOLENOID OR HYDRAULIC (DSC1*) ACTUATED

SUBPLATE MOUNTING


DS*10 ISO 4401-10

DS*11 ISO 4401-10 oversize ports

p max **350** bar

Q max **1600** l/min

OPERATING PRINCIPLE

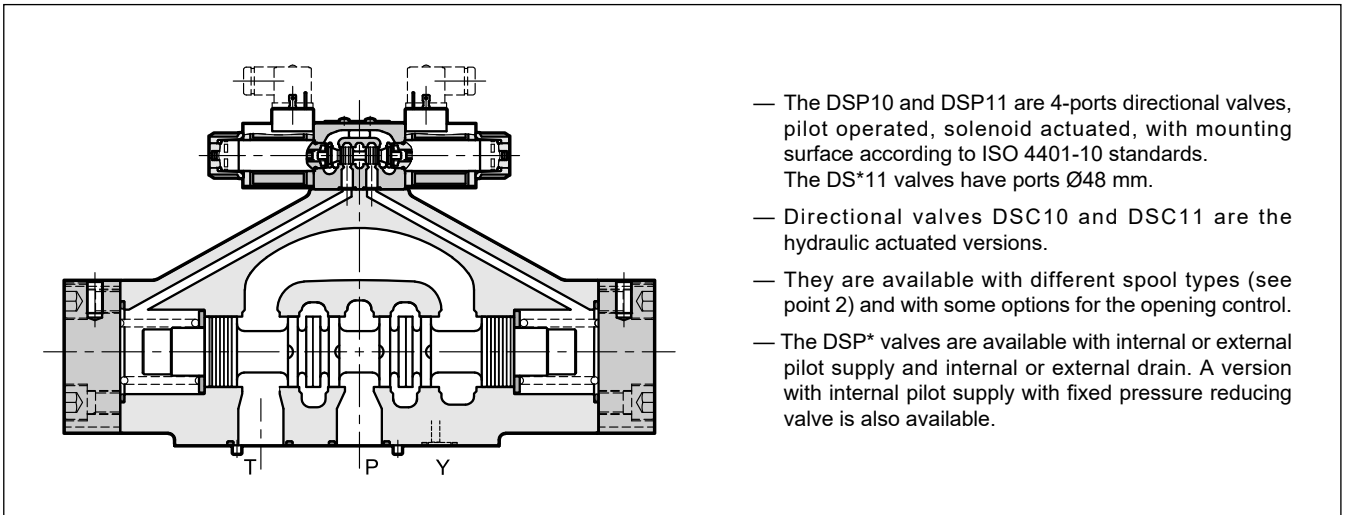

- The DSP10 and DSP11 are 4-ports directional valves, pilot operated, solenoid actuated, with mounting surface according to ISO 4401-10 standards. The DS*11 valves have ports Ø48 mm.
- Directional valves DSC10 and DSC11 are the hydraulic actuated versions.
- They are available with different spool types (see point 2) and with some options for the opening control.
- The DSP* valves are available with internal or external pilot supply and internal or external drain. A version with internal pilot supply with fixed pressure reducing valve is also available.

PERFORMANCES

(obtained with mineral oil of viscosity of 36 cSt at 50°C)

		DS*10	DS*10H	DS*11
Maximum operating pressure	bar	350	420	320
- ports P - A - B (standard version)		300	350	250
- port T (external drainage)		210 (CC) / 160 (CA)	210 (CC) / 160 (CA)	210 (CC) / 160 (CA)
- port T (internal drainage)				
Maximum flow rate from port P to A - B - T	l/min	1100	1100	1600
Ambient temperature range	°C	-20 / +50		
Fluid temperature range	°C	-20 / +80		
Fluid viscosity range	cSt	10 ÷ 400		
Fluid contamination degree	according to ISO 4406:1999 class 20/18/15			
Recommended viscosity	cSt	25		
Mass: DSP	kg	41.4	41.4	38.6
DSC		40.1	40.1	37.3

1 - IDENTIFICATION CODE FOR SOLENOID ACTUATED DIRECTIONAL VALVES

D	S	P		-	/		-		/		/	K1	/	
----------	----------	----------	--	---	---	--	---	--	---	--	---	-----------	---	--

Pilot operated directional valve, solenoid actuated

10 = ISO 4401-10 size
11 = ISO 4401-10 with oversized ports

Option: _____
(omit for standard version)
H = high pressure p_{max} 420 bar
(not available for DSP11)

Spool type (see point 2) _____
S* **TA**
SA* **TB**
SB* **RK***

Series: _____
22 = for DSP10
12 = for DSP11
(the overall dimensions do not change within the same ten)

Seals: _____
N = NBR seals for mineral oil (**standard**)
V = FPM seals for special fluids

Pilot supply (see points 10 and 11): _____
I = Internal (not available for spools S2 - S4 - TA02 - TB02 - RK02 - S*2 - S*4)
E = External
Z = Internal pilot supply with 30 bar pressure reducing valve, fixed adjustment.

Drain (see points 10 and 11): _____
I = Internal
E = External

Control options (see point 15): _____
C = Main spool stroke control (not available for spool S4)
D = Main spool switching speed control
P15 = Subplate placed under the pilot stage with restrictor of $\varnothing 1.5$ in P port

Manual override:
Omit for override integrated in the tube (**standard**)
CM = Manual override, boot protected (see point 16)

Coil electrical connection:
plug for connector
type EN 175301-803
(ex DIN 43650)

Power supply (see point 8)

Direct current

D12 = 12 V
D24 = 24 V
D48 = 48 V
D110 = 110 V
D220 = 220 V
D00 = Valve without coils (see **NOTE**)





Alternate current

A24 = 24 V - 50 Hz
A48 = 48 V - 50 Hz
A110 = 110 V - 50 Hz / 120 V - 60 Hz
A230 = 230 V - 50 Hz / 240 V - 60 Hz
A00 = Valve without coils (see **NOTE**)
F110 = 110 V - 60 Hz
F220 = 220 V - 60 Hz




NOTE: The locking rings of the coils and the relevant O-rings are supplied.

2 - DSP10 AND DSP11 SPOOLS TYPES






Type S*:
2 solenoids - 3 positions
with spring centering





Type SA*:
1 solenoid side A
2 positions (central + external)
with spring centering





Type SB*:
1 solenoid side B
2 positions (central + external)
with spring centering





Type RK:
2 solenoids - 2 positions
with mechanical retention



Type TA:
1 solenoid side A
2 external positions
with return spring



Type TB:
1 solenoid side B
2 external positions
with return spring



Please consult our Technical Department for other types of spools.

3 - IDENTIFICATION CODE FOR HYDRAULIC ACTUATED DIRECTIONAL VALVES

	D	S	C			-		/ 12		-	E	E
--	----------	----------	----------	--	--	----------	--	-------------	--	----------	----------	----------

Pilot operated directional valve, hydraulic actuated

10 = ISO 4401-10 size
11 = ISO 4401-10 with oversize ports

Option: (omit for standard version)
H = high pressure p_{max} 420 bar (not available for DSP11)

Spool type (see hydraulic symbols below)

S* **TA**
SA* **TB**
SB*

Spool type
DSC* valves are delivered with short-circuit subplate. The hydraulic actuation take place by pressurization in X and Y ports.

External drain (see points 10 and 11)

External pilot supply (see points 10 and 11)

Seals:
N = NBR seals for mineral oil (standard)
V = FPM seals for special fluids

Series:
(the overall and mounting dimensions remain unchanged from 10 to 19)

S*

TA

TB

4 - HYDRAULIC FLUIDS


Use mineral oil-based hydraulic fluids HL or HM type, according to ISO 6743-4. For these fluids, use NBR seals (code V). For fluids HFDR type (phosphate esters) use FPM seals (code V). For the use of other kinds of fluid such as HFA, HFB, HFC, please consult our technical department. Using fluids at temperatures higher than 80 °C causes a faster degradation of the fluid and of the seals characteristics.

The fluid must be preserved in its physical and chemical characteristics.

5 - PRESSURE DROPS Δp -Q

(values obtained with viscosity 36 cSt at 50 °C)

5.1 - DSP10 pressure drops

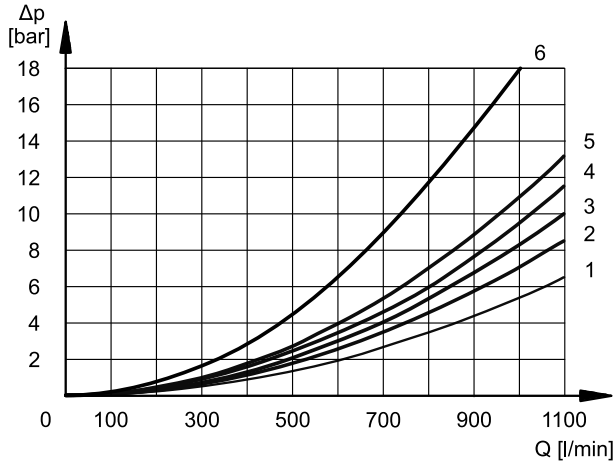


ACTUATED VALVE

SPOOL	FLOW DIRECTIONS				
	P→A	P→B	A→T	B→T	P→T
	CURVES ON GRAPH				
S1, SA1, SB1	3	3	1	2	
S2, SA2, SB2	4	4	2	4	
S3, SA3, SB3	3	3	2	4	
S4, SA4, SB4	3	3	2	4	
TA, TB	3	3	1	2	
TA02, TB02	4	4	2	4	
RK	3	3	1	2	

NORMAL POSITION

SPOOL	FLOW DIRECTIONS				
	P→A	P→B	A→T	B→T	P→T
	CURVES ON GRAPH				
S2			3	4	5
S3			5	5	
S4, TA02					6

5.2 - DSP11 pressure drops

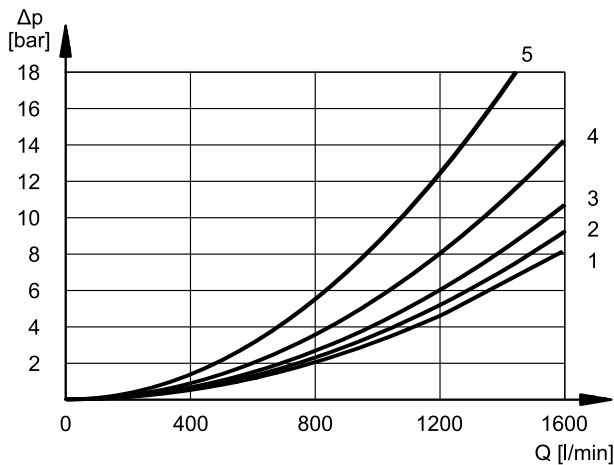

ACTUATED VALVE

SPOOL	FLOW DIRECTIONS				
	P→A	P→B	A→T	B→T	P→T
	CURVES ON GRAPH				
S1, SA1, SB1	1	1	1	2	
S2, SA2, SB2	1	1	1	3	
S3, SA3, SB3	1	1	1	3	
S4, SA4, SB4	1	1	1	3	
TA, TB	1	1	1	2	
TA02, TB02	1	1	1	3	
RK	1	1	1	2	

NORMAL POSITION

SPOOL	FLOW DIRECTIONS				
	P→A	P→B	A→T	B→T	P→T
	CURVES ON GRAPH				
S2			2	2	2
S3			4	4	
S4					5

6 - SWITCHING TIMES

The values indicated refer to a solenoid valve working with piloting pressure of 100 bar, with mineral oil at a temperature of 50°C, at viscosity of 36 cSt and with P→A / B→T connections.

The energizing and de-energizing times are obtained at the pressure variation which occurs on the lines.

TIMES (± 10%) [ms]	ENERGIZED		DE-ENERGIZED	
	2 Pos	3 Pos	2 Pos	3 Pos
AC solenoid	90	60	90	60
DC solenoid	130	100	90	60


7 - OPERATING LIMITS

The curves define the flow rate operating fields according to the valve pressure of the different versions. The values have been obtained according to ISO 6403 norm with solenoids at rated temperature and supplied with voltage equal to 90% of the nominal voltage, with pilot supply pressure of 10 bar

The value have been obtained with mineral oil, viscosity 36 cSt, temperature 50 °C and filtration according to ISO 4406.1999 class 18/16/13.

Limits refer to the 4-port operation. The operating limits of a 4-port valve in 3-port operation, or with port A or B plugged, or without flow may reduce considerably.

7.1 - DSP10

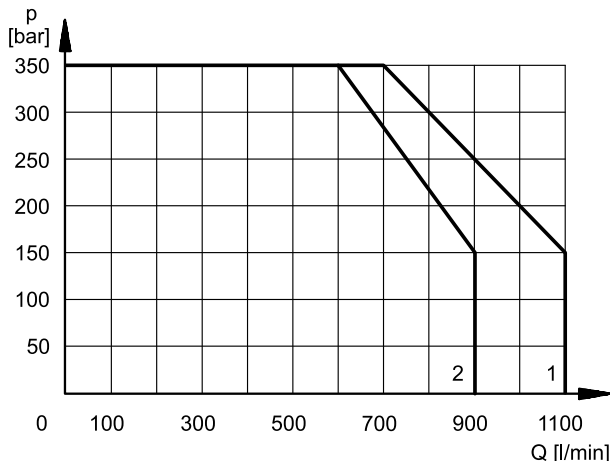


DC SOLENOID VALVE

SPOOL	CURVE	
	P→A	P→B
S1, SA1, SB1	1	1
S2, SA2, SB2	2	2
S3, SA3, SB3	1	1
S4, SA4, SB4	2	2
TA, TB	1	1
TA02, TB02	1	1
RK	1	1

NOTE: Limits showed for S1, S3, TA / TB and RK spools are determined by the value of the piloting pressure (10 bar).

7.1 - DSP11

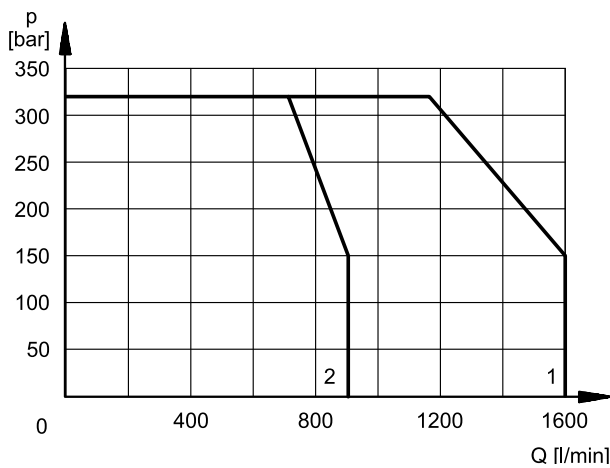

8 - ELECTRICAL FEATURES

8.1 - Solenoids

These are essentially made up of two parts: tube and coil. The tube is threaded into the valve body and includes the armature that moves immersed in oil, without wear. The inner part, in contact with the oil in the return line, ensures heat dissipation.

The coil is fastened to the tube by a threaded ring, and can be rotated 360°, to suit the available space.

NOTE 1: In order to further reduce the emissions, use of type H connectors is recommended. These prevent voltage peaks on opening of the coil supply electrical circuit (see cat. 49 000).

NOTE 2: The IP65 protection degree is guaranteed only with the connector correctly connected and installed.

VOLTAGE SUPPLY FLUCTUATION	± 10% Vnom
MAX SWITCH ON FREQUENCY	6.000 ins/hr
DUTY CYCLE	100%
ELECTROMAGNETIC COMPATIBILITY (EMC) (NOTE 1)	In compliance with 2014/30/EU
LOW VOLTAGE	In compliance with 2014/35/EU
CLASS OF PROTECTION Atmospheric agents (IEC 60529) Coil insulation (VDE 0580) Impregnation: DC valve AC valve	IP 65 (NOTE 2) class H class F class H

8.2 - Current and absorbed power for DC solenoid valve

The table shows current and power consumption values of the DC coils.

Using connectors type "D" (see cat. 49 000) with embedded bridge rectifier it is possible to feed DC coils (starting from 48V voltage) with alternating current (50 or 60 Hz), considering a reduction of the operating limits by 5 ÷ 10% approx.

(values ± 10%)

	Resistance at 20°C [Ω]	Current consumption [A]	Power consumption [W]	Coil code
				K1
D12	4.4	2.72	32.7	1903080
D24	18.6	1.29	31	1903081
D48	78.6	0.61	29.5	1903083
D110	436	0.26	28.2	1903464
D220	1758	0.13	28.2	1903465

8.3 - Current and absorbed power for AC solenoid valve

The table shows current and power consumption values at inrush and at holding, relevant to the different coil types for AC current.

(values ± 5%)

Suffix	Nominal Voltage [V]	Freq. [Hz]	Resistance at 20°C [Ω]	Current consumption at inrush [A]	Current consumption at holding [A]	Power consumption at inrush [VA]	Power consumption at holding [VA]	Coil Code K1
A24	24	50	1,69	5,81	1,32	139	32	1902830
A48	48		6,02	3,78	0,86	182	41	1902831
A110	110V-50Hz 120V-60Hz	50/60	33	1,76	0,40	194	44	1902832
				1,54	0,35	185	42	
A230	230V-50Hz 240V-60Hz		135	0,92	0,21	213	48	1902833
				0,79	0,18	190	43	
F110	110	60	28,5	1,45	0,33	160	36	1902834
F220	220		103	0,92	0,21	203	46	1902835

9 - ELECTRIC CONNECTORS

Solenoid valves are delivered without connectors. Connectors can be ordered separately. See catalogue 49 000.

10 - MAX PRESSURES

PRESSURES [bar]	DSP10	DSP10H	DSC10	DSC10H	DSP11	DSC11
Max pressure in P, A, B ports	350	420	350	420	320	320
Max pressure in T line with external drain	300	350	300	350	250	250
Max pressure in T line with internal drain	210 (DC) 160 (AC)	210 (DC) 160 (AC)	-	-	210 (DC) 160 (AC)	-
Max pressure in Y line with external drain	210 (DC) 160 (AC)	210 (DC) 160 (AC)	-	-	210 (DC) 160 (AC)	-
Minimum pilot supply pressure:	5 ÷ 12 (NOTE 1)					
Maximum pilot supply pressure (NOTE 2)	280	350	280	350	280	320

NOTE 1: The valve needs a difference of at least +10 bar between the pilot pressure and the discharge/drainage pressure in order to work correctly.

NOTE 2: If the working pressure is higher than these rated limits, then provide an external pilot line with p_{max} within the rated limits and purchase the valve with E type pilot supply.

For the valves with electro-hydraulic actuation (DSP), if the external pilot line is not possible, you must opt for the version with Z type pilot supply (see point 11), with maximum inlet pressure in P according to the values indicated in the table.


11 - PILOT AND DRAIN

The valves with electro-hydraulic actuation (DSP) are available with both pilot supply and drain internal or external. The version with external drain allows a higher back pressure on the return line.

The pilot supply Z type consists of an arrangement with internal piloting and 30 bar supply pressure for the pilot stage by means of a fixed adjustment pressure reducing valve .

The valves with hydraulic actuation (DSC) are available with external pilot supply and external drain only.


NOTE: The pilot supply and drainage configuration must be chosen when ordering. Subsequent modification is only permitted by authorized experienced operators or at the factory.

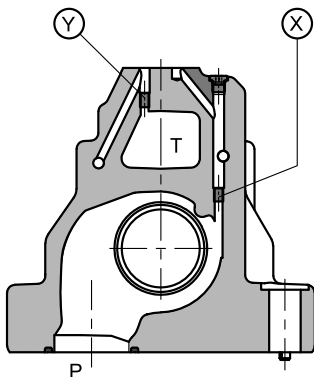


X: plug M6x8 for external pilot
Y: plug M6x8 for external drain

TYPE OF VALVE		Plug assembly	
		X	Y
IE	internal pilot and external drain	NO	YES
II	internal pilot and internal drain	NO	NO
EE	external pilot and external drain	YES	YES
EI	external pilot and internal drain	YES	NO

12 - OVERALL AND MOUNTING DIMENSIONS FOR DSP10 AND DSP11

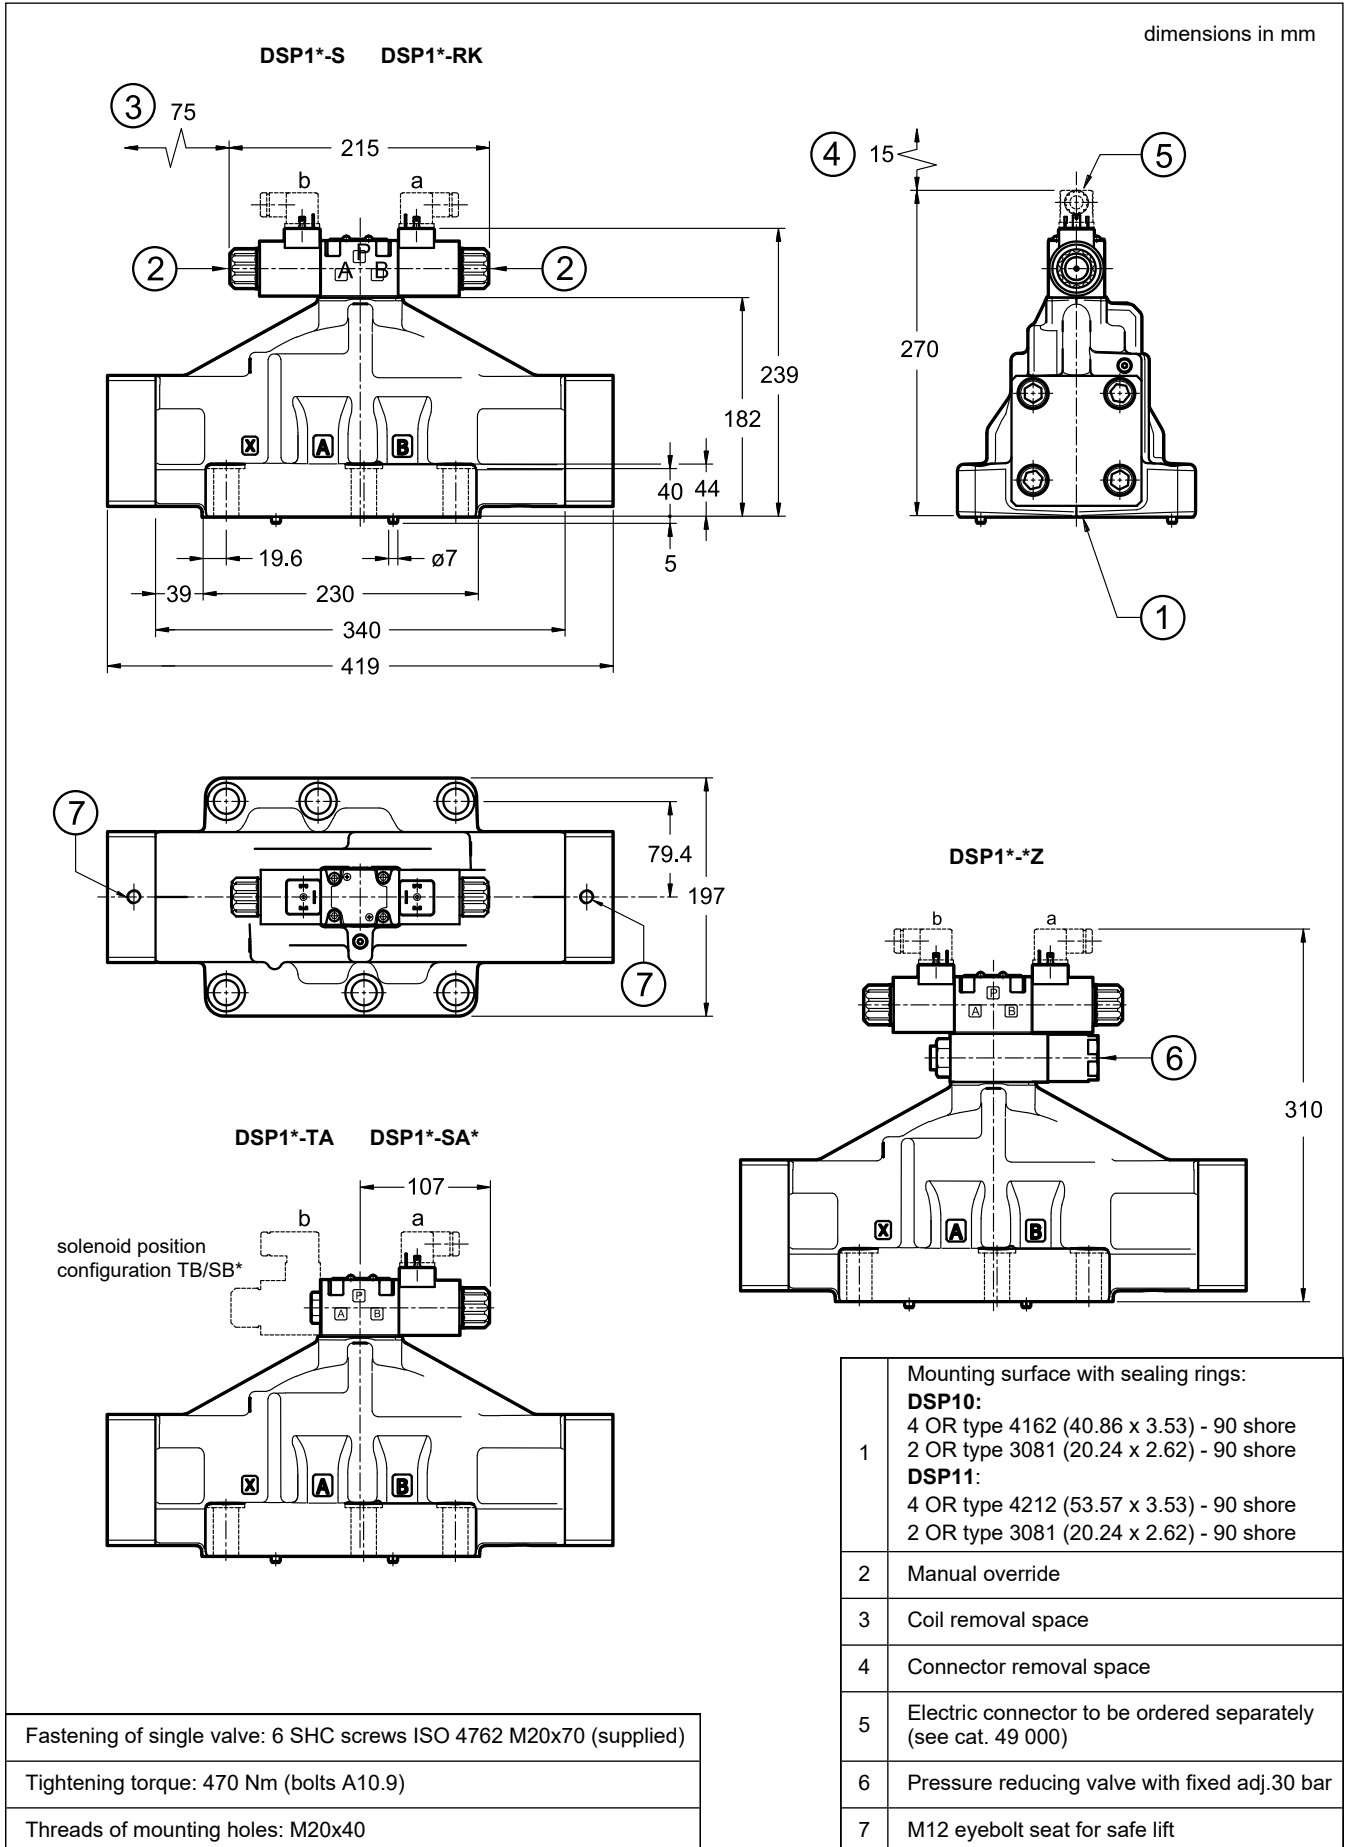


13 - OVERALL AND MOUNTING DIMENSIONS FOR DSC10 AND DSC11

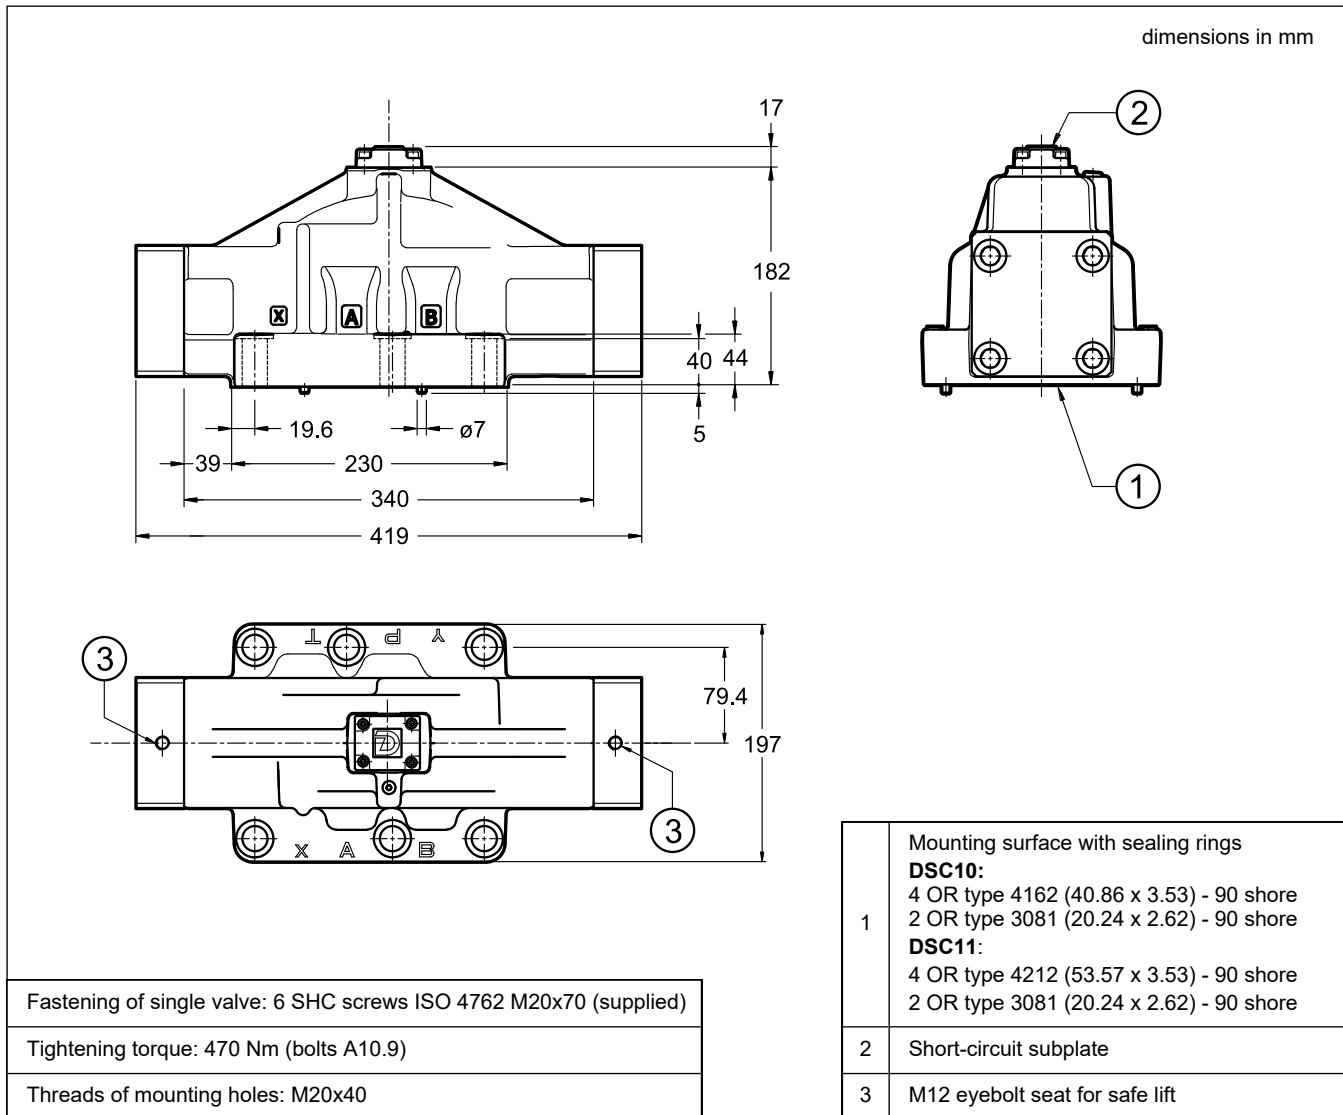

14 - MOUNTING INTERFACES


DS*10

ISO 4401-10-09-0-05
(CETOP 4.2-4-10-350)

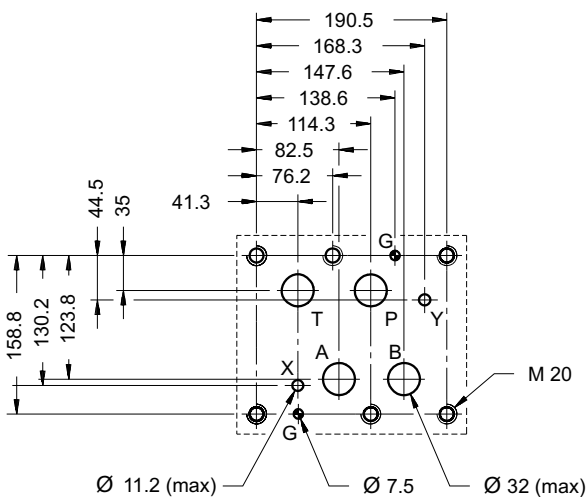

DS*11

ISO 4401-10-09-0-05
(CETOP 4.2-4-10-320)
deviating from standard:
P, T, A, B ports Ø48

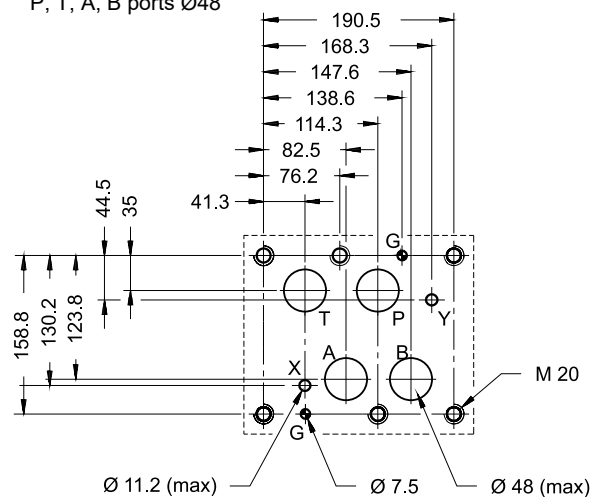


15 - OPTIONS

15.1 - Control of the main spool stroke: C

Stroke control for the main spool is possible by means of special side covers so as to vary the maximum clearance opening.

This solution allows control of the flow rate from the pump to the actuator and from the actuator to the outlet, obtaining a double adjustable control on the actuator.


Add the letter **C** in the identification code to order this version (see point 1).

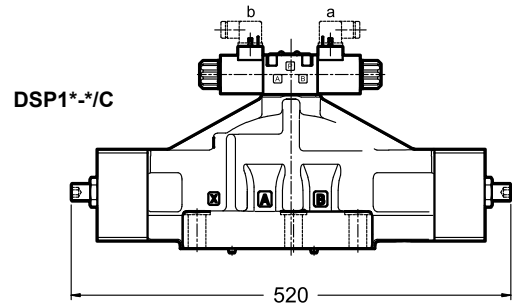

15.2 - Control of the main spool shifting speed: D

By placing a double flow control valve (QTM3 type) between the pilot solenoid valve and the main stage, the pilot supply flow can be adjusted and therefore the changeover smoothness can be varied.


Add the letter **D** in the identification code to order this version (see point 1).

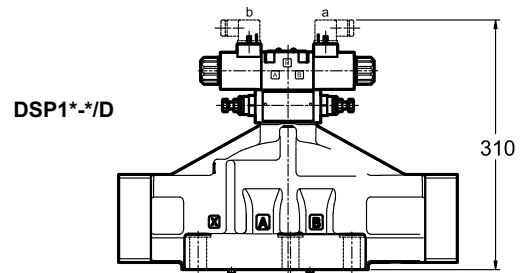

15.3 - Subplate with throttle on line P

It is possible to introduce a subplate with a restrictor of $\varnothing 1.5$ on line P between the pilot solenoid valve and the main stage.


Add **P15** in the identification code to order this version (see point 1).

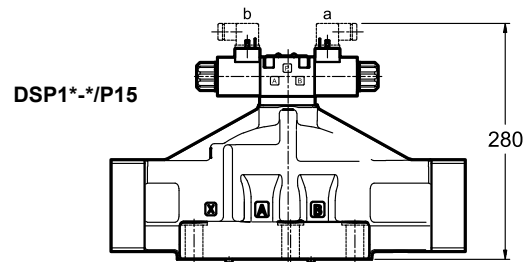

16 - MANUAL OVERRIDE

Whenever the solenoid valve installation may involve exposure to atmospheric agents or use in tropical climates, a boot protected manual override is recommended.

Add **/CM** at the end of the identification code to order this version (see point 1).

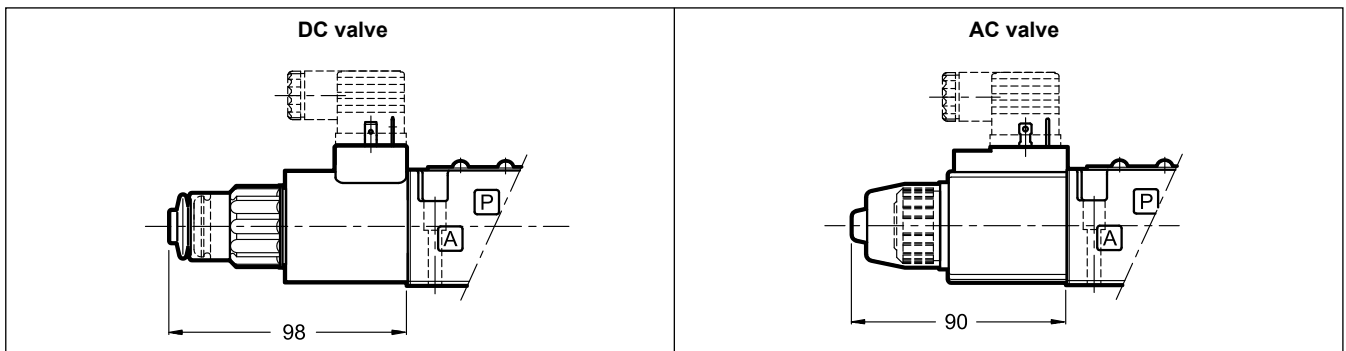


17 - INSTALLATION

Configurations with centering and recall springs can be mounted in any position; type RK valves - without springs and with mechanical detent - must be mounted with the longitudinal axis horizontal.

Valve fastening takes place by means of screws or tie rods, laying the valve on a lapped surface, with values of planarity and smoothness that are equal to or better than those indicated in the drawing.

If the minimum values of planarity or smoothness are not met, fluid leakages between valve and mounting surface can easily occur.

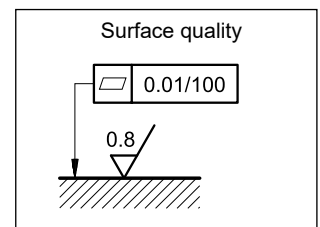



DSP1*

DUPLOMATIC
MOTION SOLUTIONS
*a member of **DAIKIN** group*

DUPLOMATIC MS Spa

via Mario Re Depaolini, 24 | 20015 Parabiago (MI) | Italy

T +39 0331 895111 | E vendite.ita@duplomatic.com | sales.exp@duplomatic.com
duplomaticmotionsolutions.com