


Data sheet


Float switch brass design 7

Type: SSM....7....


Device with temperature sensor or temperature switch combinable,
 see also level / temperature measurement technology combined

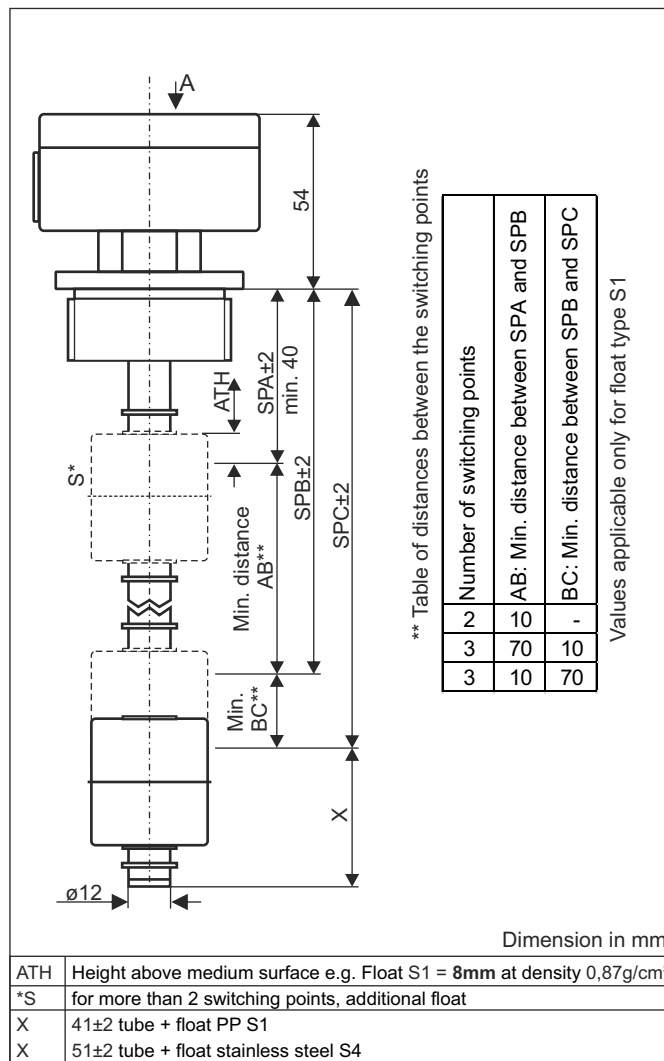


View A



Order key

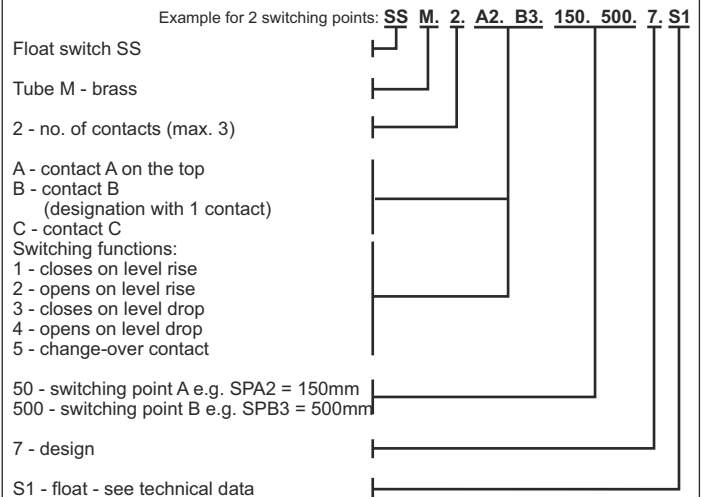

Example for terminal diagrams

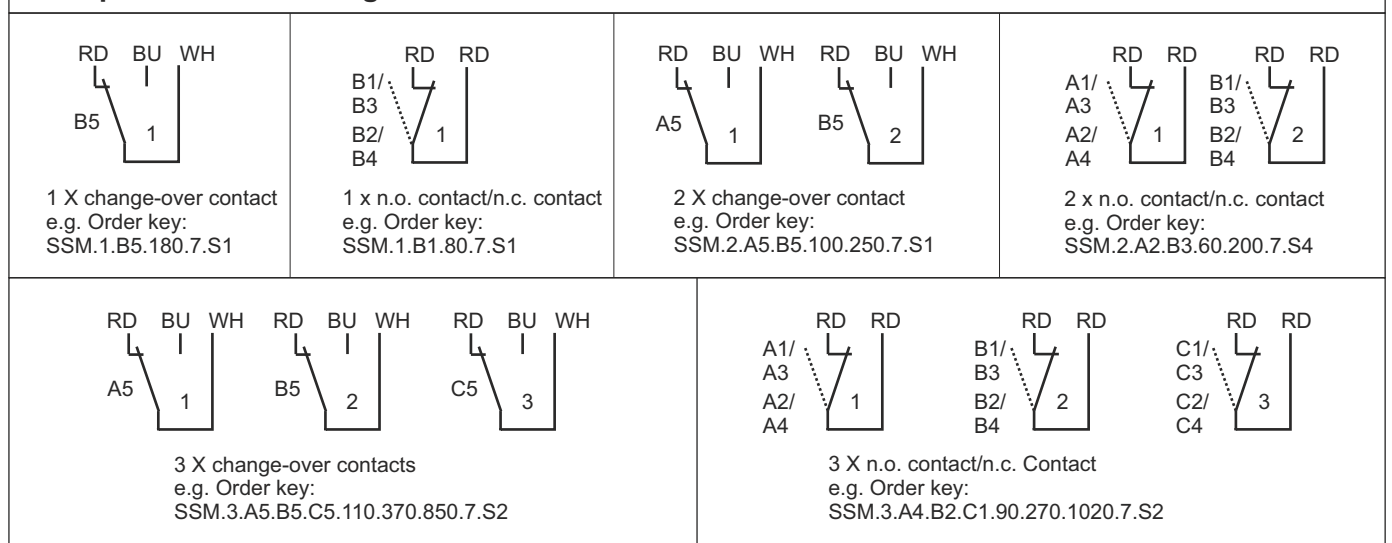

Data sheet

Float switch brass design 7

Type: SSM....7....

Technical Data

Connction:	terminal connection 1,5mm ² in the housing cable entry at the housing M16x1,5, material alu, colour grey
Mounting:	1 1/2" thread, material alu
Tube:	ø12mm, material brass
Float:	ø35x40mm, material PP, type S1 ø40x40mm, material PP, type S2 ø40x30mm, material PP, type S3 ø45x52mm, material stainless steel 1.4571, type S4
Switching points:	reed contacts, max. 3x n.o. contact/n.c. contact or change-over contact, additional reed contacts available on request
Switching voltage:	max. 230 VAC
Switching current:	1A
Switching capacity:	60VA
Pressure:	max. 1 bar
Operating temperature:	-20°C to 80°C in medium, -20°C to 70°C above mounting
Protection rating:	IP 65