



# AIR MOVEMENT TECHNOLOGIES




**Moro S.r.l.** company was established in 1983, through the years, becomes a reliable name for seriousness and professionalism, known in Italy and in the world as synonymous of high-quality in design and construction of a wide range of industrial centrifugal and axial blowers, able to satisfy all market requests to shrink costs and drastically cutting production times.

Since its establishment and over the course of the years, **Moro S.r.l.** has made customer satisfaction its main prerogative. **Moro S.r.l.** looks to the future with seriousness and attention by developing efficient and high performance industrial fans, continuing to combine what has always been succeeded well for it:

CAPABILITY  
QUALITY  
CUSTOMER  
SERVICE



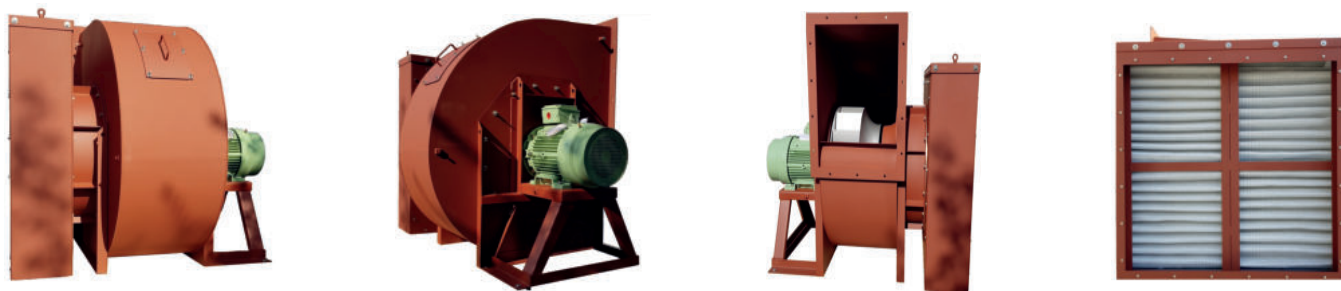

In compliance with the directives and laws on matter of safety and quality standards, **Moro S.r.l.** is able to build centrifugal and axial blowers in compliance with Directive 2009/125/EC, known as "ErP" (Energy-related-Products), and in accordance with Directive 2014/34/EU (ATEX) suitable to operate in environments with presence (also contemporary) of explosive gases and dusts (zones 1/21 and 2/22).



**Moro S.r.l.** is also able to build blowers for high temperatures, blowers completely made in stainless steel for food and/or pharmaceutical sector (mirror polished or pickled) and blowers entirely made of aluminium suitable to work with ozone presence.



S.r.l.

Via Pirandello, 10 - 20825 Barlassina (MB)

Phone +39 0362-556050 r.a. Fax + 39 0362-557261

E-mail: [info@moro.it](mailto:info@moro.it) - Internet: [www.moro.it](http://www.moro.it)





## MN

Girante a pale curve avanti  
Forwardly curved blades  
Roue à aubes courbes avant  
Worwärts gebogener Schaufeln  
Turbina pala curva hacia adelante

Portata - Flow rate  
Débit - Volumenstrom - Caudal  
50 ÷ 2500 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
23 ÷ 150 mm H<sub>2</sub>O



## MB

Girante a pale curve avanti  
Forwardly curved blades  
Roue à aubes courbes avant  
Worwärts gebogener Schaufeln  
Turbina pala curva hacia adelante

Portata - Flow rate  
Débit - Volumenstrom - Caudal  
500 ÷ 30000 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
25 ÷ 160 mm H<sub>2</sub>O



## MBQ

Girante a pale curve avanti  
Forwardly curved blades  
Roue à aubes courbes avant  
Worwärts gebogener Schaufeln  
Turbina pala curva hacia adelante

Portata - Flow rate  
Débit - Volumenstrom - Caudal  
500 ÷ 16000 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
25 ÷ 150 mm H<sub>2</sub>O



## RL

Girante a pale curve rovesce  
Backwardly curved blades  
Roue à aubes courbes à l'arrière  
Nach hinten geneigten Schaufeln  
Turbina pala curva hacia atrás

Portata - Flow rate  
Débit - Volumenstrom - Caudal  
700 ÷ 240000 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
10 ÷ 388 mm H<sub>2</sub>O



## MRLQ

Girante a pale curve rovesce  
Backwardly curved blades  
Roue à aubes courbes à l'arrière  
Nach hinten geneigten Schaufeln  
Turbina pala curva hacia atrás

Portata - Flow rate  
Débit - Volumenstrom - Caudal  
500 ÷ 34000 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
25 ÷ 370 mm H<sub>2</sub>O




## MM

Girante a pale curve avanti  
Forwardly curved blades  
Roue à aubes courbes avant  
Worwärts gebogener Schaufeln  
Turbina pala curva hacia adelante

Portata - Flow rate  
Débit - Volumenstrom - Caudal  
500 ÷ 10000 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
100 ÷ 350 mm H<sub>2</sub>O

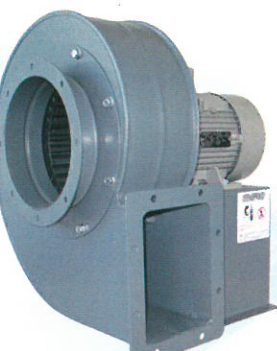

## GR

Girante a pale curve rovesce  
Backwardly curved blades  
Roue à aubes courbes à l'arrière  
Nach hinten geneigten Schaufeln  
Turbina pala curva hacia atrás

Portata - Flow rate  
Débit - Volumenstrom - Caudal  
360 ÷ 120000 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
58 ÷ 1500 mm H<sub>2</sub>O




## RM

Girante a pale curve rovesce  
Backwardly curved blades  
Roue à aubes courbes à l'arrière  
Nach hinten geneigten Schaufeln  
Turbina pala curva hacia atrás

Portata - Flow rate  
Débit - Volumenstrom - Caudal  
360 ÷ 120000 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
40 ÷ 590 mm H<sub>2</sub>O

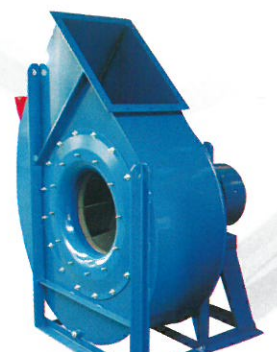

## GF/RU

Girante a pale curve rovesce  
Backwardly curved blades  
Roue à aubes courbes à l'arrière  
Nach hinten geneigten Schaufeln  
Turbina pala curva hacia atrás

Portata - Flow rate  
Débit - Volumenstrom - Caudal  
360 ÷ 120000 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
40 ÷ 650 mm H<sub>2</sub>O



## MS

Girante a pale curve avanti o p  
Forwardly curved blades or radial blades  
Roue à aubes courbes avant ou radiales  
Worwärts oder offen gebogener Schaufeln  
Turbina pala curva hacia adelante o

Portata - Flow rate  
Débit - Volumenstrom - Caudal  
45 ÷ 1600 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
50 ÷ 300 mm H<sub>2</sub>O



## MAR

Girante a pale curve rovesce  
Backwardly curved blades  
Roue à aubes courbes à l'arrière  
Nach hinten geneigten Schaufeln  
Turbina pala curva hacia atrás

Portata - Flow rate  
Débit - Volumenstrom - Caudal  
300 ÷ 15000 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
50 ÷ 900 mm H<sub>2</sub>O



## VG

Girante a pale curve rovesce  
Backwardly curved blades  
Roue à aubes courbes à l'arrière  
Nach hinten geneigten Schaufeln  
Turbina pala curva hacia atrás

Portata - Flow rate  
Débit - Volumenstrom - Caudal  
100 ÷ 48000 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
140 ÷ 2280 mm H<sub>2</sub>O



## MAP

Girante a pale curve avanti  
Forwardly curved blades  
Roue à aubes courbes avant  
Worwärts gebogener Schaufeln  
Turbina pala curva hacia adelante

Portata - Flow rate  
Débit - Volumenstrom - Caudal  
100 ÷ 1400 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
60 ÷ 380 mm H<sub>2</sub>O




## MA

Girante a pale radiali  
Radial blades  
Roue à aubes radiales  
Radialschaufel  
Turbina pala recta

Portata - Flow rate  
Débit - Volumenstrom - Caudal  
200 ÷ 10000 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
80 ÷ 700 mm H<sub>2</sub>O




## MAR/S

Girante a pale curve rovesce  
Backwardly curved blades  
Roue à aubes courbes à l'arrière  
Nach hinten geneigten Schaufeln  
Turbina pala curva hacia atrás

Portata - Flow rate  
Débit - Volumenstrom - Caudal  
300 ÷ 4000 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
50 ÷ 550 mm H<sub>2</sub>O

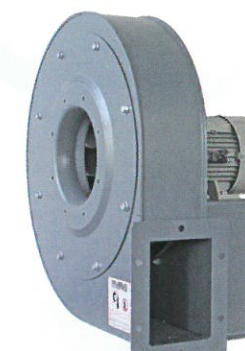

## VI

Girante a pale curve rovesce  
Backwardly curved blades  
Roue à aubes courbes à l'arrière  
Nach hinten geneigten Schaufeln  
Turbina pala curva hacia atrás

Portata - Flow rate  
Débit - Volumenstrom - Caudal  
250 ÷ 6200 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
420 ÷ 2500 mm H<sub>2</sub>O








## VM

Girante a pale curve rovesce  
Backwardly curved blades  
Roue à aubes courbes à l'arrière  
Nach hinten geneigten Schaufeln  
Turbina pala curva hacia atras

**Portata** - Flow rate  
Débit - Volumenstrom - Caudal  
300 ÷ 65000 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
110 ÷ 2200 mm H<sub>2</sub>O



## TL

Girante a pale curve rovesce  
Backwardly curved blades  
Roue à aubes courbes à l'arrière  
Nach hinten geneigten Schaufeln  
Turbina pala curva hacia atras

**Portata** - Flow rate  
Débit - Volumenstrom - Caudal  
100 ÷ 2700 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
590 mm H<sub>2</sub>O



## MHR

Girante a pale curve rovesce  
Backwardly curved blades  
Roue à aubes courbes à l'arrière  
Nach hinten geneigten Schaufeln  
Turbina pala curva hacia atras

**Portata** - Flow rate  
Débit - Volumenstrom - Caudal  
150 ÷ 3500 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
180 ÷ 1400 mm H<sub>2</sub>O



## VP

Girante a pale curve rovesce  
Backwardly curved blades  
Roue à aubes courbes à l'arrière  
Nach hinten geneigten Schaufeln  
Turbina pala curva hacia atras

**Portata** - Flow rate  
Débit - Volumenstrom - Caudal  
100 ÷ 16000 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
140 ÷ 2280 mm H<sub>2</sub>O



## VA

Girante a pale curve avanti  
Forwardly curved blades  
Roue à aubes courbes avant  
Vorwärts gebogener Schaufeln  
Turbina pala curva hacia adelante

**Portata** - Flow rate  
Débit - Volumenstrom - Caudal  
65 ÷ 1450 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
120 ÷ 2000 mm H<sub>2</sub>O



## VC

Girante a pale curve rovesce  
Backwardly curved blades  
Roue à aubes courbes à l'arrière  
Nach hinten geneigten Schaufeln  
Turbina pala curva hacia atras

**Portata** - Flow rate  
Débit - Volumenstrom - Caudal  
250 ÷ 6200 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
420 ÷ 2500 mm H<sub>2</sub>O



## BSTS27

Bistadio  
Two-stage  
Double stade  
Zweistufig  
Biestadío

**Portata** - Flow rate  
Débit - Volumenstrom - Caudal  
300 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
300 mm H<sub>2</sub>O



## MSTS

Multistadio  
Multistages  
Roues multiples  
Mehrstufige Geblase  
Multiestadi

**Portata** - Flow rate  
Débit - Volumenstrom - Caudal  
100 ÷ 800 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
200 ÷ 1750 mm H<sub>2</sub>O




## ZA

Girante a pale aperte  
Open blades  
Roue à aubes ouvertes  
Offen Schaufel  
Turbina con palas arietas

**Portata** - Flow rate  
Débit - Volumenstrom - Caudal  
720 ÷ 41400 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
260 ÷ 1080 mm H<sub>2</sub>O

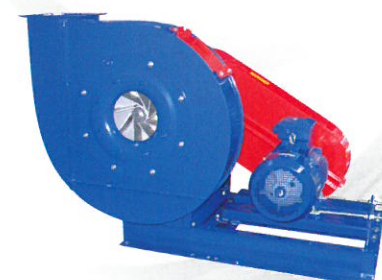


## ZC

Girante a pale aperte  
Open blades  
Roue à aubes ouvertes  
Offen Schaufel  
Turbina con palas arietas

**Portata** - Flow rate  
Débit - Volumenstrom - Caudal  
1250 ÷ 27000 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
94 ÷ 499 mm H<sub>2</sub>O

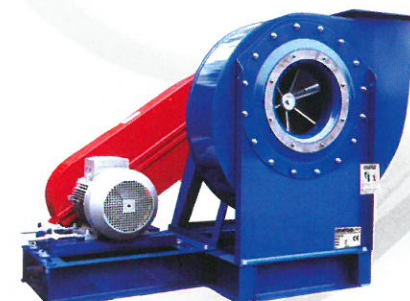

## ZM

Girante a pale radiali  
Radial blades  
Roue à aubes radiales  
Radialschaufel  
Turbina pala recta

**Portata** - Flow rate  
Débit - Volumenstrom - Caudal  
100 ÷ 40000 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
50 ÷ 450 mm H<sub>2</sub>O




## MTV

Torrino di estrazione centrifugo  
Centrifugal roof units  
Tourelle centrifuge d'extraction  
Zentrifugal-Absaugturm  
Extractor de tejado cenrifugo

**Portata** - Flow rate  
Débit - Volumenstrom - Caudal  
450 ÷ 19500 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
60 mm H<sub>2</sub>O

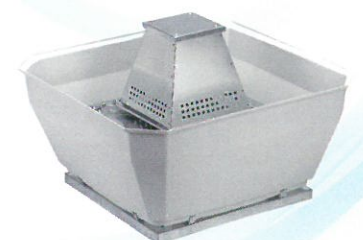

## ZB

Girante a pale aperte  
Open blades  
Roue à aubes ouvertes  
Offen Schaufel  
Turbina con palas arietas

**Portata** - Flow rate  
Débit - Volumenstrom - Caudal  
720 ÷ 41400 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
260 ÷ 1080 mm H<sub>2</sub>O




## ZD

Girante a pale aperte avanti  
Forwardly open blades  
Roue à aubes ouvertes avant  
Vorwärts offen Schaufel  
Turbina con palas arietas hacia ade

**Portata** - Flow rate  
Débit - Volumenstrom - Caudal  
3000 ÷ 1900 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
160 ÷ 330 mm H<sub>2</sub>O

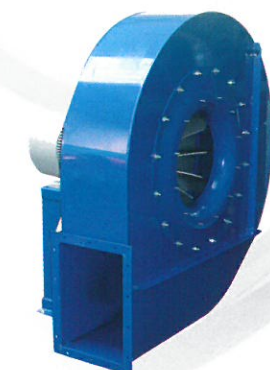

## MGV

Girante a pale curve rovesce  
Backwardly curved blades  
Roue à aubes courbes à l'arrière  
Nach hinten geneigten Schaufeln  
Turbina pala curva hacia atras

**Portata** - Flow rate  
Débit - Volumenstrom - Caudal  
800 ÷ 12500 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
60 ÷ 620 Pa




## MTF 260

Girante a pale curve rovesce  
Backwardly curved blades  
Roue à aubes courbes à l'arrière  
Nach hinten geneigten Schaufeln  
Turbina pala curva hacia atras

**Portata** - Flow rate  
Débit - Volumenstrom - Caudal  
1000 m<sup>3</sup>/h

Pressione - Pressure  
Pression - Druck - Presion  
20 mm H<sub>2</sub>O







Ihr  Vertriebspartner vor Ort:

## BIBUS Austria GmbH

Firmensitz:  
Eduard-Klinger-Str. 12  
3423 St. Andrä-Wördern  
Austria

Tel.: +43 720 301 707 0

Niederlassung Leonding:  
Technologiering 13-17  
4060 Leonding  
Austria

Tel.: +43 720 301 707 100

info@bibus.at  
www.bibus.at

