

Technical Product Sheet




BV49A-3434B-F4-PN10/PN16 - Handwheel

Gate valve, flanged PN16, resilient seated, F4 short face to face, with handwheel
Face to Face Standard: EN 558-1 series 14



Item Number	Belven Ref.
49A3444B2040	BV49A-3434B-F4-PN16 DN040 - HANDWHEEL
49A3444B2050	BV49A-3434B-F4-PN16 DN050 - HANDWHEEL
49A3444B2065	BV49A-3434B-F4-PN16 DN065 - HANDWHEEL
49A3444B2080	BV49A-3434B-F4-PN16 DN080 - HANDWHEEL
49A3444B2100	BV49A-3434B-F4-PN16 DN100 - HANDWHEEL
49A3444B2125	BV49A-3434B-F4-PN16 DN125 - HANDWHEEL
49A3444B2150	BV49A-3434B-F4-PN16 DN150 - HANDWHEEL

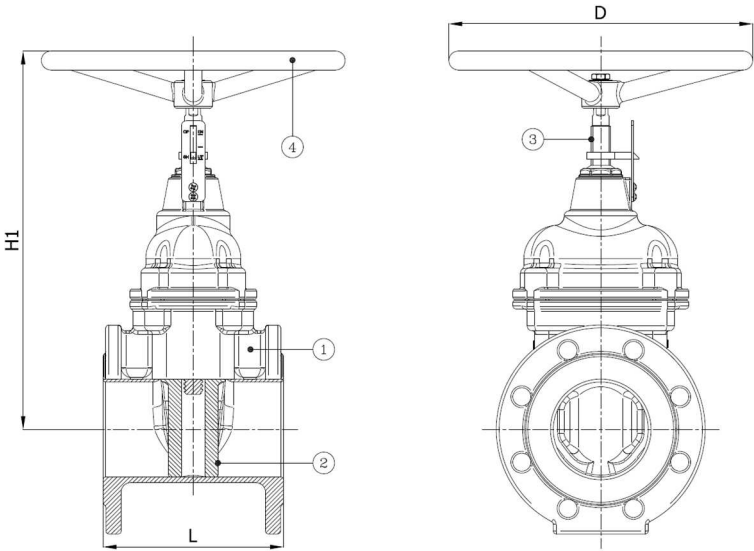


DN/Size	L	H1	D	Press.Cl.	Weight(kg)
DN040 (1 1/2")	140	264	200	PN16	7.90
DN050 (2")	150	280,5	200	PN16	10.20
DN065 (2 1/2")	170	311,5	250	PN16	12.50
DN080 (3")	180	367	250	PN16	16.40
DN100 (4")	190	398,5	320	PN16	21.60
DN125 (5")	200	463,5	320	PN16	29.30
DN150 (6")	210	501	320	PN16	37.00

BV49A-3434B-F4-PN10 - Handwheel

Gate valve, flanged PN10, resilient seated, F4 short face to face, with handwheel
Face to Face Standard: EN 558-1 series 14



Item Number	Belven Ref.
49A2444B2200	BV49A-3434B-F4-PN10 DN200 - HANDWHEEL
49A2444B2250	BV49A-3434B-F4-PN10 DN250 - HANDWHEEL
49A2444B2300	BV49A-3434B-F4-PN10 DN300 - HANDWHEEL
49A2444B2350	BV49A-3434B-F4-PN10 DN350 - HANDWHEEL
49A2444B2400	BV49A-3434B-F4-PN10 DN400 - HANDWHEEL
49A2444B2450	BV49A-3434B-F4-PN10 DN450 - HANDWHEEL
49A2444B2500	BV49A-3434B-F4-PN10 DN500 - HANDWHEEL
49A2444B2600	BV49A-3434B-F4-PN10 DN600 - HANDWHEEL

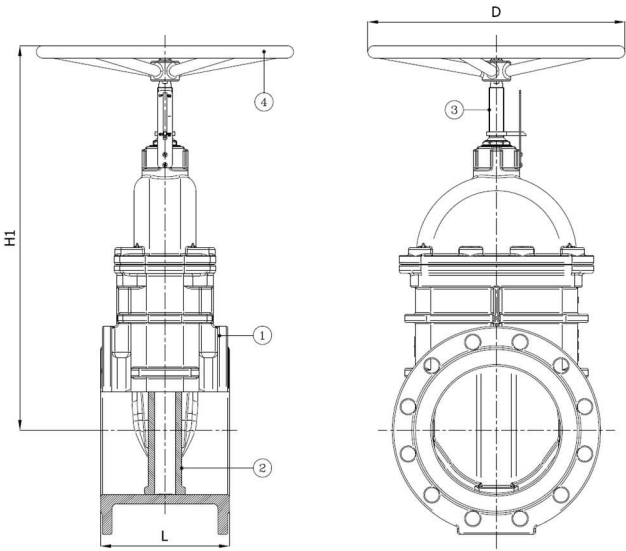


DN/Size	L	H1	D	Press.Cl.	Weight(kg)
DN200 (8")	230	647	450	PN10	58.00
DN250 (10")	250	753	500	PN10	90.00
DN300 (12")	270	815	500	PN10	133.00
DN350 (14")	290	867	550	PN10	180.00
DN400 (16")	310	941	550	PN10	261.00
DN450 (18")	330	1062	550	PN10	345.00
DN500 (20")	350	1141	600	PN10	415.00
DN600 (24")	390	1293	700	PN10	575.00

BV49-3434E-F4-PN10/PN16 - Handwheel

Gate valve, flanged PN16, resilient seated, F4 short face to face, with handwheel, max. temp. 80°C
Face to Face Standard: EN 558-1 series 14



Item Number	Belven Ref.
BV49-3434E-F4-PN10	
BV49-3434E-F4-PN10 - NOT PUBLISHED A3-A4	
BV49-3434E-F4-PN10-BS NOT PUBLISHED A3-A4	
BV49-3434E-F4-PN16 DN040-DN150	
BV49-3434E-F4-PN16 DN040-DN150 NOT PUBLISHED A3-A4	
BV49-3434E-F4-PN16 DN200-DN600	
BV49-3434E-F4-PN16 DN200-DN600 NOT PUBLISHED A3-A4	
BV49-3434E-F4-PN16-BS DN050-DN300 NOT PUBLISHED A4	
BV49-3434E-F4-PN16-BS DN350-DN600 NOT PUBLISHED A4	
BV49-3434E-F5-PN10 NOT PUBLISHED A4	
BV49-3434E-F5-PN10-BS NOT PUBLISHED A4	
BV49-3434E-F5-PN16 DN040-DN150 NOT PUBLISHED A4	
BV49-3434E-F5-PN16 DN200-DN600 NOT PUBLISHED A4	
BV49-3434E-F5-PN16-BS DN050-DN300 NOT PUBLISHED A4	
BV49-3434E-F5-PN16-BS DN350-DN600 NOT PUBLISHED A4	
BV49A-3434B-F4-PN10 DN200+250 PUBLISHED	
BV49A-3434B-F4-PN16 DN040-DN150	
BV49A-3434B-F4-PN16 DN200-DN600 NOT PUBLISHED A4	
BV49A-3434B-F5-PN10 NOT PUBLISHED A4	
BV49A-3434B-F5-PN16 DN040-DN150	
BV49A-3434B-F5-PN16 DN200-DN600	

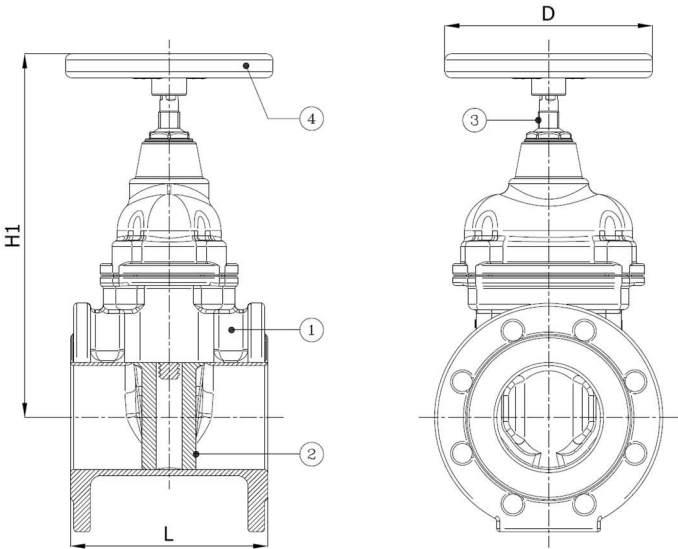

Technical Product Sheet



BV49-3434E-F4-PN10/PN16 - Handwheel

DN/Size	Press.Cl.	Weight(kg)
	PN10	
	PN16	

Belven N.V.

Blokhuisstraat 24 | 2800 Mechelen | Belgium
Tel. 015 29 40 70 | Fax. 015 20 14 13 | info@belven.com | www.belven.com


We keep the right to change the mentioned dimensions, weights, values and materials at any time without prior or direct notice.

BV49-3434E-F4-PN10 - Handwheel

Gate valve, flanged PN10, resilient seated, F4 short face to face, with handwheel, max. temp.80°C
Face to Face Standard: EN 558-1 series 14



Item Number	Belven Ref.
BV49-3434E-F4-PN10	
BV49-3434E-F4-PN10 - NOT PUBLISHED A3-A4	
BV49-3434E-F4-PN10-BS NOT PUBLISHED A3-A4	
BV49-3434E-F4-PN16 DN040-DN150	
BV49-3434E-F4-PN16 DN040-DN150 NOT PUBLISHED A3-A4	
BV49-3434E-F4-PN16 DN200-DN600	
BV49-3434E-F4-PN16 DN200-DN600 NOT PUBLISHED A3-A4	
BV49-3434E-F4-PN16-BS DN050-DN300 NOT PUBLISHED A4	
BV49-3434E-F4-PN16-BS DN350-DN600 NOT PUBLISHED A4	
BV49-3434E-F5-PN10 NOT PUBLISHED A4	
BV49-3434E-F5-PN10-BS NOT PUBLISHED A4	
BV49-3434E-F5-PN16 DN040-DN150 NOT PUBLISHED A4	
BV49-3434E-F5-PN16 DN200-DN600 NOT PUBLISHED A4	
BV49-3434E-F5-PN16-BS DN050-DN300 NOT PUBLISHED A4	
BV49-3434E-F5-PN16-BS DN350-DN600 NOT PUBLISHED A4	
BV49A-3434B-F4-PN10 DN200+250 PUBLISHED	
BV49A-3434B-F4-PN16 DN040-DN150	
BV49A-3434B-F4-PN16 DN200-DN600 NOT PUBLISHED A4	
BV49A-3434B-F5-PN10 NOT PUBLISHED A4	
BV49A-3434B-F5-PN16 DN040-DN150	
BV49A-3434B-F5-PN16 DN200-DN600	

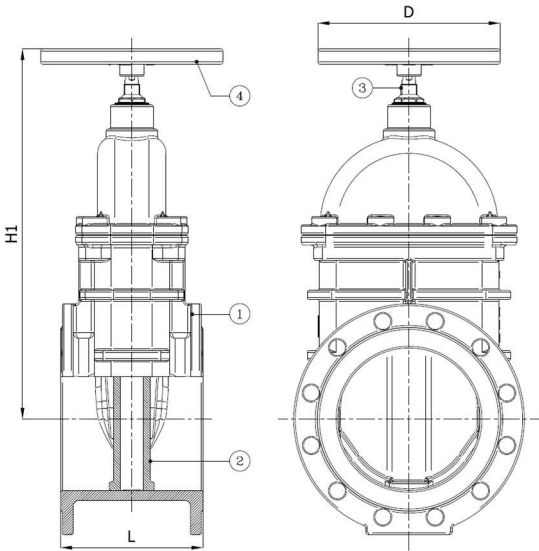

Technical Product Sheet



BV49-3434E-F4-PN10 - Handwheel

DN/Size	Press.Cl.	Weight(kg)
	PN10	
	PN16	

Belven N.V.

Blokhuisstraat 24 | 2800 Mechelen | Belgium
Tel. 015 29 40 70 | Fax. 015 20 14 13 | info@belven.com | www.belven.com

We keep the right to change the mentioned dimensions, weights, values and materials at any time without prior or direct notice.

Technical Product Sheet


BV49-3434E-F4-PN16 - ISO

Gate valve, flanged PN16, resilient seated, F4 short face to face, bare shaft with ISO 5211 flange for automation

Face to Face Standard: EN 558-1 series 14



Item Number	Belven Ref.
493444E0050	BV49-3434E-F4-PN16 DN050 - BARE SHAFT
493444E0065	BV49-3434E-F4-PN16 DN065 - BARE SHAFT
493444E0080	BV49-3434E-F4-PN16 DN080 - BARE SHAFT
493444E0100	BV49-3434E-F4-PN16 DN100 - BARE SHAFT
493444E0125	BV49-3434E-F4-PN16 DN125 - BARE SHAFT
493444E0150	BV49-3434E-F4-PN16 DN150 - BARE SHAFT
493444E0200	BV49-3434E-F4-PN16 DN200 - BARE SHAFT
493444E0250	BV49-3434E-F4-PN16 DN250 - BARE SHAFT
493444E0300	BV49-3434E-F4-PN16 DN300 - BARE SHAFT

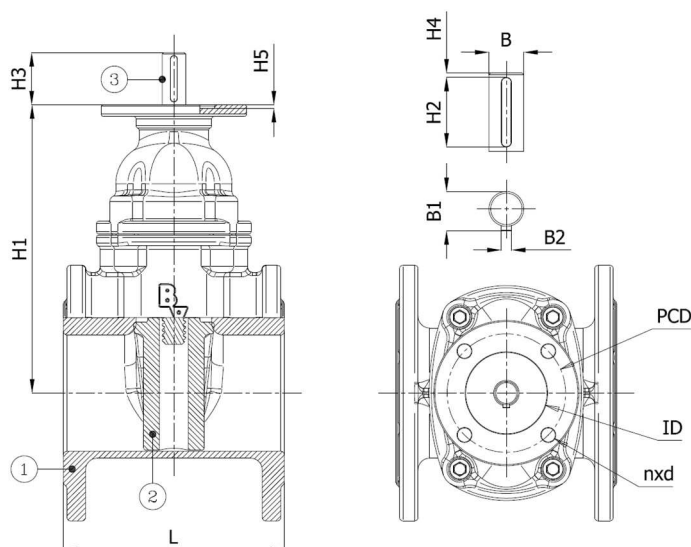

DN/Size	L	H1	H2	H3	H4	PCD	B	B1	B2	ID	H5	ISO	n x d	Press.Cl.	Weight(kg)
DN050 (2")	150	320	36	45	5	102	20	21,5	6	70	3,5	F10	4 x d12	PN16	11.00
DN065 (2 1/2")	170	335	36	45	5	102	20	21,5	6	70	3,5	F10	4 x d12	PN16	14.00
DN080 (3")	180	370	36	45	5	102	20	21,5	6	70	3,5	F10	4 x d12	PN16	17.00
DN100 (4")	190	420	36	45	5	102	20	21,5	6	70	3,5	F10	4 x d12	PN16	21.00
DN125 (5")	200	480	36	45	5	102	20	21,5	6	70	3,5	F10	4 x d12	PN16	29.00
DN150 (6")	210	520	36	45	5	102	20	21,5	6	70	3,5	F10	4 x d12	PN16	38.00
DN200 (8")	230	620	55	65	5	140	30	32	8	100	4,5	F14	4 x d18	PN16	58.00
DN250 (10")	250	720	55	65	5	140	30	32	8	100	4,5	F14	4 x d18	PN16	90.00
DN300 (12")	270	780	55	65	5	140	30	32	8	100	4,5	F14	4 x d18	PN16	120.00

Belven N.V.

Blokhuysstraat 24 | 2800 Mechelen | Belgium

Tel. 015 29 40 70 | Fax. 015 20 14 13 | info@belven.com | www.belven.com

We keep the right to change the mentioned dimensions, weights, values and materials at any time without prior or direct notice.