

Preparation unit—GP Series

GPR Series Precision Regulator



Specification

Model		GPR20006	GPR30008	GPR40008	GPR40010	GPR40015
Fluid		Air				
Port size [Note1]		1/8"	1/4"	1/4"	3/8"	1/2"
Max.supply pressure		1.0MPa(145psi)				
Operating pressure	Lower pressure	0.005~0.2MPa(0.7~29psi)		0.01~0.2MPa(1.5~29psi)		
	Medium pressure	0.01~0.4MPa(1.5~58psi)				
	High pressure	0.01~0.8MPa(1.5~116psi)				
Sensitivity		Within 0.2%F.S.				
Repeatability		Within ±0.5%F.S.				
Air consumption (ANR)		≤4L/min	≤4L/min	≤9.5L/min		≤11.5L/min
Temperature range		-20~70°C(Unfreeze)				
Weight		144g	336g	717g		

[Note1] G thread is available.

Symbol



Product feature

1. High pressure regulating accuracy and rapid-response.
2. Good pressure and flow chart.
3. Easy installation, it can be installed independently by bracket or directly with existing filter combination components of module type.
4. In addition to high pressure type, the type of medium pressure and lower pressure can be selected.

Ordering code

GPR300 08 H □ □ G


① ② ③ ④ ⑤ ⑥

① Model	② Port size	③ Regulating pressure range	④ Accessories	⑤ Pressure gauge	⑥ Thread type [Note1]
GPR200: 200 Series Precision Regulator	06: 1/8"	L: 0.005~0.2MPa(0.73~29psi) M: 0.01~0.4MPa(1.45~58psi) H: 0.01~0.8MPa(1.45~116psi)	Blank: Bracket J: No bracket	Blank: With pressure gauge N: Without pressure gauge	G: G Thread (Scale:MPa&bar)
GPR300: 300 Series Precision Regulator	08: 1/4"				
GPR400: 400 Series Precision Regulator	08: 1/4" 10: 3/8" 15: 1/2"	L: 0.01~0.2MPa(1.45~29psi) M: 0.01~0.4MPa(1.45~58psi) H: 0.01~0.8MPa(1.45~116psi)			

[Note1] Please consult us for special requirements.

Inner structure

GPR300

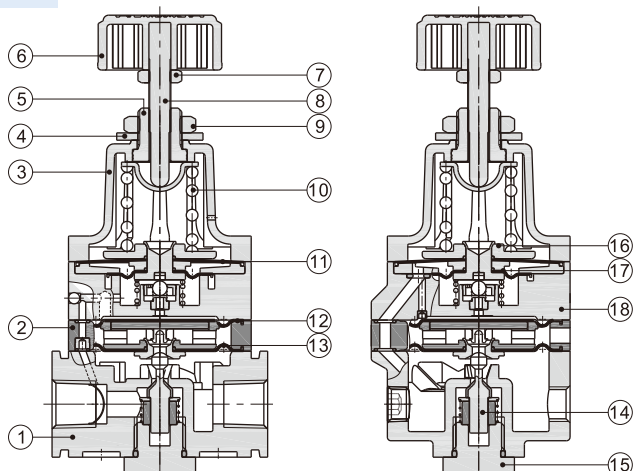


No.	Item	Material
1	Regulator body	Aluminum alloy
2	Pilot body	Plastic
3	Regulator seat	Aluminum alloy
4	Bracket gasket	SPCC
5	Adjusting nut	Carbon steel
6	Regulator knob	Plastic
7	Nut	Carbon steel
8	Regulator spindle	Carbon steel
9	Nut	Carbon steel
10	Spring	Spring steel
11	Pilot upper diaphragm	NBR
12	Regulator upper diaphragm	NBR
13	Regulator lower diaphragm	NBR
14	Spool	Stainless steel+NBR
15	Bonnet	Carbon steel
16	Pilot diaphragm upper hard core	Aluminum alloy
17	Pilot lower diaphragm	NBR
18	Nozzle body	Aluminum alloy


GP Series Precision Regulator

Pressure chart


Lower pressure Type:20006

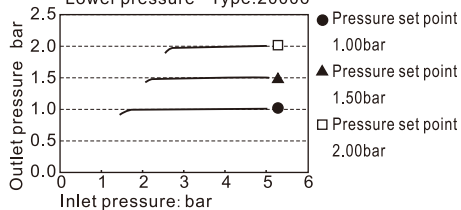


Lower pressure Type:30008

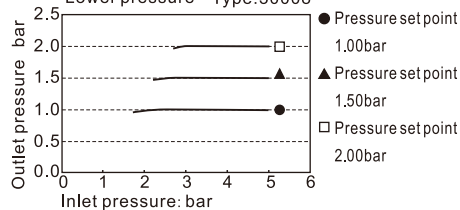


Lower pressure Type:40015

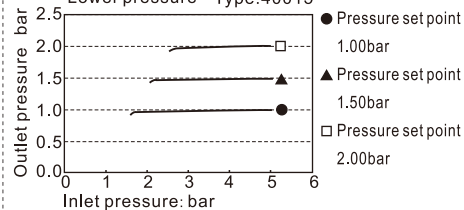


Medium pressure Type:20006

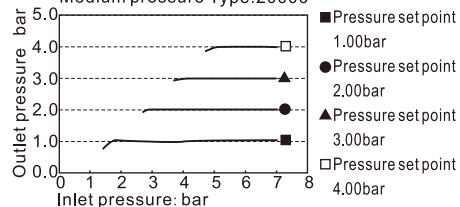


Medium pressure Type:30008

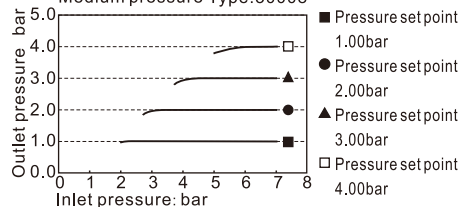


Medium pressure Type:40015

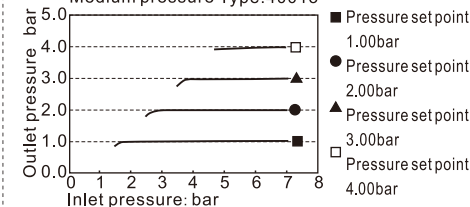


High pressure Type:20006

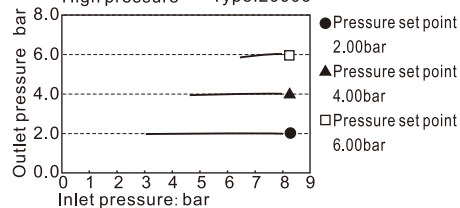

High pressure Type:30008

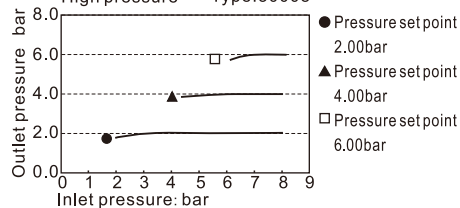


High pressure Type:40015

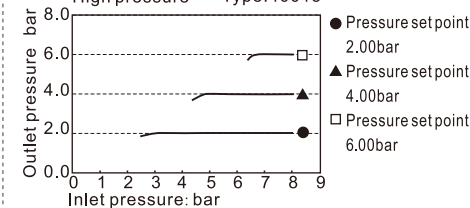

Flow chart


Lower pressure

Type: 20006

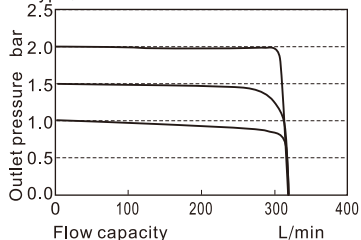


Lower pressure

Type: 30008

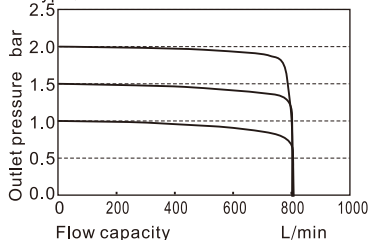


Lower pressure

Type: 40015

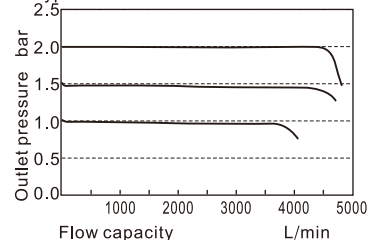


Medium pressure

Type: 0006

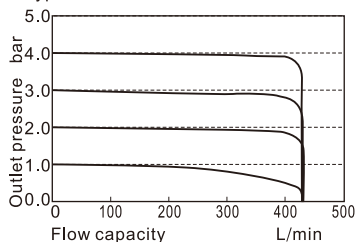


Medium pressure

Type: 30008

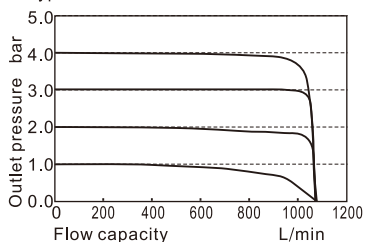


Medium pressure

Type: 40015

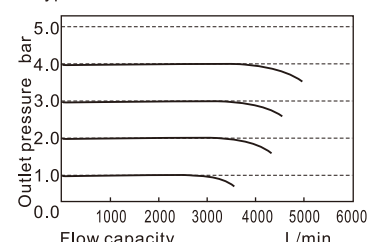


High pressure

Type: 20006

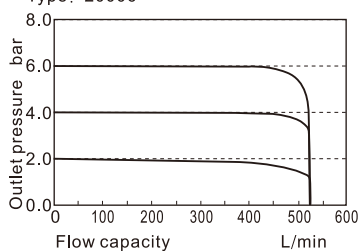


High pressure

Type: 30008

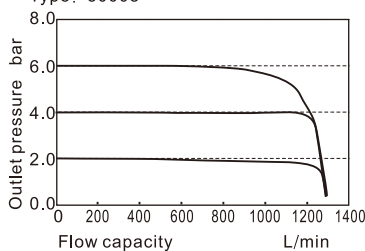


High pressure

Type: 40015

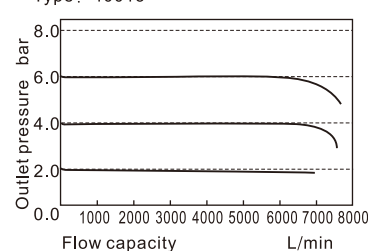


Overflow chart


Lower pressure

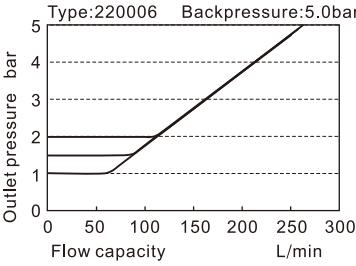


Lower pressure

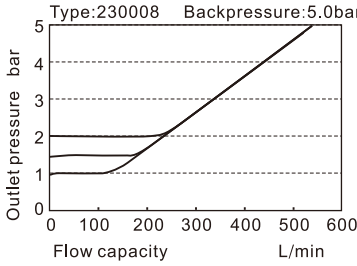


Lower pressure

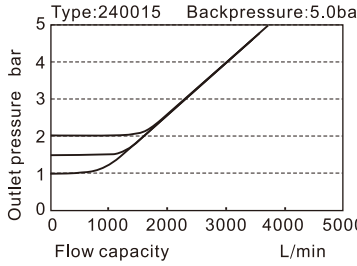


Medium pressure

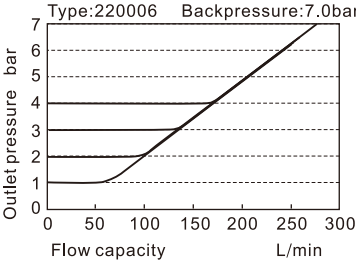


Medium pressure

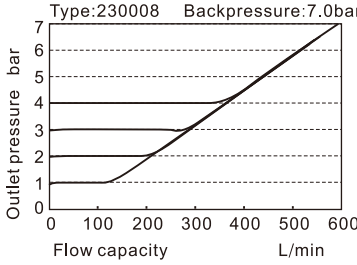


Medium pressure

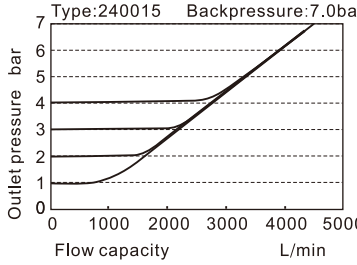


High pressure

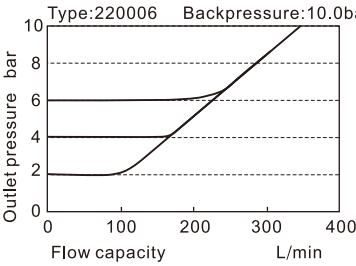

High pressure

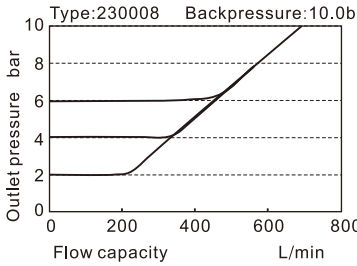

High pressure

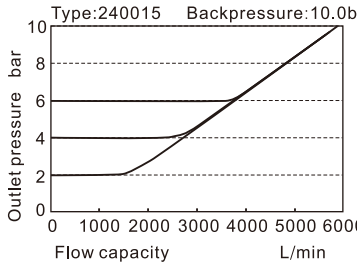


Preparation unit—GP Series


GP Series Precision Regulator

Dimensions

GPR200

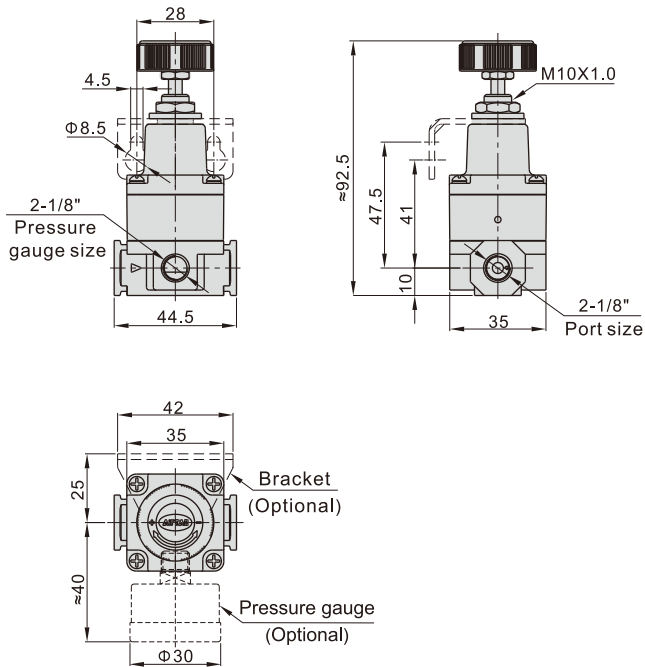

GPR300

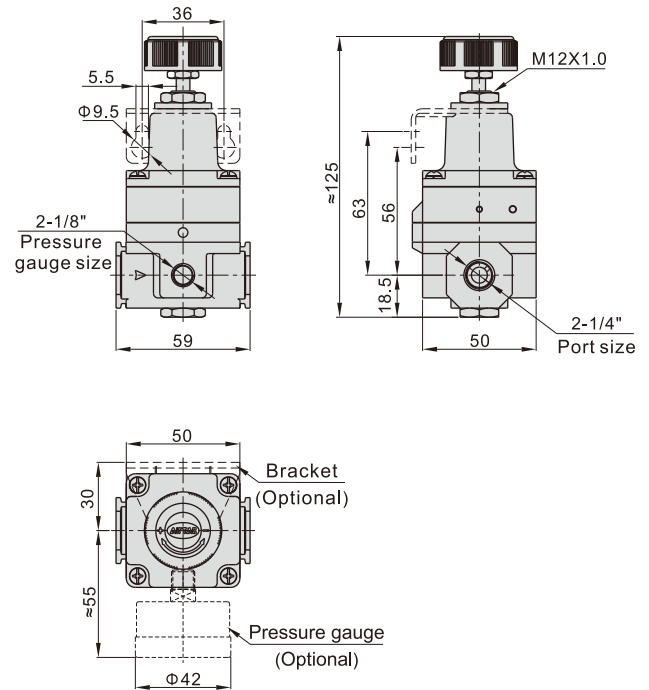

GPR400

