

*“Simplicity is the most difficult thing to secure in this world:  
it is the last limit of experience and the last effort of genius”*

George Sand

A I R E K A



## WHY AIREKA

AIREKA is the new brand under which Stima S.p.A. has decided to gather a series of diverse products that share the common feature of being simple and yet innovative solutions to long-standing and complex issues, for which we believe the market does not offer adequate answers. The simplicity is the result of creative work, know-how, and extensive experience that the designers instilled in these products. So, special features make them one-of-a-kind. Always with a great focus on customers' demands.



**Simian Project S.r.l.** was started in 2007 as a result of the business flair and experience of Leonardo Lombardi as a designer in the automotive and packaging industries. Creativity, dynamism, and efficiency are the qualities that characterise both the products and the work methods of the company, by offering customers tailor-made solutions with quick turnaround time and high added value.

Made in Italy





## **SOME EXAMPLES AND SECTORS OF APPLICATION** **6**

## ■ PNEUMATIC COOLERS

| Series VR / VRX / VR U-G  | 9  |
|---------------------------|----|
| VR-100                    | 12 |
| VR-200                    | 13 |
| VR-300T                   | 14 |
| VR-300U                   | 15 |
| VR-200U                   | 16 |
| VR-400U                   | 17 |
| VR-400G                   | 18 |
| VR-600U                   | 19 |
| VR-600G                   | 20 |
| VRX-100                   | 21 |
| VRX-300                   | 22 |
| VRX-500                   | 23 |
| VRX-1000                  | 24 |
| ACCESSORIES               | 25 |
| CONTROL UNIT XTRONIC2     | 26 |
| CONTROL UNIT 345 B        | 27 |
| CONTROL UNIT 345 T        | 28 |
| EXAMPLES OF INSTALLATIONS | 29 |

## ■ ELECTRONICALLY-CONTROLLED PNEUMATIC COOLERS

|  |           |
|--|-----------|
| <b>Series XTRONIC</b>                    | <b>30</b> |
| VRX-100 XTRONIC                          | 31        |
| VR-200U XTRONIC                          | 32        |
| VRX-300 XTRONIC                          | 33        |
| VR-400U XTRONIC                          | 34        |
| VRX-500 XTRONIC                          | 35        |
| VRX-1000 XTRONIC                         | 36        |
| <b>SPECIAL VERSIONS AND APPLICATIONS</b> | <b>37</b> |
| COOLER AIR SAVING                        | 38        |

**AIR KNIVES**

| Series ABT / ABX / ABZ         | 43 |
|--------------------------------|----|
| ABT-030                        | 45 |
| ABT-030 PLUS                   | 46 |
| ABT-060                        | 47 |
| ABT-100                        | 48 |
| ABT-200                        | 49 |
| ABT-240                        | 50 |
| ABT-400                        | 51 |
| ABT-600                        | 52 |
| ABT-800                        | 53 |
| ACCESSORIES - SPECIAL VERSIONS | 54 |
| ABT-F1C                        | 55 |
| ABX-1000                       | 56 |
| ABX-1500                       | 57 |
| ABX-2000                       | 58 |
| ABZ-1000                       | 59 |
| ABZ-1500                       | 60 |
| ABZ-2000                       | 61 |

## AIR AMPLIFIERS

|                             |           |
|-----------------------------|-----------|
| <b>Series AM-T</b>          | <b>63</b> |
| AM-10T                      | 64        |
| AM-15T                      | 65        |
| AM-20T                      | 66        |
| AM-25T                      | 67        |
| AM-30T                      | 68        |
| AM-40T                      | 69        |
| AM-50T                      | 70        |
| ACCESSORI                   | 71        |
| <b>SPECIAL APPLICATIONS</b> | <b>72</b> |
| AIR-SPEED 25                | 72        |
| AIRCLEAN 30                 | 73        |


## ■ SPECIAL NOZZLES

| Series UGP / UGL / UGD / UGF / UGB | 74 |
|------------------------------------|----|
| UGP 20A / UGP 20B                  | 75 |
| UGP 45A / UGP 45B                  | 76 |
| UGL                                | 77 |
| UGD 18-I                           | 78 |
| UGD 08 / UGD 12 / UGD 18 / UGD 30  | 79 |
| UGF 03 / UGF 04 / UGF 05 / UGF 06  | 80 |
| UGB 100 / UGB 300                  | 81 |

## ■ CONDENSATE SEPARATORS

|                   |           |
|-------------------|-----------|
| <b>Series HSC</b> | <b>83</b> |
| HSC - T2          | 84        |
| ACCESSORIES       | 85        |

## ■ PICTURES OF APPLICATIONS

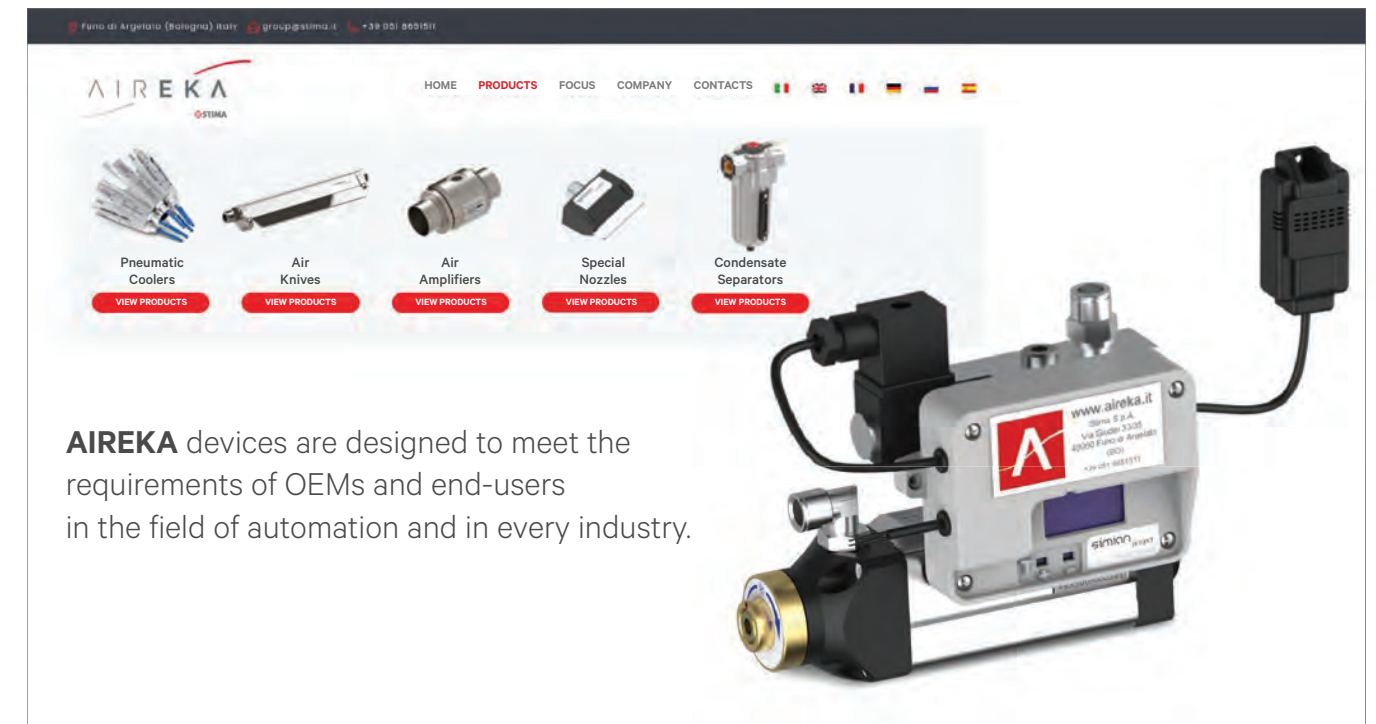

**AIREKA** devices are designed to meet the requirements of OEMs and end-users in the field of automation and in every industry.

**They stand out in the market because of:**

- Unique and innovative design;
- High performances;
- Robustness, simplicity of use, and high reliability;
- Customised versions (in dimensions and materials) easily available;
- High quality standards and scrupulous tests;
- Employ of electronics on many devices.

For more information, you can also check our website:

**www.aireka.it**

# EXAMPLES OF SECTORS OF APPLICATION



## PNEUMATIC COOLERS

- **MACHINE TOOLS / MACHINING**  
Cooling of machined parts and of tools: milling, turning, cutting, etc.; cooling of blades and saws, etc.
- **AUTOMATIC MACHINERY / PACKAGING**  
Cooling of control cabinets, of closing points of bags, of welding points, of glues, of foils for packaging, of control displays, of touch panels, etc.
- **COMPOSITE MATERIALS**  
Tooling, machining, etc.; carbon fibres' processing.
- **MOULDING**  
Both for plastics and metals. Cooling of moulds, sprues, and moulded parts.
- **AUTOMOTIVE**  
Cooling of plastic components.
- **FOUNDRIES**  
Cooling of moulds and workpieces.
- **PRESSES**  
Cooling of electric motors and of parts of the press itself.
- **PAPER PROCESSING**  
Cooling of blades.
- **TEXTILE**  
Cooling of needles.
- **LASER CUTTING**
- **TUBES EXTRUSION**
- **LINEAR MOTORS.**



## AIR KNIVES

- **PACKAGING**  
Cleaning of parts on conveyor belts, opening of plastic bags, blowing plastic films, etc.
- **MACHINE TOOLS / MACHINING**  
To clean and dry machined parts, cleaning of machine windows, etc.
- **WOODWORKING**  
To clean panels, to blow-off chips, etc.
- **AUTOMOTIVE**  
Cleaning and drying of vehicles' bodies before finishing.
- **FINISHING**  
Drying of surfaces before painting.
- **FOODSTUFFS**  
Drying of bottles after filling, to clean vegetables, to clean photocells and optical sensors.
- **PAPER PROCESSING**  
Sheeting, browsing of foils, to remove scraps, etc.
- **TILES / CERAMICS**  
To dry and clean tiles.
- **INDUSTRIAL LAUNDERING**  
To dry parts.



## AIR AMPLIFIERS

- **PACKAGING / AUTOMATIC MACHINERY**  
To convey granules, tobacco, coffee powder, etc., to either blow-off and suction shavings.
- **MACHINE TOOLS**  
To blow-off shavings and scraps, to empty tanks of emulsified water, etc.
- **WOODWORKING**  
To blow-off chips.
- **WELDING**  
Aspiration of fumes and gases
- **PHARMACEUTICAL**  
Conveying of pills.
- **WIRES EXTRUSION**  
To clean the wire.
- **3D PRINTERS**  
Conveying of plastic granules.



## SPECIAL NOZZLES


- **DEVICES FOR BLOW-OFF AND CLEANING**  
Automatic machinery, metal processing, plastic industry, woodworking, ceramic, marble processing.








Description of the set-up and instrumentation used for our tests on pneumatic coolers.

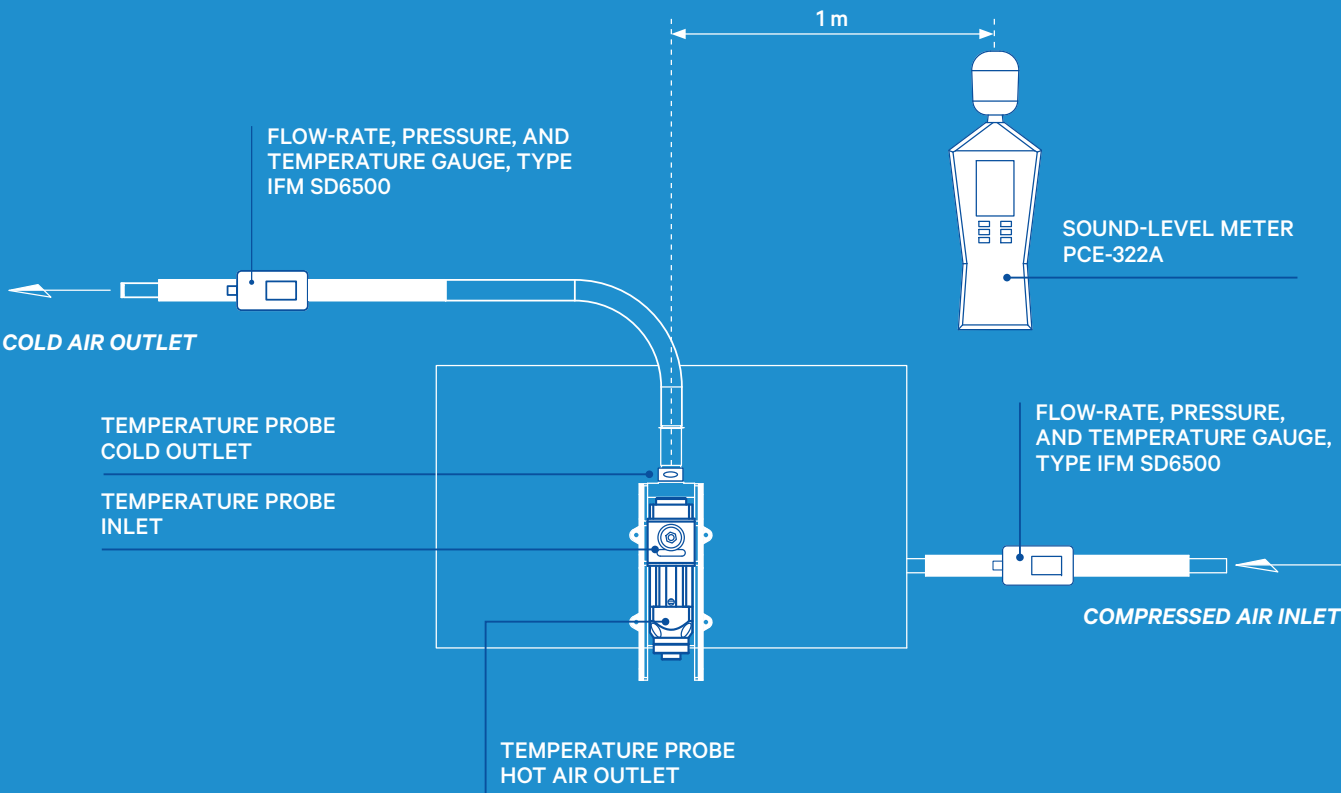

The **VR / VRX / VR U-G SERIES** coolers are state-of-the-art solutions for compressed-air cooling based on the principle of the Vortex Tube. The excellent performances of flow-rate and  $\Delta T$  generated, the design, the fastenings that make them extremely versatile to mount, and the possibility to combine them in a patented system with the air amplifiers (to use the hot air flow), offer customers an innovative, effective, and inexpensive solution to cool down metal and plastic parts, electric and electronic control cabinets, and mechanical applications. All this with a simple connection to the compressed-air line.

- $\Delta T$  up to  $-40^{\circ}\text{C}$  for the cold flow and  $+60^{\circ}\text{C}$  for the hot flow, in comparison to the temperature of air at inlet
- Easy to install, thanks to flanges and magnetic supports
- Patented system of hot air's recovery to actuate an amplifier/conveyor
- Made of corrosion-resistant materials
- No moving part, so not subject to wear and tear
- No electricity or chemical substances required
- They do not cause either sparkles or interferences
- Instant operation
- Reliable and maintenance-free



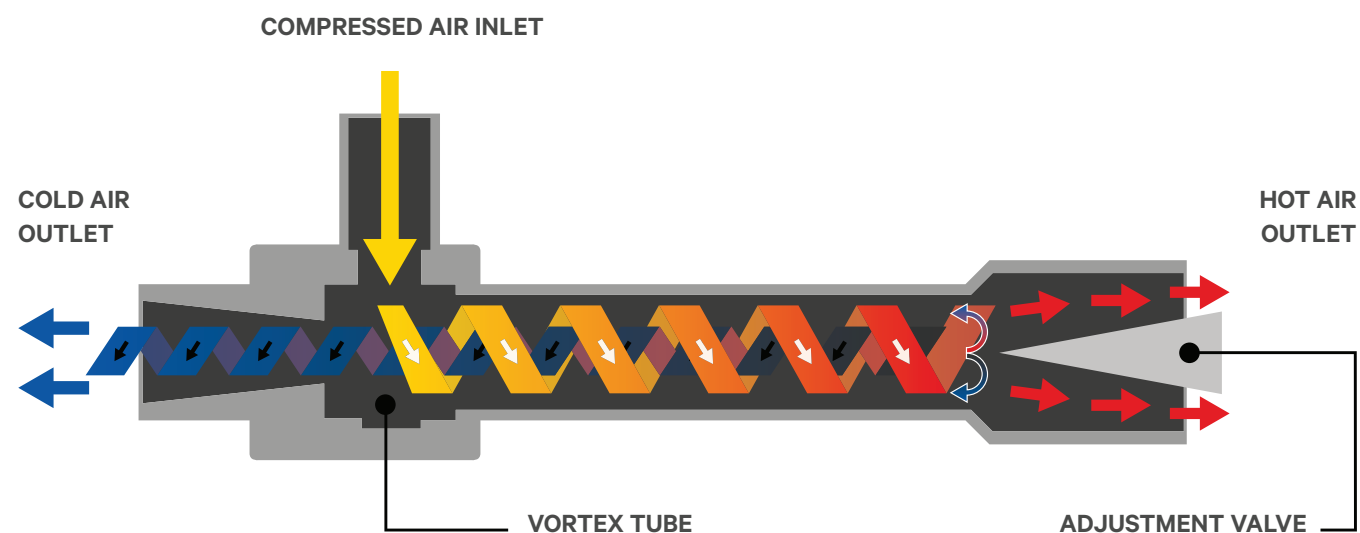

Ranque-Hilsch tube (Vortex tube)

## DESCRIPTION OF VORTEX TUBES

The Ranque-Hilsch tube, in the industrial sector better known as "Vortex tube", is a device that splits a compressed-air flow in 2 separate streams: one of cold air, and one of hot air.

The core of the system is the vortex chamber, which is connected to 2 opposed tubes, one of which features a valve. When the compressed air is injected tangentially in the chamber, this causes the rotary movement of air towards one of the exits. This vortex moves rotating at high speed and brushing against the inner side of the tube, increasing in temperature; the valve placed at the hot air outlet enables some of it to be exhausted. The remaining part goes back, creating a low pressure vortex moving towards the other exit and giving away heat to the first vortex. So, this flow is much colder.

The  $\Delta T$  generated is inversely proportional to the volume of the flow. The differences in temperature are considerable and can reach  $-40^{\circ}\text{C}$  for the cold flow and  $60^{\circ}\text{C}$  for the hot flow.

In the industrial field the Vortex tubes have been employed for a long time and have found a variety of applications in which they offer a major added value. They have great cooling performances, are very easy to install and have instant operation, have no moving part and therefore are maintenance-free. Plus, they do not require electric power, so they are suitable for dangerous environments and humid areas.

If the application enables their use, they are price-worthier than electric coolers. Our coolers SERIES VR and VRX, beside the excellent performances in comparison to the other products in the market, were designed to be easily customised according to customers' demands.








# SERIES VR-100

MODULAR PNEUMATIC COOLERS

# SERIES VR-200

MODULAR PNEUMATIC COOLERS

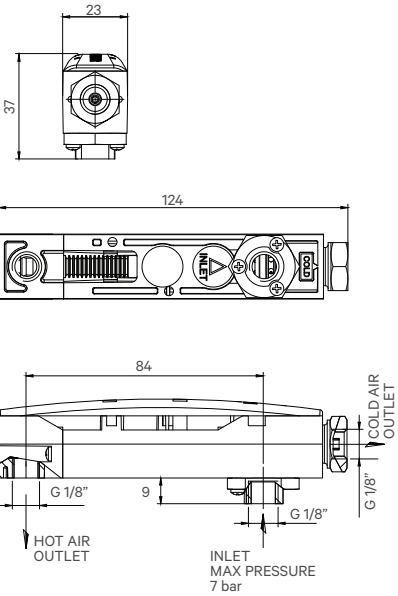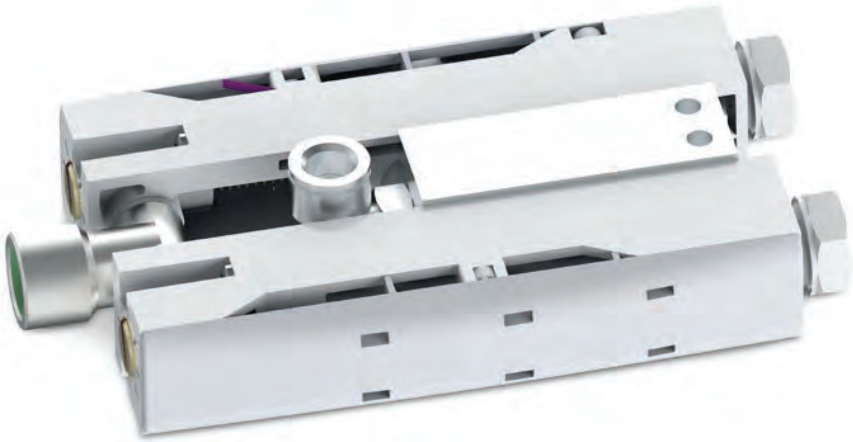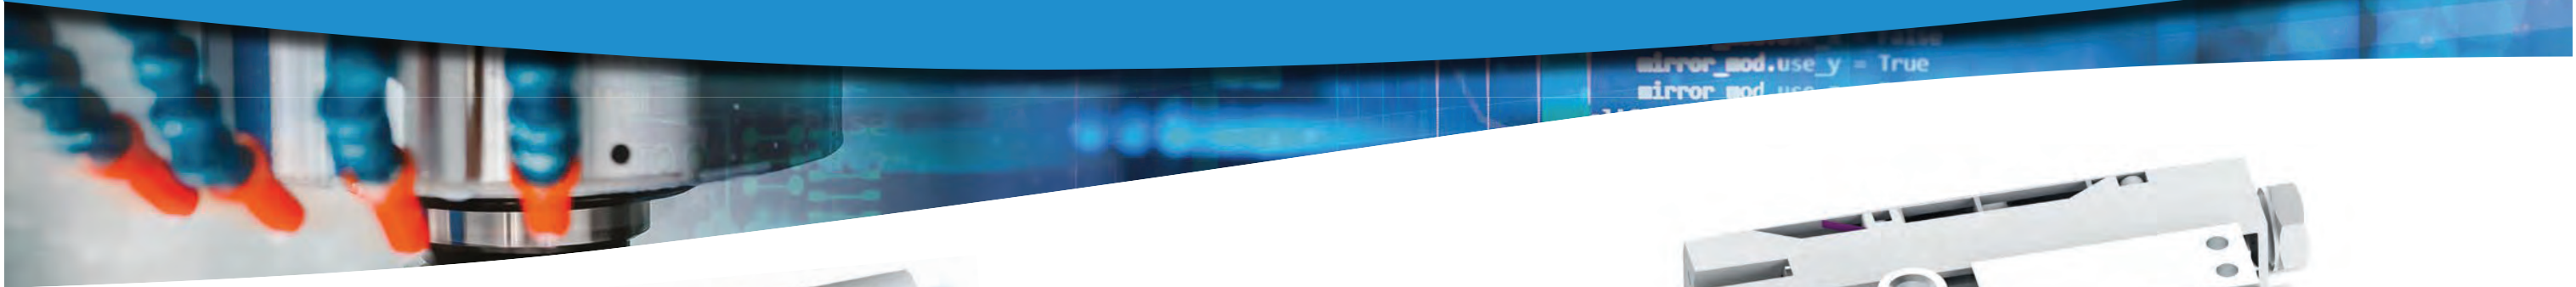


| GENERAL FEATURES - VR-100 |   |
|---------------------------|---|
| Materials                 | Body and cover: Nylon 6.6<br>Air connections and nozzles: brass |
| Air inlet port            | G-1/8" F  |
| Outlet port (cold flow)   | G-1/8" F  |
| Exhaust port (hot flow)   | G-1/8" F  |
| Recommended hose          | Ø-8x1   |
| Air supply pressure       | 3 ÷ 7 bar   |
| Cooling power*            | 120 W - 100 Kcal/h - 400 BTUH                                   |
| Optional magnetic support | KACM-VR100  |

\*with inlet pressure 7 Bar and inlet temperature 20°C

PERFORMANCES AND CONSUMPTION TABLE (with air temperature at inlet 20°C)

| Pressure bar | Outlet temperature cold flow °C | Consumption NL/min |
|--------------|---------------------------------|--------------------|
| 1            | -1,5                            | 32                 |
| 2            | -8                              | 53                 |
| 3            | -15                             | 74                 |
| 4            | -21,5                           | 94                 |
| 5            | -24,5                           | 115                |
| 6            | -26,5                           | 135                |
| 7            | -28                             | 154                |

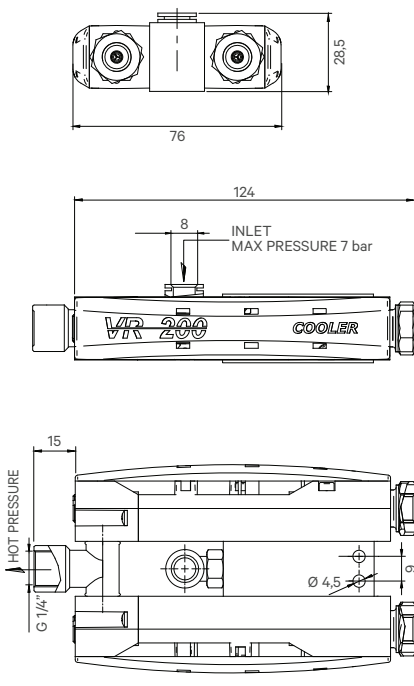

| GENERAL FEATURES - VR-200 |   |
|---------------------------|---|
| Materials                 | Body and cover: Nylon 6.6<br>Air connections and nozzles: brass |
| Air inlet port            | Push-in fitting Ø-8x6   |
| Outlet port (cold flow)   | 2 x G-1/8" F  |
| Exhaust port (hot flow)   | 2 x G-1/8" F  |
| Recommended hose          | Ø-8x1   |
| Air supply pressure       | 3 ÷ 7 bar   |
| Cooling power*            | 240 W - 200 Kcal/h - 800 BTUH                                   |
| Optional magnetic support | KACM-VR200  |

\*with inlet pressure 7 Bar and inlet temperature 20°C


PERFORMANCES AND CONSUMPTION TABLE (with air temperature at inlet 20°C)

| Pressure bar | Outlet temperature cold flow °C | Consumption NL/min |
|--------------|---------------------------------|--------------------|
| 1            | -1,5                            | 64                 |
| 2            | -8                              | 106                |
| 3            | -15                             | 148                |
| 4            | -21,5                           | 196                |
| 5            | -24,5                           | 230                |
| 6            | -26,5                           | 270                |
| 7            | -28                             | 308                |



SERIES VR-300T • 3 OUTLETS  
MODULAR PNEUMATIC COOLERS

SERIES VR-300U • SINGLE OUTLET  
MODULAR PNEUMATIC COOLERS

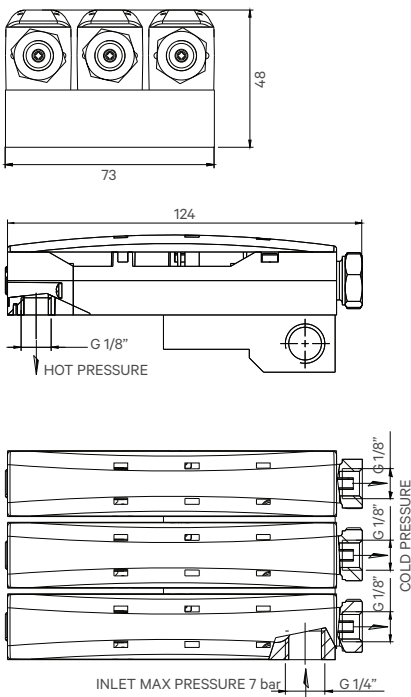


GENERAL FEATURES - VR-300T

|                           |   |
|---------------------------|---|
| Materials                 | Body and cover: Nylon 6.6<br>Air connections and nozzles: brass |
| Air inlet port            | G-1/4" F  |
| Outlet port (cold flow)   | 3 x G-1/8" F  |
| Exhaust port (hot flow)   | 3 x G-1/8" F  |
| Recommended hose          | Ø-8x1   |
| Air supply pressure       | 1 ÷ 7 bar   |
| Cooling power*            | 360 W - 300 Kcal/h - 1200 BTUH                                  |
| Optional magnetic support | KACM-VR300  |

\*with inlet pressure 7 Bar and inlet temperature 20°C

PERFORMANCES AND CONSUMPTION TABLE (with air temperature at inlet 20°C)

| Pressure bar | Outlet temperature cold flow °C | Consumption NL/min |
|--------------|---------------------------------|--------------------|
| 1            | -1,5                            | 96                 |
| 2            | -8                              | 159                |
| 3            | -15                             | 222                |
| 4            | -21,5                           | 282                |
| 5            | -24,5                           | 345                |
| 6            | -26,5                           | 405                |
| 7            | -28                             | 462                |

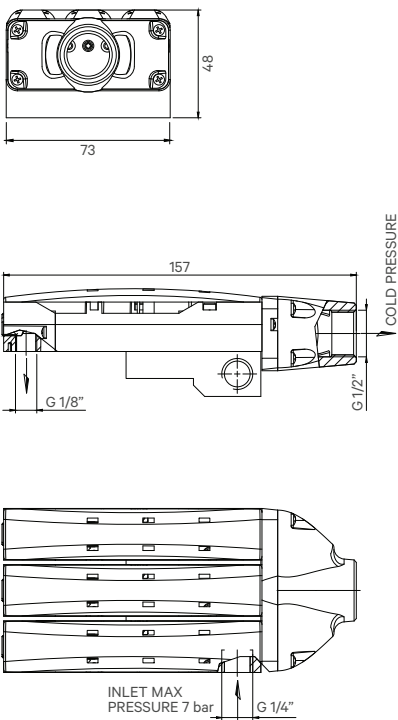

GENERAL FEATURES - VR-300U

|                           |   |
|---------------------------|---|
| Materials                 | Body and cover: Nylon 6.6<br>Air connections and nozzles: brass |
| Air inlet port            | G-1/4" F  |
| Outlet port (cold flow)   | 1 x G-1/2" F  |
| Exhaust port (hot flow)   | 3 x G-1/8" F  |
| Recommended hose          | Ø-8x1   |
| Air supply pressure       | 3 ÷ 7 bar   |
| Cooling power*            | 360 W - 300 Kcal/h - 1200 BTUH                                  |
| Optional magnetic support | KACM-VR300  |



\*with inlet pressure 7 Bar and inlet temperature 20°C

PERFORMANCES AND CONSUMPTION TABLE (with air temperature at inlet 20°C)

| Pressure bar | Outlet temperature cold flow °C | Consumption NL/min |
|--------------|---------------------------------|--------------------|
| 1            | -1,5                            | 96                 |
| 2            | -8                              | 159                |
| 3            | -15                             | 222                |
| 4            | -21,5                           | 282                |
| 5            | -24,5                           | 345                |
| 6            | -26,5                           | 405                |
| 7            | -28                             | 462                |

SERIES VR-200U • SINGLE OUTLET  
HIGH-PERFORMANCE COMPACT PNEUMATIC COOLERS

SERIES VR-400U • SINGLE OUTLET  
HIGH-PERFORMANCE COMPACT PNEUMATIC COOLERS

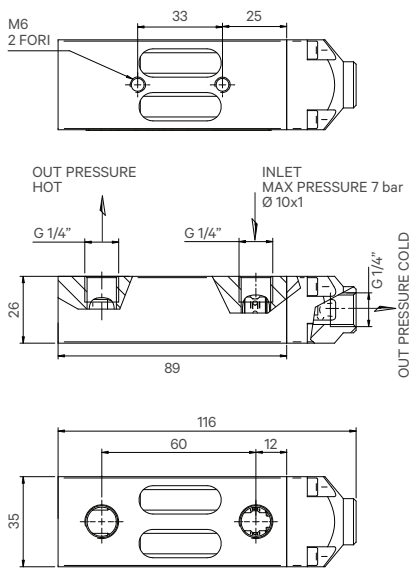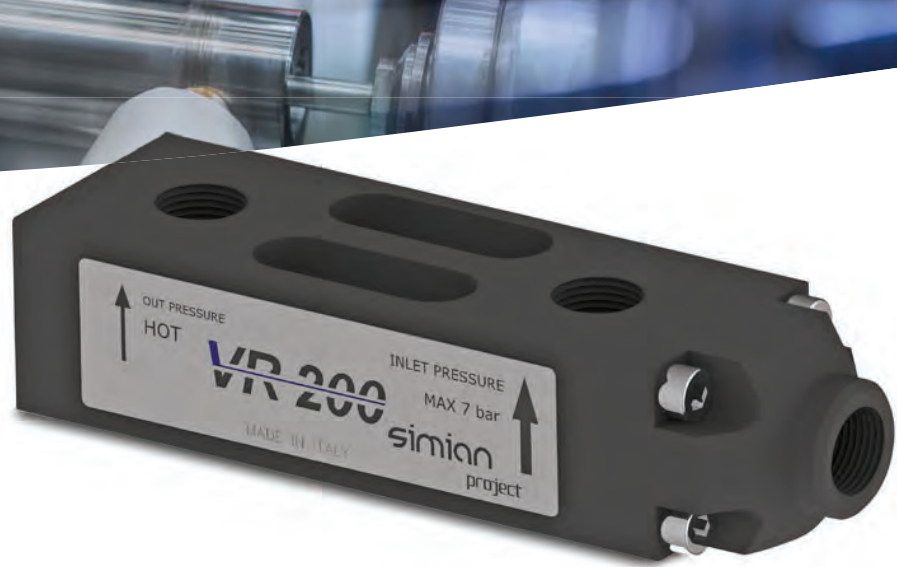

GENERAL FEATURES - VR-200U


|                           |  |
|---------------------------|--|
| Materials                 | Body and cover: Delrin<br>Ports and nozzles: Brass |
| Air inlet port            | G-1/4" F   |
| Outlet port (cold flow)   | G-1/4" F   |
| Exhaust port (hot flow)   | G-1/4" F   |
| Recommended hose          | Ø-8x1  |
| Air supply pressure       | max 7 bar  |
| Cooling power*            | 264 W - 220 Kcal/h - 880 BTUH                      |
| Optional magnetic support | By means of 2 threads M6 on the body               |
| Weight                    | 210 g  |

\* With inlet pressure 7 Bar and inlet temperature 20°C.

PERFORMANCES AND CONSUMPTION TABLE (with air temperature at inlet 20°C)

| Pressure bar | Outlet temperature cold flow °C | Consumption NL/min | Noise level* dBA |
|--------------|---------------------------------|--------------------|------------------|
| 1            | -2                              | 64                 | 50               |
| 2            | -12                             | 106                | 54               |
| 3            | -18                             | 148                | 58               |
| 4            | -23                             | 188                | 61               |
| 5            | -26                             | 230                | 65               |
| 6            | -28                             | 270                | 68               |
| 7            | -31                             | 308                | 70               |

\*Test made with insulated LOC-LINE flexible tube at cold outlet, and tube L= 1 m at hot air outlet.

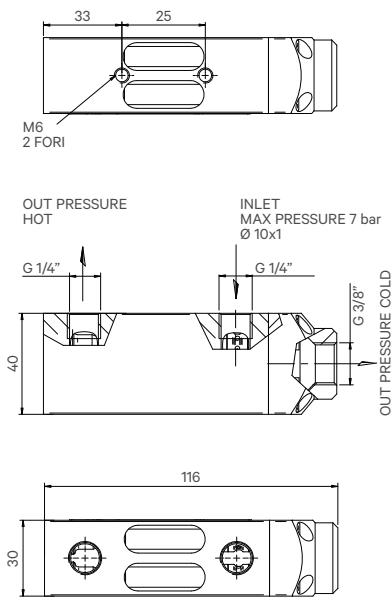

GENERAL FEATURES - VR-400U

|                                   |  |
|-----------------------------------|--|
| Materials                         | Body and cover: Delrin<br>Ports and nozzles: Brass |
| Air inlet port                    | G-1/4" F   |
| Exhaust port (hot flow)           | G-1/4" F   |
| Recommended hose                  | Ø-10x1   |
| Supply pressure                   | max 7 bar  |
| Cooling power*                    | 528 W - 440 Kcal/h - 1760 BTUH                     |
| Optional fixation of magnetic kit | By means of 2 threads M6 on body                   |
| Weight                            | 285 g  |

\* With inlet pressure 7 Bar and inlet temperature 20°C..

PERFORMANCES AND CONSUMPTION TABLE (with air temperature at inlet 20°C)


| Pressure bar | Outlet temperature cold flow °C | Consumption NL/min | Noise level* dBA |
|--------------|---------------------------------|--------------------|------------------|
| 1            | -2                              | 128                | 55               |
| 2            | -12                             | 212                | 60               |
| 3            | -18                             | 296                | 64               |
| 4            | -23                             | 376                | 67               |
| 5            | -26                             | 460                | 70               |
| 6            | -28                             | 540                | 71               |
| 7            | -31                             | 616                | 73               |

\*Test made with insulated LOC-LINE flexible tube at cold outlet, and tube L= 1 m at hot air outlet.



SERIES VR-400G • TO COOL DOWN BLADES, BELTS, AND BANDS  
HIGH-PERFORMANCE COMPACT PNEUMATIC COOLERS

SERIES VR-600U • SINGLE OUTLET  
HIGH-PERFORMANCE COMPACT PNEUMATIC COOLERS

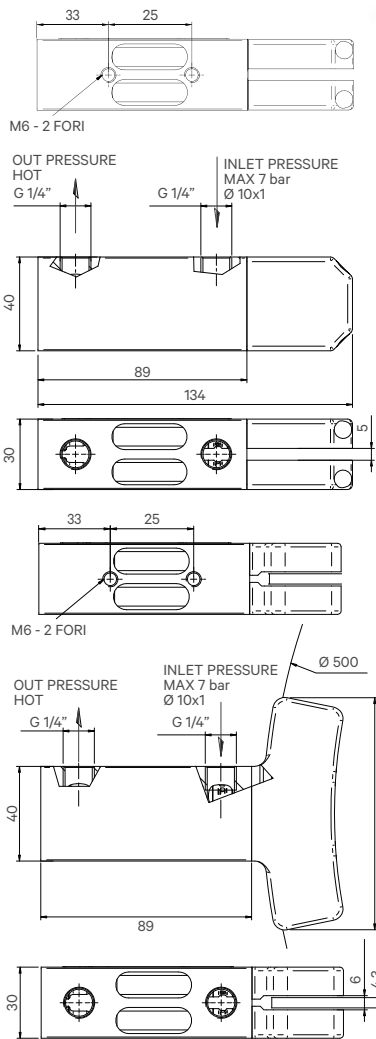


GENERAL FEATURES - VR-400G

|                          |   |
|--------------------------|---|
| Materials                | Body: Derlin<br>Clamps: ABS (other materials on request)<br>Inner spindles: brass |
| Air inlet port           | G-1/4" F  |
| Clamps width (cold flow) | 5 mm (customised dimensions on request)   |
| Outlet port (hot flow)   | G-1/4" F  |
| Recommended hose         | Ø-10x1  |
| Air supply pressure      | max 7 bar   |
| Cooling power*           | 528 W - 440 Kcal/h - 1760 BTUH  |
| Fixation                 | By means of two M6 threads on body  |
| Weight                   | 340 g   |

\* With inlet pressure 7 Bar and inlet temperature 20°C.

PERFORMANCES AND CONSUMPTION TABLE (with air temperature at inlet 20°C)

| Pressure bar | Outlet temperature cold flow °C | Consumption NL/min |
|--------------|---------------------------------|--------------------|
| 1            | -2                              | 128                |
| 2            | -12                             | 212                |
| 3            | -18                             | 296                |
| 4            | -23                             | 376                |
| 5            | -26                             | 460                |
| 6            | -28                             | 540                |
| 7            | -31                             | 616                |

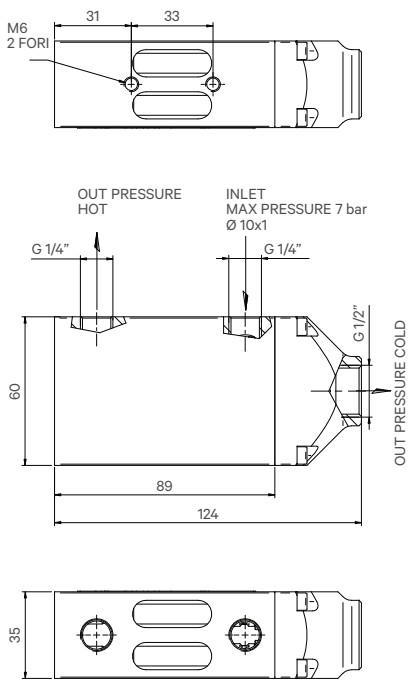

GENERAL FEATURES - VR-600U

|                          |  |
|--------------------------|--|
| Materials                | Body: Derlin<br>Ports and nozzles: Brass |
| Air inlet port           | G-1/4" F                                 |
| Clamps width (cold flow) | G-1/2" F                                 |
| Outlet port (hot flow)   | G-1/4" F                                 |
| Recommended hose         | Ø-10x1                                   |
| Air supply pressure      | max 7 bar                                |
| Cooling power*           | 720 W - 600 Kcal/h - 2400 BTUH           |
| Fixation                 | By means of two M6 threads on body       |
| Weight                   | 460 g                                    |

\* With inlet pressure 7 Bar and inlet temperature 20°C.

PERFORMANCES AND CONSUMPTION TABLE (with air temperature at inlet 20°C)

| Pressure bar | Outlet temperature cold flow °C | Consumption NL/min | Noise level* dBA |
|--------------|---------------------------------|--------------------|------------------|
| 1            | -2                              | 192                | 58               |
| 2            | -12                             | 318                | 64               |
| 3            | -18                             | 444                | 68               |
| 4            | -23                             | 564                | 72               |
| 5            | -26                             | 690                | 75               |
| 6            | -28                             | 810                | 78               |
| 7            | -31                             | 924                | 80               |

\*Test made with insulated LOC-LINE flexible tube at cold outlet, and tube L= 1 m at hot air outlet.






SERIES VR-600G • TO COOL DOWN BLADES, BELTS, AND BANDS  
HIGH-PERFORMANCE COMPACT PNEUMATIC COOLERS

SERIES VRX-100  
HIGH-PERFORMANCE PNEUMATIC COOLERS



SPECIAL VERSION FEATURING INLET  
FOR MINIMAL LUBRICATION

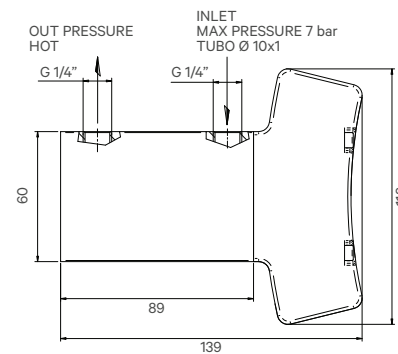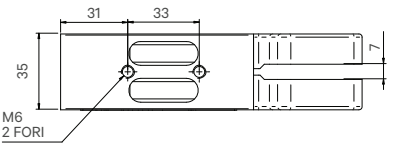


GENERAL FEATURES- VR-600G

|                          |   |
|--------------------------|---|
| Materials                | Body: Derlin<br>Clamps: ABS (other materials on request)<br>Inner spindles: Brass |
| Air inlet port           | G-1/4" F  |
| Clamps width (cold flow) | 11 mm (customised dimensions on request)  |
| Outlet port (hot flow)   | G-1/4" F  |
| Recommended hose         | Ø-10x1  |
| Air supply pressure      | max 7 bar   |
| Cooling power*           | 790 W - 660 Kcal/h - 2640 BTUH  |
| Fixation                 | By means of two M6 threads on body  |
| Weight                   | 540 g   |

\* With inlet pressure 7 Bar and inlet temperature 20°C.

PERFORMANCES AND CONSUMPTION TABLE (with air temperature at inlet 20°C)

| Pressure bar | Outlet temperature cold flow °C | Consumption NL/min |
|--------------|---------------------------------|--------------------|
| 1            | -2                              | 192                |
| 2            | -12                             | 318                |
| 3            | -18                             | 444                |
| 4            | -23                             | 564                |
| 5            | -26                             | 690                |
| 6            | -28                             | 810                |
| 7            | -31                             | 924                |

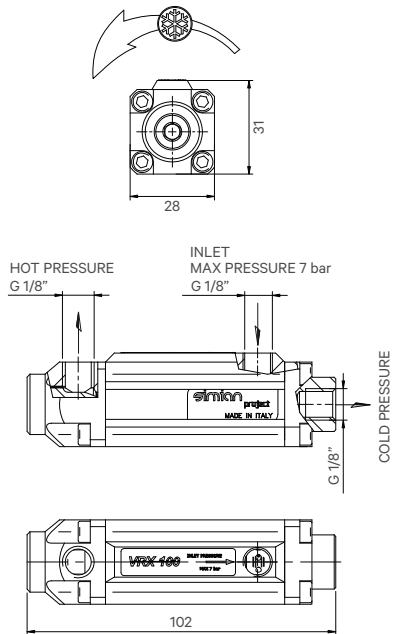

\*Test made with insulated LOC-LINE flexible tube at cold outlet, and tube L= 1 m at hot air outlet.



GENERAL FEATURES - VRX-100

|                           |   |
|---------------------------|---|
| Materials                 | Sleeve: anodized aluminium<br>Ends: Nylon 6.6 |
| Air inlet port            | G-1/8" F                                      |
| Outlet port (cold flow)   | G-1/8" F                                      |
| Exhaust port (hot flow)   | G-1/8" F                                      |
| Recommended hose          | Ø-8x1   |
| Air supply pressure       | 1 ÷ 7 bar                                     |
| Cooling power*            | 132 W - 110 Kcal/h - 440 BTUH                 |
| Optional magnetic support | KACM-VRX-100                                  |
| Weight                    | 170 g   |


\* With inlet pressure 7 Bar and inlet temperature 20°C.

PERFORMANCES AND CONSUMPTION TABLE (with air temperature at inlet 20°C)

| Pressure bar | Outlet temperature cold flow °C | Consumption NL/min | Noise level* dBA |
|--------------|---------------------------------|--------------------|------------------|
| 1            | -2                              | 32                 | 54               |
| 2            | -12                             | 53                 | 58               |
| 3            | -18                             | 74                 | 62               |
| 4            | -23                             | 94                 | 64               |
| 5            | -26                             | 115                | 64               |
| 6            | -28                             | 135                | 66               |
| 7            | -31                             | 154                | 68               |

# SERIES VRX-300

## HIGH-PERFORMANCE PNEUMATIC COOLERS

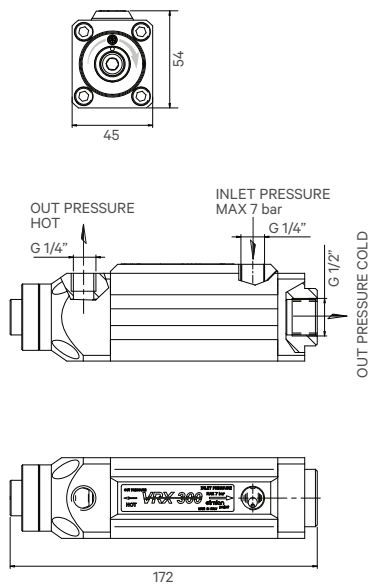

| GENERAL FEATURES - VRX-300 |   |
|----------------------------|---|
| Materials                  | Sleeve: anodized aluminium<br>Ends: Delrin100 |
| Air inlet port             | G-1/4" F                                      |
| Outlet port (cold flow)    | G-1/2" F                                      |
| Exhaust port (hot flow)    | G-1/4" F                                      |
| Recommended hose           | Ø 10x1  |
| Air supply pressure        | 1 ÷ 7 bar                                     |
| Cooling power*             | 600 W - 523 Kcal/h - 2075 BTUH                |
| Optional magnetic support  | KACM-VRX500                                   |
| Weight                     | 740 g   |

\* With inlet pressure 7 Bar and inlet temperature 20°C..


PERFORMANCES AND CONSUMPTION TABLE (with air temperature 20°C)

| Pressure bar | Outlet temperature cold flow °C | Consumption NL/min | Noise level* dBA |
|--------------|---------------------------------|--------------------|------------------|
| 1            | -3                              | 50                 | 67               |
| 2            | -7                              | 170                | 72               |
| 3            | -10                             | 290                | 74               |
| 4            | -13                             | 410                | 76               |
| 5            | -16                             | 525                | 78               |
| 6            | -17                             | 650                | 80               |
| 7            | -19                             | 750                | 82               |

\*Test made with insulated LOC-LINE flexible tube at cold outlet, and tube L= 1 m at hot air outlet.

# SERIES VRX-500

## HIGH-PERFORMANCE PNEUMATIC COOLERS

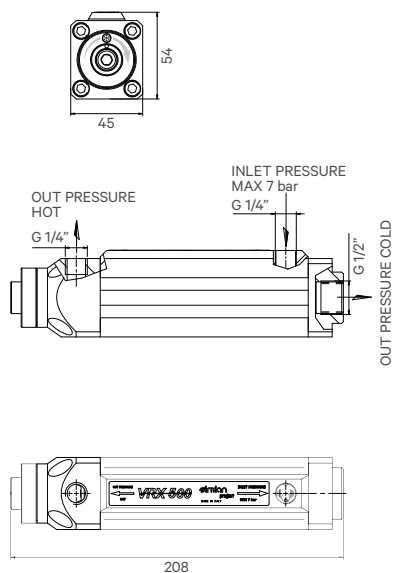

| GENERAL FEATURES - VRX-500 |   |
|----------------------------|---|
| Materials                  | Sleeve: anodized aluminium<br>Ends: Delrin100 |
| Air inlet port             | G-1/4" F                                      |
| Outlet port (cold flow)    | G-1/2" F                                      |
| Exhaust port (hot flow)    | G-1/4" F                                      |
| Recommended hose           | Ø 10x1  |
| Air supply pressure        | 1 ÷ 7 bar                                     |
| Cooling power*             | 730 W - 630 Kcal/h - 2500 BTUH                |
| Optional magnetic support  | KACM-VRX500                                   |
| Weight                     | 860 g   |

\* With inlet pressure 7 Bar and inlet temperature 20°C..

PERFORMANCES AND CONSUMPTION TABLE (with air temperature 20°C)



| Pressure bar | Outlet temperature cold flow °C | Consumption NL/min | Noise level* dBA |
|--------------|---------------------------------|--------------------|------------------|
| 1            | -3                              | 120                | 66               |
| 2            | -7                              | 250                | 71               |
| 3            | -10                             | 380                | 72               |
| 4            | -13                             | 500                | 75               |
| 5            | -16                             | 633                | 77               |
| 6            | -17                             | 783                | 78               |
| 7            | -19                             | 900                | 80               |

\*Test made with insulated LOC-LINE flexible tube at cold outlet, and tube L= 1 m at hot air outlet.



SERIES VRX-1000  
HIGH-PERFORMANCE PNEUMATIC COOLERS

ACCESSORIES  
PNEUMATIC COOLERS

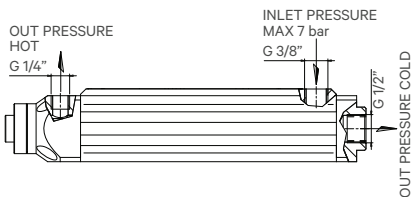

GENERAL FEATURES - VRX-1000

|                           |   |
|---------------------------|---|
| Materials                 | Sleeve: anodized aluminium<br>Ends: Delrin100 |
| Air inlet port            | G-3/8" F                                      |
| Outlet port (cold flow)   | G-1/2" F                                      |
| Exhaust port (hot flow)   | G-1/4" F                                      |
| Recommended hose          | Ø 12x1  |
| Air supply pressure       | 1 ÷ 7 bar                                     |
| Cooling power*            | 1650 W - 1417 Kcal/h - 5600 BTUH              |
| Optional magnetic support | KACM-VRX1000                                  |
| Weight                    | 1060 g  |

\* With inlet pressure 7 Bar and inlet temperature 20°C..

PERFORMANCES AND CONSUMPTION TABLE (with air temperature at inlet 20°C)

| Pressure bar | Outlet temperature cold flow °C | Consumption NL/min | Noise level* dBA |
|--------------|---------------------------------|--------------------|------------------|
| 1            | -3                              | 230                | 70               |
| 2            | -7                              | 500                | 73               |
| 3            | -10                             | 800                | 75               |
| 4            | -13                             | 1100               | 77               |
| 5            | -16                             | 1424               | 79               |
| 6            | -17                             | 1760               | 81               |
| 7            | -19                             | 2025               | 83               |

\*Test made with insulated LOC-LINE flexible tube at cold outlet, and tube L= 1 m at hot air outlet.



MAGNETIC SUPPORT

| Part-number          | Cooler                         |
|----------------------|--------------------------------|
| KACM-VR100           | VR100                          |
| KACM-VR200           | VR200                          |
| KACM-VR300           | VR300                          |
| KACM-VR246           | VR200U-G / VR400U-G / VR600U-G |
| KACM-VRX100          | VRX100                         |
| KACM-VRX300 / VRX500 | VRX300 / VRX500                |
| KACM-VRX1000         | VRX1000                        |

ADJUSTABLE NOZZLE (INSULATED VERSION) FOR COLD OUTLET)

| Part-number | Port Ø | Nozzle Ø | No. modules | Length mm |
|-------------|--------|----------|-------------|-----------|
| AC28        | 1/8"   | 3        | 4           | 100       |
| AC34        | 1/4"   | 3        | 4           | 100       |
| AC47        | 3/8"   | 6        | 6           | 180       |
| AC27        | 1/2"   | 6        | 6           | 180       |

ADJUSTABLE NOZZLE (NON-INSULATED VERSION) FOR COLD OUTLET)

| Part-number   | Port Ø | Nozzle Ø | No. modules | Length mm |
|---------------|--------|----------|-------------|-----------|
| 82021/8 1/8-3 | 1/8"   | 3        | 8           | 155       |
| 84041/6 1/2-9 | 1/2"   | 9        | 6           | 170       |

Other configurations available on request

STRAIGHT PUSH-IN FITTING FOR AIR SUPPLY

| Part-number | Hose Ø | Size | Cooler                             |
|-------------|--------|------|------------------------------------|
| S6510       | 8      | 1/8" | VR-100 / VR-200 / VR-300 / VRX-100 |
| S6510       | 10     | 1/4" | VRX-300 / VRX-500                  |
| S6510       | 12     | 1/4" | VRX-1000                           |
| S6510       | 10     | 3/8" | VR-600                             |

ELBOW PUSH-IN FITTING FOR AIR SUPPLY

| Part-number | Hose Ø | Size | Cooler                             |
|-------------|--------|------|------------------------------------|
| S6520       | 8      | 1/8" | VR-100 / VR-200 / VR-300 / VRX-100 |
| S6520       | 10     | 1/4" | VRX-300 / VRX-500                  |
| S6520       | 12     | 1/4" | VRX-1000                           |
| S6520       | 10     | 3/8" | VR-600                             |

SILENCER FOR HOT FLOW EXHAUST

| Part-number | Size | Noise at 6 bar dBA |
|-------------|------|--------------------|
| SC 1/8      | 1/8" | 70                 |
| SC 1/4      | 1/4" | 67                 |
| SC 3/8      | 3/8" | 67                 |

In sintered bronze.

SILENCER FOR COLD FLOW OUTLET (ITEM FOR VRX-300/VRX-500)

| Codice | Size |
|--------|------|
| AC25   | 1/2" |



# CONTROL UNITS XTRONIC2

## 1 / 2 / 3 SOLENOID VALVES

# CONTROL UNITS XTRONIC 345 B

## PNEUMATIC COOLERS

CONTROL UNIT XTRONIC2 C EV-1S/C



### DESCRIPTION

Control box featuring:



1. Switch for automatic/manual operation
2. Solenoid valve
3. Electronic kit with 7-segment display
4. Temperature probe and safety fuses (high-temperature kit available on request).

### GENERAL FEATURES - XTRONIC2 (1/2/3 SOLENOID VALVES)


|   |                     |
|---|---------------------|
| Supply voltage                          | 220 V AC            |
| Recommended hose                        | Ø 10x1              |
| Supply pressure                         | max 7 bar           |
| Probe length                            | 1 m                 |
| Application                             | Outside of cabinets |
| Weight                                  |                     |
| XTRONIC2 C-EV-1S/C (1 solenoid valve)   | 1300 g              |
| XTRONIC2 C-2EV-1S/C (2 solenoid valves) | 1600 g              |
| XTRONIC2 C-3EV-1S/C (3 solenoid valves) | 1900 g              |

### GENERAL FEATURES - XTRONIC 345 B


|                         |                  |
|-------------------------|------------------|
| Supply voltage          | 24 V DC          |
| Probe length            | 1 m              |
| Temperature range       | -20°C +60°C      |
| Humidity range          | 00% 100% RH      |
| Accuracy                | 0.1°C , 0.1 % RH |
| Current capacity        | max 10 A         |
| Coil voltage and power  | 24 V - 3.1 W     |
| Electric wires' section | 0.75 mm          |
| Supply cable length     | 1.5 m            |
| Application             | Inside cabinets  |

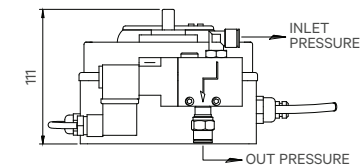


XTRONIC2 C-EV-1S/C  
1 SOLENOID VALVE



XTRONIC2 C-2EV-1S/C  
2 SOLENOID VALVES

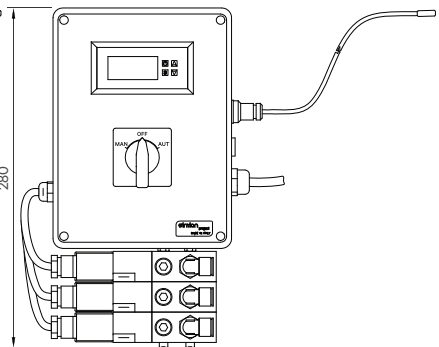


XTRONIC2 C-3EV-1S/C  
3 SOLENOID VALVES

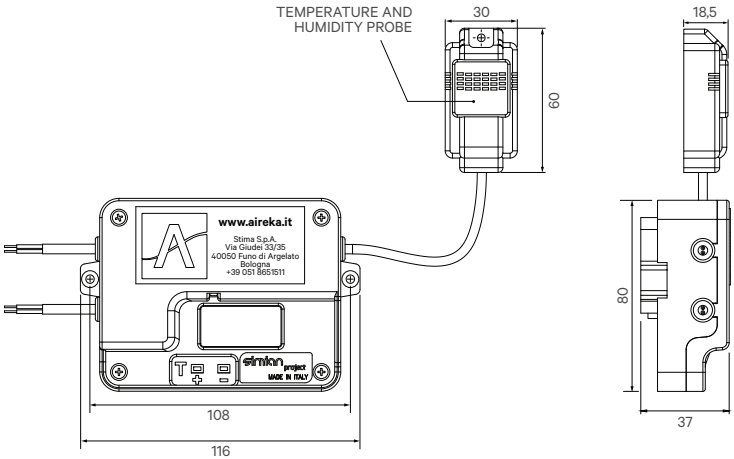






| GENERAL FEATURES - XTRONIC 345 T |                  |
|----------------------------------|------------------|
| Supply                           | 24 V DC          |
| Probe length                     | 1 m              |
| Time setting                     | Weekly / h24     |
| Humidity range                   | 0% - 100% RH     |
| Accuracy                         | 0.1°C , 0.1 % RH |
| Current capacity                 | max 10 A         |
| Coil power                       | 24 V - 3.1 W     |
| Electric wires' section          | 0.75 mm          |
| Application                      | Inside / outside |

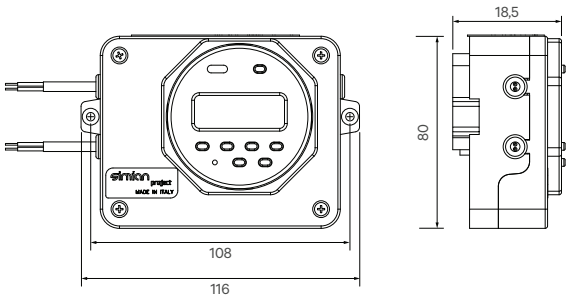

The installation of coolers in control cabinets can be of 3 types:


- EXTERNAL unit**  
to have the inner temperature of the cabinet displayed directly;
- INTERNAL unit**  
so that to have a compact solution;
- HYBRID systems** where the pneumatic cooler works in combination with an already existing air conditioning unit.

- Hot air
- Cold air

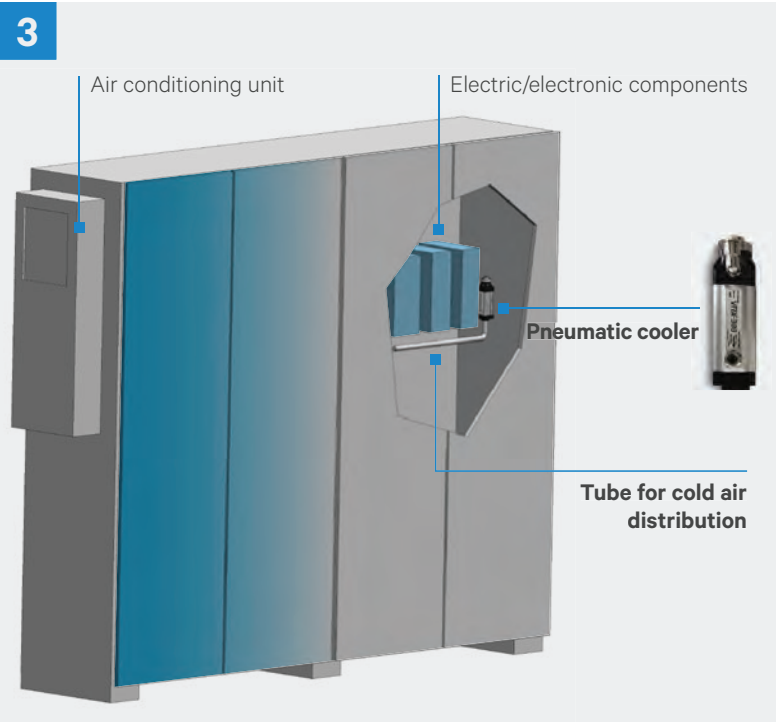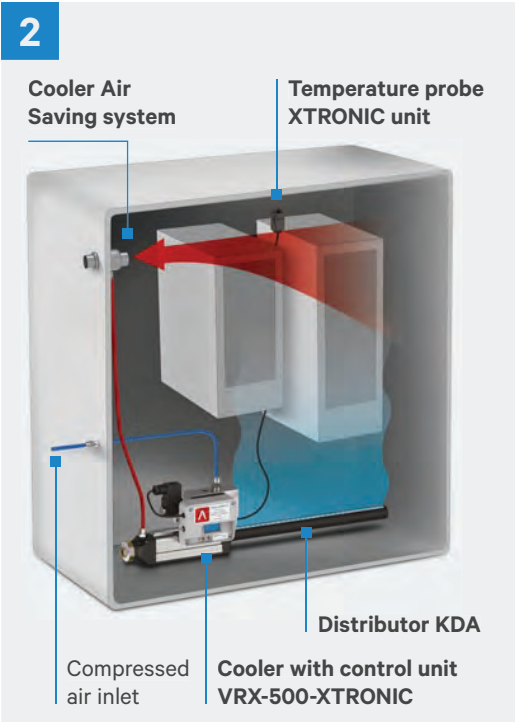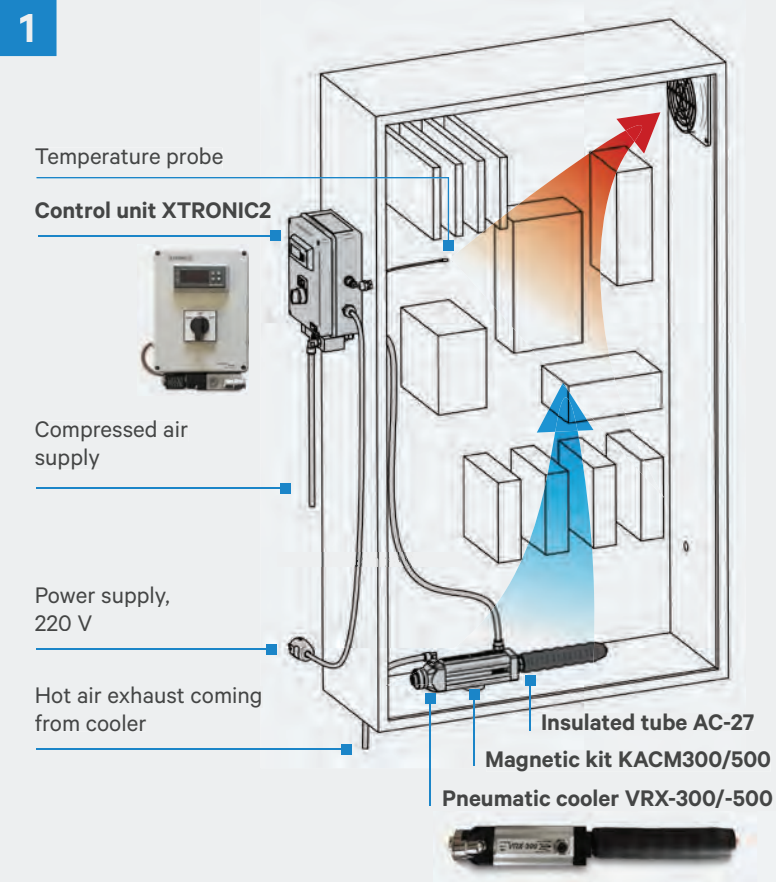



# ELECTRONICALLY-CONTROLLED PNEUMATIC COOLERS

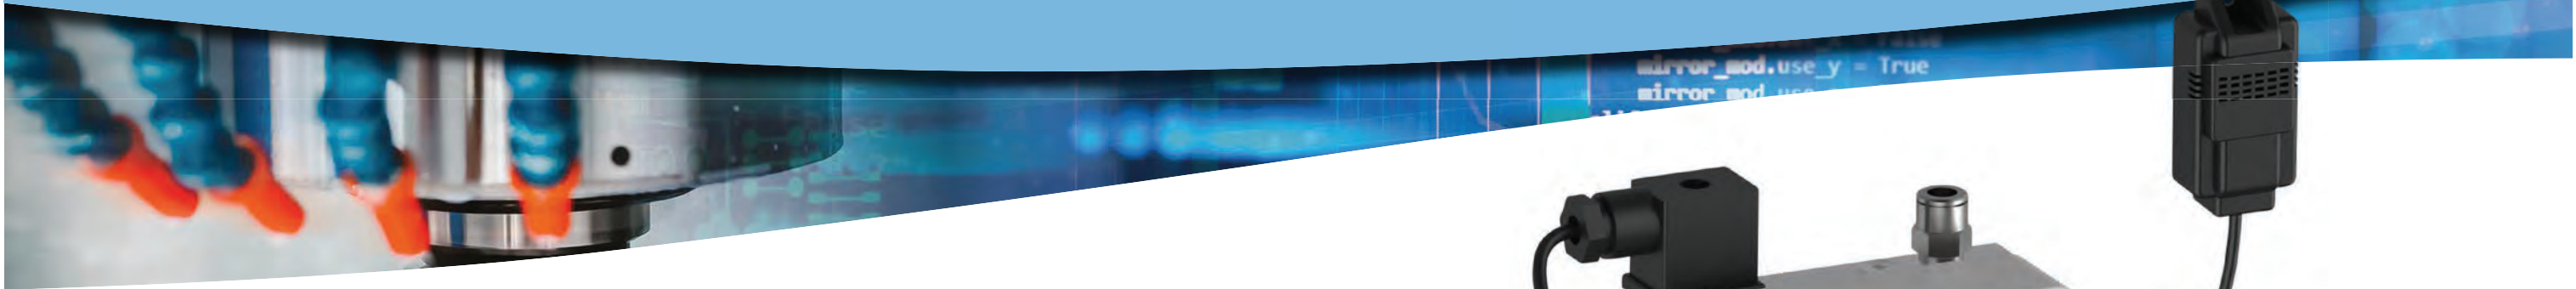

# STAND-ALONE SERIES, VRX-100-XTRONIC

## ELECTRONICALLY-CONTROLLED PNEUMATIC COOLERS



### STAND-ALONE SERIES


These are pneumatic coolers with temperature-control device, in a single unit. The market increasingly demands stand-alone devices, which are able to function autonomously, based on the parameters of the ambient temperature. Therefore, we designed and developed the **XTRONIC** temperature-control units, which are available both for remote control and installed on pneumatic coolers.

So, it will be enough to place one of these electronically-controlled devices inside the enclosure that has to be cooled, connect the pneumatic hoses and the electric wires, and set the desired temperature range on the display of the unit.

This way, the cooler will start working only when it is necessary, it will maintain the required refrigeration, and it will make it possible to save compressed air and energy.

Our **XTRONIC** control units can be customised too.

| GENERAL FEATURES - VRX-100 XTRONIC |                       |
|------------------------------------|-----------------------|
| Supply voltage                     | 24 V DC               |
| Recommended hose                   | Ø 8x1                 |
| Supply pressure                    | max 7 bar             |
| Cooling power and performances     | See VRX-100 (page 21) |
| Probe length                       | 1 m                   |
| Temperature range                  | -20°C +60°C           |
| Humidity range                     | 00% 100% RH           |
| Accuracy                           | 0.1°C , 0.1 % RH      |
| Current capacity                   | max 10 A              |
| Coil voltage and power             | 24 V - 3.1 W          |
| Electric wires' section            | 0.75 mm               |
| Weight                             | 760 g                 |

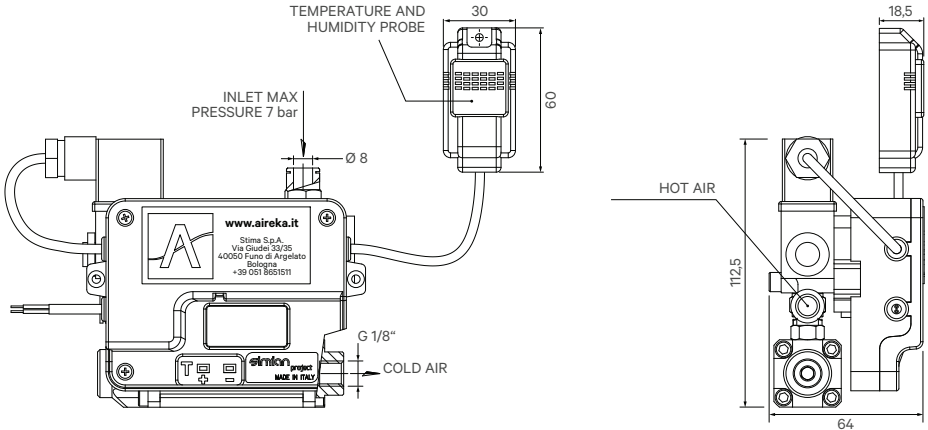




# STAND-ALONE SERIES, VR-200U-XTRONIC

## ELECTRONICALLY-CONTROLLED PNEUMATIC COOLERS



| GENERAL FEATURES - VR-200U XTRONIC |                       |
|------------------------------------|-----------------------|
| Supply voltage                     | 24 V DC               |
| Recommended hose                   | Ø 8x1                 |
| Supply pressure                    | max 7 bar             |
| Cooling power and performances     | See VR-200U (page 16) |
| Probe length                       | 1 m                   |
| Temperature range                  | -20°C +60°C           |
| Humidity range                     | 00% 100% RH           |
| Accuracy                           | 0.1°C , 0.1 % RH      |
| Current capacity                   | max 10 A              |
| Coil voltage and power             | 24 V - 3.1 W          |
| Electric wires' section            | 0.75 mm               |
| Weight                             | 770 g                 |

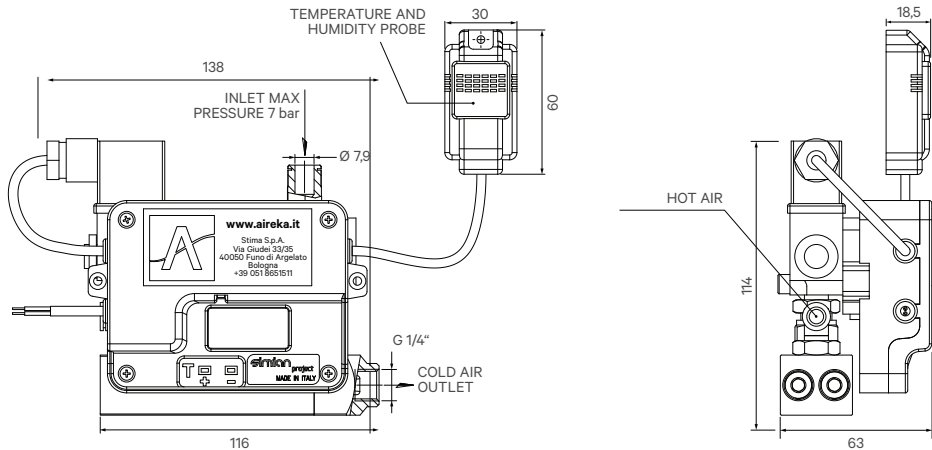


# STAND-ALONE SERIES, VRX-300 XTRONIC

## ELECTRONICALLY-CONTROLLED PNEUMATIC COOLERS



| GENERAL FEATURES - VRX-300 XTRONIC |                       |
|------------------------------------|-----------------------|
| Supply voltage                     | 24 V DC               |
| Recommended hose                   | Ø 10x1                |
| Supply pressure                    | max 7 bar             |
| Cooling power and performances     | See VRX-300 (page 22) |
| Probe length                       | 1 m                   |
| Temperature range                  | -20°C +60°C           |
| Humidity range                     | 00% 100% RH           |
| Accuracy                           | 0.1°C , 0.1 % RH      |
| Current capacity                   | max 10 A              |
| Coil voltage and power             | 24 V - 3.1W           |
| Electric wires' section            | 0.75 mm               |
| Weight                             | 1310 g                |

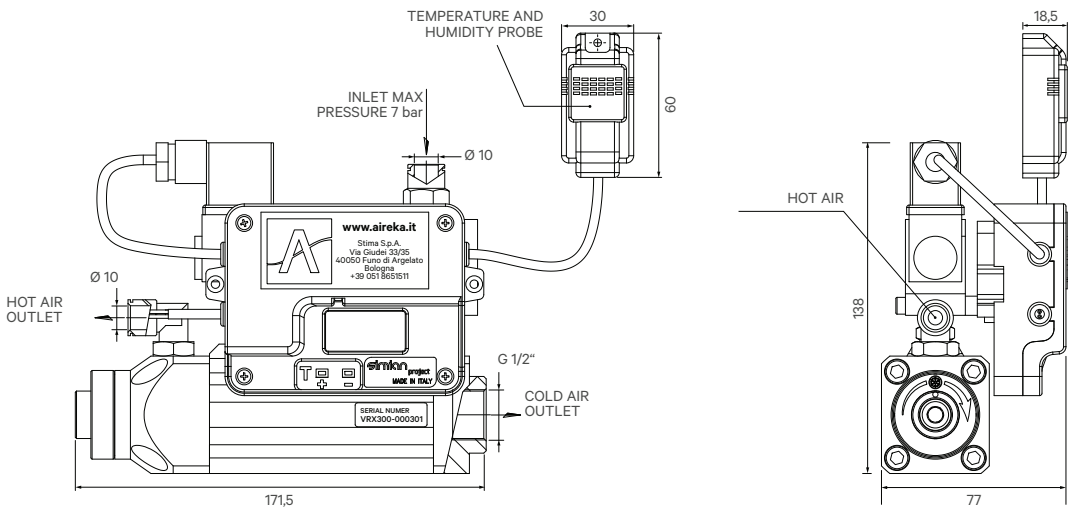


# STAND-ALONE SERIES, VR-400U-XTRONIC

## ELECTRONICALLY-CONTROLLED PNEUMATIC COOLERS



| GENERAL FEATURES - VR-400U XTRONIC |                       |
|------------------------------------|-----------------------|
| Power supply                       | 24 V DC               |
| Recommended hose                   | Ø 8x1                 |
| Supply pressure                    | max 7 bar             |
| Cooling power and performances     | See VR-400U (page 16) |
| Probe length                       | 1 m                   |
| Temperature range                  | -20°C +60°C           |
| Humidity range                     | 00% 100% RH           |
| Accuracy                           | 0.1°C , 0.1 % RH      |
| Current capacity                   | max 10 A              |
| Coil voltage and power             | 24 V - 3.1 W          |
| Electric wires' section            | 0.75 mm               |
| Weight                             | 845 g                 |

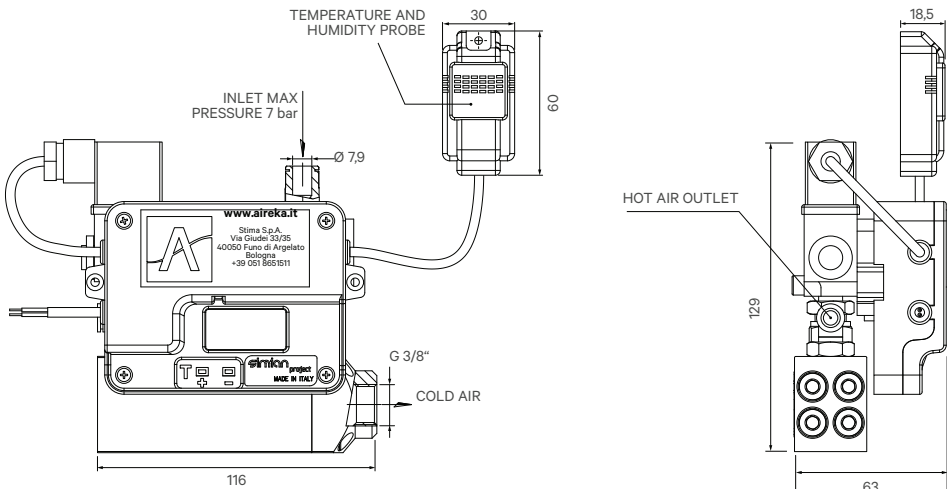


# STAND-ALONE SERIES, VRX-500 XTRONIC

## ELECTRONICALLY-CONTROLLED PNEUMATIC COOLERS



| GENERAL FEATURES - VRX-500 XTRONIC |                       |
|------------------------------------|-----------------------|
| Supply voltage                     | 24 V DC               |
| Recommended hose                   | Ø 10x1                |
| Supply pressure                    | max 7 bar             |
| Cooling power and performances     | See VR-400U (pag. 23) |
| Probe length                       | 1 mt                  |
| Temperature range                  | -20°C +60°C           |
| Humidity range                     | 00% 100% RH           |
| Accuracy                           | 0.1°C , 0.1 % RH      |
| Current capacity                   | max 10 A              |
| Coil voltage and power             | 24 V - 3.1 W          |
| Electric wires' section            | 0.75 mm               |
| Weight                             | 1430 g                |

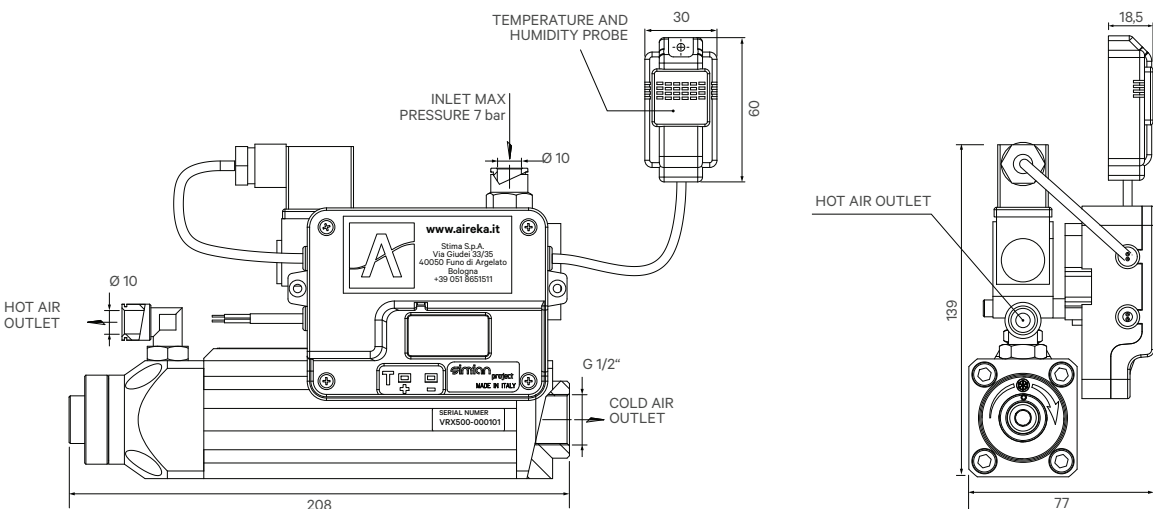



# STAND-ALONE SERIES VRX-1000-XTRONIC


ELECTRONICALLY-CONTROLLED PNEUMATIC COOLERS

# APPLICAZIONI SPECIALI



## GENERAL FEATURES - VRX-1000 XTRONIC

|                                |                         |
|--------------------------------|-------------------------|
| Power supply                   | 24 V DC                 |
| Recommended hose               | Ø 12x1                  |
| Supply pressure                | Max 7 bar               |
| Cooling power and performances | Vedi VRX-1000 (pag. 24) |
| Probe length                   | 1 m                     |
| Temperature range              | -20°C +60°C             |
| Humidity range                 | 00% 100% RH             |
| Accuracy                       | 0.1°C , 0.1 % RH        |
| Current capacity               | max 10 A                |
| Coil voltage and power         | 24 V - 3.1 W            |
| Electric wires' section        | 0.75 mm                 |
| Weight                         | 1630 g                  |

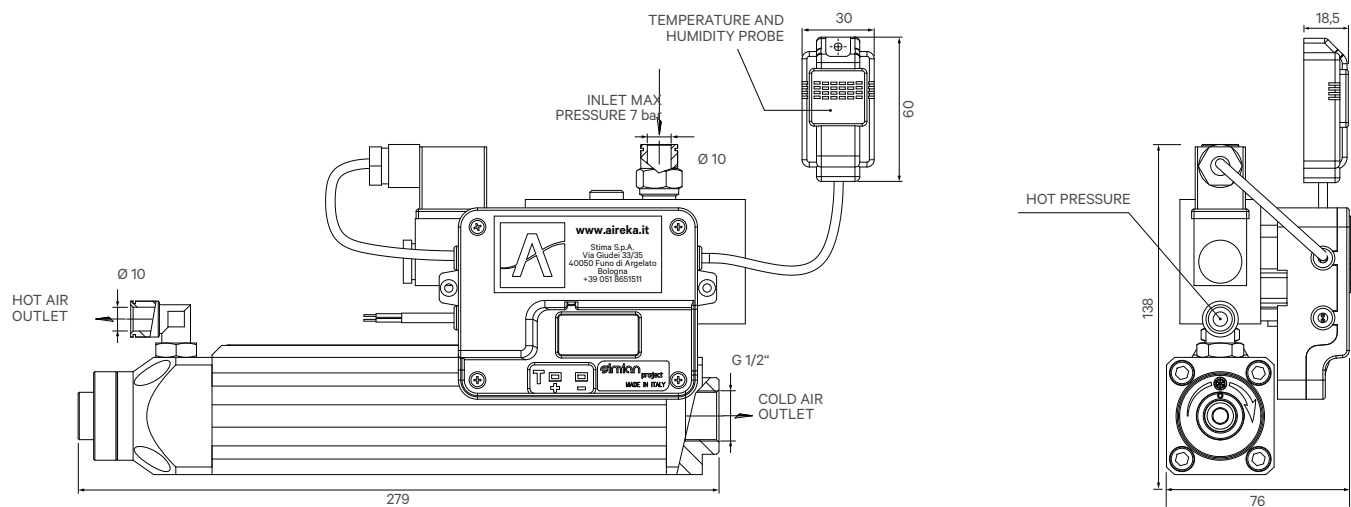

VRX300 + KDA  
HEATER VERSION



VRX500 MOTION  
COOLER WITH ADJUSTMENT CONTROLLABLE BY PLC



VRX300 + KDA  
WITH DISTRIBUTOR OF COLD AIR



RING-COOLING SYSTEM



KDA  
Cold air distributor  
All lengths available on request



# COOLER AIR SAVING

## PATENTED SYSTEM



The best practice in cooling down enclosures involves also a correct distribution of the cold air, after it has been produced.

To make it possible, we supply air-blowing modules, connection fittings in technopolymer, and tubes with double insulation. All this to have zero losses of cold energy and to get the highest effectiveness in your application.

All these accessories are customisable, to meet your specific demands.



Filter against impurities, for the fixation of the hot air extractor




Fittings for cold air distribution



Customisable air-blowing module



Single air-blowing module

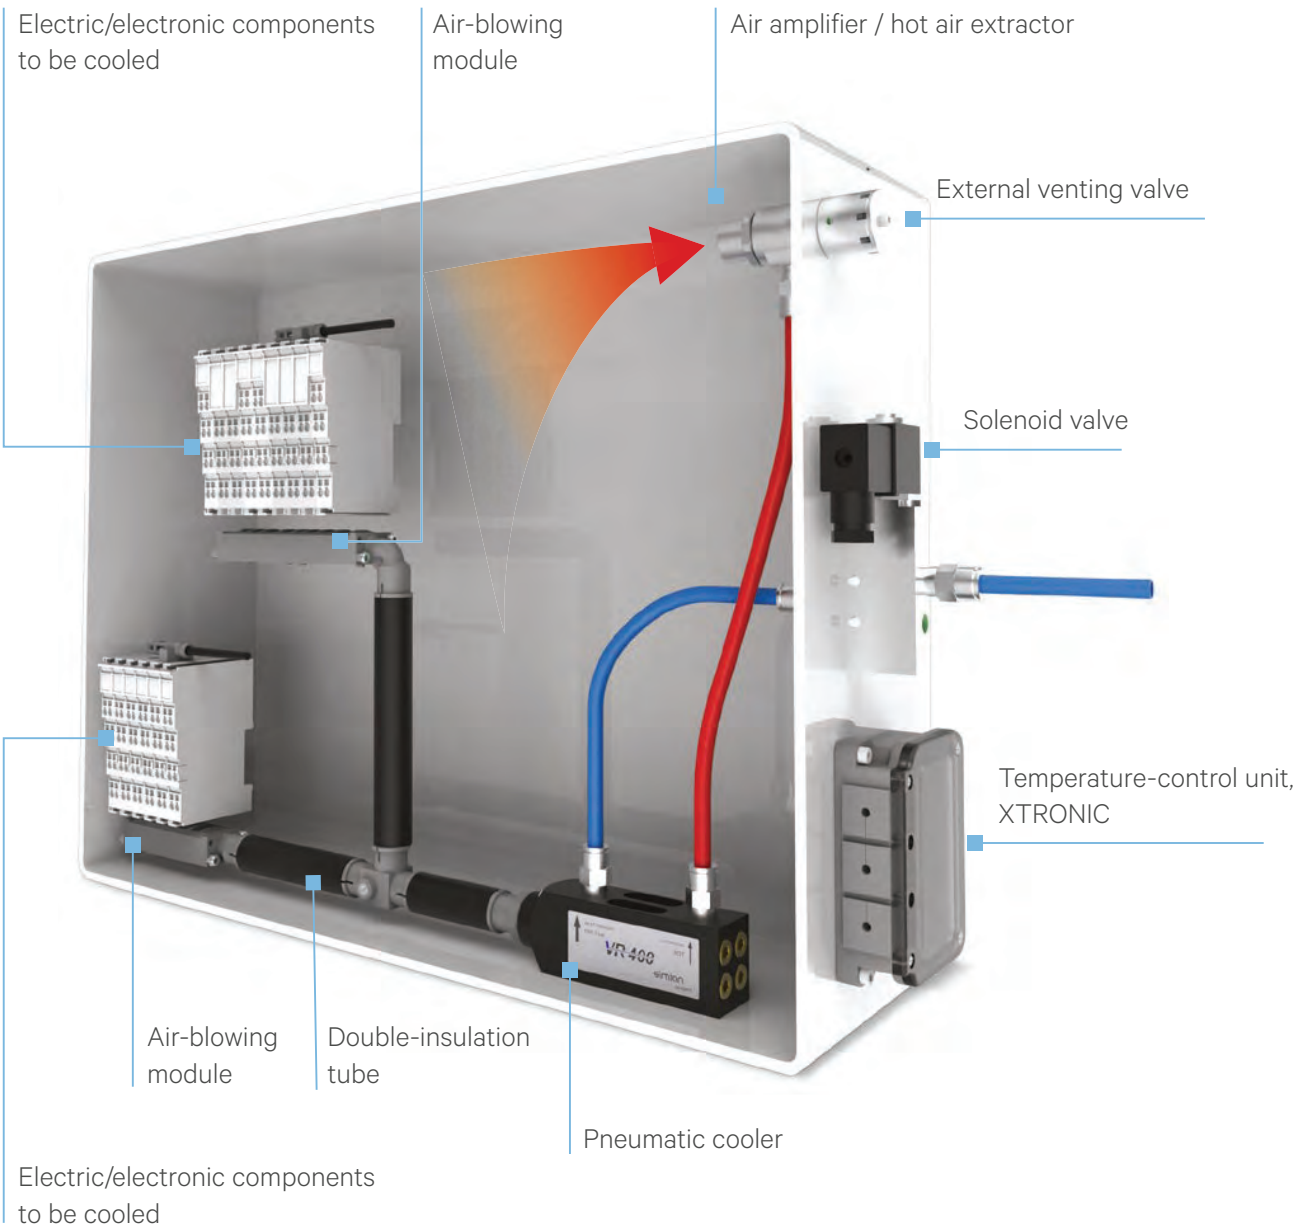



# COOLER AIR SAVING PATENTED SYSTEM



**VR Series** coolers and **AM Series** amplifiers used together to introduce cold air and extract hot air from electrical cabinets at the same time, using a single compressed air supply.

- Effective ventilation of the electrical cabinet
- Reduction of compressed air consumption
- Optimisation of cooling results

No matter how much cold air is introduced into an electrical cabinet, the effectiveness and efficiency of cooling will never be optimal unless the hot air generated by the electrical components is properly ventilated at the same time. With ventilation we mean both the creation of convection flows inside the cabinet which effectively distribute the air around the components, and the actual extraction of hot air from the cabinet itself.

By using the Cooler Air Saving patented system by Simian Project, two results are obtained: the first, using the VR Series coolers, is the prompt and precise cooling of the components that heat the cabinet the most. This thanks to the flexibility of installation (brackets and magnets) and the fact that the flow of cold air can be precisely directed on the main heat sources (by using adjustable nozzles). The second result is the proper ventilation of the electrical cabinet, thanks to the extraction power generated by the AM Series air amplifier, which is actuated by the hot air exhausted from the cooler.

The picture shows the system set up inside an electrical cabinet:

The VRX-500 cooler (fig.1) is actuated with compressed air from outside; the flow of cold air is directed, by using adjustable nozzles, on the electrical components that give off the most heat, while the exhaust of hot air is channelled by the red hose (fig. 3) to actuate the AM Series amplifier

The amplifier (fig.2) is mounted on the top right-hand side of the electrical cabinet; the pass-through installation allows it to suction and extract air from the cabinet; in the example of the picture, its position in the upper part of the cabinet ensures that the extraction occurs where most of the hot air accumulates and that even the electrical components located on the opposite side of the source of cold air remain at a temperature suitable for optimal functioning.

Even where pass-through mounting is not possible (for example in the event of installations in cabinets where IP protection must be guaranteed), the

fitting of the amplifier inside the cabinet ensures forced recycling of air, which eliminates the concentration of hot air in the areas located furthest away from sources of cold air.

The patented system also works well together with industrial air-conditioners in electrical cabinets with the following characteristics:

- Large electrical cabinets where the cold air generated by the air-conditioner has trouble in reaching all parts of the cabinet;
- Electrical cabinets with electrical components laid out in such a way that the convection of air around the components is tricky;
- Electrical cabinets where the heat is generated by a few components that are located far from the area where the air-conditioner introduces the cold air.



**N.B.:** The Cooler Air Saving system works with VRX-300, VRX-500, and VRX-1000 coolers together with AM-20ES and AM-40ES amplifiers.







Description of the set-up and instrumentation used for our tests on air knives.

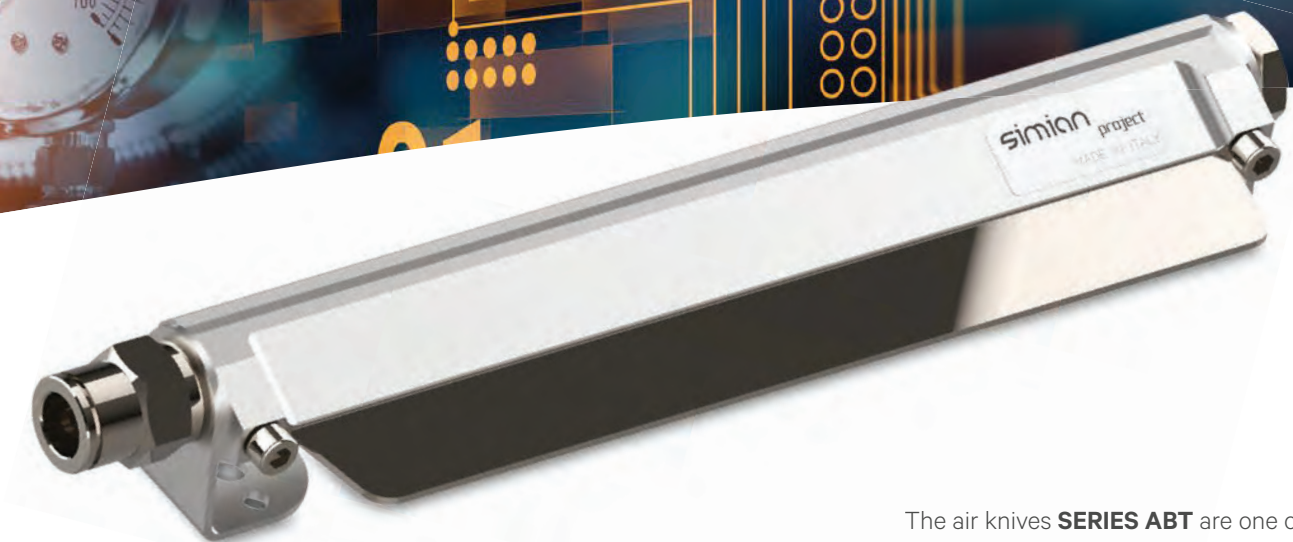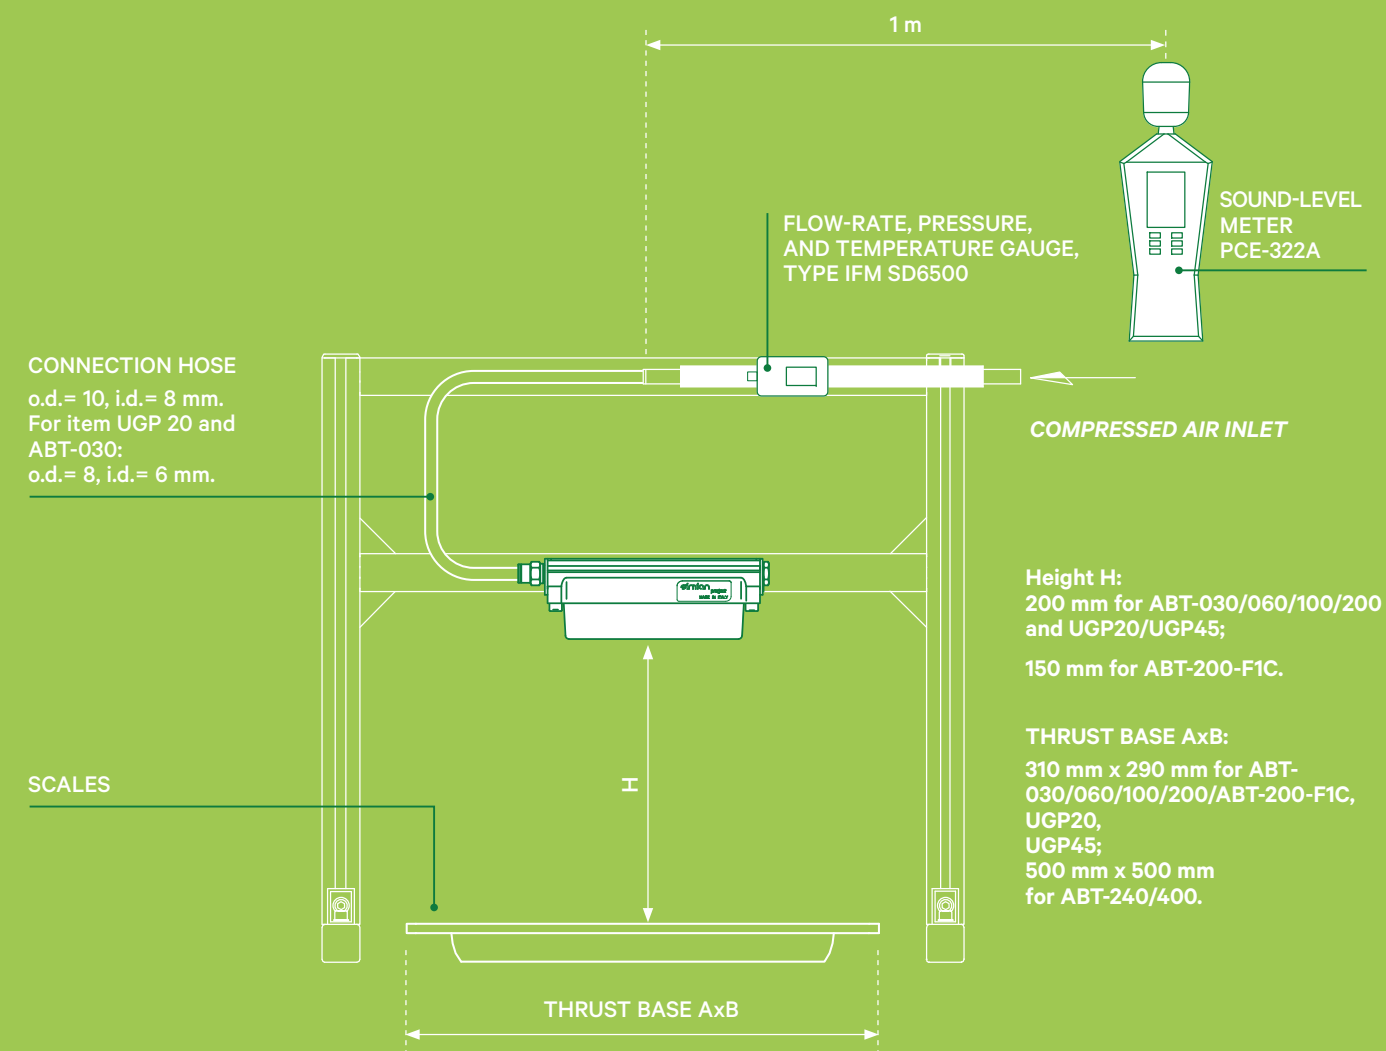

The air knives **SERIES ABT** are one of a kind, thanks to their high blowing power, which is a result of the air flow on both sides of the blade, and thanks to their easy installation, by means of two neodymium magnets and of brackets, which make it possible to direct the knife according to all demands. These products are very effective for cleaning, drying, and cooling.

- Design geometries optimised to maximise the Coanda effect
- Double blow-off flow (both sides of the blade)
- Powerful, uniform flow, suitable for cleaning small and large surfaces
- Modular design and possibility of customisation
- No moving parts, so maintenance-free









DESCRIPTION OF THE COANDA EFFECT

The air amplifiers and the air knives exploit the Coanda effect.

This phenomenon can be explained as the tendency of a fluid to follow the contour of a surface nearby. It is named after the pioneer of aerodynamics Henri Coanda, who in 1936 patented some instruments that exploited the capacity to deviate a flow.

The compressed air introduced in an amplifier or in an air knife is forced to pass through a reduced section, from 0.02 mm to 0.08 mm, and, by lapping the surface nearby, the surrounding air is attracted towards the flow's direction, so that the volume of air becomes from 5 to 20 times bigger than it was at the inlet.

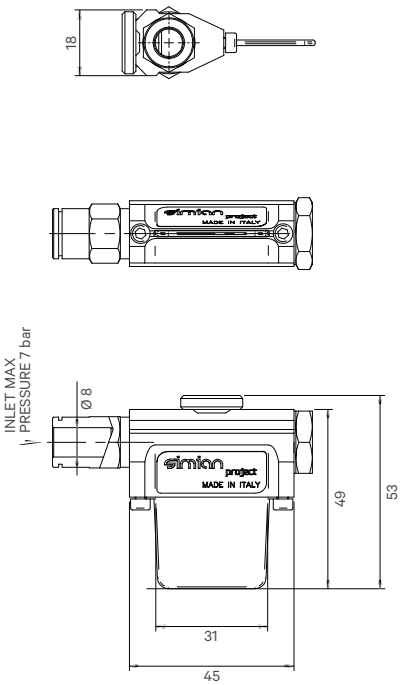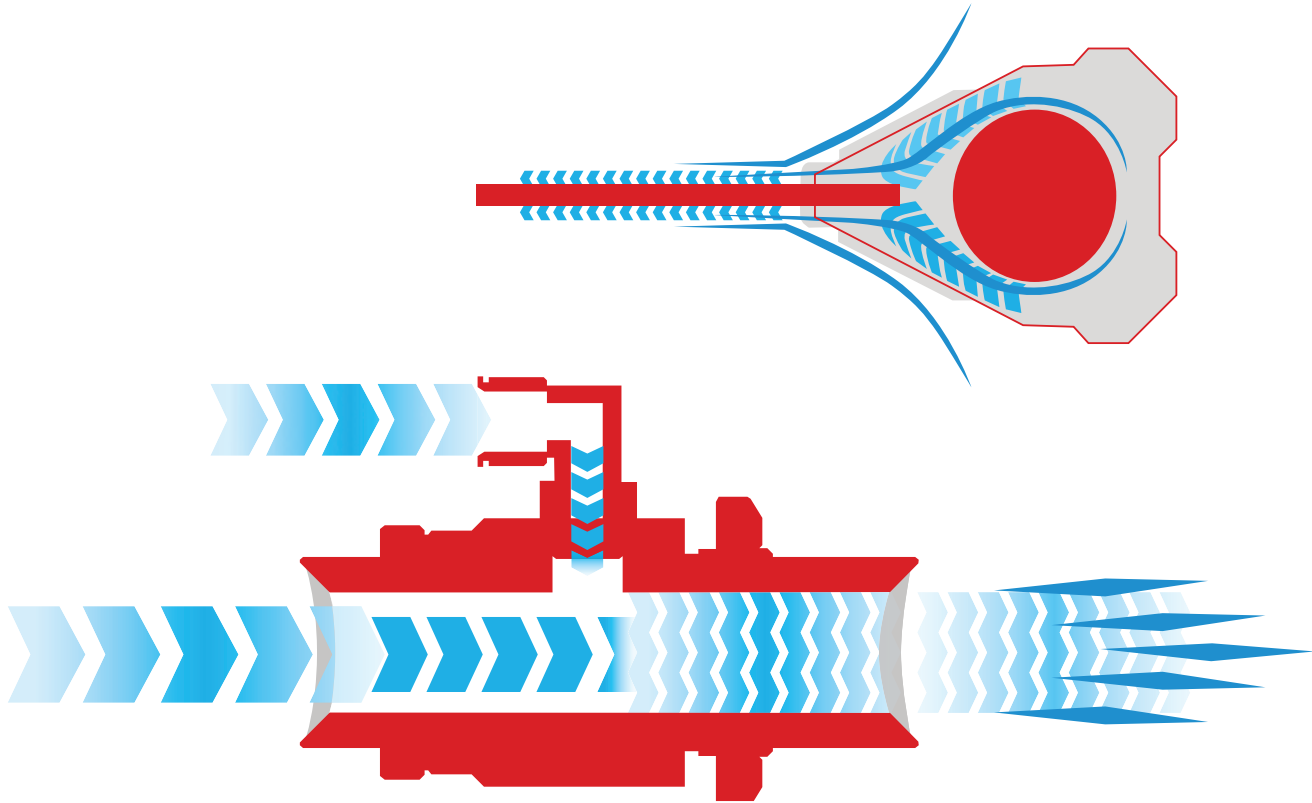

| GENERAL FEATURES - ABT-030 |                                     |
|----------------------------|-------------------------------------|
| Materials                  | Anodized aluminium and AISI304 s.s. |
| Air supply port            | Fitting Ø-8                         |
| Fixation                   | Optional angular bracket            |
| Blade length               | 32 mm                               |
| Air supply pressure        | 1-7 bar                             |
| Optional magnetic support  | KACM-ABT030                         |
| Weight                     | 110 g                               |

| PERFORMANCES AND CONSUMPTION TABLE |                    |                      |                 |
|------------------------------------|--------------------|----------------------|-----------------|
| Pressure bar                       | Consumption NI/min | Thrust a 200 mm in g | Noise level dBA |
| 1                                  | 150                | 97                   | 70              |
| 2                                  | 255                | 213                  | 76              |
| 3                                  | 346                | 330                  | 79              |
| 4                                  | 433                | 450                  | 82              |
| 5                                  | 516                | 590                  | 84              |
| 6                                  | 599                | 720                  | 85              |
| 7                                  | 666                | 850                  | 86              |

# SERIES ABT-030 PLUS

## DOUBLE-SLOT AIR KNIVES






# SERIES ABT-060

## DOUBLE-SLOT AIR KNIVES



### GENERAL FEATURES - ABT-030 PLUS

|                           |                                     |
|---------------------------|-------------------------------------|
| Materials                 | Anodized aluminium and AISI304 s.s. |
| Air supply port           | Fitting Ø-10                        |
| Fixation                  | Optional angular bracket            |
| Blade length              | 32 mm                               |
| Air supply pressure       | 1-7 bar                             |
| Optional magnetic support | KACM-ABT030                         |
| Weight                    | 130 g                               |




### PERFORMANCES AND CONSUMPTION TABLE

| Pressure bar | Consumption NI/min | Thrust a 200 mm in g | Noise level dBA |
|--------------|--------------------|----------------------|-----------------|
| 1            | 166                | 120                  | 70              |
| 2            | 266                | 230                  | 76              |
| 3            | 366                | 360                  | 78              |
| 4            | 458                | 500                  | 81              |
| 5            | 549                | 640                  | 82,5            |
| 6            | 633                | 780                  | 84              |
| 7            | 716                | 940                  | 86              |

### GENERAL FEATURES - ABT-060

|                           |                                     |
|---------------------------|-------------------------------------|
| Materials                 | Anodized aluminium and AISI304 s.s. |
| Air supply port           | Fitting Ø-10                        |
| Fixation                  | Optional angular bracket            |
| Blade length              | 76 mm                               |
| Air supply pressure       | 1-7 bar                             |
| Optional magnetic support | KACM-ABT030                         |
| Weight                    | 170 g                               |

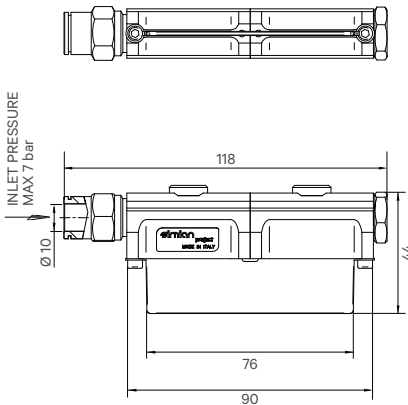

### PERFORMANCES AND CONSUMPTION TABLE

| Pressure bar | Consumption NI/min | Thrust a 200 mm in g | Noise level dBA |
|--------------|--------------------|----------------------|-----------------|
| 1            | 283                | 170                  | 72              |
| 2            | 449                | 340                  | 77              |
| 3            | 629                | 570                  | 80              |
| 4            | 816                | 810                  | 83              |
| 5            | 982                | 1090                 | 85              |
| 6            | 1166               | 1400                 | 86              |
| 7            | 1350               | 1700                 | 87              |




# SERIES ABT-100

DOUBLE-SLOT AIR KNIVES

# SERIES ABT-200

DOUBLE-SLOT AIR KNIVES

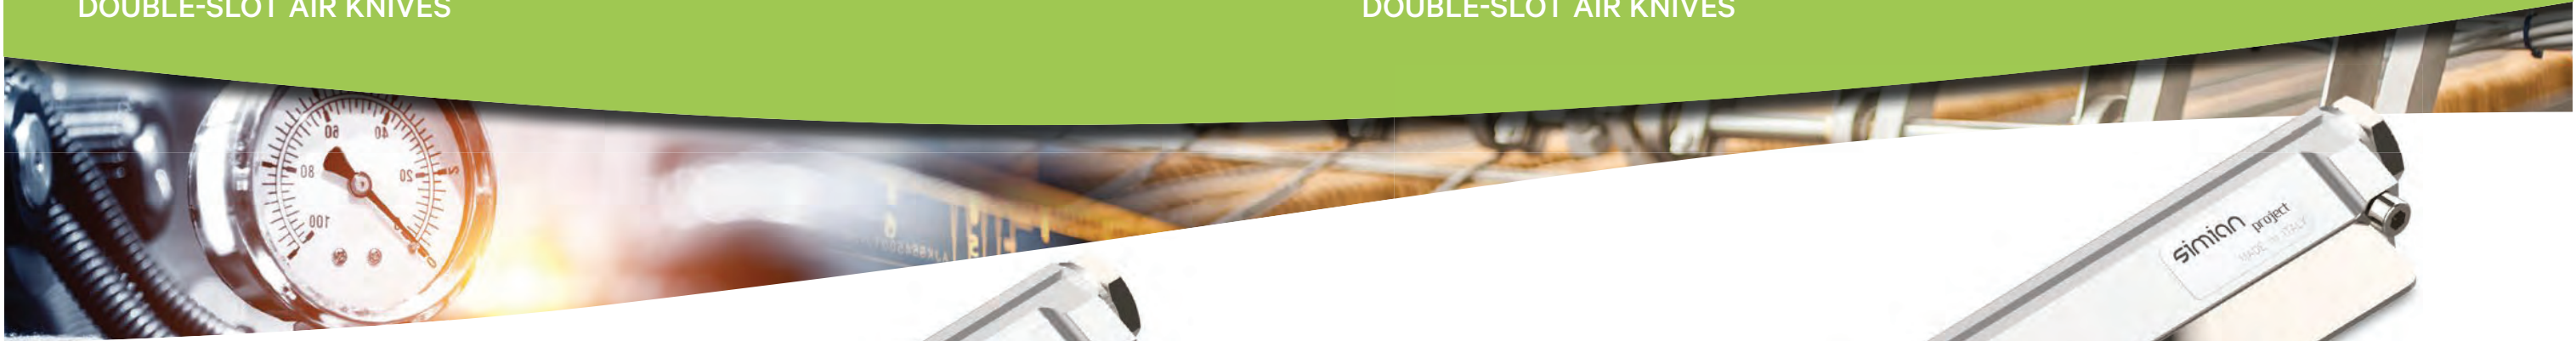


### GENERAL FEATURES - ABT-100

|                           |                                     |
|---------------------------|-------------------------------------|
| Materials                 | Anodized aluminium and AISI304 s.s. |
| Air supply port           | Fitting Ø-10                        |
| Fixation                  | Integrated feet                     |
| Blade length              | 100 mm                              |
| Air supply pressure       | 1-7 bar                             |
| Optional magnetic support | KACM-ABT100                         |
| Weight                    | 200 g                               |



### GENERAL FEATURES - ABT-200

|                           |                                     |
|---------------------------|-------------------------------------|
| Materials                 | Anodized aluminium and AISI304 s.s. |
| Air supply port           | Fitting Ø-10                        |
| Fixation                  | Integrated feet                     |
| Blade length              | 170 mm                              |
| Air supply pressure       | 1-7 bar                             |
| Optional magnetic support | KACM-ABT200                         |
| Weight                    | 290 g                               |

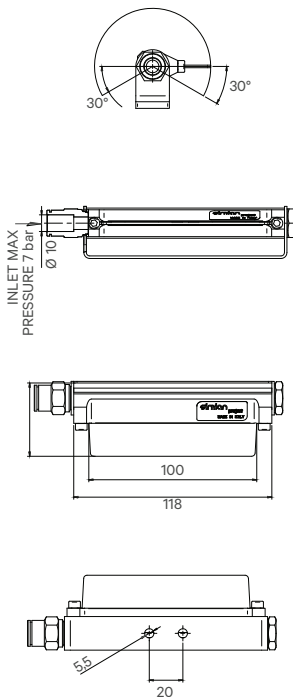

### PERFORMANCES AND CONSUMPTION TABLE

| Pressure bar | Consumption NI/min | Thrust a 200 mm in g | Noise level dBA |
|--------------|--------------------|----------------------|-----------------|
| 1            | 366                | 216                  | 75              |
| 2            | 558                | 450                  | 79              |
| 3            | 724                | 690                  | 82              |
| 4            | 899                | 930                  | 84              |
| 5            | 1082               | 1210                 | 85              |
| 6            | 1233               | 1530                 | 87              |
| 7            | 1410               | 1800                 | 88              |

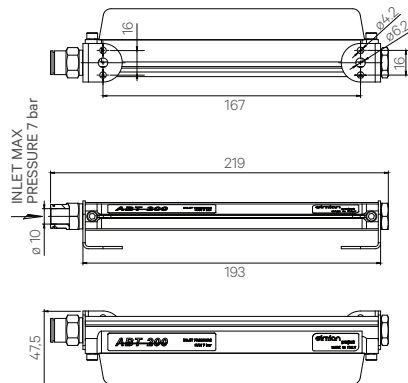

### PERFORMANCES AND CONSUMPTION TABLE

| Pressure bar | Consumption NI/min | Thrust a 200 mm in g | Noise level dBA |
|--------------|--------------------|----------------------|-----------------|
| 1            | 499                | 245                  | 75              |
| 2            | 940                | 570                  | 80              |
| 3            | 1582               | 1030                 | 84              |
| 4            | 2082               | 1450                 | 87              |
| 5            | 2665               | 2000                 | 90              |
| 6            | 3248               | 2400                 | 93              |

# SERIES ABT-240

DOUBLE-SLOT AIR KNIVES




# SERIES ABT-400

DOUBLE-SLOT AIR KNIVES



GENERAL FEATURES - ABT-240

|                           |                                     |
|---------------------------|-------------------------------------|
| Materials                 | Anodized aluminium and AISI304 s.s. |
| Air supply port           | Fitting Ø 10                        |
| Fixation                  | Integrated feet                     |
| Flow width                | 218 mm                              |
| Supply pressure           | 1-7 bar                             |
| Optional magnetic support | KACM-ABT100                         |
| Weight                    | 300 g                               |

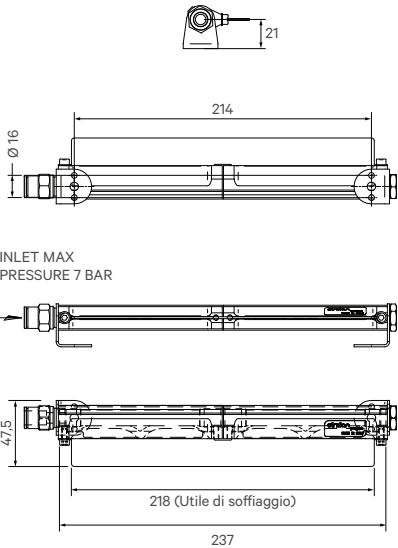


PERFORMANCES AND CONSUMPTION TABLE

| Pressure bar | Consumption NI/min | Thrust a 200 mm in g | Noise level dBA |
|--------------|--------------------|----------------------|-----------------|
| 1            | 283                | 190                  | 72              |
| 2            | 449                | 350                  | 77              |
| 3            | 629                | 515                  | 80              |
| 4            | 816                | 730                  | 83              |
| 5            | 982                | 990                  | 85              |
| 6            | 1166               | 1260                 | 86              |

GENERAL FEATURES - ABT-400

|                           |                                     |
|---------------------------|-------------------------------------|
| Materials                 | Anodized aluminium and AISI304 s.s. |
| Air supply port           | Fitting Ø 10                        |
| Fixation                  | Integrated feet                     |
| Flow width                | 362 mm                              |
| Supply pressure           | 7 bar                               |
| Optional magnetic support | KACM-ABT200                         |
| Weight                    | 450 g                               |

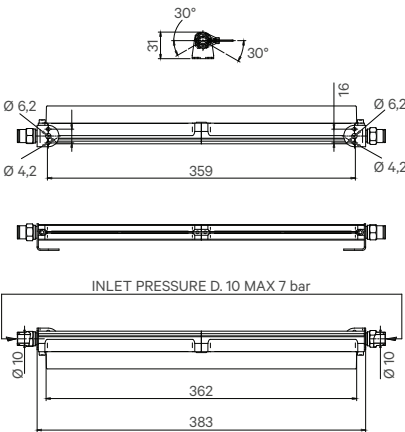

PERFORMANCES AND CONSUMPTION TABLE

| Pressure bar | Consumption NI/min |
|--------------|--------------------|
| 1            | 1530               |
| 2            | 1956               |
| 3            | 2720               |
| 4            | 3146               |
| 5            | 3910               |
| 6            | 4760               |
| 7            | 5326               |



# SERIES ABT-600

DOUBLE-SLOT AIR KNIVES

# SERIES ABT-800

DOUBLE-SLOT AIR KNIVES



| GENERAL FEATURES - ABT-600 |                                     |
|----------------------------|-------------------------------------|
| Materials                  | Anodized aluminium and AISI304 s.s. |
| Air supply port            | Fitting Ø 10                        |
| Fixation                   | Integrated feet                     |
| Flow width                 | 554 mm                              |
| Supply pressure            | max 7 bar                           |
| Optional magnetic support  | KACM-ABT200                         |
| Weight                     | 690 g                               |



| GENERAL FEATURES - ABT-800 |                                     |
|----------------------------|-------------------------------------|
| Materials                  | Anodized aluminium and AISI304 s.s. |
| Air supply port            | Fitting Ø 10                        |
| Fixation                   | Integrated feet                     |
| Flow width                 | 745 mm                              |
| Supply pressure            | max 7 bar                           |
| Optional magnetic support  | KACM-ABT200                         |
| Weight                     | 900 g                               |

PERFORMANCES AND CONSUMPTION TABLE

| Pressure bar | Consumption NI/min |
|--------------|--------------------|
| 1            | 2295               |
| 2            | 2934               |
| 3            | 4080               |
| 4            | 4719               |
| 5            | 5865               |
| 6            | 7140               |
| 7            | 7989               |

PERFORMANCES AND CONSUMPTION TABLE

| Pressure bar | Consumption NI/min |
|--------------|--------------------|
| 1            | 2295               |
| 2            | 2934               |
| 3            | 4080               |
| 4            | 4719               |
| 5            | 5865               |
| 6            | 7140               |
| 7            | 7989               |

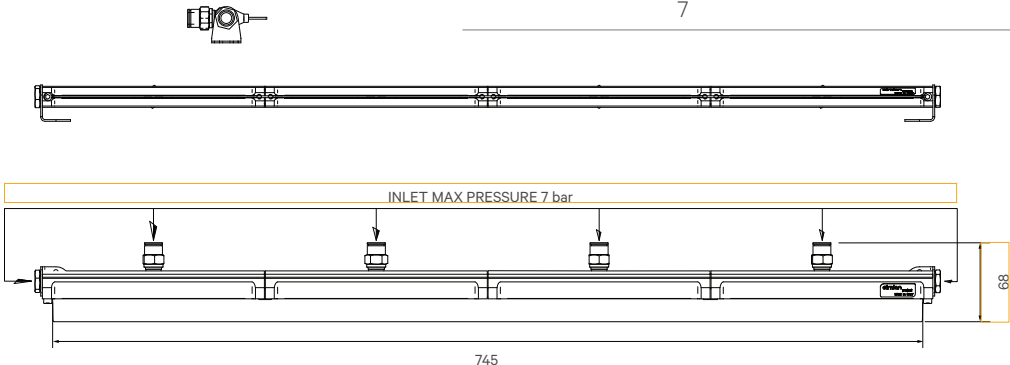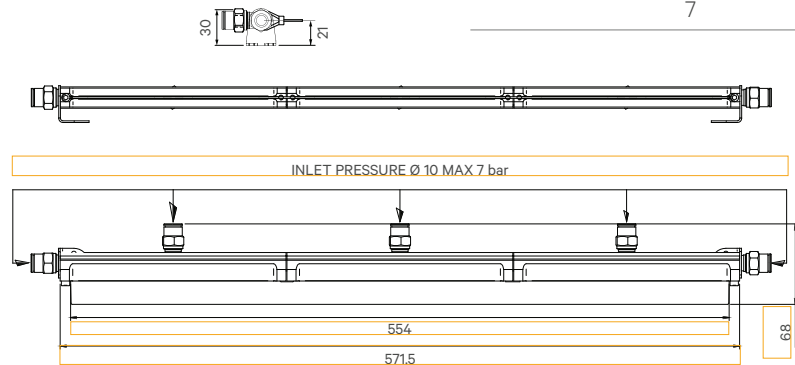

# ACCESSORIES AND SPECIAL VERSIONS

## AIR KNIVES

# SERIES ABT-F1C

## CALIBRATED SINGLE-SLOT AIR KNIVES



**ABT 200**  
WITH CONCAVE AND CONVEX LIP



**ABT 030 PLUS**  
WITH SHAPED LIP



**ABT 030 PLUS**  
WITH TUBE FOR CONNECTION  
TO MACHINE TOOL



**ABT 030 PLUS**  
WITH CURVED LIP



### GENERAL FEATURES - ABT-F1C

|                                     |                         |
|-------------------------------------|-------------------------|
| Materials                           | Aluminium and Delrin    |
| Air supply port                     | Fitting Ø 10            |
| Fixation                            | Integrated feet         |
| Flow width                          | From 150 mm to 1200 mm  |
| Supply pressure                     | max 7 bar               |
| Noise level for every 200 mm length | Range from 62 to 82 dBA |
| Optional magnetic kit               | KACM-ABT200             |






| MAGNETIC SUPPORT |   |
|------------------|---|
| PART-NUMBER      | AIR KNIFE                                       |
| KACM-ABT030      | ABT-030 / ABT-060                               |
| KACM-ABT100      | ABT-100   |
| KACM-ABT200      | ABT-200 / ABT-240 / ABT-400 / ABT-600 / ABT-800 |



| FIXATION BRACKET |                   |
|------------------|-------------------|
| PART-NUMBER      | AIR KNIFE         |
| ABT-05           | ABT-030 / ABT-060 |

| CUSTOMISED VERSIONS  |  |
|--|--|
| On request we can supply versions customised in shape and/or material. |  |

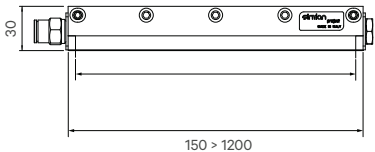

### PERFORMANCE AND CONSUMPTION TABLE (For length 100 mm)

| Pressure bar | Consumption NI/min | Thrust force at 150 mm, in g |
|--------------|--------------------|------------------------------|
| 1            | 109                | 61                           |
| 2            | 195                | 135                          |
| 3            | 279                | 220                          |
| 4            | 341                | 310                          |
| 5            | 416                | 400                          |
| 6            | 483                | 520                          |
| 7            | 566                | 635                          |



# SERIES ABX-1000

LONG AIR KNIVES SUPPLIED BY AIR AMPLIFIER

# SERIES ABX-1500

LONG AIR KNIVES SUPPLIED BY AIR AMPLIFIER



## GENERAL FEATURES - ABX-1000



|                 |                                      |
|-----------------|--------------------------------------|
| Materials       | Anodised aluminium / Stainless steel |
| Fixation        | On request                           |
| Flow width      | 1000 mm                              |
| Supply pressure | Based on the type of air supply      |

On request: supply connection at 90°.

## GENERAL FEATURES - ABX-1500

|                 |                                      |
|-----------------|--------------------------------------|
| Materials       | Anodised aluminium / Stainless steel |
| Fixation        | On request                           |
| Flow width      | 1500 mm                              |
| Supply pressure | Based on the type of air supply      |

On request: supply connection at 90°.

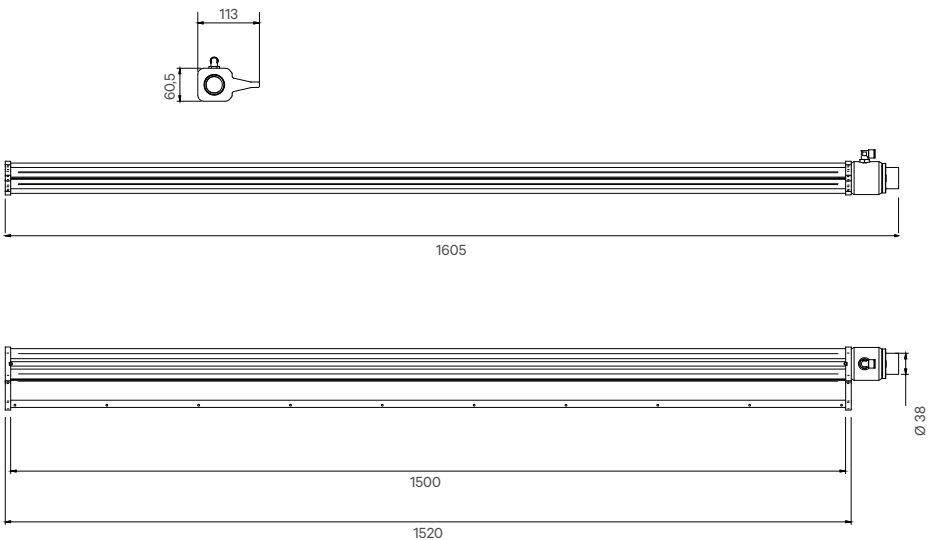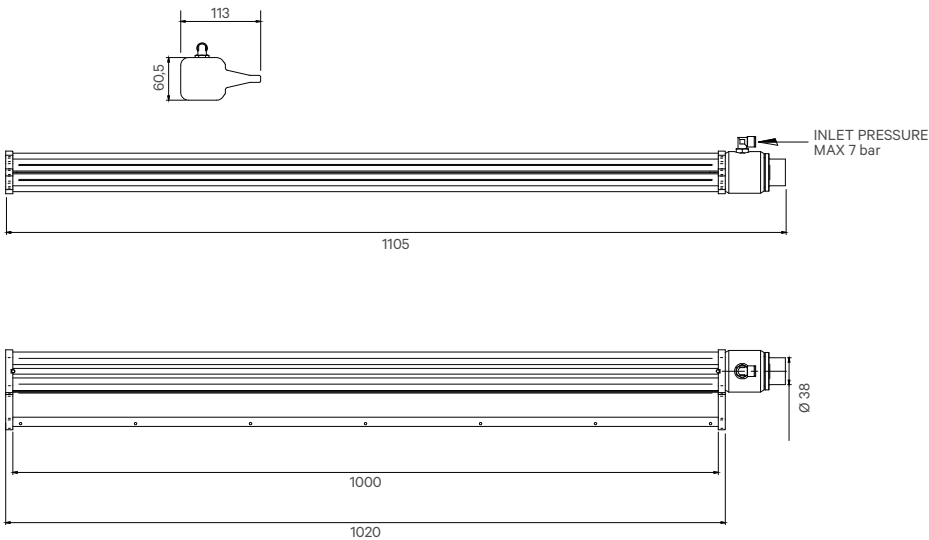

# SERIES ABX-2000

LONG AIR KNIVES SUPPLIED BY AIR AMPLIFIER

# SERIES ABZ-1000





LONG AIR KNIVES TO BE SUPPLIED BY ELECTRIC BLOWER



## GENERAL FEATURES - ABX-2000

|                 |                                      |
|-----------------|--------------------------------------|
| Materials       | Anodised aluminium / Stainless steel |
| Fixation        | On request                           |
| Flow width      | 2000 mm                              |
| Supply pressure | Based on the type of air supply      |

On request: supply connection at 90°.

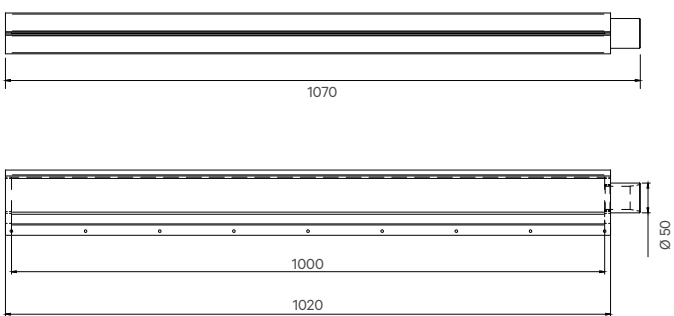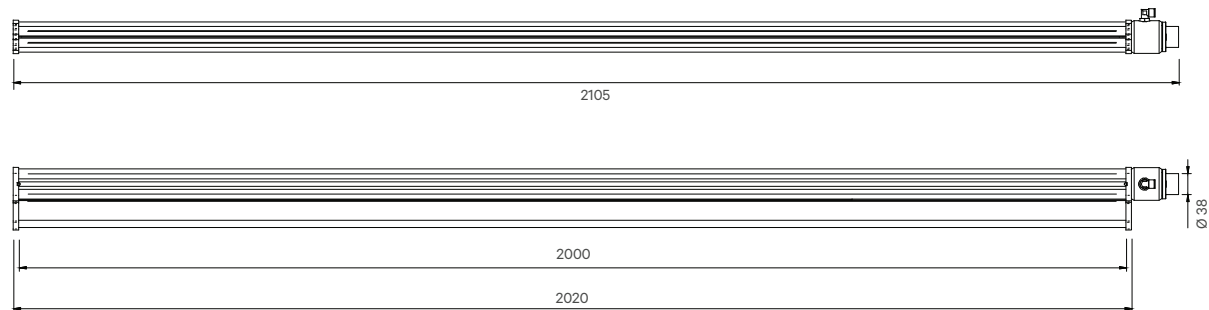

## GENERAL FEATURES - ABZ-1000

|                 |                                 |
|-----------------|---------------------------------|
| Materials       | Zinc-plated metal sheet         |
| Fixation        | On request                      |
| Flow width      | 1000 mm                         |
| Supply pressure | Based on the type of air supply |

On request: supply connection at 90°.



# SERIES ABZ-1500

LONG AIR KNIVES TO BE SUPPLIED BY ELECTRIC BLOWER



# SERIES ABZ-2000



LONG AIR KNIVES TO BE SUPPLIED BY ELECTRIC BLOWER



## GENERAL FEATURES - ABZ-1500

|                 |                                 |
|-----------------|---------------------------------|
| Materials       | Zinc-plated metal sheet         |
| Fixation        | On request                      |
| Flow width      | 1500 mm                         |
| Supply pressure | Based on the type of air supply |




On request: heated air flow.

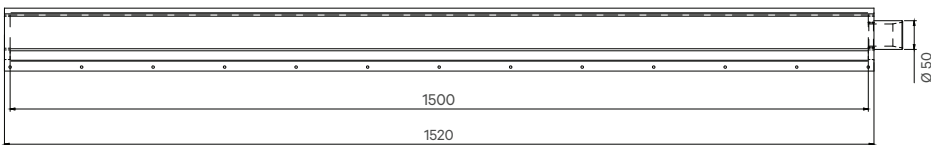

## GENERAL FEATURES - ABZ-2000

|                 |                                 |
|-----------------|---------------------------------|
| Materials       | Zinc-plated metal sheet         |
| Fixation        | On request                      |
| Flow width      | 2000 mm                         |
| Supply pressure | Based on the type of air supply |

On request: heated air flow.

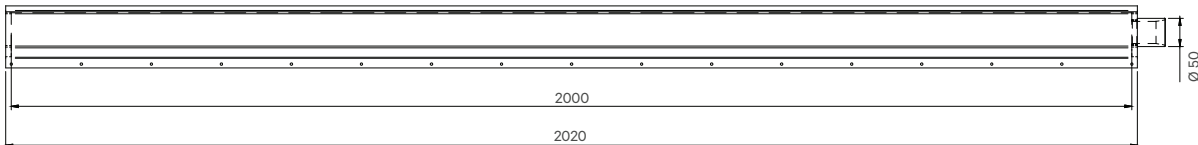


Description of the set-up and instrumentation used for our tests on air amplifiers.

CONNECTION HOSE


FOR ITEMS AM-10T/AM-15T  
o.d.= 8, i.d.= 6 mm.

FOR ITEMS AM-20T/AM-25T/AM-30T:  
o.d.= 10, i.d.= 8 mm.

FOR AM-40T/AM-50T:  
o.d. = 12, i.d. = 10 mm.

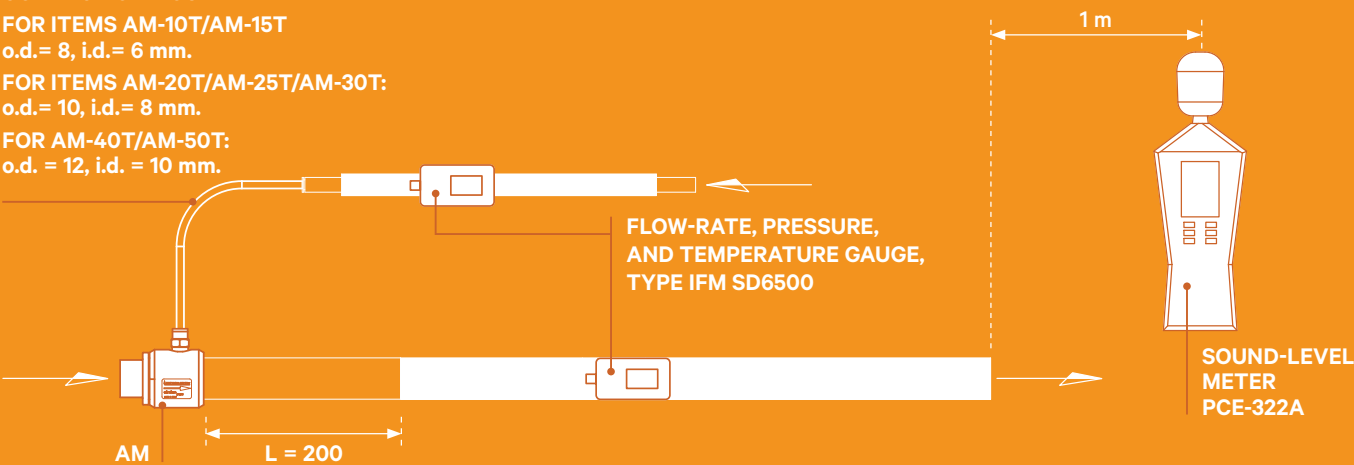

VACUUM GAUGE

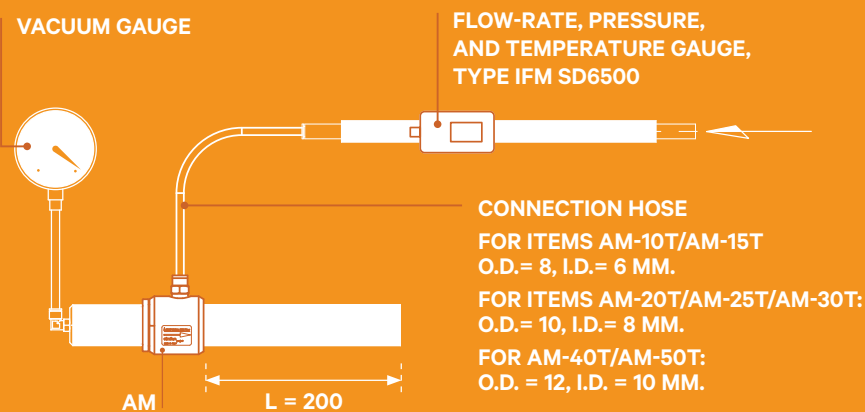

The **AM-T Series** air amplifiers offer excellent performance for both suction and blow-off. The quality of design and construction optimises the Coanda effect, so they use a small amount of compressed air to generate a powerful, high-speed flow. Their capability to perform both functions of suction and blow-off make them useful for many applications, including ventilating electric cabinets, conveying fumes and lightweight particles produced by machining, conveying and handling of light parts, drying, and cooling. When combined with the VR Series coolers, they create an effective patented system where, by conveying the hot air flow exhausted by the cooler to actuate an AM Series amplifier, the cooling power is optimised, so that to make it possible to draw hot air out of enclosures and ventilate closed areas to be cooled. The flow-rate can be adjusted by simply turning the nut.

- Design geometries optimised to maximise the Coanda effect
- Adjustable flow-rate
- Wide section for suction and blow-off, suitable for a variety of applications
- Instant operation
- No moving part, so not subject to wear and tear
- No electricity or chemical substances required
- More efficient than venturis and ejectors
- It does not cause neither sparks nor interferences
- Reliable and maintenance-free





# SERIES AM-10T

AIR AMPLIFIERS

# SERIES AM-15T

AIR AMPLIFIERS



MANUAL ADJUSTMENT

**GENERAL FEATURES - AM-10T**

|                     |               |
|---------------------|---------------|
| Materials           | Aluminium     |
| Air inlet port      | G-1/8" F      |
| Inlet diameter      | Ø 19          |
| Outlet diameter     | Ø 19          |
| Air supply pressure | max 7 bar     |
| Recommended hose    | Ø 6x1 - Ø 8x1 |
| Weight              | 95 g          |

MANUAL ADJUSTMENT

**GENERAL FEATURES - AM-15T**

|                     |                |
|---------------------|----------------|
| Materials           | Aluminium      |
| Air inlet port      | G-1/8" F       |
| Inlet diameter      | Ø 19           |
| Outlet diameter     | Ø 19           |
| Air supply pressure | max 7 bar      |
| Recommended hose    | Ø 8x1 - Ø 10x1 |
| Weight              | 100 g          |

PERFORMANCES AND CONSUMPTION TABLE



| OPENING 90°            |                       |                     |                        |                |                    |
|------------------------|-----------------------|---------------------|------------------------|----------------|--------------------|
| SUPPLY PRESSURE<br>bar | CONSUMPTION<br>NI/min | FLOW-RATE<br>NI/min | AMPLIFICATION<br>RATIO | VACUUM<br>mbar | NOISE LEVEL<br>dBA |
| 2                      | 76                    | 349,9               | 4,6                    | 65             | 63                 |
| 3                      | 101                   | 449,8               | 4,4                    | 100            | 65                 |
| 4                      | 126                   | 506,4               | 4,0                    | 130            | 66                 |
| 5                      | 153                   | 558,1               | 3,6                    | 155            | 68                 |
| 6                      | 178                   | 621,4               | 3,5                    | 185            | 70                 |
| OPENING 180°           |                       |                     |                        |                |                    |
| 2                      | 158                   | 533,12              | 3,4                    | 100            | 76                 |
| 3                      | 216                   | 643                 | 3,0                    | 155            | 80                 |
| 4                      | 283                   | 741,4               | 2,6                    | 190            | 85                 |
| 5                      | 341                   | 816,34              | 2,4                    | 220            | 90                 |
| 6                      | 391                   | 849,6               | 2,2                    | 240            | 92                 |

PERFORMANCES AND CONSUMPTION TABLE

| OPENING 90°            |                       |                     |                        |                |                    |
|------------------------|-----------------------|---------------------|------------------------|----------------|--------------------|
| SUPPLY PRESSURE<br>bar | CONSUMPTION<br>NI/min | FLOW-RATE<br>NI/min | AMPLIFICATION<br>RATIO | VACUUM<br>mbar | NOISE LEVEL<br>dBA |
| 2                      | 100                   | 899,6               | 9,0                    | 30             | 70                 |
| 3                      | 133                   | 1132,9              | 8,5                    | 45             | 74                 |
| 4                      | 168                   | 1332,8              | 7,9                    | 60             | 76                 |
| 5                      | 204                   | 1516                | 7,4                    | 75             | 78                 |
| 6                      | 244                   | 1649,3              | 6,8                    | 90             | 79                 |
| OPENING 180°           |                       |                     |                        |                |                    |
| 2                      | 225                   | 1366                | 6,1                    | 60             | 80                 |
| 3                      | 299                   | 1666                | 5,6                    | 95             | 84                 |
| 4                      | 373                   | 1949,2              | 5,2                    | 130            | 88                 |
| 5                      | 443                   | 2165,8              | 4,9                    | 160            | 89                 |
| 6                      | 509                   | 2265,8              | 4,4                    | 180            | 90                 |

SERIES AM-20T  
AIR AMPLIFIERS

SERIES AM-25T  
AIR AMPLIFIERS

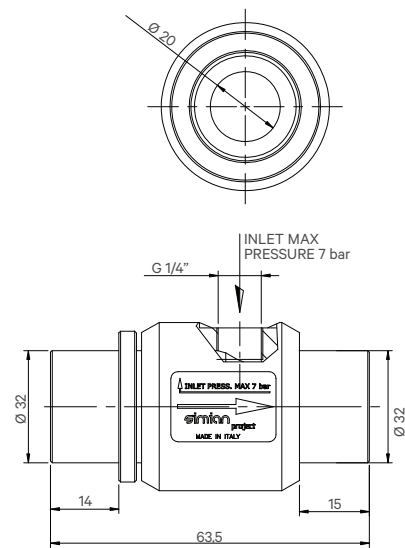
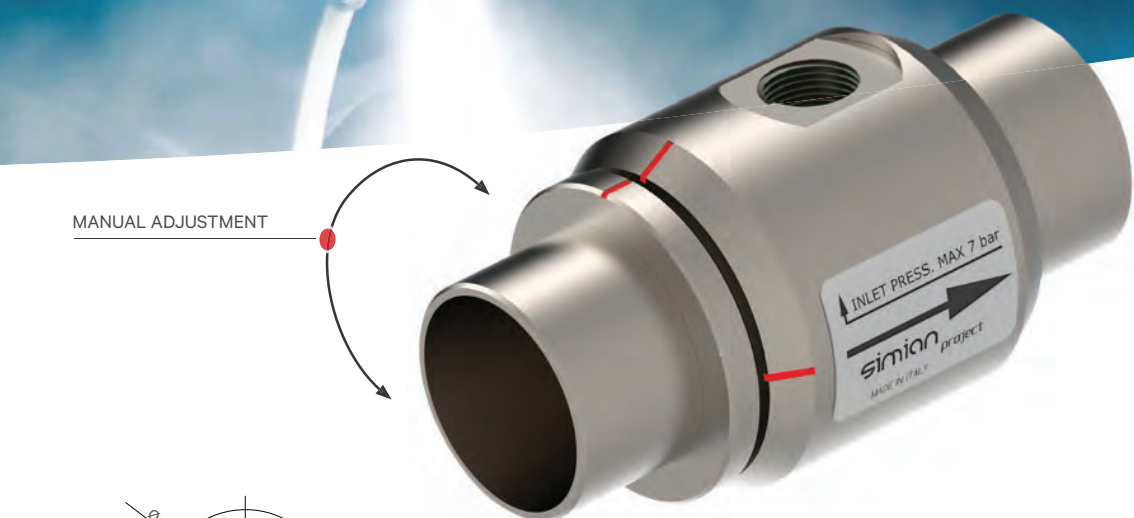


GENERAL FEATURES - AM-20T

|                     |                |
|---------------------|----------------|
| Materials           | Aluminium      |
| Air inlet port      | G-1/4" F       |
| Inlet diameter      | Ø 32           |
| Outlet diameter     | Ø 32           |
| Air supply pressure | max 7 bar      |
| Recommended hose    | Ø 8x1 - Ø 10x1 |
| Weight              | 240 g          |

PERFORMANCES AND CONSUMPTION TABLE

| OPENING 90°            |                       |                     |                        |                |                    |
|------------------------|-----------------------|---------------------|------------------------|----------------|--------------------|
| SUPPLY PRESSURE<br>bar | CONSUMPTION<br>NI/min | FLOW-RATE<br>NI/min | AMPLIFICATION<br>RATIO | VACUUM<br>mbar | NOISE LEVEL<br>dBA |
| 2                      | 186                   | 1499,4              | 8,0                    | 10             | 68                 |
| 3                      | 266                   | 1832,6              | 6,9                    | 15             | 72                 |
| 4                      | 333                   | 2199,1              | 6,6                    | 22             | 74                 |
| 5                      | 391                   | 2532,3              | 6,5                    | 29             | 75                 |
| 6                      | 458                   | 2798,9              | 6,1                    | 35             | 77                 |
| OPENING 180°           |                       |                     |                        |                |                    |
| 2                      | 391                   | 2132,5              | 5,4                    | 20             | 75                 |
| 3                      | 519                   | 2699                | 5,2                    | 32             | 78                 |
| 4                      | 646                   | 3115,4              | 4,8                    | 45             | 80                 |
| 5                      | 771                   | 3582                | 4,6                    | 58             | 82                 |
| 6                      | 899                   | 3965                | 4,4                    | 70             | 85                 |

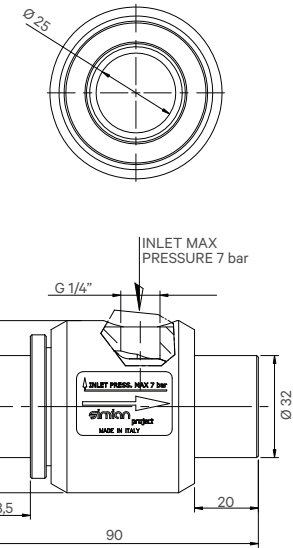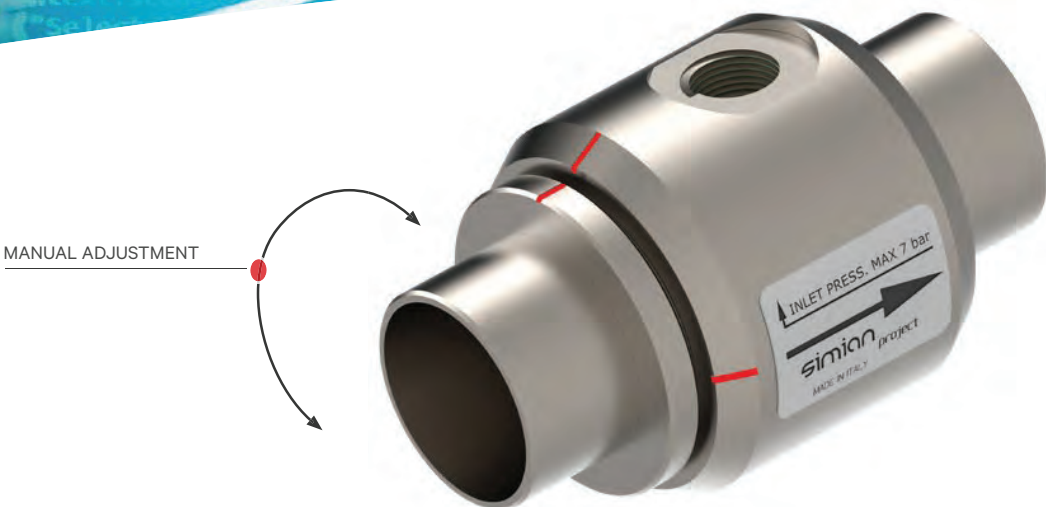

GENERAL FEATURES - AM-25T

|                     |                 |
|---------------------|-----------------|
| Materials           | Aluminium       |
| Air inlet port      | G-1/4           |
| Inlet diameter      | Ø 32            |
| Outlet diameter     | Ø 32            |
| Air supply pressure | max 7 bar       |
| Recommended hose    | Ø 10x1 - Ø 12x1 |
| Weight              | 280 g           |



PERFORMANCES AND CONSUMPTION TABLE

| OPENING 90°            |                       |                     |                        |                |                    |
|------------------------|-----------------------|---------------------|------------------------|----------------|--------------------|
| SUPPLY PRESSURE<br>bar | CONSUMPTION<br>NI/min | FLOW-RATE<br>NI/min | AMPLIFICATION<br>RATIO | VACUUM<br>mbar | NOISE LEVEL<br>dBA |
| 2                      | 283                   | 1549,4              | 5,5                    | 15             | 74                 |
| 3                      | 366                   | 1992,2              | 5,4                    | 24             | 75                 |
| 4                      | 466                   | 2364,7              | 5,1                    | 32             | 77                 |
| 5                      | 583                   | 2665,6              | 4,6                    | 41             | 78                 |
| 6                      | 699                   | 2998,8              | 4,3                    | 50             | 80                 |
| OPENING 180°           |                       |                     |                        |                |                    |
| 2                      | 583                   | 2582,3              | 4,4                    | 35             | 78                 |
| 3                      | 850                   | 3165,4              | 3,7                    | 55             | 81                 |
| 4                      | 1100                  | 3615,2              | 3,3                    | 75             | 84                 |
| 5                      | 1350                  | 4031,7              | 3,0                    | 95             | 86                 |
| 6                      | 1649                  | 4414,9              | 2,7                    | 110            | 88                 |



SERIES AM-30T  
AIR AMPLIFIERS



SERIES AM-40T  
AIR AMPLIFIERS

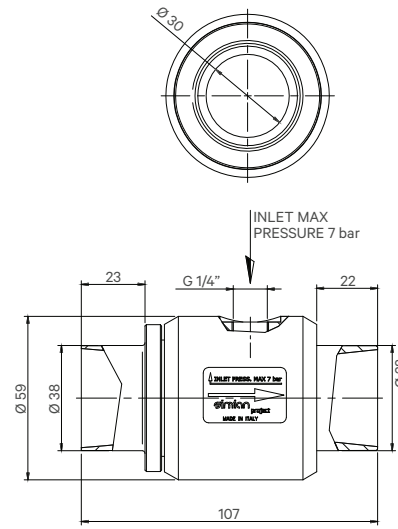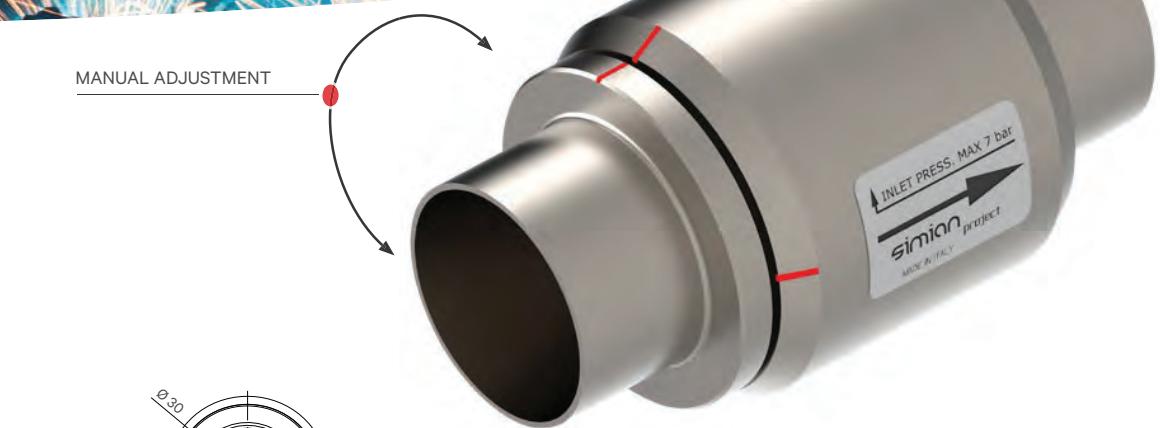

| GENERAL FEATURES - AM-30T |                 |
|---------------------------|-----------------|
| Materials                 | Aluminium       |
| Air inlet port            | G-1/4           |
| Inlet diameter            | Ø 38            |
| Outlet diameter           | Ø 38            |
| Air supply pressure       | max 7 bar       |
| Recommended hose          | Ø 10x1 - Ø 12x1 |
| Weight                    | 380 g           |

PERFORMANCES AND CONSUMPTION TABLE

| OPENING 90°            |                       |                     |                        |                |                    |
|------------------------|-----------------------|---------------------|------------------------|----------------|--------------------|
| SUPPLY PRESSURE<br>bar | CONSUMPTION<br>NI/min | FLOW-RATE<br>NI/min | AMPLIFICATION<br>RATIO | VACUUM<br>mbar | NOISE LEVEL<br>dBA |
| 2                      | 333                   | 3415                | 10,2                   | 15             | 80                 |
| 3                      | 483                   | 4081,7              | 8,5                    | 24             | 82                 |
| 4                      | 610                   | 4581,5              | 7,5                    | 32             | 84                 |
| 5                      | 730                   | 4998                | 6,8                    | 41             | 86                 |
| 6                      | 833                   | 5497,8              | 6,6                    | 50             | 88                 |
| OPENING 180°           |                       |                     |                        |                |                    |
| 2                      | 766                   | 4165                | 5,4                    | 40             | 84                 |
| 3                      | 1116                  | 4998                | 4,5                    | 52             | 88                 |
| 4                      | 1416                  | 5664,4              | 4,0                    | 65             | 91                 |
| 5                      | 1790                  | 6414                | 3,6                    | 80             | 93                 |
| 6                      | 2200                  | 6830,6              | 3,1                    | 100            | 94                 |

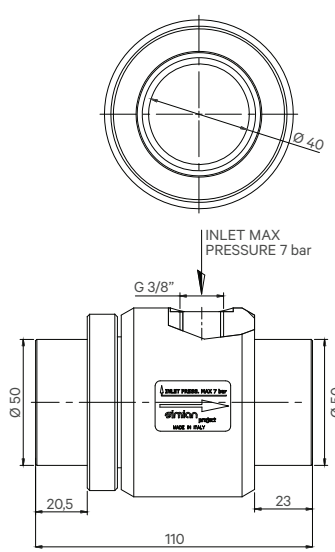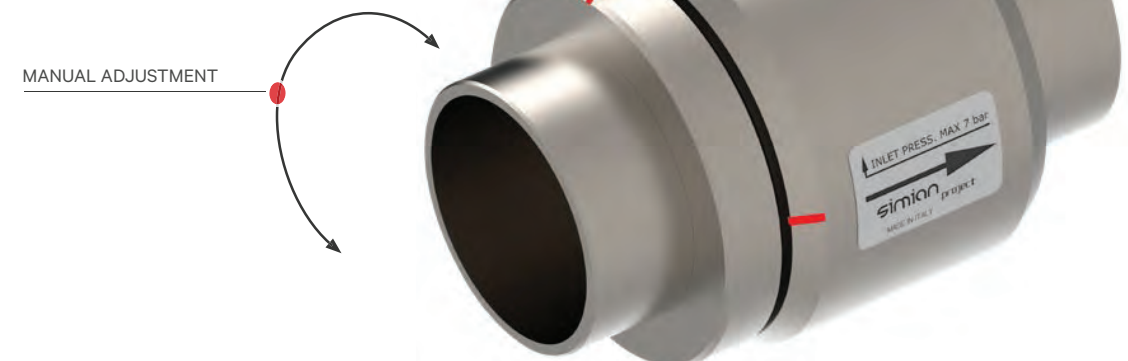

| GENERAL FEATURES - AM-40T |                 |
|---------------------------|-----------------|
| Materials                 | Aluminium       |
| Air inlet port            | G-3/8           |
| Inlet diameter            | Ø 50            |
| Outlet diameter           | Ø 50            |
| Air supply pressure       | max 7 bar       |
| Recommended hose          | Ø 12x1 - Ø 14x1 |
| Weight                    | 600 g           |

PERFORMANCES AND CONSUMPTION TABLE




| OPENING 90°            |                       |                     |                        |                |                    |
|------------------------|-----------------------|---------------------|------------------------|----------------|--------------------|
| SUPPLY PRESSURE<br>bar | CONSUMPTION<br>NI/min | FLOW-RATE<br>NI/min | AMPLIFICATION<br>RATIO | VACUUM<br>mbar | NOISE LEVEL<br>dBA |
| 2                      | 483                   | 3332                | 6,9                    | 12             | 80                 |
| 3                      | 660                   | 4248                | 6,4                    | 20             | 83                 |
| 4                      | 850                   | 4998                | 5,9                    | 25             | 85                 |
| 5                      | 1025                  | 5831                | 5,7                    | 30             | 87                 |
| 6                      | 1210                  | 6297                | 5,2                    | 35             | 89                 |
| OPENING 180°           |                       |                     |                        |                |                    |
| 2                      | 1082                  | 4998                | 4,6                    | 28             | 87                 |
| 3                      | 1566                  | 5831                | 3,7                    | 38             | 91                 |
| 4                      | 2082                  | 6580                | 3,2                    | 50             | 93                 |
| 5                      | 2600                  | 7663                | 2,9                    | 63             | 95                 |
| 6                      | 3048                  | 8663                | 2,8                    | 75             | 97                 |

SERIES AM-50T  
AIR AMPLIFIERS

ACCESSORIES  
AIR AMPLIFIERS



MANUAL ADJUSTMENT

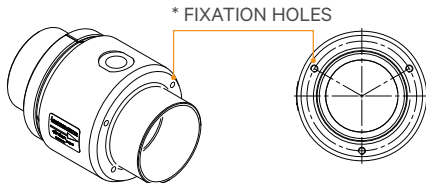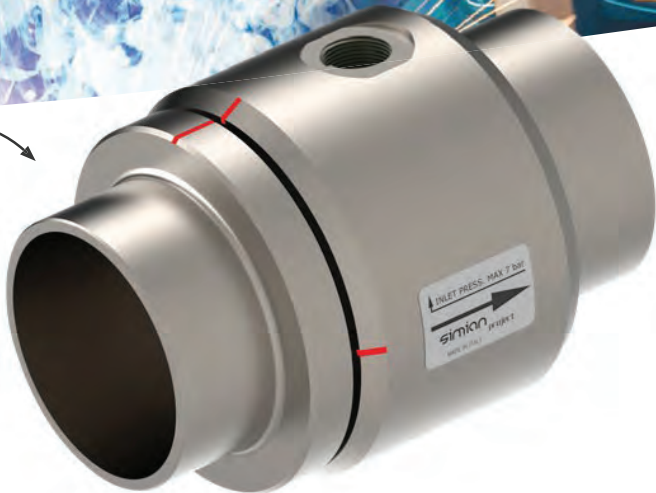

STRAIGHT PUSH-IN FITTING FOR AIR SUPPLY

| Part Number | Hose Ø | Thread | Air amplifier            |
|-------------|--------|--------|--------------------------|
| S6510       | 6      | 1/8"   | AM10-T                   |
| S6510       | 8      | 1/8"   | AM10-T / AM15-T          |
| S6510       | 10     | 1/8"   | AM15-T                   |
| S6510       | 8      | 1/4"   | AM20-T                   |
| S6510       | 10     | 1/4"   | AM20-T / AM25-T / AM30-T |
| S6510       | 12     | 1/4"   | AM25-T / AM30-T          |
| S6510       | 12     | 3/8"   | AM40-T / AM50-T          |
| S6510       | 14     | 3/8"   | AM40-T / AM50-T          |

ELBOW PUSH-IN FITTING FOR AIR SUPPLY

| Part Number | Hose Ø | Thread | Air amplifier            |
|-------------|--------|--------|--------------------------|
| S6520       | 6      | 1/8"   | AM10-T                   |
| S6520       | 8      | 1/8"   | AM10-T / AM15-T          |
| S6520       | 10     | 1/8"   | AM15-T                   |
| S6520       | 8      | 1/4"   | AM20-T                   |
| S6520       | 10     | 1/4"   | AM20-T / AM25-T / AM30-T |
| S6520       | 12     | 1/4"   | AM25-T / AM30-T          |
| S6520       | 12     | 3/8"   | AM40-T / AM50-T          |
| S6520       | 14     | 3/8"   | AM40-T / AM50-T          |

FIXATION BRACKET

| Part Number | Air amplifier   |
|-------------|-----------------|
| ABT-05T     | AM10-T / AM15-T |
| ABT-05      | AM20-T / AM25-T |

On request, with fixation holes\*.

FILTERS FOR FIXATION TO CABINETS

| Part Number | Air amplifier   | A Ø |
|-------------|-----------------|-----|
| AC32        | AM-10T / AM-15T | 19  |
| AC31        | AM-20T / AM-25T | 32  |
| AC26        | AM-30T          | 38  |
| AC43        | AM-40T          | 50  |
| AC44        | AM-50T          | 63  |

GENERAL FEATURES - AM-50T

|                     |                 |
|---------------------|-----------------|
| Materials           | Aluminium       |
| Air inlet port      | G-3/8           |
| Inlet diameter      | Ø 63            |
| Outlet diameter     | Ø 63            |
| Air supply pressure | max 7 bar       |
| Recommended hose    | Ø 12x1 - Ø 14x1 |
| Weight              | 950 g           |


PERFORMANCES AND CONSUMPTION TABLE

| OPENING 90°            |                       |                     |                        |                |                    |
|------------------------|-----------------------|---------------------|------------------------|----------------|--------------------|
| SUPPLY PRESSURE<br>bar | CONSUMPTION<br>NI/min | FLOW-RATE<br>NI/min | AMPLIFICATION<br>RATIO | VACUUM<br>mbar | NOISE LEVEL<br>dBA |
| 2                      | 900                   | 2700                | 3,0                    | 0              | -                  |
| 3                      | 1100                  | 3300                | 3,0                    | 0              | -                  |
| 4                      | 1300                  | 3800                | 2,9                    | 0              | -                  |
| 5                      | 1470                  | 4250                | 2,9                    | 0              | -                  |
| 6                      | 1650                  | 4700                | 2,8                    | 25             | -                  |
| APERTURA 180°          |                       |                     |                        |                |                    |
| 2                      | 1450                  | 3700                | 2,6                    | 0              | -                  |
| 3                      | 1700                  | 4500                | 2,6                    | 19             | -                  |
| 4                      | 1950                  | 5300                | 2,7                    | 36             | -                  |
| 5                      | 2200                  | 5900                | 2,7                    | 55             | -                  |
| 6                      | 2450                  | 6500                | 2,7                    | 75             | -                  |



# SPECIAL APPLICATIONS

## AIR-SPEED 25 • SUCTION GUN

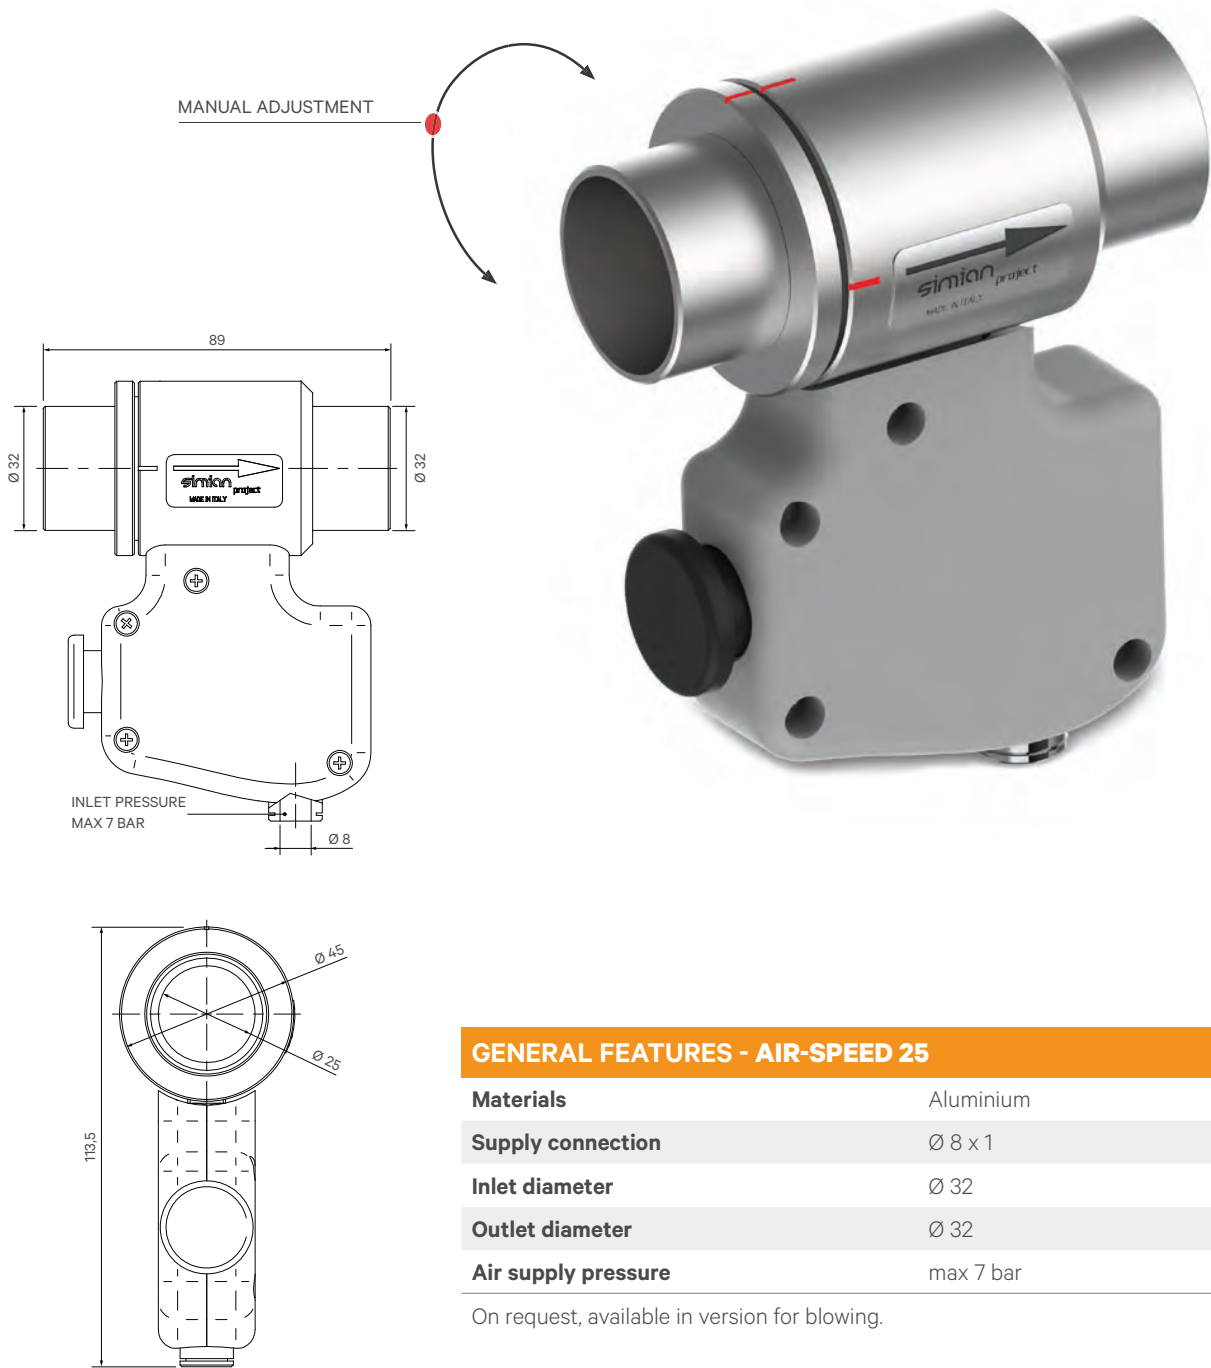

| GENERAL FEATURES - AIR-SPEED 25 |           |
|---------------------------------|-----------|
| Materials                       | Aluminium |
| Supply connection               | Ø 8 x 1   |
| Inlet diameter                  | Ø 32      |
| Outlet diameter                 | Ø 32      |
| Air supply pressure             | max 7 bar |

On request, available in version for blowing.

# SPECIAL APPLICATIONS

## AIRCLEAN 30

**FUNCTIONING PRINCIPLE**  
By opening the rear ball valve, the compressed air activates the **AM-30T** amplifier (recommended pressure: 3 - 5 bar), whose amplified and powerful flow gets out from the tapered outlet. The handle has length 1 m.

- BENEFITS**
- Manageability and robustness, as it is made of aluminium.
  - Reduction of consumption, thanks to the air amplifier.
  - High power of the air flow.




- FIELDS OF USE**
- Cleaning of large conveyor belts (waste sector, mining sector, etc.);
  - Cleaning of hoppers in the construction industry, etc.;
  - Cleaning of large components in the aeronautic, rail, and marine sectors;
  - Cleaning of silos, metallic carpentry, etc.



DEVICES DESIGNED TO RESPOND TO VARIOUS REQUIREMENTS IN THE AUTOMATION FIELD, AS LISTED BELOW:

- **Nozzles series UGP** - In-line blowing
- **Nozzles series UGL** - Cleaning of rectangular photocells
- **Nozzles series UGD** - Cleaning of optical sensors and photocells
- **Nozzles series UGF** - Cleaning of optical fibers
- **Nozzles series UGF** - Cleaning of optical fibers


Possibility of customisation, both in terms of materials and dimensions

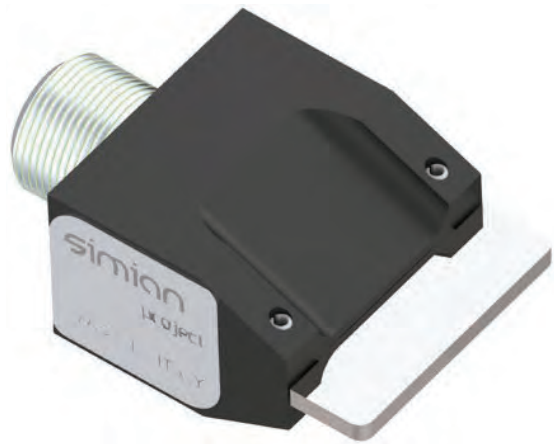


UGP 20A



UGP 20B

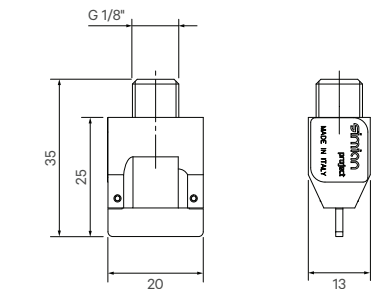

UGP 20A

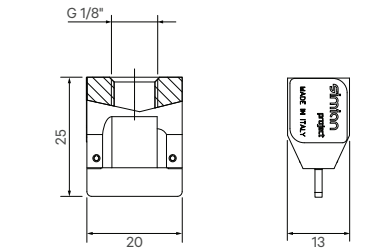

UGP 20B

GENERAL FEATURES - UGP 20A - UGP 20B

|                 |  |
|-----------------|--|
| Material        | Delrin and AISI304 stainless steel       |
| Inlet port      | G 1/8" M (UGP 20A)<br>G 1/8" F (UGP 20B) |
| Flow width      | 20 mm                                    |
| Supply pressure | 1 ÷ 7 bar                                |
| Weight          | 18 g (UGP 20A)<br>12 g (UGP 20B)         |

PERFORMANCES AND CONSUMPTION TABLE

| PRESSURE | AIR CONSUMPTION | THRUST* | NOISE LEVEL |
|----------|-----------------|---------|-------------|
|          |                 |         |             |
| bar      | NI/min          | Grams   | dBA         |
| 1        | 95              | 50      | 62          |
| 2        | 154             | 130     | 67          |
| 3        | 220             | 200     | 71          |
| 4        | 286             | 290     | 75          |
| 5        | 345             | 370     | 78          |
| 6        | 404             | 460     | 80          |
| 7        | 460             | 550     | 83          |

\*Thrust force (in grams) measured at a distance of 200 mm.





# SERIES UGP 45A - UGP 45B

## FLAT-FLOW NOZZLES

# SERIES UGL





## NOZZLE FOR RECTANGULAR PHOTOCELLS




UGP 45A



UGP 45B

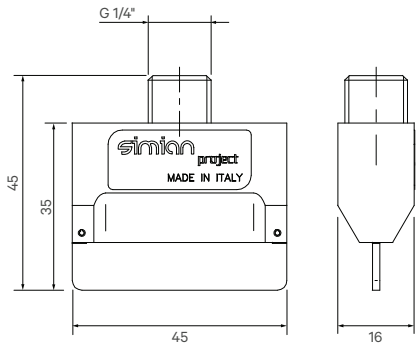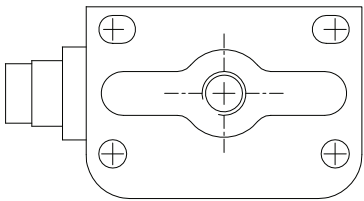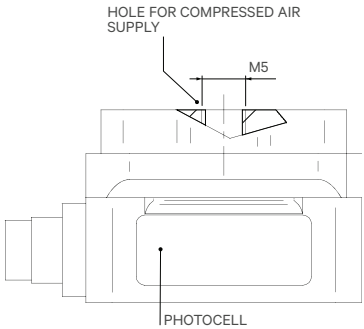

UGP 45A

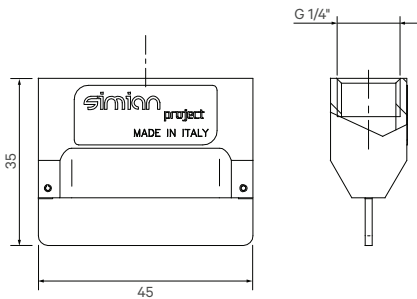

UGP 45B

### GENERAL FEATURES - UGP 45A - UGP 45B

|                 |  |
|-----------------|--|
| Material        | Delrin and AISI304 s.s.                  |
| Inlet port      | G 1/4" M (UGP 45A)<br>G 1/4" F (UGP 45B) |
| Flow width      | 45 mm                                    |
| Supply pressure | 1 ÷ 7 bar                                |
| Weight          | 32 g (UGP 45A)<br>25 g (UGP 45B)         |

### PERFORMANCES AND CONSUMPTION TABLE

| PRESSURE<br>bar | AIR CONSUMPTION<br>NL/min | THRUST*<br>Grams | NOISE LEVEL<br>dBA |
|-----------------|---------------------------|------------------|--------------------|
| 1               | 130                       | 80               | 65                 |
| 2               | 231                       | 180              | 70                 |
| 3               | 340                       | 290              | 73                 |
| 4               | 436                       | 410              | 77                 |
| 5               | 540                       | 550              | 80                 |
| 6               | 650                       | 700              | 82                 |
| 7               | 780                       | 850              | 83                 |

\*Thrust force (in grams) measured at a distance of 200 mm.

### GENERAL FEATURES - UGL

|            |              |
|------------|--------------|
| Material   | On request   |
| Inlet port | Not included |
| Dimensions | On request   |

### PERFORMANCES AND CONSUMPTION TABLE

| PRESSURE<br>bar | CONSUMPTION<br>NL/MIN |
|-----------------|-----------------------|
| 0,2             | 13                    |

# SERIES UGD 18-I

NOZZLE FOR CLEANING

# SERIES UGD 08 / UGD 12 / UGD 18 / UGD 30

NOZZLE FOR CLEANING



UGD-27 FOR VIDEO-CAMERAS

## DIMENSIONS - UGD 18-I

| Material | Moulded Nylon |    |    |
|----------|---------------|----|----|
| Type     | A             | B  | C  |
| UGD-18I  | M18x1         | 42 | 26 |




## DIMENSIONS - UGD 08 / UGD 12 / UGD 18 / UGD 30

| Material | Aluminium |    |      |
|----------|-----------|----|------|
| Type     | A         | B  | C    |
| UGD-08   | M8x1      | 27 | 9    |
| UGD-12   | M12x1     | 32 | 11,5 |
| UGD-18   | M18x1     | 38 | 11,5 |
| UGD-30   | M30x1,5   | 50 | 13,5 |

Other dimensions on request.

## PERFORMANCES AND CONSUMPTION TABLE (ONLY VERSION UGD-18)

| PRESSURE<br>bar | CONSUMPTION<br>NI/min |
|-----------------|-----------------------|
| 0,2             | 21                    |
| 0,3             | 28                    |
| 0,4             | 40                    |
| 0,5             | 48                    |

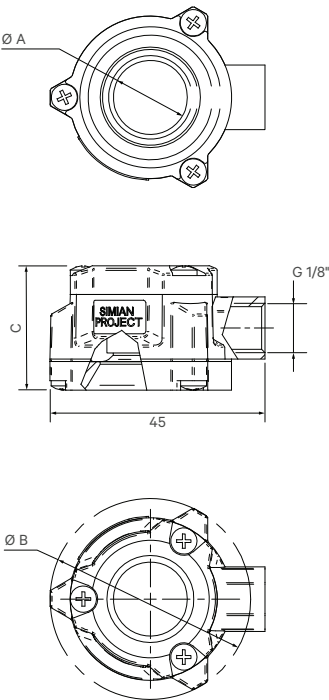





# SERIES UGF 03 / UGF 04 / UGF 05 / UGF 06

NOZZLE FOR OPTICAL FIBER CLEANING

# SERIES UGB 100 / UGB 300

AIR-KNIFE FOR LIGHT CURTAINS

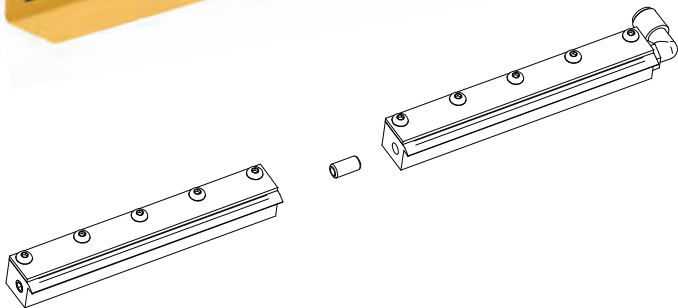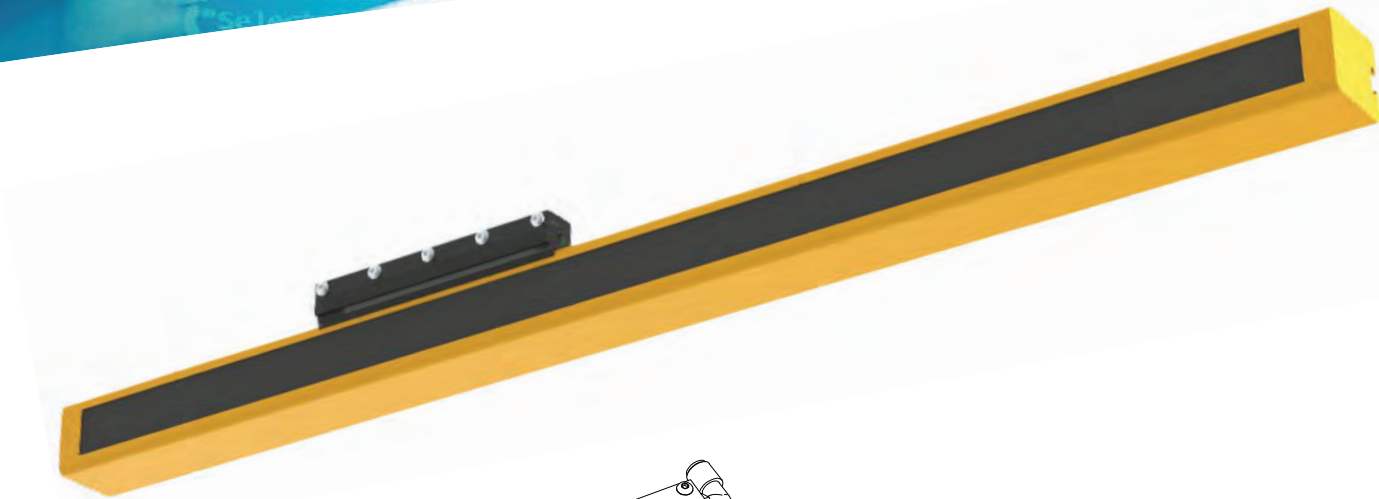






MULTIPLE SOLUTION

## GENERAL FEATURES - UGB 100 / UGB 300

|               |                               |
|---------------|-------------------------------|
| Material      | Alluminio anodizzato / Delrin |
| Inlet fitting | Not included                  |
| Curtain width | 100 mm / 300 mm               |

## PERFORMANCES AND CONSUMPTION TABLE

| Pressione<br>Bar | Consumption L = 300 mm<br>m³/h | NI/min | Consumption x 100 mm<br>NI/min |
|------------------|--------------------------------|--------|--------------------------------|
| 0,3              | 4                              | 82     | 27                             |
| 0,5              | 6                              | 114    | 38                             |
| 0,7              | 8                              | 138    | 46                             |
| 1                | 10                             | 175    | 58                             |
| 1,5              | 14                             | 238    | 79                             |
| 2                | 18                             | 305    | 102                            |
| 2,5              | 21                             | 358    | 119                            |
| 3                | 24                             | 408    | 136                            |
| 4                | 30                             | 508    | 169                            |

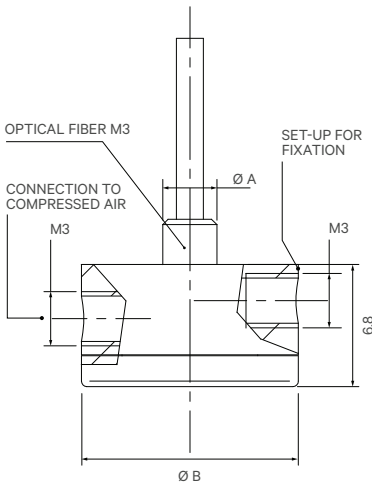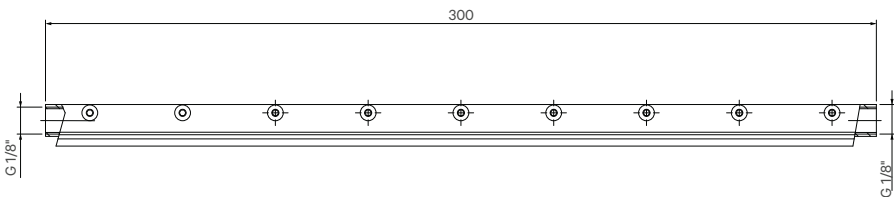

## GENERAL FEATURES - UGF 03 / UGF 04 / UGF 05 / UGF 06

|               |                    |       |
|---------------|--------------------|-------|
| Material      | Anodized aluminium |       |
| Inlet fitting | Not included       |       |
| Dimensions    | Ø A                | Ø B   |
| UGF 03        | M3                 | 12 mm |
| UGF 04        | M4                 | 15 mm |
| UGF 05        | M5                 | 15 mm |
| UGF 06        | M6                 | 16 mm |



## Series HSC

Effective, maintenance-free,  
and suitable for any flow-rate  
and application



The main strengths of the condensate separators **Series HSC** are effectiveness, reliability, and versatility.

The effectiveness in the removal of condensate is obtained through the particular design of the **DRYVOLUTION** system: thanks to a series of concentric flanges, assembled with a precise angle of incidence with respect to the direction of inlet flow, they generate a compressed air expansion (which takes place inside a chamber downstream of the flanges) that brings about a considerable decrease in the temperature and consequently the condensation of humidity. This is then directed to the bottom of the bowl.

The reliability derives from the fact that no electric power and no chemical

substance is used, and moreover there is no moving part (with the exception of the sole automatic drain): the performance is steady and maintenance is practically zero.

The versatility is guaranteed by the performances and the technical features: the range covers a wide spectrum of flow-rates and the materials used, together with the assembly, make it a very sturdy product. Therefore, it perfectly suits many different applications: upstream of coalescing filters (cleaning of air inside clean rooms), downstream of big compressors for air distribution inside factories, on board of trucks and agricultural machines, upstream of pneumatic tools, etc.


- Water separation through the decrease in the temperature of compressed air
- No moving part, except for the automatic drain
- Easy to install
- Made in technopolymer and brass OT58
- One size, with 3 possible flow-rate settings
- Maintenance-free
- No electricity or chemical substances required
- No sparks or interferences caused
- Instant operation
- Possibility of combination with cooler VR50 to further lower temperatures





SERIES - HSC - T2 - HIGH SEPARATOR CONDENSE
THERMODYNAMIC DRYER


ACCESSORIES
THERMODYNAMIC DRYER

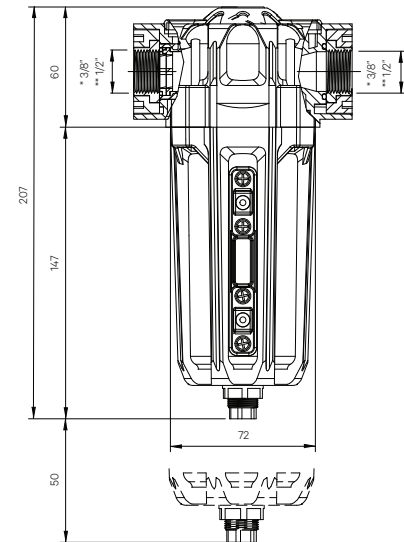


GENERAL FEATURES - HSC - T2

|                                      |                                    |
|--------------------------------------|------------------------------------|
| Type of functioning                  | Thermodynamic                      |
| Materials                            | Technopolymer                      |
| Ports                                | 1/2" G (with bushings in brass)    |
| Weight                               | 500 g                              |
| Installation                         | Vertical                           |
| Operating temperature                | -10°C + 50°C                       |
| Condensate drain                     | Automatic, by float                |
| Medium                               | Compressed air                     |
| Operating pressure                   | Max. 12 Bar                        |
| Max. flow-rate (3 possible settings) | 1266* NI/min at max. opening       |
| Factory setting                      | Intermediate opening (1100 NI/min) |

\*values at P1= 6 Bar and Delta P= 0.5 Bar.





\*HSC-02-38-SCC
\*\*HSC-02-12-SCC

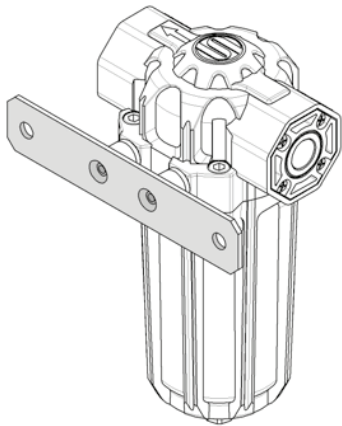

WALL BRACKET

| PART-NUMBER | DIMENSIONS      |
|-------------|-----------------|
| HSC-13      | 150 x 30 x 2,50 |

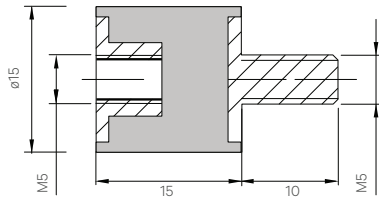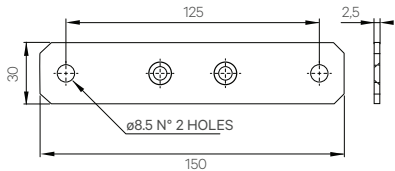

ANTI-VIBRATION SUPPORT

| PART-NUMBER | DIMENSIONS |
|-------------|------------|
| HSC-17      | 15 x 15 M5 |



SOME EXAMPLES OF APPLICATIONS






# SOME EXAMPLES OF APPLICATIONS



Air knife to dry pharma containers

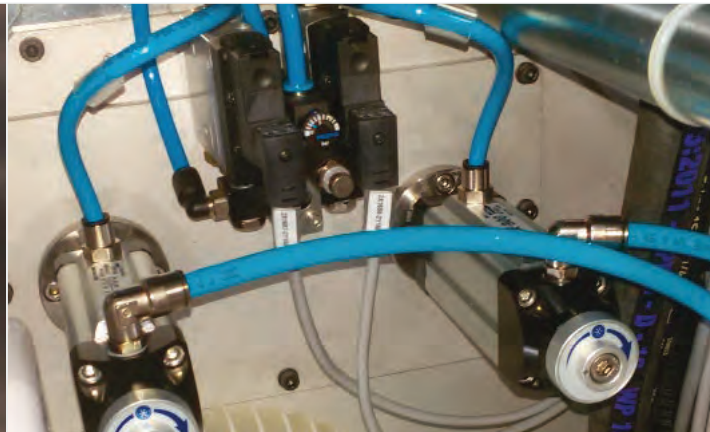


Cooling of glueing station



Cooling down of tool - Woodworking sector



Air knife for defective parts' discard

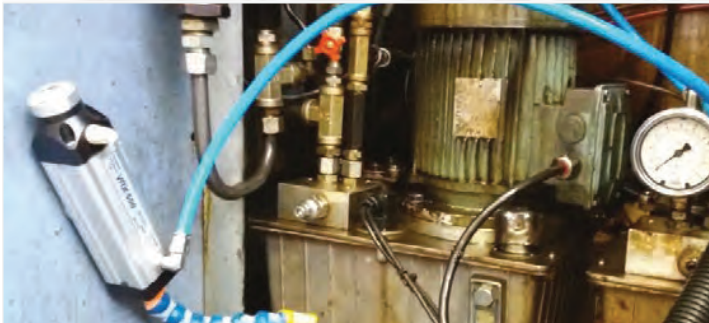

Cooler for hydraulic application




Amplifier to dry plastic wire



Air amplifiers for profiles' cleaning



Air knife to clean machine-tool window

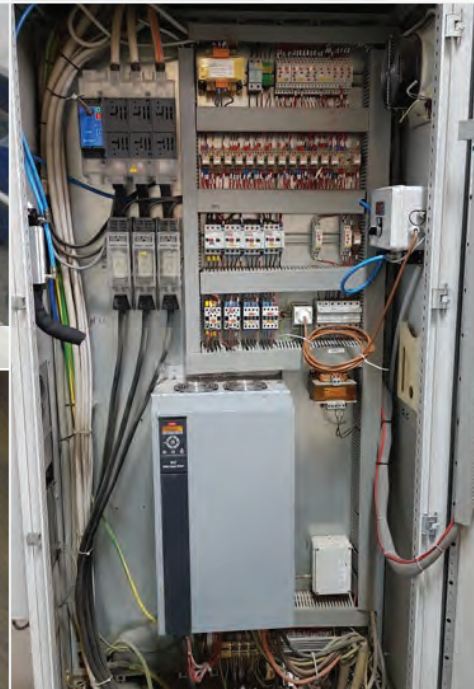

Cooling of cabinets (with control unit)



Cooling of blades



Cooling of control cabinets



Air-knife to stretch films



Cooling of cabinets



Cooling of junction boxes



Cooling of a tool - Plastics sector



Air knives to detach metal sheets







