
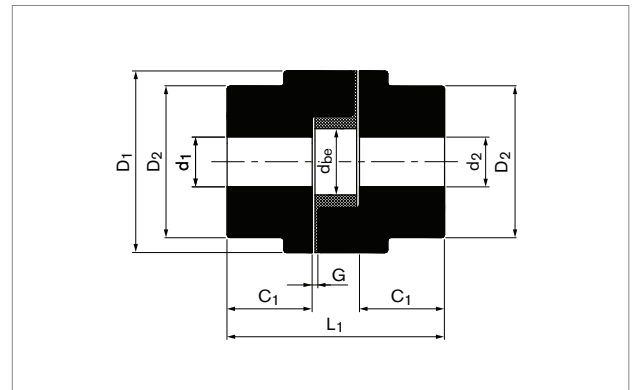



Elastomer Jaw Couplings

RINGFEDER® RLES L, SW & RRS



RLES L: 2-Part Coupling with Elastomer-Spider

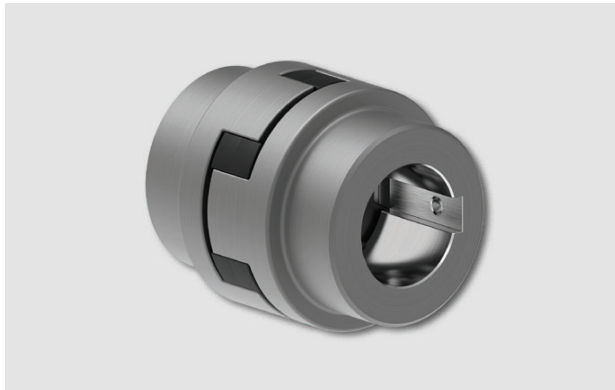

RLES SW: 2-Part Coupling with snap wrap Elastomer-Element

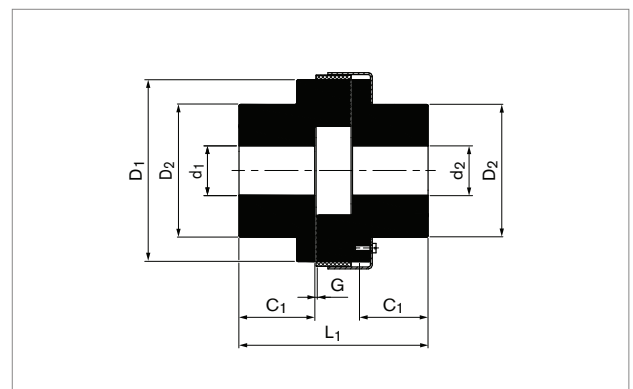

RLES RRS: 3-Part Coupling with Spacer and snap wrap Elastomer-Element

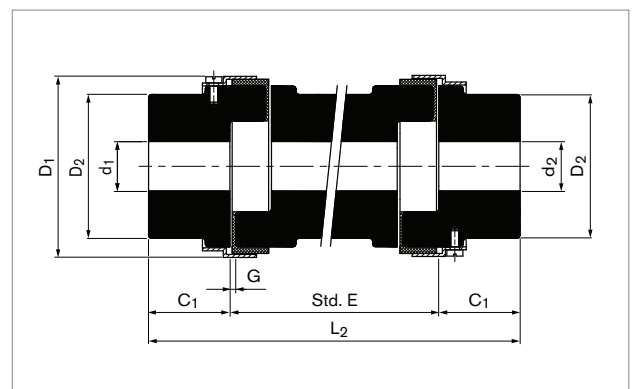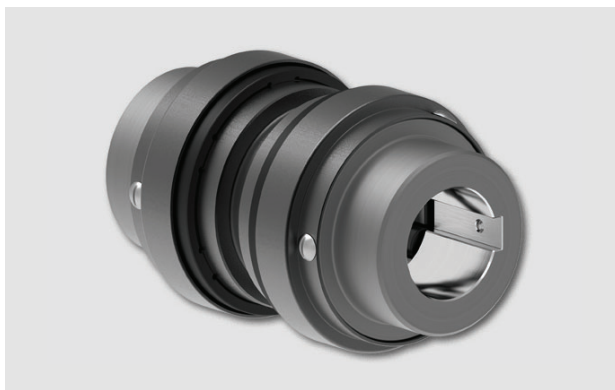

To continue see next page

Elastomer Jaw Couplings RINGFEDER® RLES L, SW & RRS

Dimensions of RLES L										
Size	T _{KN}			n _{max}	Pilot Bore Size	Max. Bore Diameter d ₁ /d ₂	D ₁	D ₂	C ₁	L ₁
	Rubber	Polyurethane	H-Trans							
	Nm	Nm	Nm	1/min	mm	mm	mm	mm	mm	mm
35	0.38	-	-	31000	-	10	16	16	6.5	21
50	2.80	4.2	7.0	18000	-	16	27	27	15	42
70	4.90	7.4	12.3	14000	-	20	35	35	19	51
75 ⁽¹⁾	9.80	14.7	24.5	11000	-	22	45	45	21	55
75 ⁽²⁾	9.80	14.7	24.5	11000	-	22	45	39	21	55
95	21.10	31.7	52.8	9000	-	28	54	49	25	63
99	46.40	69.6	116	7000	-	30	65	51	27	72
100	46.40	69.6	116	7000	-	35	65	57	35	88
110	89	133.5	222.5	5000	-	42	85	76	43	108
150	141	211.5	352.5	5000	-	48	96	80	45	115
190	190	285	475	5000	-	60	115	102	54	133
225	265	397.5	662.5	4200	-	65	127	111	64	153
226	327	490.5	817.5	4800	25	70	137	119	70	178
276	532	798	-	1800	25	75	157	127	80	200
280	782	1173	-	-	30	80	192	140	80	200
295	1279	1918.5	-	-	30	95	237	162	95	238

Dimensions of RLES L								
Size	G	d _{be}	Gw			J		
			Sintered Iron	Aluminum	Cast Iron	Sintered Iron	Aluminum	Cast Iron
	mm	mm	kg	kg	kg	kg·m ²	kg·m ²	kg·m ²
35	1	-	0.02	-	-	0.74 x 10 ⁻⁶	-	-
50	1	-	0.11	0.04	-	1.28 x 10 ⁻⁵	0.48 x 10 ⁻⁵	-
70	2	-	0.23	0.08	-	4.65 x 10 ⁻⁵	1.67 x 10 ⁻⁵	-
75 ⁽¹⁾	2	-	0.44	0.14	-	13.69 x 10 ⁻⁵	3.78 x 10 ⁻⁵	-
75 ⁽²⁾	2	-	0.44	0.14	-	13.69 x 10 ⁻⁵	3.78 x 10 ⁻⁵	-
95	2	19	-	0.24	0.65	-	10.58 x 10 ⁻⁵	2.86 x 10 ⁻⁴
99	2	27	-	0.38	1.01	-	22.21 x 10 ⁻⁵	5.99 x 10 ⁻⁴
100	2	27	-	0.44	1.14	-	27.81 x 10 ⁻⁵	7.19 x 10 ⁻⁴
110	3	35	-	1.01	2.62	-	104.47 x 10 ⁻⁵	27.24 x 10 ⁻⁴
150	3	35	-	-	3.20	-	-	41.50 x 10 ⁻⁴
190	3	45	-	-	5.63	-	-	108.85 x 10 ⁻⁴
225	3	45	-	-	7.73	-	-	176.74 x 10 ⁻⁴
226	3	51	-	-	10.22	-	-	274.80 x 10 ⁻⁴
276	3	60	-	-	14.48	-	-	470.08 x 10 ⁻⁴
280	3	70	-	-	20.56	-	-	921.92 x 10 ⁻⁴
295	3	80	-	-	35.75	-	-	2395.72 x 10 ⁻⁴

(1) The values in this line refer to the material "SIN".

To continue see next page

(2) The values in this line refer to the material "AL".

Elastomer Jaw Couplings RINGFEDER® RLES L, SW & RRS

Dimensions of RLES SW													
Size	T _{KN}			n _{max}	Pilot Bore Size	Max. Bore Diameter d ₁ /d ₂	D ₁	D ₂	C ₁	L ₁	G	Gw	J
	Rubber	Polyurethane	H-Trans										
	Nm	Nm	Nm	1/min	mm	mm	mm	mm	mm	mm	mm	kg	kg·m ²
95	21.10	31.7	52.8	-	-	28	65	49	25	63	2	0.69	3.37 x 10 ⁻⁴
99	46.40	69.6	116	-	-	30	78	51	27	72	2	1.05	6.96 x 10 ⁻⁴
100	46.40	69.6	116	-	-	35	78	57	35	88	2	1.23	8.51 x 10 ⁻⁴
110	89	133.5	222.5	-	-	42	96	76	43	108	3	2.74	30.10 x 10 ⁻⁴
150	141	211.5	352.5	-	-	48	111	80	45	115	3	3.39	47.13 x 10 ⁻⁴
190	190	285	475	-	-	60	129	102	54	133	3	5.87	118.41 x 10 ⁻⁴
225	265	397.5	662.5	-	-	65	142	111	64	153	3	7.97	189.66 x 10 ⁻⁴
226	327	490.5	817.5	-	25	70	153	119	70	178	3	10.66	300.83 x 10 ⁻⁴
276	532	798	-	-	25	75	173	127	80	200	3	15.04	513.00 x 10 ⁻⁴
280	782	1173	-	-	30	80	208	140	80	200	3	21.29	1002.88 x 10 ⁻⁴
295	1279	1918.5	-	-	30	95	253	162	95	238	3	36.98	2609.33 x 10 ⁻⁴
2955	2132	3198	-	-	30	105	253	180	108	264	3	42.04	3028.77 x 10 ⁻⁴
300	3047	4570.5	-	-	30	105	272	180	115	283	3	49.40	3999.87 x 10 ⁻⁴
350	4308	6462	-	-	30	115	323	200	128	309	3	74.56	8229.27 x 10 ⁻⁴

Dimensions of RLES RRS											
Size	T _{KN}			n _{max}	Pilot Bore Size	Max. Bore Diameter d ₁ /d ₂	D ₁	D ₂	C ₁	Std. E	L ₁
	Rubber	Polyurethane	H-Trans								
	Nm	Nm	Nm	1/min	mm	mm	mm	mm	mm	mm	mm
95	21.10	31.7	52.8	3600	-	28	65	49	25	90	63
100	46.40	69.6	116	3600	-	35	78	57	35	100	88
110	89	133.5	222.5	3600	-	42	96	76	43	140	108
150	141	211.5	352.5	3600	-	48	111	80	45	90	115
190	190	285	475	3600	-	60	129	102	54	100	133
225	265	397.5	662.5	-	-	65	142	111	64	140	153
226	327	490.5	817.5	-	25	70	153	119	70	180	178

Dimensions of RLES RRS									
Size	G	Gw				J			
		E = 90	E = 100	E = 140	E = 180	E = 90	E = 100	E = 140	E = 180
	mm	kg	kg	kg	kg	kg·m ²	kg·m ²	kg·m ²	kg·m ²
95	2	1,15	1,19	1,33	-	5.35 x 10 ⁻⁴	5.49 x 10 ⁻⁴	6.04 x 10 ⁻⁴	-
100	2	1,12	1,16	1,33	-	8.44 x 10 ⁻⁴	8.68 x 10 ⁻⁴	9.62 x 10 ⁻⁴	-
110	3	3,52	3,60	3,95	4,29	39.87 x 10 ⁻⁴	40.67 x 10 ⁻⁴	43.89 x 10 ⁻⁴	47.11 x 10 ⁻⁴
150	3	4,36	4,45	4,79	5,14	63.42 x 10 ⁻⁴	64.38 x 10 ⁻⁴	68.17 x 10 ⁻⁴	71.96 x 10 ⁻⁴
190	3	7,29	7,45	8,07	8,70	151.42 x 10 ⁻⁴	154.06 x 10 ⁻⁴	164.61 x 10 ⁻⁴	175.15 x 10 ⁻⁴
225	3	9,68	9,86	10,60	11,33	236.67 x 10 ⁻⁴	240.04 x 10 ⁻⁴	253.55 x 10 ⁻⁴	267.05 x 10 ⁻⁴
226	3	12,32	12,63	13,40	14,11	363.33 x 10 ⁻⁴	372.21 x 10 ⁻⁴	391.65 x 10 ⁻⁴	407.71 x 10 ⁻⁴

To continue see next page

Elastomer Jaw Couplings RINGFEDER® RLES L, SW & RRS

Size	Possible Material Selection RLES						
	Type L			Type SW		Type RRS	
	Sintered Iron (SIN)	Aluminum (AL)	Cast Iron (CIR)	Aluminum (AL)	Cast Iron (CIR)	Aluminum (AL)	Cast Iron (CIR)
35	•			-	-	-	-
50	•	•		-	-	-	-
70	•	•		-	-	-	-
75	•	•		-	-	-	-
95		•	•	•	•	•	•
99		•	•	•	•	-	-
100		•	•	•	•	•	•
110		•	•	•	•	•	•
150			•		•		•
190			•		•		•
225			•		•		•
226			•		•		•
276			•		•	-	-
280			•		•	-	-
295			•		•	-	-
2955	-	-	-		•	-	-
300	-	-	-		•	-	-
350	-	-	-		•	-	-

To continue see next page

Elastomer Jaw Couplings RINGFEDER® RLES L, SW & RRS

Explanations

T_{KN}	= Nom. Transmissible Torque	C₁	= Guided Length in Bore	Gw	= Approx. Weight
n_{max}	= Max. Rotational Speed	Std. E	= Std. Distance Between Shaft Ends	J	= Approx. Moment of Inertia
Pilot Bore Size	= Required Size of the Pilot Bore	L₁/L₂	= Total Length		
d₁/d₂	= Bore Diameter Hubs	G	= Width of Gap Between Left and Right Component		
D₁	= Max. Outer Diameter	d_{be}	= Inner Diameter Elastomer-Spider		
D₂	= Outer Diameter Hubs				

Technical Information

- All dimensions are in millimeters, unless otherwise specified. Decimal points are used as decimal separators.
- For vertical installation, please contact RINGFEDER POWER TRANSMISSION.
- For RRS/SW maintain gap 'G' at the time of assembly
- Maximum bores can be increased in case of steel hubs. Please contact RINGFEDER POWER TRANSMISSION.
- Please contact RINGFEDER POWER TRANSMISSION for maximum bore with square key.
- For the dimension L₂, calculate "2 x C₁ + Std. E".
- Weight 'Gw' and Moment of Inertia 'J' are given at maximum bore diameter.
- For max. permissible axial, angular and radial shaft misalignment, please contact RINGFEDER POWER TRANSMISSION.

Ordering example RLES L

Series	Type	Size	Material	Elastomer	Bore diameter d ₁	Bore diameter d ₂
RLES	L	110	AL	PU	35	40

Ordering example RLES SW

Series	Type	Size	Material	Elastomer	Bore diameter d ₁	Bore diameter d ₂
RLES	SW	300	CIR	HTR	85	100

Ordering example RLES RRS

Series	Type	Size	Material	Elastomer	Distance Between Shaft Ends E	Bore diameter d ₁	Bore diameter d ₂
RLES	RRS	190	CIR	RUB	100	50	60

Ordering Information

- Elastomer Materials: RUB = Rubber, PU = Polyurethane, HTR = H-Trans.
- Hub Materials: SIN = Sintered Iron, AL = Aluminum, CIR = Cast Iron

Disclaimer of liability

All technical details and notes are non-binding and cannot be used as a basis for legal claims. The user is obligated to determine whether the represented products meet his requirements. We reserve the right to carry out modifications at any time in the interests of technical progress.