

Extended length with mounting (EL1 - mm)
Extended length without mounting (EL2 - mm)
Stroke (mm)

Bansbach easylift

Item **Stroke (+/- 2mm)** **EL2 (+/- 2mm)**

QSI-15-60 *	60	147
QSI-15-100 *	100	227
QSI-15-150 *	150	327

(*) In stock

Diameter piston rod/cylinder: Ø 6mm / Ø 15mm
Valve: integrated
Fitting: thread piston rod/cylinder: M5*5 / M5*5
Progressivity: around 27%
Speed & damping: normal speed – high damping
Materials: piston rod and cylinder in stainless steel 316L

EP3
 Ø 6,1 6 21 M5 Ø 11


Exhaust screw U5

A5 INOX 316L
 Load max. 490N

C5 INOX 303
 Load max. 430N

Rod shroud W5-15-VA
 Ø 19
 L = stroke + 20mm

QSI-19 INOX 316L : F1 from 50 to 700N ($F_{2\max} = 930N$)

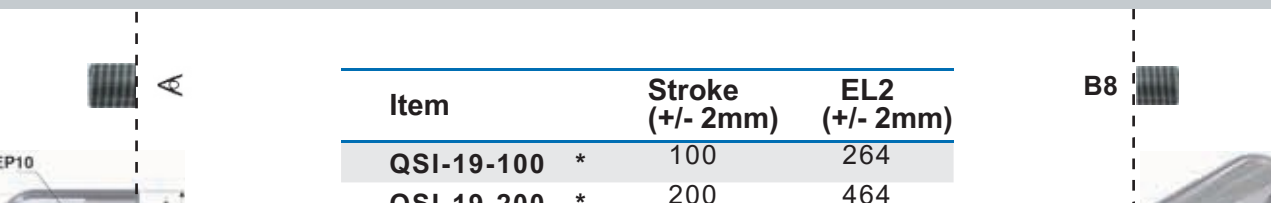

Extended length with mounting (EL1 - mm)
Extended length without mounting (EL2 - mm)
Stroke (mm)

Bansbach easylift

Item **Stroke (+/- 2mm)** **EL2 (+/- 2mm)**

QSI-19-100 *	100	264
QSI-19-200 *	200	464
QSI-19-250 *	250	564

(*) In stock

Diameter piston rod/cylinder: Ø 8mm / Ø 19mm
Valve: integrated
Fitting: thread piston rod/cylinder: M8*8 / M8*8
Progressivity: around 33%
Speed & damping: low speed – high damping
Materials: piston rod and cylinder in stainless steel 316L

EP10
 Ø 8,1 10 26 M8 Ø 14

Exhaust screw U8

A8 INOX 316L
 Load max. 1560N

C8 INOX 303
 Load max. 1430N

Rod shroud W8-19-VA
 Ø 23
 L = stroke + 30mm