

GRIPFIT PUSH-IN FITTINGS

SERIES 7000 - COOLING

Tube external diameters: 6, 8 mm
Fittings threads: ISO-228 BSPP (G1/8, G1/4, G3/8).




- Resistant to water pressure and erosion
- Dimensional stability with water contact
- Resistant to corrosion

Series 7000 Cooling push-in fittings have been designed with a special technopolymer based on bio-sourced renewable raw materials that allow the component to resist water absorption, temperature variations and liquid cooling additives.


General Data

Diameters		Ø 6 mm	Ø 8 mm
Maximum working pressure	- 20° / + 40°	16 bar	16 bar
	+ 40° / + 70°	14 bar	12 bar
	+ 70° / + 100°	12 bar	10 bar
Minimum working pressure	-0,9 bar		
Temperature	- 20 + + 100 (See characteristics of tubes used)		
Threads	GAS cylindrical ISO-228 BSPP		
Connecting tube	Polyurethane (PU), Polyethylene (PE), Polyamide (PA), Fluoropolymer (PTFE), Polyester (HY3L), rigid metal pipe with smooth grooved metal end		
Fluid	Industrial water and cooling fluids (for other fluids consult our technicians)		
Materials	(A) Body = Technopolymer (PA11), Brass with chemical nickel plating		
	(B) Button = Technopolymer (PA66)		
	(C) Gripping ring = Stainless steel (AISI 301)		
	(D) Seals = EPDM		
	(E) Thread = Brass with chemical nickel plating		

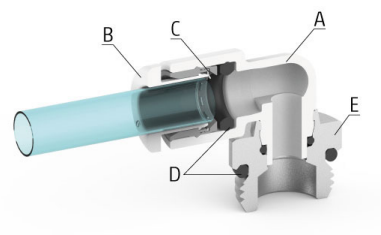

Male straight connector Mod. W6512


Chemical nickel-plated brass
Thread BSPP ISO-228



Mod.	A	D	C	F	G	H	L	SW	SW1	Weight [g]
W6512 6-1/8	6	G1/8	15,5	11,7	13,5	6	21	12	4	8
W6512 6-1/4	6	G1/4	15,5	11,7	16,4	7	22	15	4	11
W6512 8-1/8	8	G1/8	17,3	13,7	15,2	6	26	14	5	12
W6512 8-1/4	8	G1/4	17,3	13,7	16,4	7	24,5	15	6	14
W6512 8-3/8	8	G3/8	17,3	13,7	20,5	7	24	19	7	24

Female straight connector Mod. W6463


Chemical nickel-plated brass
Thread BSPP ISO-228



Mod.	A	D	C	F	G	L	P [min]	SW	Weight [g]
W6463 6-1/8	6	G1/8	10	11,7	13	25,5	6	12	13
W6463 6-1/4	6	G1/4	11,5	11,9	16,5	27	7	15	21,5
W6463 8-1/8	8	G1/8	9,5	13,7	15,2	27	6	14	13,5
W6463 8-1/4	8	G1/4	11,5	13,7	16,5	29	7	15	20,5
W6463 8-3/8	8	G3/8	12,5	13,7	20,5	30	8	19	25

Female plug Mod. W6750


Chemical nickel-plated brass



Mod.	A	G	L	Weight [g]
W6750 6	6	11,8	16,5	4,5
W6750 8	8	13,8	18,3	5,5

Male straight adaptor Mod. W6812

Chemical nickel-plated brass
Thread BSPP ISO-228



Mod.	D	G	H	L	T	SW	Weight [g]
W6812 6-1/8	G1/8	6	6	30	18	12	9
W6812 6-1/4	G1/4	6	7	32	18	15	17,4
W6812 8-1/8	G1/8	8	6	32,5	20,5	12	10,2
W6812 8-1/4	G1/4	8	7	34,5	20,5	15	17,4
W6812 8-3/8	G3/8	8	7	34,5	20,5	19	25

GRIPFIT PUSH-IN FITTINGS


SERIES 7000 - COOLING - DIMENSIONS

Swivel male elbow Mod. W7522

Thread BSPP ISO-228



Mod.	A	D	E	G	H	M	SW	Weight [g]
W7522 6-M5	6	M5	9,2	11,4	3,5	19	9	5
W7522 6-1/8	6	G1/8	10	11,4	5	19	12	8
W7522 6-1/4	6	G1/4	10	11,4	6	19	14	11
W7522 8-1/8	8	G1/8	13,5	13,7	5	21,5	12	11
W7522 8-1/4	8	G1/4	12	13,7	6	21,5	14	14
W7522 8-3/8	8	G3/8	12	13,7	7	21,5	19	19




Swivel male long elbow Mod. W7526


Thread BSPP ISO-228



Mod.	A	D	E	G	H	M	SW	Weight [g]
W7526 6-1/8	6	G1/8	23	11,4	5	19	12	13
W7526 6-1/4	6	G1/4	23	11,4	6	19	14	16
W7526 8-1/8	8	G1/8	29	13,7	5	21,5	12	18
W7526 8-1/4	8	G1/4	27	13,7	6	21,5	14	20
W7526 8-3/8	8	G3/8	27,5	13,7	7	21,5	19	24




Reducer junction straight Mod. W7800



Mod.	A	B	G	L	L1	Weight [g]
W7800 4-6	4	6	9,3	29,5	14	2
W7800 4-8	4	8	9,3	30,5	14	3
W7800 6-8	6	8	11,4	32,5	15,5	4
W7800 6-10	6	10	11,4	34,5	15,5	4
W7800 6-12	6	12	11,4	36,2	15,5	4
W7800 8-10	8	10	13,7	36,2	17,2	5
W7800 8-12	8	12	13,7	37,9	17,2	6

Equal junction elbow Mod. W7555




Mod.	A	B	G	L	L1	M	T	Weight [g]
W7555 6-6	6	6	11,4	23	8	19	17,5	4
W7555 8-8	8	8	13,7	25	9	21,5	18,5	5

Equal intermediate straight Mod. W7580



Mod.	A	B	G	L	Weight [g]
W7580 6	6	6	11,4	31,5	6
W7580 8	8	8	13,7	35,4	8




FITTINGS, CONNECTORS AND TUBES


Equal intermediate elbow Mod. W7550



Mod.	A	B	G	M	S	T1	T2	Weight [g]
W7550 6	6	6	11,4	19	4	11,4	7,5	6
W7550 8	8	8	13,7	21,5	4	13,7	8,5	9




Equal intermediate tee Mod. W7540



Mod.	A	B	G	L	M	S	T	T1	T2	Weight [g]
W7540 6	6	6	11,4	38	19	4	15	11,4	7,5	9
W7540 8	8	8	13,7	43	21,5	4	17	13,7	8,5	14



Reducer intermediate multiple tee Mod. W7545

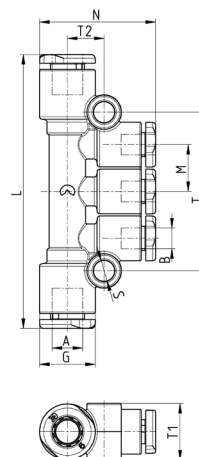

Mod.	A	B	G	L	M	N	S	T	T1	T2	Weight [g]
W7545 8-6	8	6	13,7	66	11,5	27	4	38,2	13,7	9	18

GRIPFIT PUSH-IN FITTINGS
SERIES 7000 - COOLING - DIMENSIONS


Equal intermediate Y Mod. W7560



Mod.	A	B	F	L	M	S	T	T1	T2	Weight [g]
W7560 6	6	6	23	36	11,4	4	14,5	11,5	14	9
W7560 8	8	8	27,2	41,5	13,5	4	17	14	15	15


FITTINGS, CONNECTORS AND TUBES

Plastic male plug Mod. B6900




Mod.	G	L	P	T	Weight [g]
B6900 6	6	31,5	8	22,5	1
B6900 8	8	34,5	12	24,5	2

Groove for metal pipe



Made by Camozzi grooving tool 8TRT (or machining)


A	B	C	D	E	F	G	H
3,4	4	5,3	10°	80°	0,5	30°	16,5
5,2	6	6,25	10°	80°	0,5	30°	18
7,2	8	6,4	10°	80°	0,5	30°	20



Made by machining


A	B	C	D	E	F	G	H	L	M	N
4,1	4	2	5,3	2	3,5	0,5x45°	16,5	75°	45°	0,5
6,1	6	4	5,4	2	5,5	0,5x45°	18	75°	45°	0,5
8,1	8	6	6	2	7,5	0,5x45°	20,5	75°	45°	0,5

Grooving tool for metallic tubes



Mod.	Tube Ø	A [max]	B	C	D	Weight [g]	E [spare wheel]
8TRT 6	6	140	43,5	39	50	450	RTRT 6
8TRT 8	8	143	43,5	39	50	450	RTRT 8

Plastic junction Mod. 7950



Mod.	B	L	L1	Weight [g]
7950 4	4	37	14	1
7950 6	6	39	15	1
7950 8	8	41	16	1
7950 10	10	44	18,5	1
7950 12	12	49	19	1