

Application

- Used for suppressing the noise of air release, applied to exhausted port of machine.

Feature

- Excellent noise suppression effect.
- Several options of materials (Brass, Stainless Steel, Plastic, Al)
- High durability and wide applications.
- Compact design is suitable for installing in confined space.



Product Code System

SL 01

① ②

① Type


② Thread Size

Thread Size	Metric Thread	Tape Pipe Thread									
Code	M5	01	02	03	04	06	08	10	12	16	
Size	M5	R1/8	R1/4	R3/8	R1/2	R3/4	R1	R1 1/4	R1 1/2	R2	

Thread Size	Tape Paralle Thread						
Code	G01	G02	G03	G04	G06	G08	
Size	G1/8	G1/4	G3/8	G1/2	G3/4	G1	

Case In Use


- Applied to exhausted port of machine.
- Sintering Silencer for anti-corrosion & high temperature place and
- ST Silencer for superior silence & contaminated place.



CAUTION

- Be sure to read the "Common Precautions" and "Using Precautions of Fitting Series" (P6) before using.
- Replace silencer after moderate use.
- Seal with Teflon, failure to do so will cause air leakage.
- Clean regularly to maintain good air release efficiency.
- Fastening the thread by force will cause damage on the body.


SL



- **Application** : Hydraulic & Pneumatic equipment, Water Purifier, Automobile parts, Water Ionizer, Water Heater, Tooling, etc.
- **Material** : Brass
- **Feature** : Silencer with Brass Sintering which is not burn is strong in heat and high pressure.

MODEL [ØD-T]						
Tube (Metric) - Thread(R)						
MODEL	R	A	B	L	D	H
SL M5	M5	4	3	20.7	4	9
SL 01	R 1/8	7	3.5	24.5	8	12
SL 02	R 1/4	9.5	4	31.5	10	15
SL 03	R 3/8	10.5	5	39.9	12	19
SL 04	R 1/2	12	6	47.3	15	22
SL 06	R 3/4	12	6.5	55.8	19	27
SL 08	R 1	14.5	7	70.5	32	36
SL 10	R 1 1/4	15	7.5	75.8	32	46
SL 12	R 1 1/2	15	8	81.8	38	52
SL 16	R 2	16.5	9	105.3	50	64


SCL



- **Application** : Hydraulic & Pneumatic equipment, Water Purifier, Automobile parts, Water Ionizer, Water Heater, Tooling, etc.
- **Material** : Steel, Brass
- **Feature** : Silencer with Brass Sintering which is not burn is strong in heat and high pressure. Silencer with steel is excellent in anti-corrosion. Superior mechanical strength.

MODEL [ØD-T]						
Tube (Metric) - Thread(R)						
MODEL	A	φD	φD1	φd	F	L
SCL M5	M5	6.5	5.5	3	5	16
SCL 01	R 1/8	12	8	6.5	7	22
SCL 02	R 1/4	15	11	9	9.5	27.5
SCL 03	R 3/8	19	14	11.5	10.5	38.5
SCL 04	R 1/2	23	18	15.5	12	45
SCL 06	R 3/4	30	25	22	12	57
SCL 08	R 1	37	30	28	14.5	66.5


SM



- **Application** : Hydraulic & Pneumatic equipment, Water Purifier, Automobile parts, Water Ionizer, Water Heater, Tooling, etc.
- **Material** : Brass
- **Feature** : Silencer with Brass Sintering which is not burn is strong in heat and high pressure. Easy to install it in the defined space, due to compact height.

MODEL [ØD-T]					
Tube (Metric) - Thread(R)					
MODEL	R	A	B	L	H
SM M5	M5	4	3	8.5	8
SM 01	R 1/8	7	3.5	11.5	12
SM 02	R 1/4	9.5	4	15	15
SM 03	R 3/8	10.5	5	17	19
SM 04	R 1/2	12	6	20	22
SM 06	R 3/4	12	6.5	20.5	27
SM 08	R 1	14.5	7	24.5	36


SCEL



- **Application** : Hydraulic & Pneumatic equipment, Water Purifier, Automobile parts, Water Ionizer, Water Heater, Tooling, etc.
- **Material** : Steel, Brass
- **Feature** : Silencer with Brass Sintering which is not burn is strong in heat and high pressure. Silencer with steel is excellent in anti-corrosion. Superior mechanical strength.

MODEL [ØD-T]							
Tube (Metric) - Thread(R)							
MODEL	A	R	φD	φd	F	S	L
SCEL M5	M5	7.8	5	2.5	4	7	17.5
SCEL 01	R 1/8	13.2	8.5	7	7	12	23.5
SCEL 02	R 1/4	16.2	11	9.5	9.5	15	30.5
SCEL 03	R 3/8	20.5	14	12.5	10.5	19	38.5
SCEL 04	R 1/2	25.6	17	15.5	12	23	44.5
SCEL 06	R 3/4	33.4	21	20.5	12	30	54.5
SCEL 08	R 1	40	26.5	26	14.5	36	69.5


SSL



- **Application** : Hydraulic & Pneumatic equipment, Water Purifier, Automobile parts, Water Ionizer, Water Heater, Tooling, etc.
- **Material** : Stainless Steel
- **Feature** : Silencer with stainless steel is strong in heat and high pressure. It is excellent in anti-corrosion and anti-chemicals.

MODEL [ØD-T]							
Tube (Metric) - Thread(R)							
MODEL	R	A	B	L	D	D1	H
SSL 01	R 1/8	7	4.5	29	8.2	9	12
SSL 02	R 1/4	9.5	4.5	33.5	10.5	12.5	15
SSL 03	R 3/8	10.5	5	40.5	12.5	15	19
SSL 04	R 1/2	12	6.5	50.5	16	18	23
SSL 06	R 3/4	12	7	59	22	25	30
SSL 08	R 1	15	8	71	27.5	30	36


SCTL



- **Application** : Hydraulic & Pneumatic equipment, Water Purifier, Automobile parts, Water Ionizer, Water Heater, Tooling, etc.
- **Material** : Steel, Brass
- **Feature** : Silencer with Brass Sintering which is not burn is strong in heat and high pressure. Silencer with steel is excellent in anti-corrosion. Superior mechanical strength.

MODEL [ØD-T]								
Tube (Metric) - Thread(R)								
MODEL	A	φD	φD1	φd	F	H	S	L
SCTL 01	R 1/8	12	10	6.5	7	3	8	24
SCTL 02	R 1/4	15	11.5	9	9.5	4	10	31.5
SCTL 03	R 3/8	19	15.5	11.5	10.5	5	13	39.5
SCTL 04	R 1/2	23	17.8	15.5	12	6	15	47.5
SCTL 06	R 3/4	30	25	22	12	6	19	59
SCTL 08	R 1	37	31	28	14.5	7	24	72


SCB



- **Application** : Hydraulic & Pneumatic equipment, Water Purifier, Automobile parts, Water Ionizer, Water Heater, Tooling, etc.
- **Material** : Steel, Red Copper
- **Feature** : It is strong in heat and high pressure.
Strong thread with red cooper.
It is excellent in anti-corrosion and anti-chemicals.
Superior mechanical strength.

MODEL [ØD-T]								
Tube (Metric) - Thread(R)								
MODEL	A	ØD	Ød	F	H	L	(mm)	
SCB M5	R M5	8	3	4.5	11	18		
SCB 6S	R 1/8	11	6.5	7	14	23.5		
SCB 6L	R 1/8	13	7	8	25	38		


STL



- **Application** : Hydraulic & Pneumatic equipment, Water Purifier, Automobile parts, Water Ionizer, Water Heater, Tooling, etc.
- **Material** : Brass
- **Feature** : Silencer with Brass Sintering which is not burn is strong in heat and high pressure.
Superior mechanical strength.

MODEL [ØD-T]								
Tube (Metric) - Thread(R)								
MODEL	A	ØD	ØD1	Ød	F	H	CH	L
STL 01	R 1/8	12	8.5	5	7	4.5	7	23.5
STL 02	R 1/4	14	11.5	6.2	9.5	4.5	9	29.5
STL 03	R 3/8	18	15.5	9	10.5	6	13	36.5
STL 04	R 1/2	24	20.5	13	12	7	17	45


SDL



- **Application** : Hydraulic & Pneumatic equipment, Water Purifier, Automobile parts, Water Ionizer, Water Heater, Tooling, etc.
- **Material** : Brass
- **Feature** : Silencer with Brass Sintering which is not burn is strong in heat and high pressure.
Excellent noise suppression effect.
Superior mechanical strength.

MODEL [ØD-T]								
Tube (Metric) - Thread(R)								
MODEL	A	ØD	ØD1	Ød	F	C	t	L
SDL 01	R 1/8	11	8	6	7	1.5	2	22.5
SDL 02	R 1/4	14	10	8.5	9.5	1.5	2	28
SDL 03	R 3/8	18	15	11	11	2	2	36
SDL 04	R 1/2	24	19	15	12	2	3	45
SDL 06	R 3/4	29.5	20	20	12	2.5	3	65
SDL 08	R 1	35.5	26.5	25	15	4	4	75


SBL



- **Application** : Hydraulic & Pneumatic equipment, Water Purifier, Automobile parts, Water Ionizer, Water Heater, Tooling, etc.
- **Material** : Brass
- **Feature** : Silencer with Brass Sintering which is not burn is strong in heat and high pressure.
Superior mechanical strength.

MODEL [ØD-T]								
Tube (Metric) - Thread(R)								
MODEL	A	ØD	ØD1	ØD2	Ød	F	H	L
SBL 01	R 1/8	12.5	10.8	9	6	7	2.5	23
SBL 02	R 1/4	16	13.2	11	7.5	9.5	3	29.5
SBL 03	R 3/8	20	16.5	14.5	10	10.5	3.5	37.5
SBL 04	R 1/2	26	20.5	18	12	12	4	45


SEL



- **Application** : Hydraulic & Pneumatic equipment, Water Purifier, Automobile parts, Water Ionizer, Water Heater, Tooling, etc.
- **Material** : Brass
- **Feature** : Silencer with Brass Sintering which is not burn is strong in heat and high pressure.
Superior mechanical strength.

MODEL [ØD-T]								
Tube (Metric) - Thread(R)								
MODEL	A	ØD	ØD1	Ød	F	B	S	L
SEL 01	R 1/8	10	8	4	7	4	13	29
SEL 02	R 1/4	14	12	6	9.5	4	17	35.5
SEL 03	R 3/8	16.5	15	9	10.5	5	22	36.5
SEL 04	R 1/2	20.5	19	12	12	7	27	44
SEL 06	R 3/4	24	22	16	14	10	32	65
SEL 08	R 1	31	28	22	16	10	41	75

ST




- **Application** : Used for suppressing the noise of air release, applied to exhausted port of machine.
- **Material** : PBT, PE
- **Feature** : Small size used for in low noisy applications.
Made of plastic, very light and strong.
Compact design is suitable for installing in confined space.

MODEL[ØD-T]									
Tube (Metric) - Thread(R, G)									
MODEL	R	ØB	L	C	A	H1	H2	G1	G2
ST M5	M5	7.5	18	-	5	-	-	-	-
ST 01	R 1/8	10.6	36.1	25.7	8	-	5.5	-	2.4
ST 02	R 1/4	22	63.7	43	10	19	12	8	2.7
ST 03	R 3/8	25	84.5	58	13.5	22	14	10	3.0
ST 04	R 1/2	30	93.5	64	15.5	27	19	10.5	3.5
ST G01	G 1/8	16	41	25	7	14	8	7	2
ST G02	G 1/4	21	64	42.5	10	18	12	10	2.5
ST G03	G 3/8	25	85	59.5	13	21.5	14.5	10	2.5
ST G04	G 1/2	30	94	67	14	26	19	10	3

※ The color of ST M5, STG is gray.


ST(M)
Silencers(Manifold)



- **Application** : Used for suppressing the noise of air release, applied to exhausted port of machine.
- **Material** : PBT, PE
- **Feature** : Excellent noise suppression effect
Made of plastic, very light and strong.
Compact design is suitable for installing in confined space.

MODEL[ØD-T]							
Tube (Metric) - Thread(R)							
MODEL	R	ØB	L	C	A	H	G
ST M02	R 1/4	15	46.5	36	8	10	2.5
ST M03	R 3/8	22	57.7	45	10	12	2.7


STP



- **Application** : Used for suppressing the noise of air release, applied to exhausted port of machine.
- **Material** : Nylon, PE
- **Feature** : Small size used for in low noisy applications.
Made of plastic, very light and strong.
Compact design is suitable for installing in confined space.

MODEL[ØD-T]						
Tube (Metric) - Thread(G)						
MODEL	A	ØD	d	F	S	L
STP G01	G 1/8	15	3	7	13	20.5
STP G02	G 1/4	18	5	8.7	15	29.2
STP G03	G 3/8	24	8	10	20	38.4


SMT



- **Application** : Used for suppressing the noise of air release, applied to exhausted port of machine.
- **Material** : PE
- **Feature** : Used for high flow and pressure applications.
Made of plastic, very light and strong.
Excellent noise suppression effect.

MODEL[ØD-T]				
Tube (Metric) - Thread(G)				
MODEL	A	F	ØD	L
SMT M5	M5	4	7	23
SMT G01	G 1/8	6.3	12.5	30
SMT G02	G 1/4	7.4	17	34.5
SMT G03	G 3/8	10.5	25	65
SMT G04	G 1/2	10.6	25	67
SMT G06	G 3/4	16	37	138
SMT G08	G 1	20	48	150


SLT



- **Application** : Used for suppressing the noise of air release, applied to exhausted port of machine.
- **Material** : PE
- **Feature** : Used for high flow and pressure applications.
Made of plastic, very light and strong.
Excellent noise suppression effect.

MODEL[ØD-T]				
Tube (Metric) - Thread(G)				
MODEL	A	ØD	L	F
SLT G01	G 1/8	16	32	6.5
SLT G02	G 1/4	20	42	8
SLT G03	G 3/8	24	56	10
SLT G04	G 1/2	24	56	10
SLT G06	G 3/4	48	114	18.5
SLT G08	G 1	48	114	18.5


SB



- **Application** : Hydraulic & Pneumatic equipment, Automobile parts, Tooling, etc.
- **Material** : Steel
- **Feature** : Used for high exhaust flow and unifying force applications.
Excellent noise suppression effect.

MODEL [ØD-T]								
Tube (Metric) - Thread(R)								
MODEL	A	F	φD	φd	L	B	S	
SB 01	R 1/8	7	10.4	6	35	3.5	11.1	
SB 02	R 1/4	11	13.4	8.5	45	4	14.29	
SB 03	R 3/8	12.8	16.5	12	53	4.5	17.4	
SB 04	R 1/2	15.8	21.5	15	70	5	22.2	
SB 06	R 3/4	17.7	26.5	20	80	6	27	
SB 08	R1	22.5	32.3	26	98	7	33.3	
SB 10	R 1/4	23	42.3	32	114	7.5	43	
SB 12	R 1/2	25.5	50.3	40	127	8.5	51	
SB 16	R2	26	59.3	50	140	9	60	


SAM

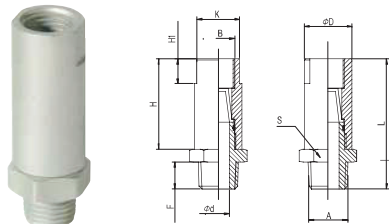

- **Application** : Hydraulic & Pneumatic equipment, Automobile parts, Tooling, etc.
- **Material** : AL, Brass
- **Feature** : Designed for exhausting water or remnants.
AL material strong in corrosion and poor environment.

MODEL [ØD-T]											
Tube (Metric) - Thread(R)											
MODEL	A	B	φD	K	φd	F	H	HI	S	L	
SAM 01	R 1/8	R 1/8	16	14	5.5	7	34	7	16	49	
SAM 02	R 1/4	R 1/4	18.5	17	8	9.5	39	10	19	55.5	
SAM 03	R 3/8	R 3/8	22	20	10	12.5	44	10	22	61.5	
SAM 04	R 1/2	R 1/2	28	26	14.5	16.5	55	10	28.7	77	
SAM 06	R 3/4	R 3/4	37.5	35	21	19	62	17.5	38	88	


SLM

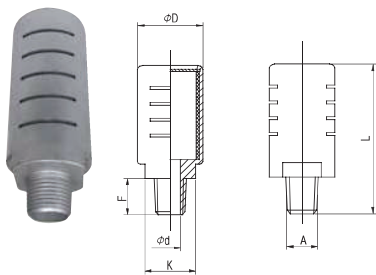

- **Application** : Hydraulic & Pneumatic equipment, Automobile parts, Tooling, etc.
- **Material** : AL
- **Feature** : Used for high exhaust flow and unifying force applications.
AL material strong in corrosion and poor environment.
Excellent noise suppression effect.
Used for large equipment with high exhaust flow.

MODEL [ØD-T]						
Tube (Metric) - Thread(R,G)						
MODEL	A	F	φD	φd	K	L
SLM 01	R 1/8	7	10.4	6	16	35
SLM 02	R 1/4	11	13.4	8.5	16	45
SLM 03	R 3/8	12.8	16.5	12	25	53
SLM 04	R 1/2	15.8	21.5	15	25	70
SLM 06	R 3/4	17.7	26.5	20	41	80
SLM 08	R1	22.5	32.3	26	41	98
SLM G01	G 1/8	7	10.4	6	16	35
SLM G02	G 1/4	11	13.4	8.5	16	45
SLM G03	G 3/8	12.8	16.5	12	25	53
SLM G04	G 1/2	15.8	21.5	15	25	70
SLM G06	G 3/4	17.7	26.5	20	41	80
SLM G08	G1	22.5	32.3	26	41	98


SAL

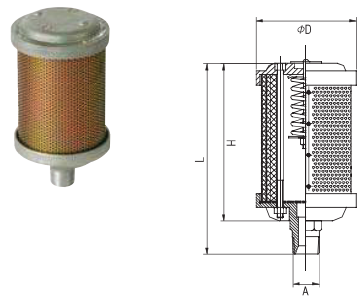

- **Application** : Hydraulic & Pneumatic equipment, Automobile parts, Tooling, etc.
- **Material** : AL
- **Feature** : Used for large equipment with high exhaust flow and noise.
AL material strong in corrosion and poor environment.
High silence effect with high density and exhaust flow.

MODEL [ØD-T]				
Tube (Metric) - Thread(R)				
MODEL	A	φD	H	L
SAL 04	R 1/2	80	125	159
SAL 06	R 3/4	87	156	180
SAL 08	R1	99	183	218
SAL 10	R1 1/4	99	183	218
SAL 12	R1 1/2	133	297	340
SAL 16	R2	133	432	470


SBC



- **Application** : Hydraulic & Pneumatic equipment, Automobile parts, Tooling, etc.
- **Material** : Brass
- **Feature** : Silencer with Brass Sintering has the flow controller which controls the speed of cylinder.

MODEL [ØD-T]							
Tube (Metric) - Thread(R)							
MODEL	R	A	B	C	L	H	M
SBC 01	R 1/8	7	3	10	34	12	M4 × 0.5
SBC 02	R 1/4	9.5	4	10.5	37	14	M5 × 0.5
SBC 03	R 3/8	10.5	4	15	48	17	M7 × 0.75
SBC 04	R 1/2	12	5	22	58.5	24	M9 × 0.75
SBC 06	R 3/4	12	7	24	66	27	M10 × 1
SBC 08	R 1	14.5	8	34	80.5	34	M10 × 1


SCC



- **Application** : Hydraulic & Pneumatic equipment, Automobile parts, Tooling, etc.
- **Material** : Brass
- **Feature** : Silencer with Brass Sintering has the flow controller which controls the speed of cylinder. The brass cover around filter provides strong body.

MODEL [ØD-T]							
Tube (Metric) - Thread(R)							
MODEL	R	A	B	LI	L	H	M
SCC 01	R 1/8	7	13.5	22.9	34.2	13	M4 × 0.5
SCC 02	R 1/4	9.5	15.5	27.5	38.5	14	M5 × 0.5
SCC 03	R 3/8	10.5	17.5	30.5	44	17	M7 × 0.75
SCC 04	R 1/2	12	20	34	48.5	22	M9 × 0.75
SCC 06	R 3/4	14.5	24	41.5	60	27	M10 × 1
SCC 08	R 1	16	31	50	70	34	M10 × 1

SDC



- **Application** : Hydraulic & Pneumatic equipment, Automobile parts, Tooling, etc.
- **Material** : Brass
- **Feature** : Silencer with Brass Sintering has the flow controller which controls the speed of cylinder. Easy to install it in the defined space, due to compact height.

MODEL [ØD-T]										
Tube (Metric) - Thread(R)										
MODEL	R	A	B	D	LI	L2	H	L	M	F
SDC 01	R 1/8	7	5	12	11.5	21.8	12	24	M6 × 0.75	10 × 2
SDC 02	R 1/4	9.5	6.5	14	15	25.8	15	29.5	M8 × 0.5	12 × 2
SDC 03	R 3/8	10.5	8.5	17	16.5	31	19	33.5	M10 × 1	14 × 2
SDC 04	R 1/2	12	8.5	18	20	33.5	22	37	M12 × 1	16 × 2
SDC 06	R 3/4	12	11	23	21	46	27	48	M14 × 1	20 × 3
SDC 08	R 1	15	15.5	28	25	55.5	34	57	M16 × 1.5	25 × 3