



Elegant and robust

The table leg **TU** is ideal for assembly work stations with high load and stability requirements.

Crossbars are fitted on the welded-on mounting plate. The crossbars are supplied with all the necessary screws.


The height is adjusted by means of a hydraulic pump operated by a hand crank or an electric drive unit.

The table leg is also available with hose rupture protection.

The 4-metre-long hydraulic hose is already mounted on the table leg and vented to ensure easy assembly.


The following accessories are available:

- crossbars of various lengths
- adjustable feet made of rubber or aluminium
- locking castors (load 70 kg)

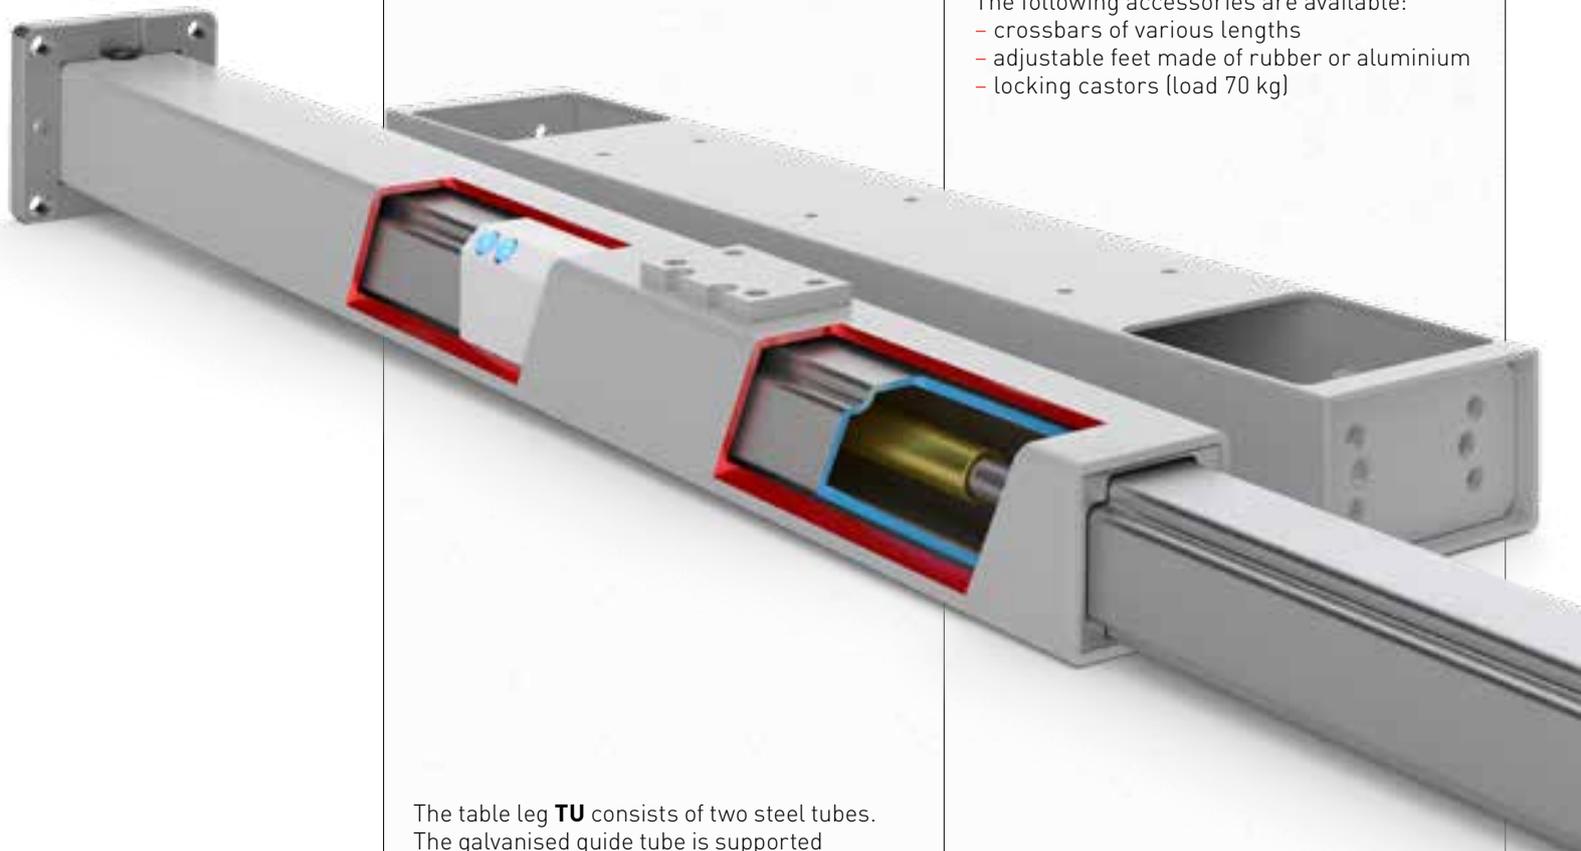

The table leg **TU** consists of two steel tubes. The galvanised guide tube is supported on bearings. The lifting movement is effected by a hydraulic cylinder.

Dimensions of **TU**

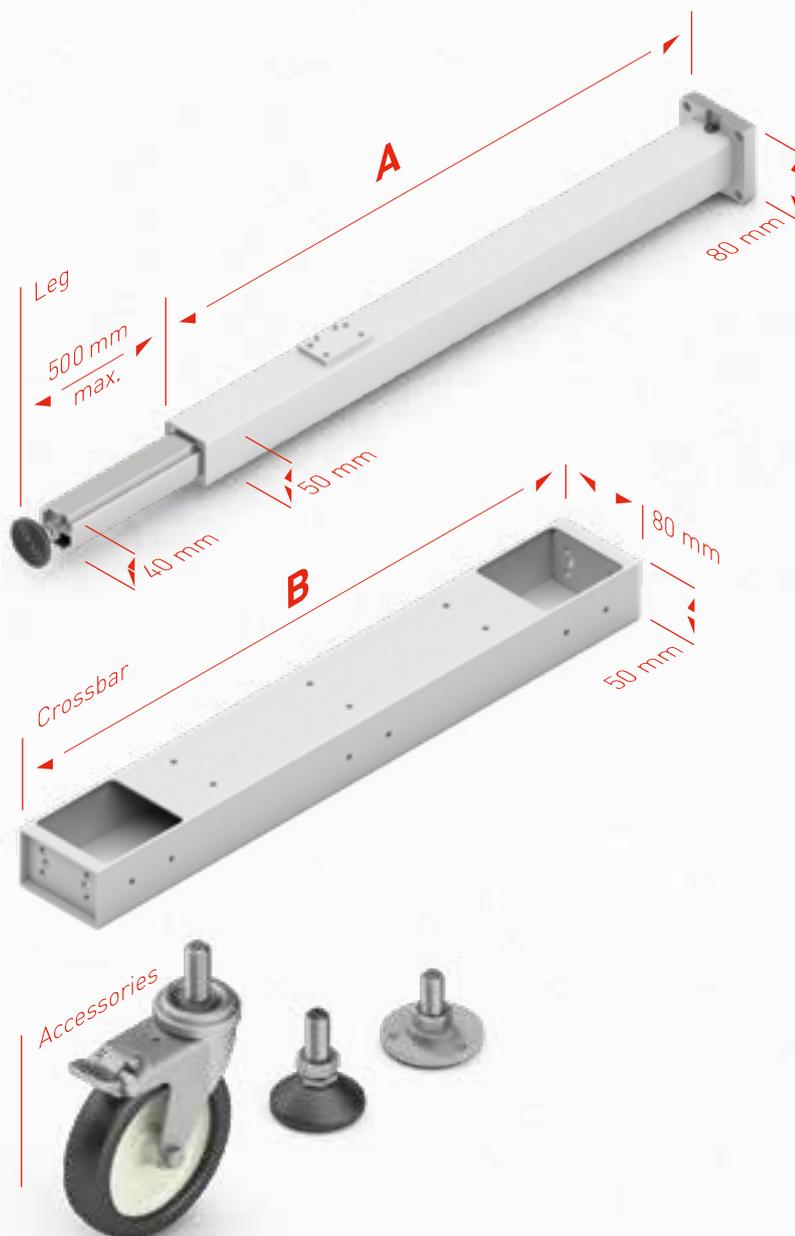

Technical data

- Robust leg with ball track
- Max. load power per leg:
1500 N (**TU 1450**)
2500 N (**TU 1840**)
- The system power depends on the pump used
- Lifting distance max. 500 mm
- Max. static bending moment $M_b = 350 \text{ Nm}$
- Max. dynamic bending moment $M_{bdyn} = 150 \text{ Nm}$
- The leg is supplied with a 4-m hydraulic hose pre-fitted as standard
- Colour : RAL 9006 white aluminium
- Food grade hydraulic fluid

Table leg **TU**

	A	Lift
TU 1450	710 mm	500
TU 1840	717 mm	400

Crossbar **TU**

	B
TU 550	550 mm
TU 750	750 mm
TU 950	950 mm
TU 1150	1150 mm
TU 1550	1550 mm