

OPEN FRAME PROPORTIONAL CONTROLLER

SERIES OF

Modular system for proportional control of pressure, flow and position.



- Closed loop flow control
- Compatible to be used with oxygen
- Composed of two base modules:
 - Head
 - Expansion
- Customised, turnkey solutions
- Analog, CANopen or IO-Link interface

The Open Frame Controller can be easily configured to meet specific application needs, to provide the most efficient, turnkey solutions, this reducing assembly times and system complexity.

The different Head and Expansion modules can be combined and driven through simple serial communications, making the control of complex applications easier.

Typical applications could include the mixing of different gases, piloting different pressures in different parts of the machine.

The new "Open Frame Controller" system is a platform for providing closed loop control of flow, pressure and position and is suitable for Industry 4.0 applications.

The system is composed of two base modules: Head and Expansion.

General Data

Construction	modular, compact, directly operated
Number of ways	2/2-way 3/3-way Parallel
Flow	max. 90 NL/min
Fluid	compressed air, inert gases and oxygen. Filtering according to ISO 8573-1 class 7.4.4
Supply pressure	-1 ÷ 10 bar
Operating pressure	-1 ÷ 10 bar
Ports	G1/8
Materials	seals: FKM
Mounting position	any position
Analogical input	0-10 V or 4-20 mA
Analogical output	0-10 V
Supply voltage, Current absorbed	24 VDC 0,3A or 12 VDC 0,6A (Head or Expansion Module)
BUS interface	CANopen CiA 301 IO-Link (connection type portclass B)
Protection class	IP20
Hysteresis	Pressure control version <= 3%FS; Flow control version <= 2%FS
Repeatability	Pressure control version <= 1%FS for pressures less than 1 Bar <= 2%FS; Flow control version <= 2%FS
Resolution	Flow control version <= 2%FS
Linearity	Pressure control version <= 2%FS; Flow control version <= 5%FS
Environmental temperature (min and max °C)	0 ÷ 60°C For low temperature on request.
Weight	300 g Single module

OPEN FRAME PROPORTIONAL CONTROLLER

SERIES OF - CODING EXAMPLES

Coding Examples

OF	-	0	P	1	1	-	L	L	W	2	-	D	-
OF	SERIES: Open Frame												
0	ELECTRICAL INTERFACE 0 = 0 + 10V analog, 24V power supply 1 = CANopen, 24V power supply 2 = IO-Link -> CAN, 24V power supply 8 = 4 + 20 mA analog, 24V power supply 9 = No header/24V 4 = 0 + 10V analog, 12V power supply 5 = CANopen, 12V power supply 7 = 4 + 20 mA analog, power supply 12V A = No header/12V												
P	CONTROL FUNCTION: A = Open Loop (flow 2-way) Head B = Open Loop (flow 3-way) Head & Expansion Q = Flow 2- way closed loop Head C = Flow 3 way closed loop Head & Expansion H = high flow pressure control, 2 ways (parallel) Head & Expansion N = Pressure control, closed loop 2 ways, Head P = Pressure control, closed loop 3 ways, Head & Expansion J = high flow 2 way flow control with booster (parallel) Head & Expansion W = Single ended position control (Head & Expansion) x1 Z = Double ended position control (Head & Expansion) x2												
1	SIZE: 1 = size 37 mm												
1	PNEUMATIC PORT: 1 = G1/8												
L	HEAD VALVE SIZE: F = Ø 1 mm (without Expansion valve) H = Ø 1,2 mm L = Ø 1,6 mm N = Ø 2 mm Q = Ø 2,4 mm												
L	EXPANSION VALVE SIZE: F = Ø 1 mm H = Ø 1,2 mm L = Ø 1,6 mm N = Ø 2 mm Q = Ø 2,4 mm												
W	SEALS MATERIAL: W = FKM												
2	BODY MATERIAL: 2 = brass/aluminum												
D	FULL SCALE OF THE RELATIVE SENSOR - ONLY FOR HEAD: B = 0,2 bar D = 2 bar E = 7bar F = 10 bar G = +/- 1 bar												
B	MAX. PRESSURE (DIFFERENTIAL SENSOR) ONLY FOR HEAD: 0 = no dp sensor B = 200 mbar C = 1 bar												
14	CALIBRATED NOZZLE SIZE (FOR HEAD ONLY): 00 = no nozzle 12 = 1,2mm 14 = 1,4mm 16 = 1,6mm 18 = 1,8mm 20 = 2,0mm 23 = 2,3mm 28 = 2,8mm												
OX1	USE WITH OXYGEN: = Not suitable for oxygen service OX1 = for oxygen service - level of cleanliness according to ASTM G93-03 Standard, Level E												

Operating pressure

The maximum operating pressure of the open frame depends on the following:

- Maximum pressure of the pilot valve;
- Full scale of the relative sensor.

Head valve size

	Ø Nozzle [mm]	Pmax [bar]
F	1	10
H	1,2	8
L	1,6	6
N	2	5
Q	2,4	4

Full scale of the relative sensor - Only for head

	Full scale [bar]
B	0,2
D	2
E	7
F	10
G	±1

The maximum operating pressure of the device corresponds to the minimum value of the identified pressures.

For example:

OF-OP11-LHW2-E-A-04


- Valve size "L", Ø 1,6 mm, Pmax = 6 bar;
- Valve size "H", Ø 1,2 mm, Pmax = 8 bar;
- Full scale of the relative pressure sensor "E", Pmax 7 bar;
- The maximum operating pressure is the lowest of the three; 6 bar.

Maximum flow


In case of versions with closed loop flow control (control functions Q, C and J) the maximum flow depends on the combination of Differential pressure sensor and Calibrated nozzle.

DIFFERENTIAL PRESSURE SENSOR		
	Calibrated nozzle	Maximum flow [NL/min]
B	Ø 1,4	10
B	Ø 1,6	13
B	Ø 1,8	16
B	Ø 2,0	20
C	Ø 1,6	29
C	Ø 2,0	45
C	Ø 2,3	60
C	Ø 2,8	90


Flow diagrams Open Frame - Closed loop flow control valve version

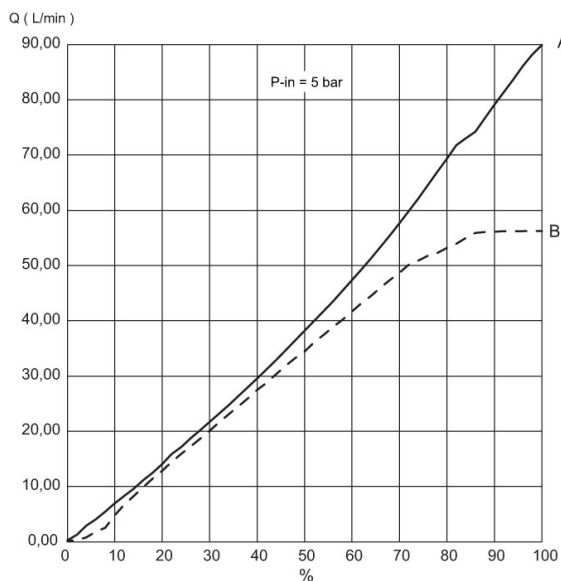

Q = Flow (l/min)
% = Percentage of the command signal
A = P out flow = P atmosphere
B = Delta flow P 1 bar

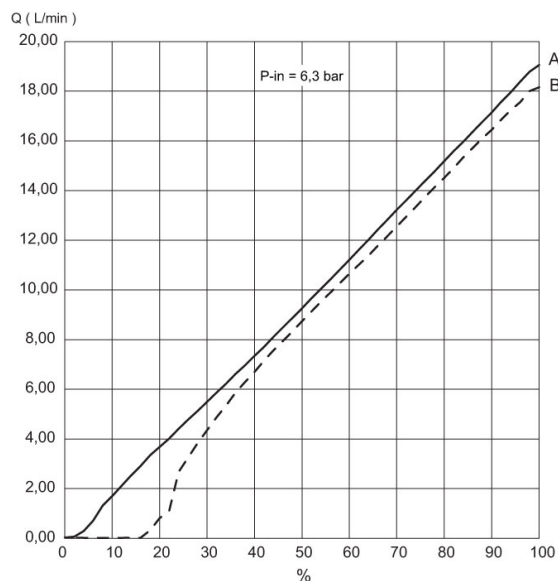


Q = Flow (l/min)
% = Percentage of the command signal
A = P out flow = P atmosphere
B = Delta flow P 1 bar

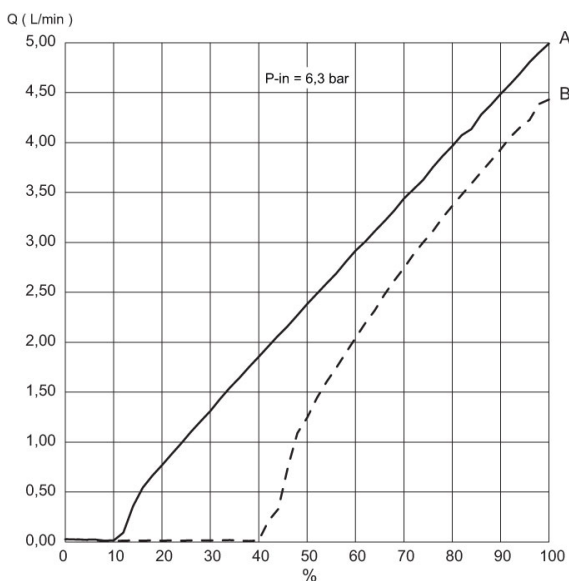


Q = Flow (l/min)
% = Percentage of the command signal
A = P out flow = P atmosphere
B = Delta flow P 1 bar

Nota 1: The graphs shown above are for reference only. Thanks to the high flexibility of the Open Frame, the different modules will be calibrated accurately according to the specifications of each application, exploiting the product in the best way possible.


Flow diagrams Open Frame – 3-way and 2-way Pressure regulator version

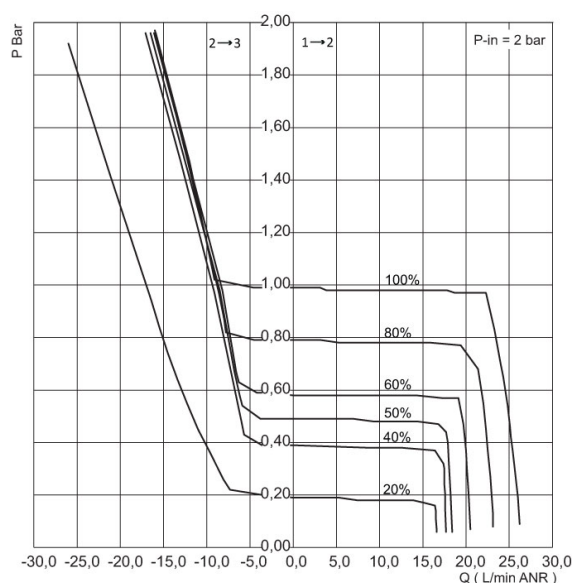

Operating pressure 1 bar

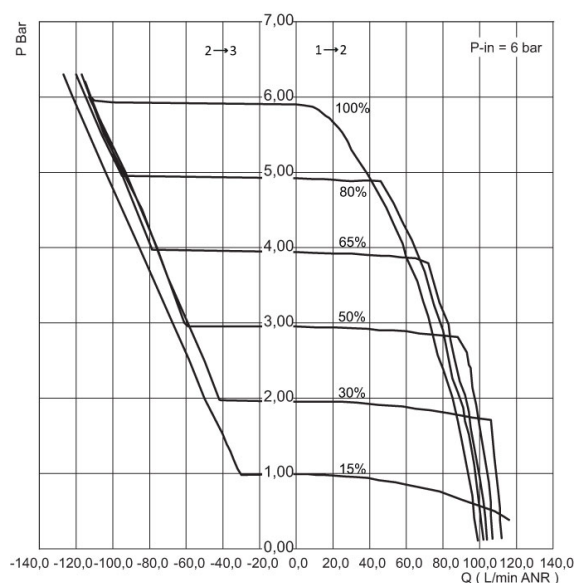

Operating pressure 6 bar

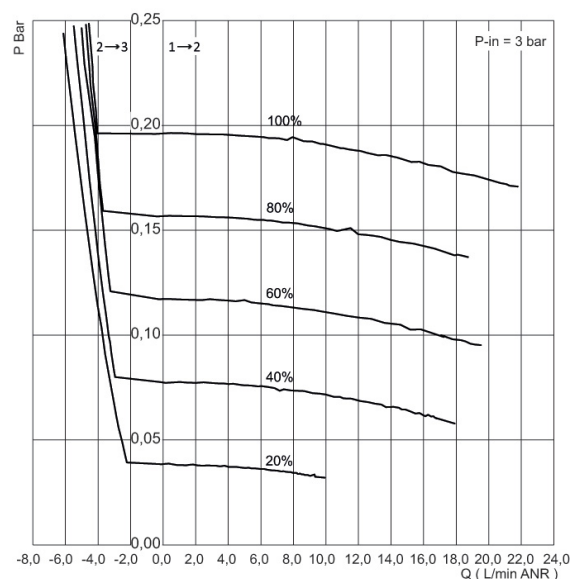


Operating pressure 0,2 bar

Note 1: Regarding the pressure regulation graphs shown above, please do not consider the negative values when you refer to the 2-way regulator, as these values relate to the exhaust flow which is absent in the 2-way version.


Note 2: The graphs shown above are for reference only. Thanks to the high flexibility of the Open Frame, the different modules will be calibrated accurately according to the specifications of each application, exploiting the product in the best way possible.

SERIES OPEN FRAME - PNEUMATIC SCHEME

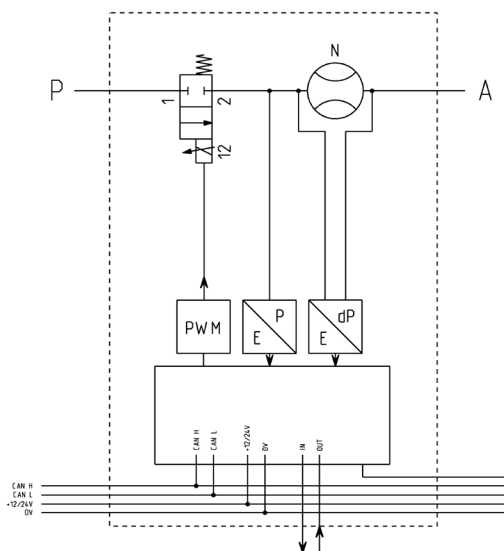

HEAD MODULE SCHEME

P= pressure inlet head
A= use of head
N= calibrated nozzle

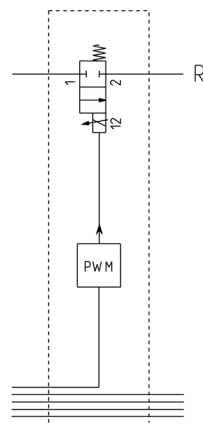

EXPANSION MODULE SCHEME


R= expansion exhaust

MOUNTING EXAMPLE


To correctly mount the modular HEAD and EXPANSION components, insert the fixing elements (A) in the special seats between the two bodies and the O-Ring (C) in the seat on the EXPANSION body.

Join the two bodies and fix them into position with the fixing nuts (B), close to the side in contact.

The positions of the covers (D), prepared at the factory, cannot be changed.

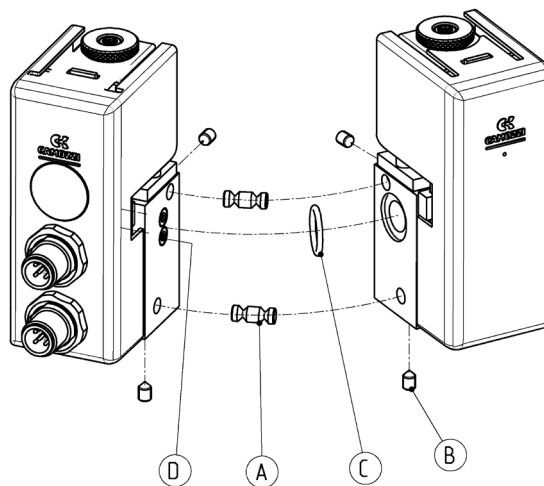

Open Frame proportional controller - dimensions

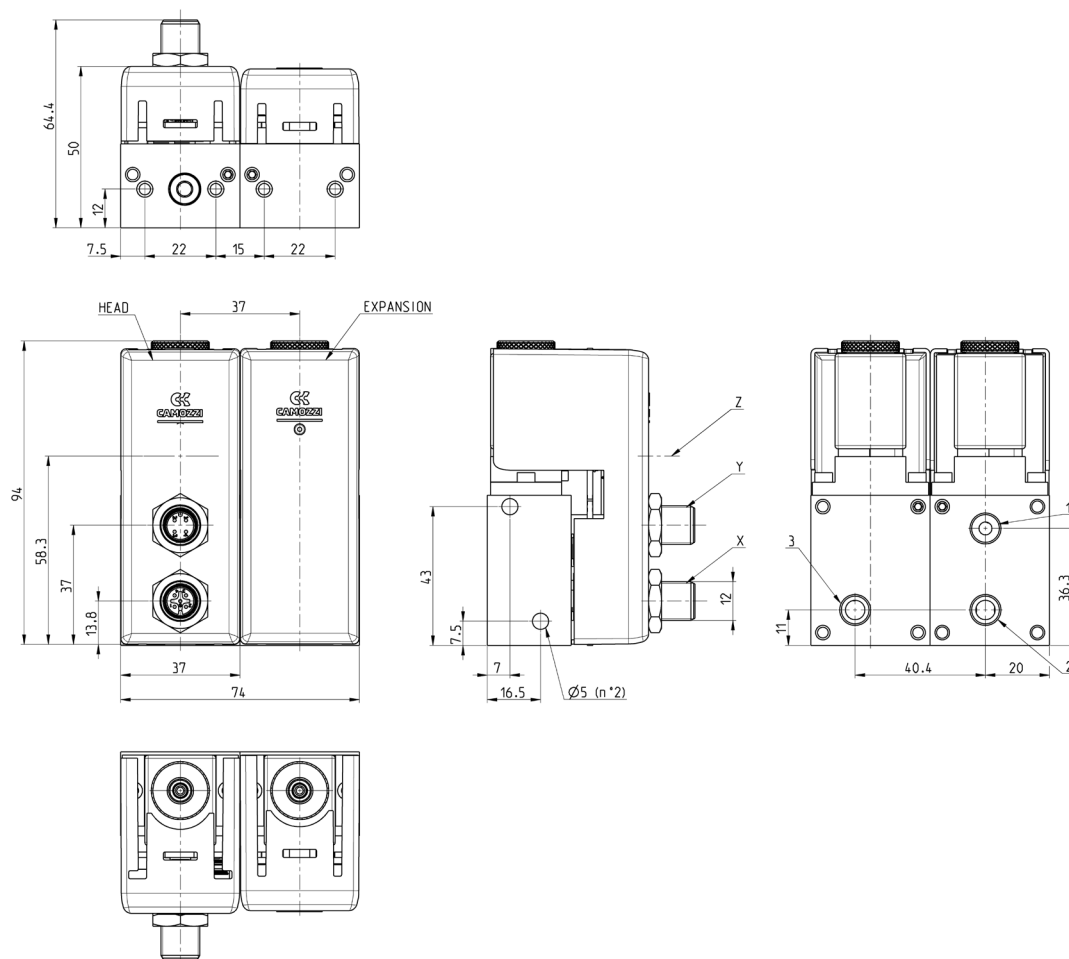

Mod.	X	Y	Z	A	B	C	M4
OF-2	M12 5 PIN (Male)	M12 5 PIN (Male)	Micro USB	G1/8	G1/8	G1/8	M4 thread for mounting

Mounting bracket for DIN rail Open Frame




DIN EN 50022 (7,5mm x 35mm - width 1)

Supplied with:
 1x mounting bracket
 1x screw M4x6 UNI 5931

This accessory cannot be used with the Light sub-base.

Mod.
PCF-K8P




PROPORTIONAL TECHNOLOGY

8



The kit includes:
 2x shaped steel pins
 4x steel grub screws
 1x electrical connection

Mod.
OF-M-PIN




Rear bracket OPEN FRAME



The kit includes
 1x zinc-plated bracket
 2x M4x8 white zinc-plated screws


Mod.
OF-ST

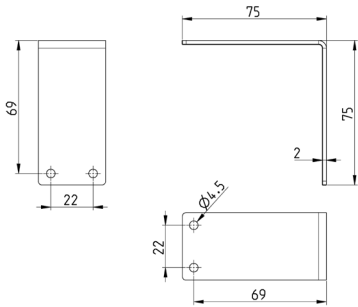

USB to Micro USB cable Mod. G11W-G12W-2




For the hardware configuration of the Camozzi products

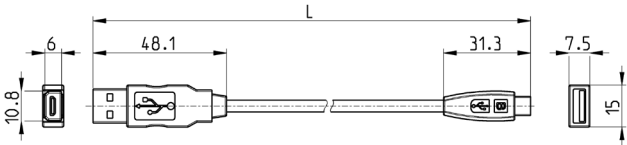


Mod.	Description	Connections	Material for outer sheath	Cable length "L" (m)
G11W-G12W-2	Black shielded cable 28 AWG	Standard USB to Micro USB	PVC	2

Cable with M12, 5 pin, connector, female, straight, shielded

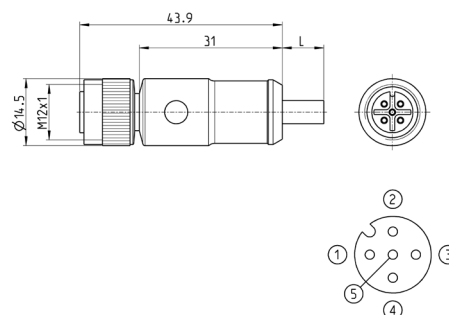

Mod.	Cable length [m]	Shielding	N° wires
CS-LF05HB-C200	2	Unshielded	5
CS-LF05HB-C500	5	Unshielded	5
CS-LF05HB-D200	2	Shielded	5
CS-LF05HB-D500	5	Shielded	5


Cable with M12 5 pin connector, 90°, female

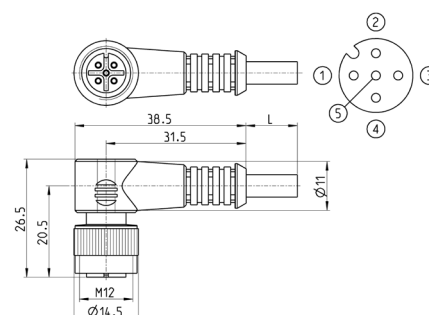

Mod.	Cable length [m]	Shielding	N° wires
CS-LR05HB-C200	2	Unshielded	5
CS-LR05HB-C500	5	Unshielded	5
CS-LR05HB-D200	2	Shielded	5
CS-LR05HB-D500	5	Shielded	5


Connector M12, 5 pin, female, straight

CANopen bus IN

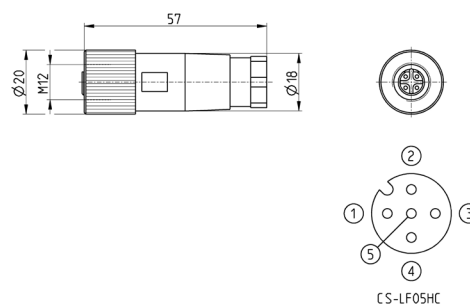

Mod.	Description	Type of connector	Connection
CS-LF05HC	For wiring	Straight	M12 A 5 pin female

Connector M12, 5 pin, female, angular

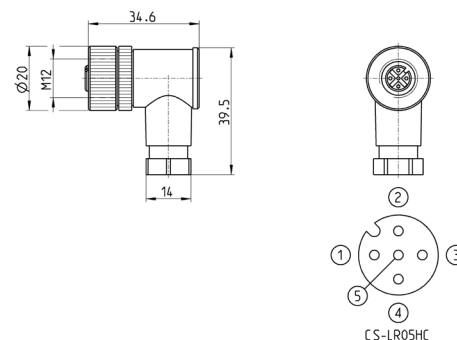

Mod.	Description	Type of connector	Connection
CS-LR05HC	for wiring	90°	M12 A 5 pin female