

NDP-50FAN Specifications

SolidPRO® Flapper

Port Dimensions (158.5 GPM Max.)

Intake & discharge connection:

Aluminum (ADC-12) 2" ANSI B16.5 #150
(with tapped 2" Female NPT)

Air inlet (incl. ball valve): 3/4" Female NPT

Air exhaust (incl. silencer): 1" Female NPT

Maximum Liquid Temperature*

Diaphragm Material	Temperature
Buna N	180°F (82°C)
Santoprene® (TPO)	180°F (82°C)

*The maximum liquid temperature for metal pumps is determined by the elastomer (diaphragm material).

Air Supply Pressure (All Models)

30 – 100 PSI (2~7 kgf/cm²)

Discharge Volume Per Cycle

Rubber diaphragm: 0.63 gallons

Maximum Cycles Per Minute

Rubber diaphragm: 251

Maximum Size Solid

2"

Maximum Dry Suction Lift

Rubber fitted pump capability: 24'

Air Motor

Aluminum air motor standard.

Valve Type

Flap Valve

Notes: Santoprene® fitted pumps include EPDM wetted o-rings & TPO flap valves.




Aluminum

Dimensions: 27.92"L x 16.30"W x 32.62"H


Net Wt.: 115 lbs. (52 kg)

Shipping Wt.: 130 lbs.


Model Number Nomenclature

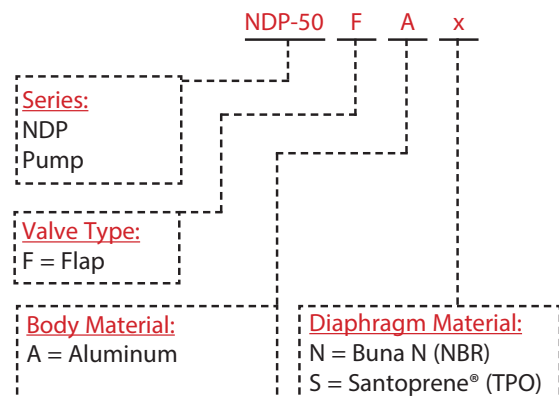

Performance Curve

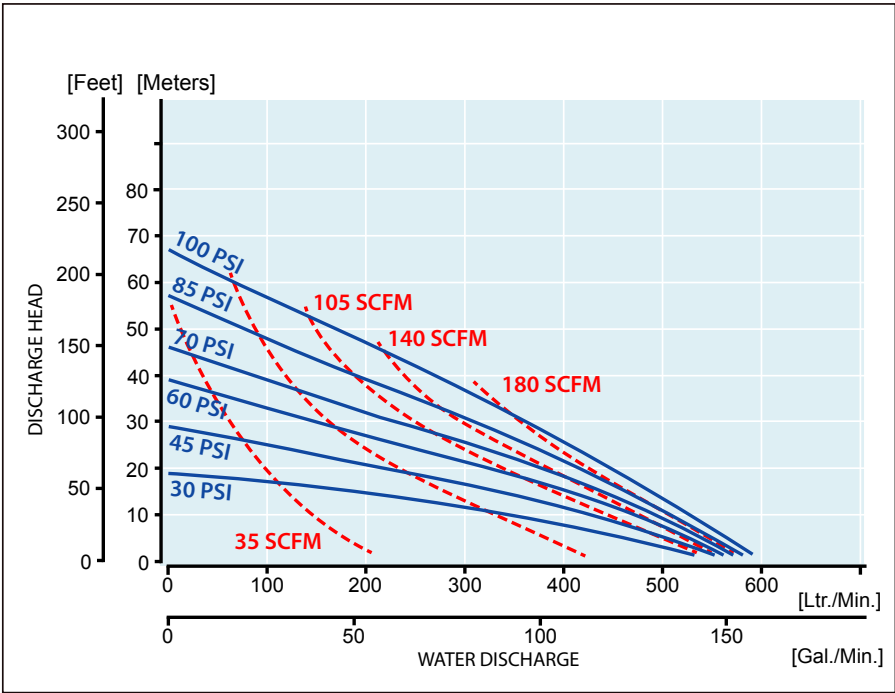

Dimensions

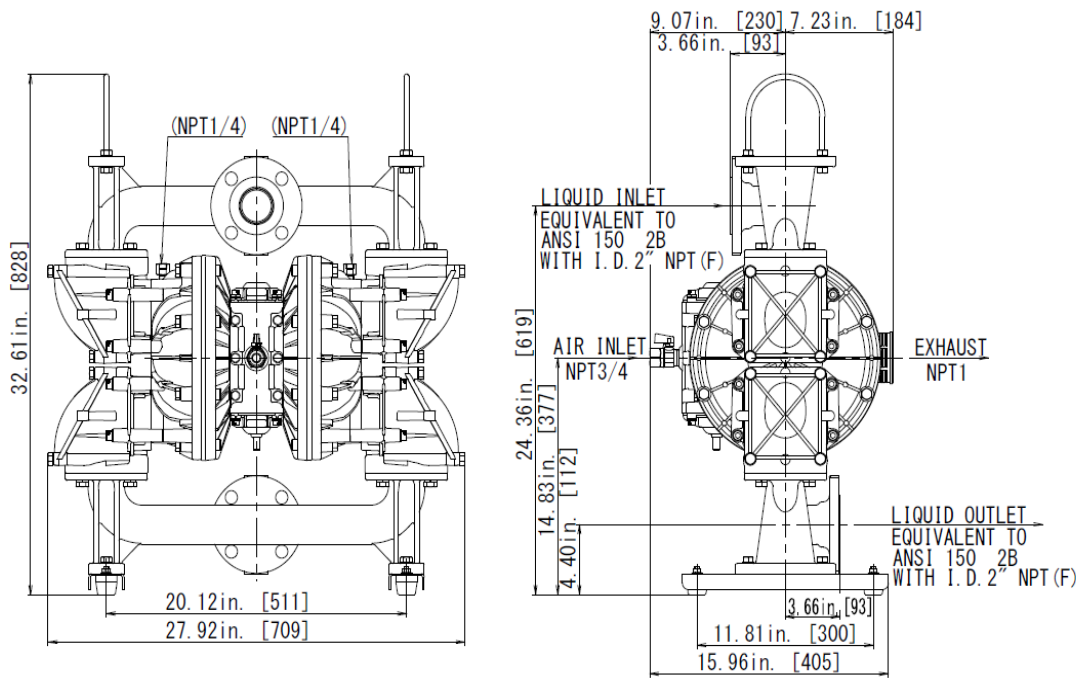

Yamada America, Inc. 955 E. Algonquin Rd., Arlington Heights, IL 60005
USA Toll-Free: 800-990-7867 | Phone: 847-631-9200 | Fax: 847-631-9273
Email: sales@yamadapump.com | Web: yamadapump.com

© 2025 Yamada America, Inc.



AutoCAD® is a registered trademark of Autodesk, Inc.

Hytrel® is a registered trademark of E.I. du Pont de Nemours and Company.

Kynar® is a registered trademark of Arkema.

Nordel™ is a trademark of DuPont Dow Elastomers.

Ryton® is a registered trademark of Chevron Phillips Chemical Company.

Santoprene® is a registered trademark of Advanced Elastomer Systems.

Viton® is a registered trademark of DuPont Performance Elastomers.

Swagelok™ & **VCR™** are trademarks of the Swagelok Companies.

Flaretek® is a registered trademark of Entegris.

Garlock ONE-UP® is a registered trademark of W.L. Gore & Associates.

Yamada® is a registered trademark of Yamada America, Inc.

SolidPRO Designed to Pump Fluids Containing Solids® is a registered trademark of Yamada America, Inc.

Xtreme Duty Pro XDP® is a registered trademark of Yamada America, Inc.

The Proof's in the Pump® is a registered trademark of Yamada America, Inc.

The Proof is in the Pump® is a registered trademark of Yamada America, Inc.

Engineered to Perform. Designed to Outlast.® is a registered trademark of Yamada America, Inc.

Due to Yamada's continued commitment to product improvement, specifications may change without notice.



Yamada America, Inc. 955 E. Algonquin Rd., Arlington Heights, IL 60005
USA Toll-Free: 800-990-7867 | Phone: 847-631-9200 | Fax: 847-631-9273
Email: sales@yamadapump.com | Web: yamadapump.com

© 2025 Yamada America, Inc.