



JDK Serie / JDK series

JDK-S-150 / JDK-S-200 / JDK-S-250


Produktmerkmale

- Kompaktes Design
- Energieeffizient
- Metallgehäuse

Product characteristics

- Compact design
- Low energy consumption
- High quality metal housing

Abmessungen / Dimensions

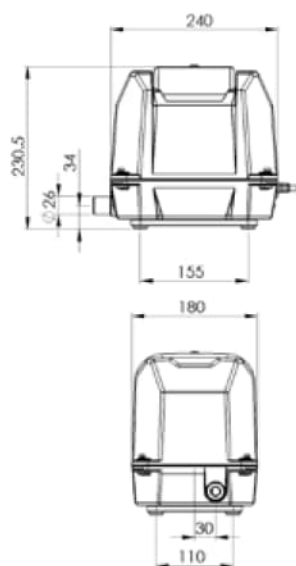

Technische Daten / Technical data

Modell / <i>Model</i>			JDK-150	JDK-200	JDK-250
Volumenstrom ¹⁾ / <i>Air flow</i> ¹⁾	l/min	0 mbar	270	290	340
		50 mbar	240	270	325
		100 mbar	210	245	300
		150 mbar	180	220	270
		200 mbar	150	200	250
Spannung ²⁾ / <i>Voltage</i> ²⁾	VAC		230		
Wirkleistung / <i>Effective Power</i>	W	200 mbar	115	180	225
Geräuschpegel / <i>Noise level</i>	dB(A)		44	46	52
Abmessungen / <i>Dimensions</i>	mm	L x B x H L x W x H	240 x 180 x 230.5		
Schlauchanschluss / <i>Connection</i>	mm	Ø außen Ø outside	26		
Nettogewicht / <i>Net weight</i>	kg		10		

¹⁾ Die tatsächliche Leistung kann bis zu +/- 10% von den Angaben abweichen

²⁾ Werte bei 50 Hz

¹⁾ Product performance may vary +/- 10% from performance curves

²⁾ Values at 50 Hz

Ersatzteile / Zubehör Spare Parts / Accessories

Ersatzteile / Spares	Bestell-Nr. / Code
Reparatur-Kit / Service Kit	K-JDK-150/500-D
Membran-Set / Diaphragm Sets	D-JDK-150/500
Filter / Filter	FILTER-JDK-150/-500
Magnet / Magnet	K-JDK-150/200-300/400-M
	K-JDK-250/500-M
Zubehör / Accessories	
Manometer / Pressure Gauge	BP1 / 44M
L-Schlauchstück mit Drucksicherheitsventil / L-Typehose with pressure relief valve	SE45-L

Leistungsdaten / Performance data

230 V / 50 Hz, Optimaler Einsatzbereich
230 V / 50 Hz, Optimal operating span

