

THE COUPLING.



PRECISION COUPLINGS

AUGEMENTED REALITY APP

NEXT LEVEL INFORMATION DISCOVER THE FUTURE TODAY

The R+W app blurs the borders between the real and virtual worlds. Thanks to Augmented Reality technology, you can experience the R+W product portfolio like never before



Every product image in our catalog shown with this icon contains additional information. With your smartphone or tablet, you unlock all of this in virtual reality.

JUST A FEW STEPS TO AUGMENTED REALITY

1. Download the free R+W App from the App Store or Google Play. It is available for all devices with iOS version 7.0 or higher, as well as Android devices with version 4.1 or higher.
2. Wherever you see an image with the Augmented Reality icon in the catalog, you can use the Augmented Reality app to learn more about product.
3. The app will recognize the image and display the AR content. To enter the virtual world, simply hold your mobile device 20-30 cm above the brochure and move it slightly. 3D models, animations, videos, and other information are waiting to be discovered.



Download the R+W AR App free from the App Store or Google Play now.
The R+W App is also available as Windows version (rw-couplings.com/app/).



NEXT LEVEL COMMUNICATION

SOCIALIZING WITH R+W

Would you like to learn more about R+W and our couplings? We are pleased to take you into the world of R+W. On our YouTube channel, you can find several videos pertaining to our product line.

Are you more interested in application examples for our couplings? If so, please take a look at our case studies that can be found on our homepage. Here you can also subscribe to the R+W newsletter or find a link to download the R+W App.

And if you simply cannot get enough of us, you can find us on Facebook, Google+, and Twitter.



WHO WE ARE.

ABOVE ALL R+W IS: THE PERFECT COUPLING

When R+W Antriebselemente GmbH was first established in 1990 in Klingenberg, Germany, there were three people on board. The head office is still there, but we are now more than 220 people, with subsidiaries in the USA, China, Italy, Singapore, France and Slovakia, and are partnered with over 60 well established distributors in more than 50 countries throughout the world. Many developments have lead to this success, but most importantly it was brought about by our endless search for the best possible coupling solutions as well as the high esteem in which we hold all of our customers.

WE PROVIDE INSPIRED SOLUTIONS
BACKED BY SOUND PLANNING AND
DESIGN.

R+W stands for expertise in the development of solutions for precise torque transmission. The focus of our development is on innovative coupling systems for all sectors of precision drive technology. As a leading manufacturer of precision couplings and line shafts, we strive to maintain a permanent status of technology leadership in our field. Our central claim: R+W couplings ensure precision for process reliability and efficiency, and to that end we seek perfection.

Optimized for technology and business, our product portfolio includes:

- ▶ **Bellows couplings**
- ▶ **Elastomer insert couplings**
- ▶ **Ball-detent safety couplings**
- ▶ **Line shaft couplings**
- ▶ **High torque industrial couplings**
- ▶ **Development of customized solutions with collaboration from start to finish, including:**
 - Consultation
 - Conception
 - Engineering analysis
 - Prototyping
 - Manufacturing

TO THE TOP OF THE WORLD WITH TONS OF DRIVE

Our guiding principle, DRIVE, is a mutual calling that unifies our 220 employees: To manufacture top-notch, high-performance couplings and torque limiters for the global market; precise to the micrometer.

With DRIVE, we present ourselves as a Dynamic, Reliable, Innovative and Versatile market and technology leader that strives for Expansion by making further development and improvement part of our everyday business.

DRIVE MEANS

DYNAMIC

Dynamics fascinate us. For our team "dynamic" means outstanding expertise in all matters involving torque transmission and ideal collaboration for the acquisition and application of company knowledge. We work shoulder to shoulder with our customers on a dynamic course toward performance and corporate excellence!

RELIABLE

Our course is set for the future! R+W makes state of the art, zero backlash, wear free coupling systems for the leading industries in drive technology. In addition, we manufacture pioneering special solutions produced with absolute precision. Our reliable products are a sound investment in the efficiency and dependability of your systems and machines.

INNOVATIVE

We understand that adaptability is one of the most significant strengths of our company. A creative work environment based on the spirit of innovation does not happen by accident; instead it is the result of consistent effort.

OTHER R+W COUPLINGS

Aside from the products detailed in this catalog, we also offer quality shaft couplings and torque limiters for high powered industrial drives.

More information on these can be found in our **INDUSTRIAL COUPLINGS** catalog.

In order to remain at the heart of technology development, we network tightly with the elite industry leaders and collaborate intensively with universities and technical colleges. This has led to the creation of a prolific research & development department in which we have been able to prototype and test our own inventions.

VERSATILE

Versatility at R+W begins with leveraging the creativity, skills and capacities of our employees. With a broad foundation and a solution oriented mindset, we work in accordance with customer requirements and respond quickly to changes. For this very reason we are also the perfect partner for designing, engineering, and manufacturing unique and special coupling. We are particularly proud of the high level of diversification of our products and of our dedication to continuous improvement.

EXPANDING

Expansion is a critical objective for the future of our company. Most importantly for us this means maintaining genuine industry contacts in a continuously growing global network of expertise. Our customers benefit from our broad based proximity to the market and from strong collaboration with our partners. This allows us to stay focused on our customers' most up to date requirements, keeping us flexible and able to respond to inquiries with the right solution!



APPLICATIONS AND DESIGN FEATURES PRECISION COUPLINGS

SIZING AND SELECTION

P. 9

INSTALLATION AND HANDLING

P. 21



P. 29

from **2 – 10,000 Nm**

AREAS OF APPLICATION

for highly dynamic motion in:

- Machine tools
- Packaging machinery
- Printing machinery
- Paper converting machinery
- Labeling machinery
- Automation equipment

FEATURES

- torsionally stiff
- low moment of inertia
- zero backlash
- highly concentric
- naturally very well balanced
- precise transmission
- infinite life
- wear and maintenance free
- easy to install

TORSIONALLY STIFF MINIATURE BELLows COUPLINGS



P. 49

from **0.05 – 10 Nm**

AREAS OF APPLICATION

for precise transmission of angular motion and torque in:

- Linear actuators
- Semiconductor machinery
- Medical devices
- Lab automation systems
- Micro pumps
- Test and measurement systems

FEATURES

- zero backlash
- torsionally stiff
- precise transmission
- infinite life
- easy to install

BACKLASH FREE SERVO DISC PACK COUPLING



P. 63

from **25 – 100 Nm**

AREAS OF APPLICATION

For dynamic drive applications in

- Machine tools
- Printing applications
- Extruders
- Test stands

FEATURES

- High misalignment compensation
- Corrosive and/or high temperature environments
- Easy installation

from **0.5 – 25,000 Nm**

AREAS OF APPLICATION

for vibration damping torque transmission in:

- Packaging machinery
- Pump drives
- Machine tools
- Lift systems
- Conveyors
- Labeling machinery

FEATURES

- vibration damping
- electrically isolating
- backlash free
- calibrated preloaded insert
- concentrically machined hubs

BACKLASH FREE TORQUE LIMITERS



from **0.1 – 2,800 Nm**

AREAS OF APPLICATION

for overload protection in:

- Machine tools
- Packaging machinery
- Metal forming equipment
- Test stands
- Pump drives
- Assembly systems

FEATURES

- protects from rotating inertia as well as motor torque
- precise torque overload protection
- patented preload for zero backlash
- compact simple design
- low moment of inertia
- extremely fast disengagement
- low residual friction after disengagement

BACKLASH FREE AND SMOOTH RUNNING LINE SHAFTS



from **9 – 25,000 Nm**

AREAS OF APPLICATION

for spanning large distances between shaft ends in:

- Material handling systems
- Printing machinery
- Packaging machinery
- Theatre automation
- Gantry systems
- Screw jack systems

FEATURES

- installation and removal without disturbing adjacent equipment
- self-supporting up to 6 meters
- no intermediate support bearing required

FOR USE IN HAZARDOUS ENVIRONMENTS





AREAS OF APPLICATION

for safer operation in industries with explosive atmospheres, such as:

- Oil & gas extraction
- Petrochemical processing
- Munitions manufacturing
- Bulk and powder processing
- Paint systems

FEATURES

- For hazard zones 1/21 and 2/22 these couplings are authorized under directive 94/9/EG.
- Bellows couplings
 - Elastomer couplings
 - Torque limiters
 - Line shafts
 - Disc pack couplings

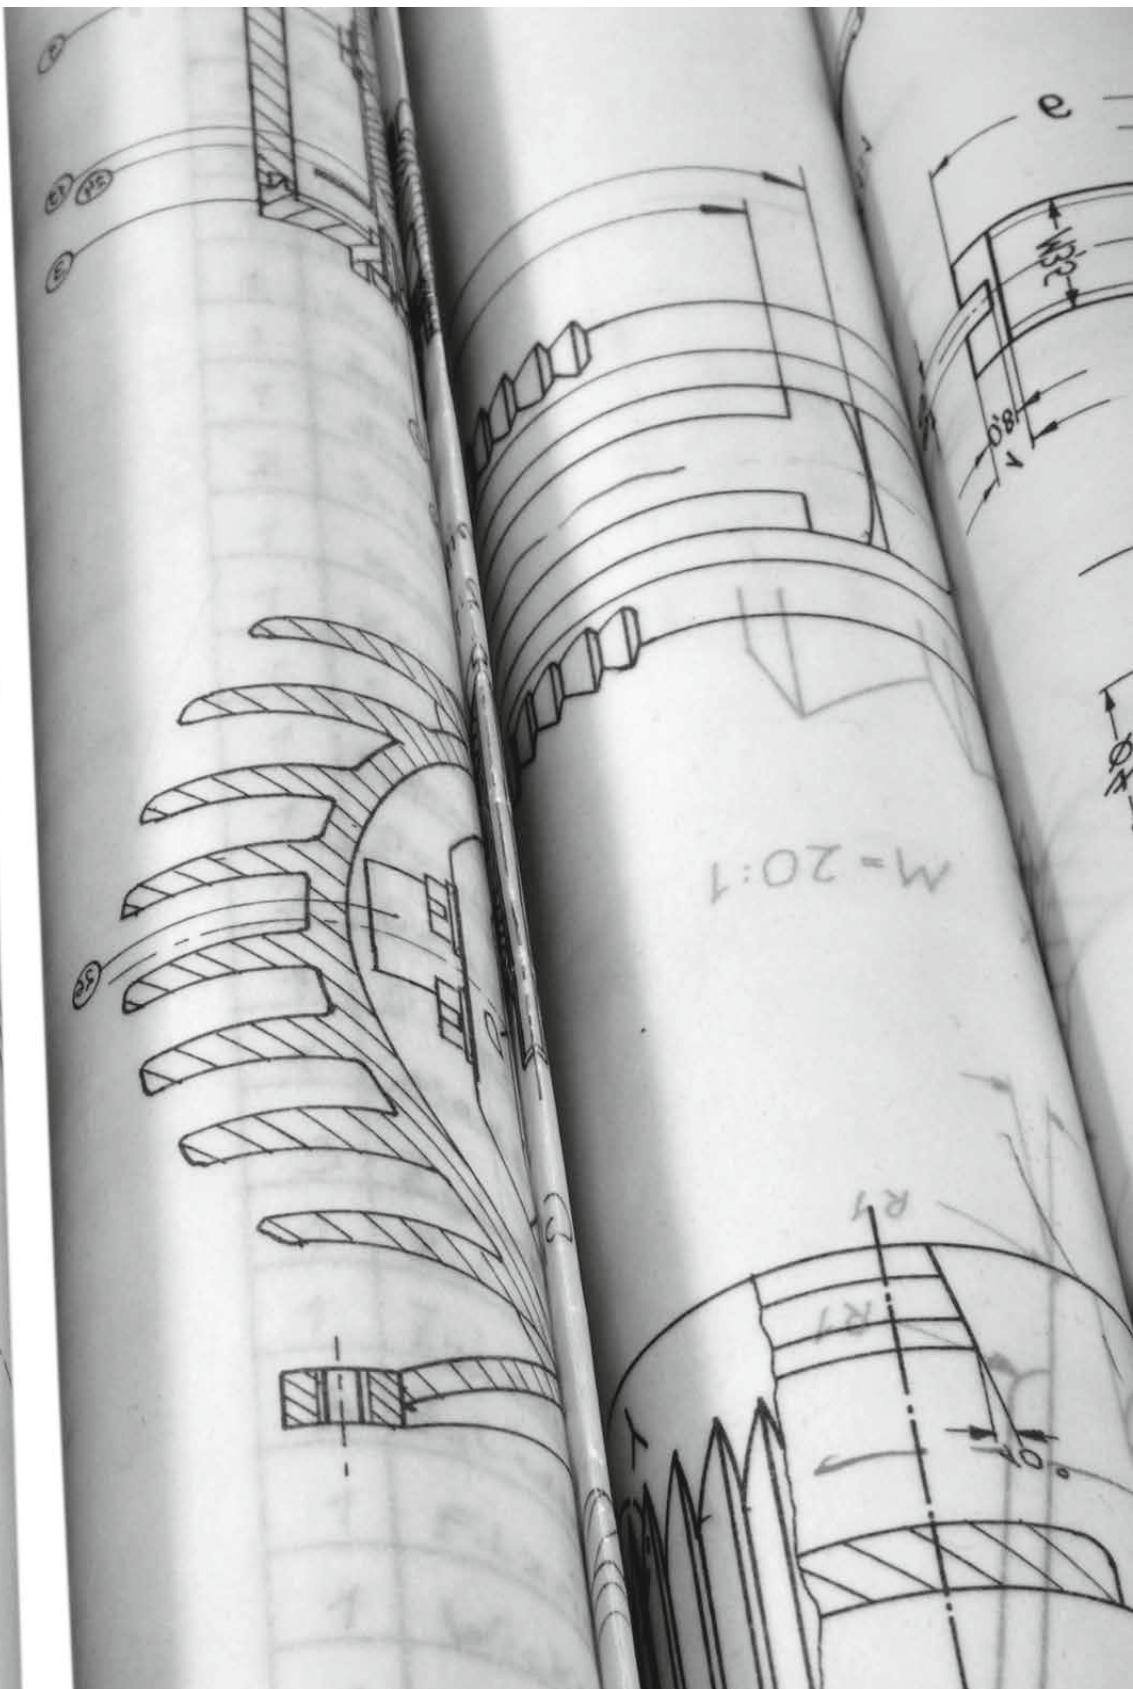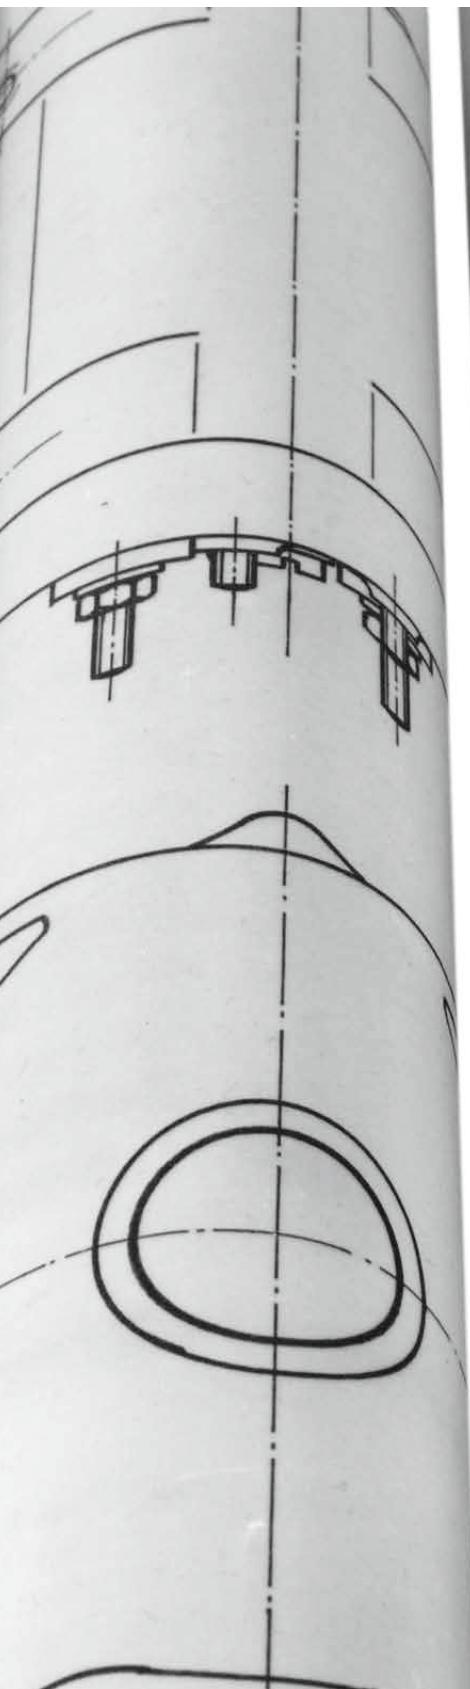

SIZING AND SELECTION

According to
DIN 740 part 2

SIZING AND SELECTION

BELLOWS COUPLINGS

BK

MK

SYMBOLS

- T_{KN} = Rated torque of the coupling (Nm)
 T_{AS} = Peak torque of the drive system
e.g. max. acceleration torque of drive (Nm)
or max. braking torque of load (Nm)
 J_L = Total load inertia
(e.g. spindle + slide + workpiece + 1/2 of coupling) (kgm^2)
 J_A = Total driving inertia
(motor [including gear ratio] + 1/2 of coupling) (kgm^2)
 C_T = Torsional stiffness of the coupling (Nm/rad)
 f_e = Natural frequency of the two mass system (Hz)
 f_{er} = Excitation frequency of the drive (Hz)
 φ = Torsional deflection (degree)

Shock or Load Factor S_A		
uniform load	non-uniform load	highly dynamic load
1	2	3-4
Common factor for servo drives in machine tools: $S_A = 2-3$		

ACCORDING TO TORQUE

Couplings are normally sized for the highest torque to be regularly transmitted. The peak torque of the application should not exceed the rated torque of the coupling. The following calculation provides an approximation of the minimum required coupling size, and allows for the maximum rated speed and misalignment to exist in the application:

$$T_{KN} \geq 1.5 \cdot T_{AS} \text{ (Nm)}$$

ACCORDING TO ACCELERATION TORQUE

A more detailed calculation takes acceleration and the driving and driven moments of inertia into account. A strong inertia ratio diminishes the effect of the load factor in the sizing calculation.

$$T_{KN} \geq T_{AS} \cdot S_A \cdot \frac{J_L}{J_A + J_L} \text{ (Nm)}$$


ACCORDING TO RESONANT FREQUENCY

The torsional natural frequency of the coupling must be significantly higher or lower than that of the equipment. For the mechanical substitution model the two mass system applies.

In practice the following applies: $f_e \geq 2 \cdot f_{er}$

$$f_e = \frac{1}{2 \cdot \pi} \sqrt{C_T \cdot \frac{J_A + J_L}{J_A \cdot J_L}} \text{ (Hz)}$$

Two Mass System

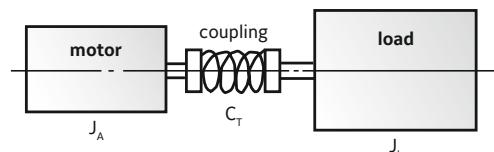

ACCORDING TO TORSIONAL DEFLECTION

To calculate transmission error as a result of torsional stress:

$$\varphi = \frac{180}{\pi} \cdot \frac{T_{AS}}{C_T} \text{ (degree)}$$

SIZING AND SELECTION

ELASTOMER COUPLINGS

EK SP TX ES

SYMBOLS

- T_{KN} = Rated torque of the coupling (Nm)
 T_{Kmax} = Maximum torque rating of the coupling (Nm)
 T_S = Peak torque applied to the coupling (Nm)
 T_{AS} = Peak torque of the drive system (Nm)
 T_{AN} = Nominal torque of the drive system (Nm)
 T_{LN} = Nominal torque of the load (Nm)
 P = Drive power (kW)
 n = Rotational speed (min.⁻¹)
 J_A = Total driving inertia
 (motor [including gear ratio]) (kgm²)
 J_L = Total load inertia
 (e.g. spindle + slide + workpiece) (kgm²)
 J_1 = Moment of inertia of driving coupling half (kgm²)
 J_2 = Moment of inertia of driven coupling half (kgm²)
 m = ratio of the moment of inertia of the drive to the load
 v = Temperature at the coupling (observed radiant heat)
 S_v = Temperature factor
 S_A = Load factor
 S_z = Start factor (factor for the number of starts per hour)
 Z_h = Number of starts per hour (1/h)

Temperature factor S_v	A	B	C	E
Temperature (v)	Sh 98 A	Sh 64 D	Sh 80 A	Sh 64 D
> -30°C to -10°C	1.5	1.3	1.4	1.2
> -10°C to +30°C	1.0	1.0	1.0	1.0
> +30°C to +40°C	1.2	1.1	1.3	1.0
> +40°C to +60°C	1.4	1.3	1.5	1.2
> +60°C to +80°C	1.7	1.5	1.8	1.3
> +80°C to +100°C	2.0	1.8	2.1	1.6
> +100°C to +120°C	-	2.4	-	2.0
> +120°C to +150°C	-	-	-	2.8

Start factor S_z	up to 120	120 to 240	over 240
Z_h			contact us
S_z	1.0	1.3	

Shock or Load Factor S_A	uniform load	non-uniform load	highly dynamic load
	1	1.8	2.5

COUPLING SELECTION FOR OPERATION WITHOUT SHOCK OR REVERSAL

The rated torque of coupling (T_{KN}) must be greater than the rated torque of the load (T_{LN}), taking into account the temperature at the coupling (Temperature factor S_v). Should T_{LN} be unknown, T_{AN} can be used as a substitute in the formula.

Calculation

$$T_{KN} > T_{AN} \cdot S_v$$

Supplemental Calculation

$$T_{AN} = \frac{9,550 \cdot P}{n}$$

Sample calculation: (without shock loads)

Coupling conditions

$$v = 70^\circ C$$

$$S_v = 1.7 \text{ (or } 70\% \text{ Elastomer Type A)}$$

Drive for centrifugal pump

$$T_{AN} = 85 \text{ Nm}$$

Calculation: $T_{KN} > T_{AN} \cdot S_v$

$$T_{KN} > 85 \text{ Nm} \cdot 1,7$$

$$T_{KN} > 144.5 \text{ Nm}$$

—————> **Result:** Coupling model EK2/150/A ($T_{KN} = 160 \text{ Nm}$) is selected.

COUPLING SELECTION FOR OPERATION WITH SHOCK LOADS

Same basic conditions as above. In addition, the maximum torque rating of the coupling (T_{Kmax}) is dictated by peak torque (T_s) due to shock loads.

Calculation

$$T_{KN} > T_{AN} \cdot S_v$$

Supplemental Calculation

$$T_{AN} = \frac{9,550 \cdot P}{n}$$

Calculation

$$T_{Kmax} > T_s \cdot S_z \cdot S_v$$

Supplemental Calculation

$$T_s = \frac{T_{AS} \cdot S_A}{m + 1}$$

$$m = \frac{J_A + J_1}{J_L + J_2}$$

SIZING AND SELECTION

TORQUE LIMITERS

SK SL ES

SYMBOLS

T_{KN}	= Rated torque of the coupling (Nm)
T_{AN}	= Load torque (Nm)
T_{AS}	= Peak torque of the motor (Nm)
J_L	= Moment of inertia of the load (kgm^2)
J_A	= Moment of inertia of the drive (kgm^2)
P_{AN}	= Drive power (kW)
α	= Angular acceleration ($1/\text{s}^2$)
t	= Acceleration / deceleration time (s)
ω	= Angular velocity (1/s)
n	= Drive speed (min^{-1})
s	= Screw lead (mm)
F_v	= Feed force (N)
η	= Spindle efficiency
d_0	= pinion dia. (pulley) (mm)
C_T	= Torsional stiffness of the coupling (Nm/rad)
$J_{\text{Masch.}}$	= Total load inertia (e.g. spindle + slide + workpiece + 1/2 of coupling) (kgm^2)
$J_{\text{Mot.}}$	= Total driving inertia (motor [including gear ratio] + 1/2 of coupling) (kgm^2)
f_e	= Natural frequency of the two mass system (Hz)
φ	= Torsional deflection (degree)

Shock or Load Factor S_A		
uniform load	non-uniform load	highly dynamic load
1	2	3
Common factor for servo drives in machine tools: $S_A = 2-3$		

ACCORDING TO DISENGAGEMENT TORQUE

Torque limiters are generally selected according to the required disengagement torque, which must be greater than the torque required for regular operation. The disengagement of the torque limiter is most commonly determined in accordance with the drive data. For this purpose, the following calculation applies:

$$T_{KN} \geq 1.5 \cdot T_{AS} \text{ (Nm)}$$

or

$$T_{KN} \geq 9,550 \cdot \frac{P_{AN}}{n} \cdot 1.5 \text{ (Nm)}$$

ACCORDING TO ACCELERATION (START-UP WITH NO LOAD)

$$T_{KN} \geq \frac{J_L}{J_A + J_L} \cdot T_{AS} \cdot S_A \geq \alpha \cdot J_L \text{ (Nm)}$$

$$\alpha = \frac{\omega}{t} = \frac{\pi \cdot n}{t \cdot 30}$$

ACCORDING TO ACCELERATION WITH LOAD (START-UP UNDER LOAD)

$$T_{KN} \geq \left[\frac{J_L}{J_A + J_L} \cdot (T_{AS} - T_{AN}) + T_{AN} \right] \cdot S_A \geq \alpha \cdot J_L + T_{AN} \text{ (Nm)}$$

ACCORDING TO LINEAR FEED FORCE

Spindle Drive (ball screw / lead screw)

$$T_{AN} = \frac{s \cdot F_v}{2,000 \cdot \pi \cdot \eta} \text{ (Nm)}$$

Belt Drive / Chain Drive

$$T_{AN} = \frac{d_0 \cdot F_v}{2,000} \text{ (Nm)}$$

ACCORDING TO RESONANT FREQUENCY (SK2 / SK3 / SK5 WITH METAL BELLows - ES2 / ESL WITH ELASTOMER RING)

The torsional natural frequency of the coupling must be significantly higher or lower than that of the equipment. For the mechanical substitution model the two mass system applies:

$$f_e = \frac{1}{2 \cdot \pi} \sqrt{C_T \cdot \frac{J_{Masch} + J_{Mot}}{J_{Masch} \cdot J_{Mot}}} \text{ (Hz)}$$

ACCORDING TO TORSIONAL DEFLECTION (SK2 / SK3 / SK5 WITH METAL BELLows - ES2 / ESL WITH ELASTOMER RING)

To calculate transmission error as a result of torsional stress:

$$\varphi = \frac{180}{\pi} \cdot \frac{T_{AN}}{C_T} \text{ (degree)}$$

ACCORDING TO LOAD HOLDING FUNCTION SYSTEM

► Load Holding Version

The SK1, SKP, and SKN models in the load holding version can secure a minimum of 2x their torque setting after disengagement. The SK2, SK3, and SK5 models can secure

only up to the torque rating of the flexible bellows after disengagement.

SIZING AND SELECTION

LINE SHAFTS

ZA EZ

SYMBOLS

- A = Total length (mm)
AB = Distance between flexures (mm)
 $AB = (A - 2 \times N)$
Z = Tube length (mm)
 $Z = (A - 2 \times H)$
H = Length of coupling ends (mm)
N = Length to flexure (mm)
 T_{AS} = Peak torque of the drive (Nm)
 φ = Torsional deflection (degree)
 C_T^B = Torsional stiffness of both flexible elements (Nm/rad)
 C_T^{ZWR} = Torsional stiffness per 1m of tubing (Nm/rad)
 C_T^{ZA} = Total torsional stiffness (Nm/rad)
 n_k = Critical speed (1/min.)
 C_{Tdyn}^E = Dynamic torsional stiffness of both elastomer inserts (Nm/rad)
 C_{Tdyn}^{EZ} = Total torsional stiffness (Nm/rad)



MODEL ZA

Size	Torsional stiffness of both bellows bodies	Torsional stiffness per 1m of standard tubing	Torsional stiffness per 1m of CFK tubing	Length of coupling ends ZA	Length of coupling ends ZAE	Length to flexure	Maximum Axial misalignment
	C_T^B (Nm/rad)	C_T^{ZWR} (Nm/rad)	C_T^{ZWR} (Nm/rad)	H (mm)	H (mm)	N (mm)	ΔK_a (mm)
10	4,525	1,770	3,690	44.5	39.5	25	2
30	19,500	6,440	13,390	57.5	52	34	2
60	38,000	11,500	23,850	71	64	41	3
150	87,500	24,000	50,050	78	72	47	4
200	95,500	73,000	-	86	-	52	4
300	250,500	220,000	151,510	94	83	56	4
500	255,000	297,000	204,250	110	96	66	5
800	475,000	389,000	267,620	101	89	64	6
1500	1,400,000	775,000	-	92	-	56	4
4000	4,850,000	1,160,000	-	102	-	61	4

Table 1

MODEL EZ

Size	Torsional stiffness of both flexible elements		Torsional stiffness per 1m of tubing	Working length EZ	Length to flexure	Max. axial misalignment
	Elastomer insert A C_T^B (Nm/rad)	Elastomer insert B C_T^B (Nm/rad)	C_T^{ZWR} (Nm/rad)	H (mm)	N (mm)	ΔK_a (mm)
5	150	350	503	25	18	1,5
10	270	825	727	34	26	2
20	1,270	2,220	1,770	46	33	4
60	3,970	5,950	6,440	63	49	4
150	6,700	14,650	11,500	73	57	4
300	11,850	20,200	24,000	86	67	4
450	27,700	40,600	73,000	99	78	4
800	41,300	90,000	389,000	125	94	4
2500	87,500	108,000	950,000	142	108	5
4500	168,500	371,500	2,200,000	181	137	5
9500	590,000	670,000	5,500,000	229	171	6

Table 2

SIZING AND SELECTION

LINE SHAFTS

ZA

EZ

MAXIMUM TRANSMITTABLE TORQUE BY BORE DIAMETER (Nm)

Size	Ø 6	Ø 8	Ø 12	Ø 16	Ø 19	Ø 25	Ø 30	Ø 32	Ø 35	Ø 45	Ø 50	Ø 55	Ø 60	Ø 65	Ø 70	Ø 75	Ø 80	Ø 90	Ø 120	Ø 140
5	4	10	15																	
10	6	12	20	32																
20		30	35	40	50	65														
60				65	120	150	180	200												
150					180	240	270	300	330											
300					300	340	450	520	570	630										
450						630	720	770	900	1120	1180	1350								
800								1050	1125	1200	1300	1400	1450	1500	1550	1600				
2500								1900	2600	2900	3200	3500	3800	4000	4300	4600	5200			
4500									5300	5800	6300	7000	7600	8200	8800	9400	10600	14100		
9500									9200	10100	11100	11900	12800	13800	14800	16700	22000	25600		

TEMPERATURE FACTOR S

Temperature (°)	> -30° to -10°	> -10° to +30°	> +30° to +40°	> +40° to +60°	> +60° to +80°	> +80° to +100°	> +100° to +120°
Sh 98 A A	1.5	1.0	1.2	1.4	1.7	2.0	-
Sh 64 D B	1.7	1.0	1.1	1.3	1.5	1.8	2.4

ACCORDING TO TORSIONAL STIFFNESS

Condition: Line shaft ZA, size 150 $T_{AS} = 150 \text{ Nm}$
Wanted: Total torsional stiffness C_T^{ZA}

$$(C_T^{ZA}) = \frac{87,500 \text{ Nm/rad} \times (24,000 \text{ Nm/rad} / 1.344 \text{ m})}{87,500 \text{ Nm/rad} + (24,000 \text{ Nm/rad} / 1.344 \text{ m})} = 14,830 \text{ [Nm/rad]}$$

$$(C_T^{ZA}) = \frac{C_T^B \cdot (C_T^{ZWR}/Z)}{C_T^B + (C_T^{ZWR}/Z)} \text{ (Nm/rad)}$$

ACCORDING TO TORSIONAL DEFLECTION

Condition: Line shaft ZA, size 150 $T_{AS} = 150 \text{ Nm}$
Wanted: Torsional deflection at maximum acceleration torque T_{AS}


Measurement (A) of Line Shaft - 1.5m
Length (Z) of Tubing = A-(2xH) = 1.344m

$$\varphi = \frac{180 \times 150 \text{ Nm}}{\pi \times 14,830 \text{ Nm/rad}} = 0.579^\circ$$

With a maximum torque of 150 Nm the torsional deflection is 0.579°

$$\varphi = \frac{180 \cdot T_{AS}}{\pi \cdot C_T^{ZA}} \text{ (degree)}$$

ACCORDING TO MAXIMUM MISALIGNMENT

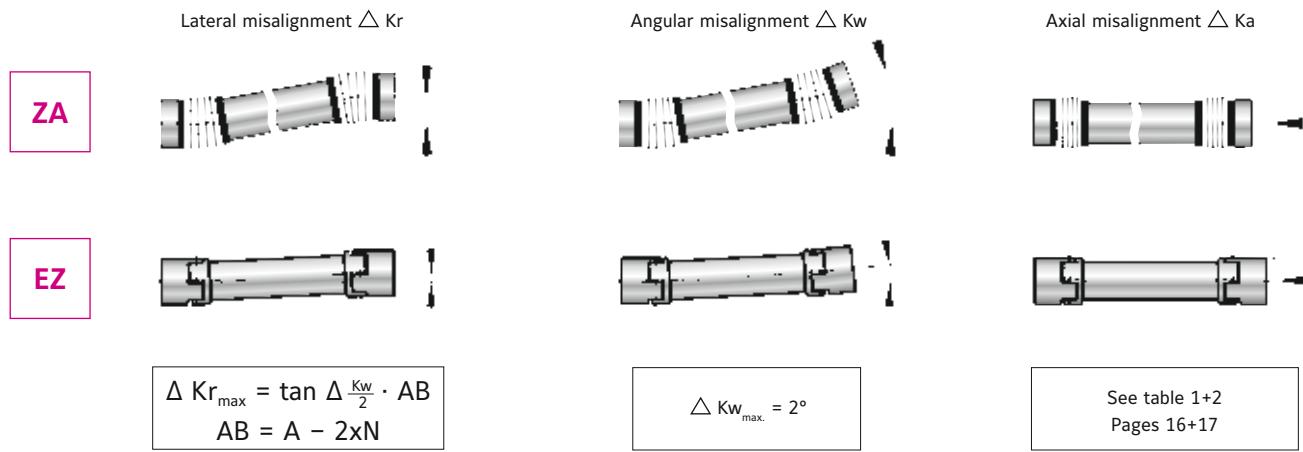

R+W CALCULATION PROGRAM

Using proprietary software, R+W will calculate the specific mechanical details of exactly the model you plan to use. Overall length, tube materials (e.g. steel, aluminum, CFK), and other factors are used to determine a number of performance values unique to your line shaft coupling.

Critical speed
Torsional stiffness of tubing
Overall stiffness
Torsional deflection
Total Weight
Moment of inertia
Maximum misalignment

n_k = 1/min.
 C_T^{ZWR} = Nm/rad
 C_T^{ZA} = Nm/rad
 φ = degree-min-sec
 m = kg
 J = kgm²
 ΔK_r = mm



INSTALLATION AND HANDLING

SHAFT / AXIS MISALIGNMENT

Exact alignment of the shaft axes extends the service life of the coupling and adjacent components by minimizing reaction loads from misalignment.

FIT CLEARANCE

Overall shaft / hub clearance of 0.01 - 0.05 mm

INSTALLATION AND HANDLING PRECISION COUPLINGS




The installation and operating instructions are an integral part of the R+W coupling. Please read carefully and follow all instructions. Failure to comply with these procedures could result in poor performance and / or failure of the coupling. Installation should be performed by a qualified technician. This manual will be included with the delivery of the coupling.

INDIRECT DRIVES

SAFETY COUPLINGS / TORQUE LIMITERS


Drive components (e.g. timing belt sprockets) must be centered on the output flange prior to mounting. Please also refer to the maximum overhung load ratings and locations provided on page 89. If the overhung load is beyond the capacity of the coupling bearings, an additional bearing can be mounted on the shaft to support the overhung load.

SK1

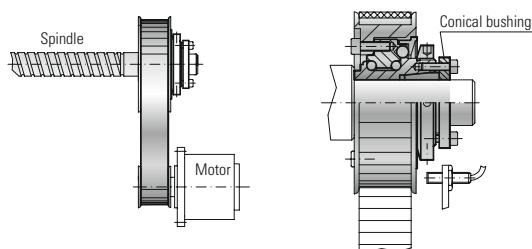


WITH CONICAL CLAMPING SYSTEM

SKP

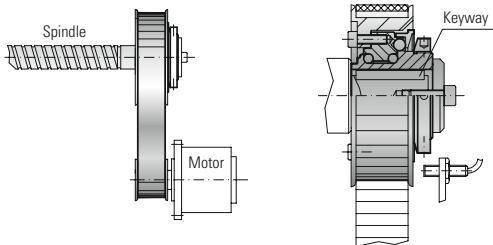

WITH KEYWAY ONLY

SKN

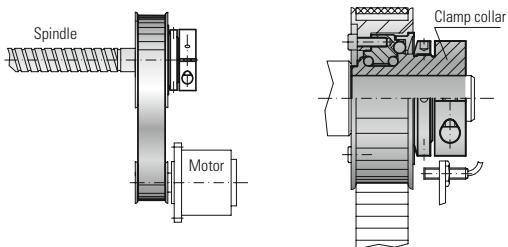


WITH CLAMPING HUB

DIRECT DRIVES

METAL BELLOWS COUPLINGS

R+W bellows couplings are flexible shaft couplings. The flexible, torsionally rigid, stainless steel bellows provides backlash free torque transmission while compensating for lateral, axial, and angular misalignment, with very low restoring forces. A number of different hub designs are available to suit a variety of application requirements.


BK1

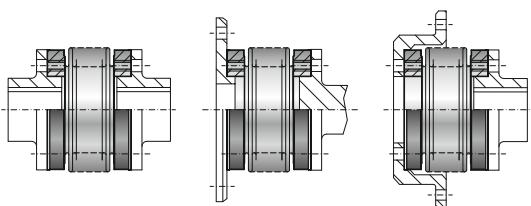

WITH SIMPLE MOUNTING FLANGE

BK2


MK2

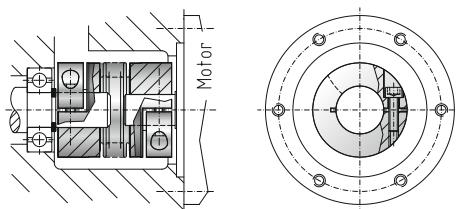

WITH CLAMPING HUB


BKH

MKH

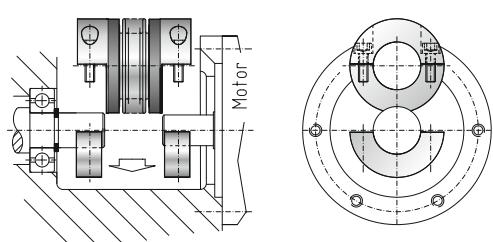

WITH FULLY SPLIT CLAMPING HUB


BK3

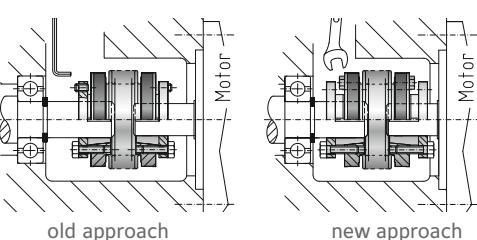

WITH CONICAL CLAMPING HUB

BK5


MK5

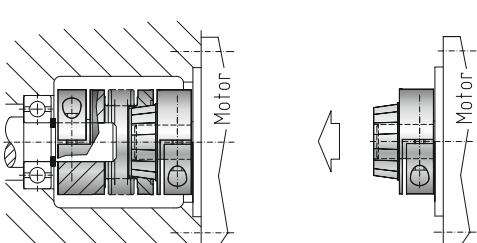

WITH CLAMPING HUB AND BLIND MATE CONNECTION

INSTALLATION AND HANDLING PRECISION COUPLINGS


BK6

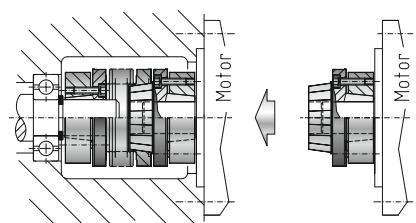

WITH CONICAL CLAMPING HUB
AND BLIND MATE CONNECTION


BK7

MK3

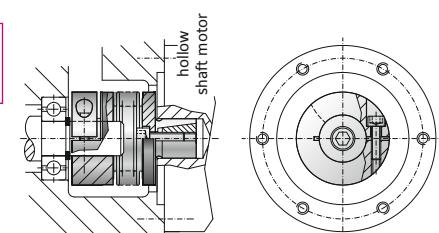


WITH EXPANDING SHAFT

BK8

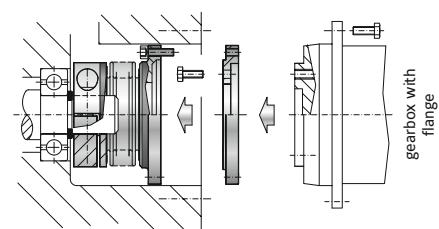


FOR ISO FLANGE MOUNTING

MK1

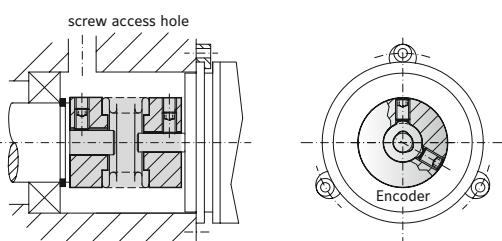


WITH RADIAL SET SCREWS

MK4

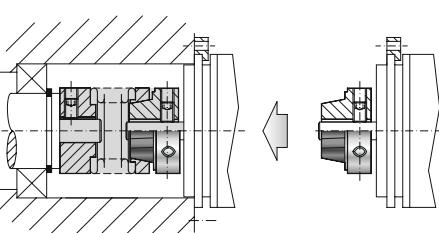

WITH RADIAL SET SCREWS
AND BLIND MATE CONNECTION

MK6

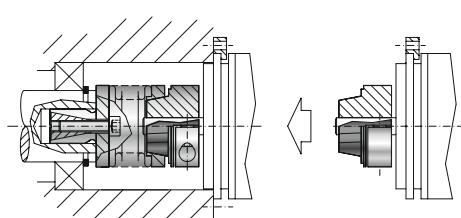


WITH EXPANDING SHAFT
AND BLIND MATE CONNECTION

ELASTOMER COUPLINGS


The equalizing element of EK couplings is the elastomer insert. It transmits torque without backlash or vibration. The elastomer insert defines the characteristics of the entire drive system. The coupling is backlash free due to a pretensioning of the elastomer insert between the two coupling halves. SERVOMAX couplings compensate for lateral, angular, and axial misalignment.

EK2

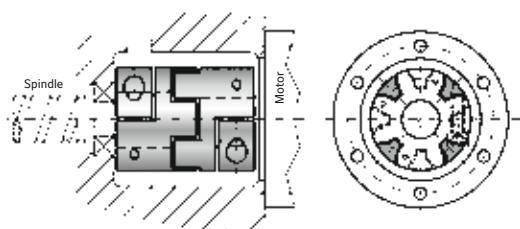


WITH CLAMPING HUB

EKH

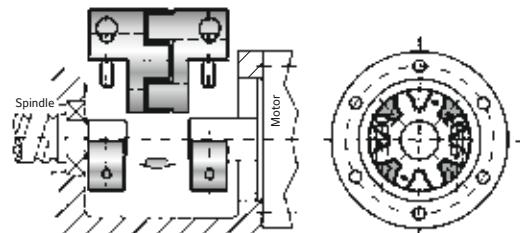


WITH FULLY SPLIT CLAMPING HUB

EK6

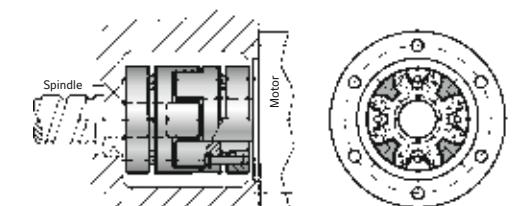


WITH CONICAL CLAMPING HUB

EKZ

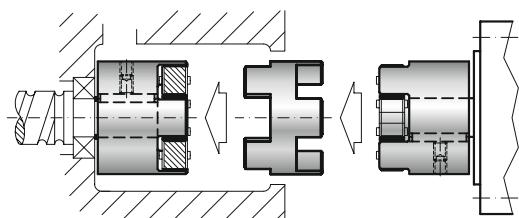

WITH DOUBLE FLEX AND SPACER

EK7

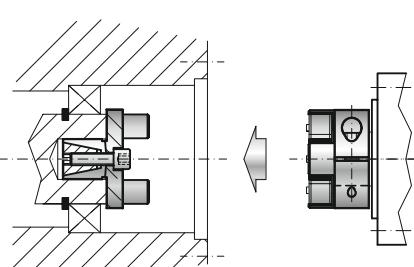


WITH EXPANDING SHAFT

INSTALLATION AND HANDLING PRECISION COUPLINGS


LINE SHAFTS

R+W line shafts are flexible shaft couplings for spanning longer distances between shaft ends. The compensation elements (bellows or elastomer) compensate for lateral, axial, and angular shaft misalignment. Torque transmission is backlash free with high torsional stiffness (bellows) or vibration damping (elastomer). In the case of bellows couplings, the tube is carried over a special support system which transfers the weight back to the hubs. Below are the various hub / shaft connections available.

ZA

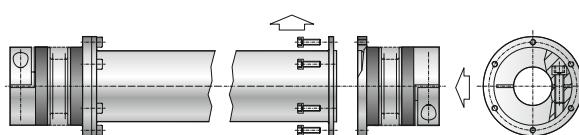


WITH CLAMPING HUB

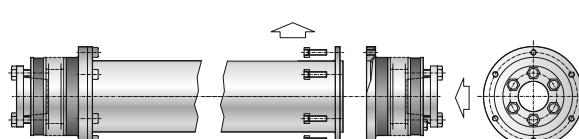


WITH CONICAL CLAMPING HUB

ZAE

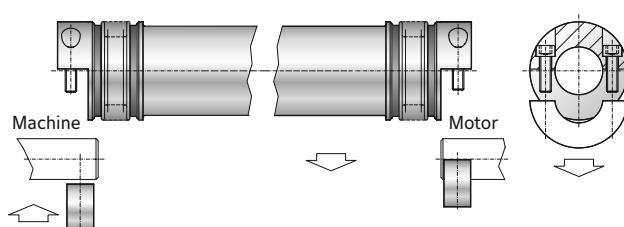

WITH FULLY SPLIT CLAMPING HUB

EZ2

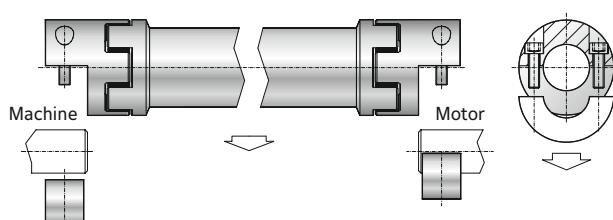


WITH FULLY SPLIT CLAMPING HUB

VERTICAL INSTALLATION

ZA

ZAE



- ▶ In vertical installations a special support transfers the weight to the bottom hub.
- ▶ This support system is available for all sizes.
- ▶ Please note, "for vertical installation" when ordering.

Schematic of support system



BK

BACKLASH FREE, TORSIONALLY STIFF METAL BELLows COUPLINGS

2 - 10,000 Nm



BELLOWS
COUPLINGS BK

GENERAL INFORMATION ABOUT R+W BELLOWS COUPLINGS:

SERVICE LIFE

R+W bellows couplings are fatigue resistant and wear free for an infinite service life, as long as the technical limits are not exceeded.

FIT CLEARANCE

Overall shaft / hub clearance of 0.01 - 0.05 mm

ROTATIONAL SPEED

Standard up to 10,000 rpm.
Over 10,000 rpm in finely balanced version; up to grade ISO G=2.5 is available.

TEMPERATURE RANGE

-30 to +100° C

SPECIAL SOLUTIONS

Various materials, tolerances, dimensions and performance ratings available for custom applications on request.

ATEX (Optional)

For use in hazardous zones 1/21 and 2/22, the metal bellows has been authorized under directive 94/9/EG and is available with certification.



TORSIONALLY STIFF BELLows COUPLINGS

2 - 10,000 Nm

MODEL	FEATURES	
BK1	 with simple flange mounting from 15 - 10,000 Nm <ul style="list-style-type: none">▶ for adapting the metal bellows to custom drive components▶ custom flange patterns available	Page 33
BK2	 with clamping hub from 15 - 10,000 Nm <ul style="list-style-type: none">▶ easy to mount▶ available in multiple lengths▶ low moment of inertia	Page 34
BKH	 with split clamping hub from 15 - 4,000 Nm <ul style="list-style-type: none">▶ radial mounting possible▶ easy to install onto pre-aligned shafts▶ low moment of inertia	Page 35
BKL	 economy class with clamping hub from 2 - 500 Nm <ul style="list-style-type: none">▶ easy to mount▶ optional self-opening clamp system▶ low moment of inertia	Page 36
BKC	 compact version with clamping hub from 15 - 500 Nm <ul style="list-style-type: none">▶ low moment of inertia▶ compact design▶ optional self-opening clamp system	Page 37

MODEL	FEATURES	
BKM	<p>torsional stiff with clamping hub from 20 - 1,000 Nm</p> <ul style="list-style-type: none"> ▶ high torque density ▶ ultra compact ▶ lowest moment of inertia of all clamping hub designs 	Page 38
BKS	<p>welded with clamping hub from 15 - 500 Nm</p> <ul style="list-style-type: none"> ▶ all stainless steel construction ▶ temperatures up to 300°C ▶ easy to mount 	Page 39
BK3	<p>with conical clamping hub from 15 - 10,000 Nm</p> <ul style="list-style-type: none"> ▶ high clamping pressure ▶ modern design for removal system ▶ highly reliable 	Page 40
SP3	<p>with external clamping ring from 15 - 500 Nm</p> <ul style="list-style-type: none"> ▶ highly concentric symmetrical design ▶ very true running to the shaft axis ▶ for high speed applications 	Page 41
BK4	<p>for tapered shafts from 15 - 150 Nm</p> <ul style="list-style-type: none"> ▶ standard 1:10 taper with feather keyway ▶ special designs on request 	Page 42

TORSIONALLY STIFF BELLows COUPLINGS SIZES FROM 2 - 10,000 Nm

MODEL	FEATURES	
BK5	 <p>with clamping hub and blind mate connection from 15 - 1,500 Nm</p> <ul style="list-style-type: none">▶ backlash free with two piece design▶ easy installation and removal▶ available as separate components	Page 43
BK6	 <p>with conical clamping ring and blind mate connection from 15 - 1,500 Nm</p> <ul style="list-style-type: none">▶ eliminates need for screw access holes▶ self centering hubs for highly concentric mounting▶ easy installation and removal	Page 44
BK7	 <p>with expanding shaft from 15 - 300 Nm</p> <ul style="list-style-type: none">▶ for hollow shaft mounting▶ save space and cost▶ solution for mismatched shaft/bore diameters	Page 45
BK8	 <p>with ISO flange mounting from 50 - 2,600 Nm</p> <ul style="list-style-type: none">▶ for flange output gearboxes▶ allows for continuous hollow through axis with some right angle gearbox designs▶ compact layout	Page 46

BK1

WITH FLANGE MOUNTING

15 - 10,000 Nm



PROPERTIES

FEATURES

- For simple flange mounting to special drive components
- custom flange patterns available


MATERIAL

- **Bellows:** high grade stainless steel

► Hubs: steel

DESIGN

Two mounting flanges concentrically assembled to the flexible bellows.
Brief overloads of up to 1.5x the rated torque are acceptable.

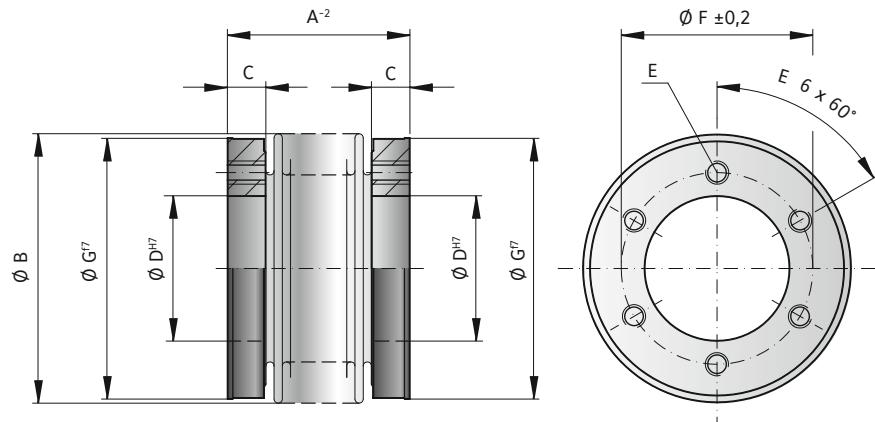

MODEL BK1

SIZE	15	30	60	150	200	300	500	800	1500	4000	6000	10000								
Rated torque (Nm)	T _{KN}	15	30	60	150	200	300	500	800	1500	4000	6000	10000							
Overall length (mm)	A-2	30	37	36	44	43	53	50	62	53	65	56	77							
Outside diameter of bellows (mm)	B	49		55		66		81		90		110		124						
Fit length/thread depth (mm)	C	7.5		10		11		13		14.5		15		16						
Inside diameter H7 (mm)	D	25		28		38		50		58		65		70						
Fastening threads	E	6 x M5		6 x M5		6 x M6		6 x M6		6 x M6		6 x M8		6 x M8						
Bolt circle diameter ± 0.2 (mm)	F	35		37		46		62		70		80		94						
Outside diameter f7 (mm)	G	49		55		66		81		90		110		122						
Moment of inertia (10 ³ kgm ²)	J _{ges}	0.07	0.08	0.14	0.15	0.30	0.32	0.90	0.95	1.30	1.40	1.95	2.10	3.0	3.4	4.3	10.6	46	132	350
Approximate weight (kg)		0.15		0.2		0.3		0.6		0.8		1.35		1.8		1.9	3.3	8.9	13.9	23.7
Torsional stiffness (10 ³ Nm/rad)	C _T	20	15	39	28	76	55	175	110	191	140	450	350	510	500	780	1304	3400	5700	10950
Axial ± (mm)		1	2	1	2	1.5	2	2	3	2	3	2.5	3.5	2.5	3.5	3.5	3.5	3.5	3	3
Lateral ± (mm)	Max. values	0.15	0.2	0.2	0.25	0.2	0.25	0.2	0.25	0.25	0.3	0.25	0.3	0.3	0.35	0.35	0.35	0.4	0.4	0.4
Angular ± (degree)		1	1.5	1	1.5	1	1.5	1	1.5	1	1.5	1	1.5	1	1.5	1.5	1.5	1.5	1.5	1.5
Axial spring stiffness (N/mm)	C _a	25	15	50	30	72	48	82	52	90	60	105	71	70	48	100	320	565	1030	985
Lateral spring stiffness (N/mm)	C _r	475	137	900	270	1200	420	1550	435	2040	610	3750	1050	2500	840	2000	3600	6070	19200	21800

ORDERING EXAMPLE	BK1	150	62	XX
Model	●			
Size		●		
Overall length mm			●	

Special designation only
(e.g. high speed balancing).

For custom features place an XX at the end of the part number and describe the special requirements (e.g. BK1 / 150 / 62 / XX; XX=finely balanced for 25,000 rpm)

BK2

WITH CLAMPING HUB

15 - 10,000 Nm

PROPERTIES



FEATURES

- easy to mount
- Optional: bolt tensioning system in size 800 and up
- light weight and low moment of inertia

DESIGN




Two clamping hubs concentrically mounted to flexible bellows.
Brief overloads of up to 1.5x the rated torque are acceptable.

MATERIAL

- **Bellows:** high grade stainless steel
- **Hubs:** see table

NEW**Advantage:**

reduce screw tightening torques by up to 90% by using multiple smaller screws to create the same tension.

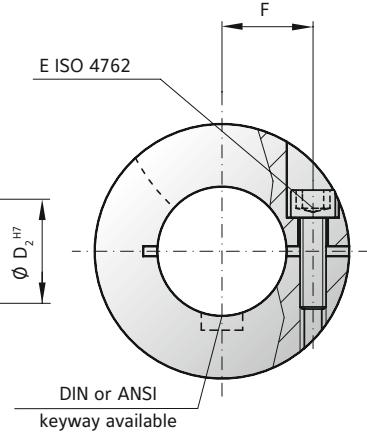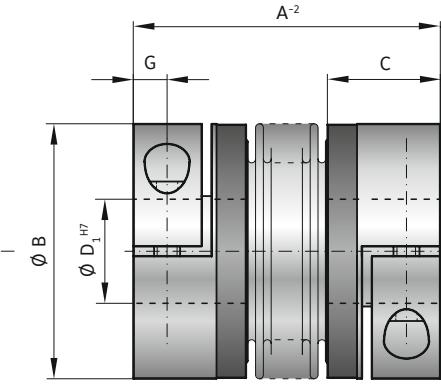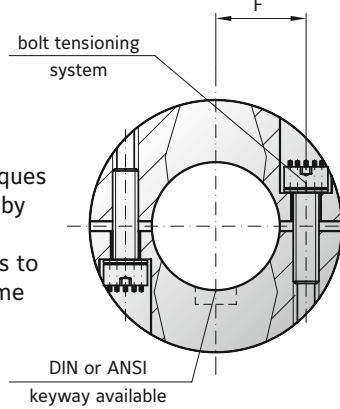

MODEL BK2

SIZE	15	30	60	80	150	200	300	500	800	1500	4000	6000	10000
Rated torque (Nm)	T _{KN}	15	30	60	80	150	200	300	500	800	1500	4000	6000
Overall length (mm)	A-2	59 66 99 69 77 113 83 93 130 94 106 143 95 107 144 105 117 163 111 125 200 133 146 169 140 179 166 230	225	252	288								
Outside diameter (mm)	B	49	55	66	81	81	90	110	124	134	157	200	253
Fit length (mm)	C	22	27	31	36	36	41	43	51	45	55	85	107
Inside diameter possible from Ø to Ø H7 (mm)	D ₁ /D ₂	8-28	10-30	12-35	14-42	19-42	22-45	24-60	35-60	40-75	50-80	50-90	60-140
Fastening screw ISO 4762	E	M5	M6	M8	M10	M10	M12	M12	M16	2x M16*	2x M20*	2x M24*	2x M30*
Tightening torque of the fastening screw (Nm)		8	15	40	50	70	120	130	200	250	470	1200	2400
Distance between centerlines (mm)	F	17	19	23	27	27	31	39	41	2x48	2x55	2x65	2x90
Distance (mm)	G	6.5	7.5	9.5	11	11	12.5	13	16.5	18	22.5	28	35
Moment of inertia (10 ⁻³ kgm ²)	J _{ges}	0.06 0.07 0.08 0.12 0.13 0.14 0.32 0.35 0.4 0.8 0.85 0.9 1.9 2 2.1 3.2 3.4 3.6 7.6 7.9 8.3 14.3 14.6 14.8 16.2 17 43 45	165	495	1214								
Hub material		Al optional steel	Al optional steel	Al optional steel	Al optional steel	steel optional AL	steel optional AL	steel optional AL	steel	steel	steel	steel	steel
Approximate weight (kg)		0.16	0.26	0.48	0.8	1.85	2.65	4	6.3	5.7	11.5	28.8	49.4
Torsional stiffness (10 ³ Nm/rad)	C _t	20 15 14 39 28 27 76 55 54 129 85 84 175 110 97 191 140 135 450 350 340 510 500 400 780 711 1304 1180 3400	5700	10950									
Axial ± (mm)		1 2 3 1 2 3 1.5 2 3 2 3 4 2 3 4 2 3 4 2.5 3.5 4.5 2.5 3.5 4.5 3.5 4.5 3.5 4.5 3.5	3	3									
Lateral ± (mm)	Max. values	0.15 0.2 1 0.2 0.25 1 0.2 0.25 1 0.2 0.25 1 0.2 0.25 1 0.25 0.3 1 0.25 0.3 1 0.3 0.35 1 0.35 1 0.4 0.4	0.4	0.4									
Angular ± (degree)		1 1.5 2 1 1.5 2 1 1.5 2 1 1.5 2 1 1.5 2 1 1.5 2 1 1.5 2 1 1.5 2 1 1.5 2 1.5 2 1.5 2 1.5 2 1.5	1.5	1.5									
Axial spring stiffness (N/mm)	C _a	25 15 84 50 30 118 72 48 165 48 32 144 82 52 130 90 60 280 105 71 605 70 48 85 100 285 320 440 565	1030	985									
Lateral spring stiffness (N/mm)	C _c	475 137 140 900 270 224 1200 420 337 920 290 401 1550 435 500 2040 610 750 3750 1050 1200 2500 840 614 2000 1490 3600 1700 6070 19200 21800	19200	21800									

* 180° opposed in each clamping hub.

WITH SPLIT CLAMPING HUB

15 - 4,000 Nm



PROPERTIES

FEATURES


- radial mounting possible
- easy installation onto pre-aligned shafts
- low moment of inertia

MATERIAL

- **Bellows:** high grade stainless steel
- **Hubs:** see table

DESIGN

Two split clamping hubs with two screws in each. Brief overloads of up to 1.5x the rated torque are acceptable.

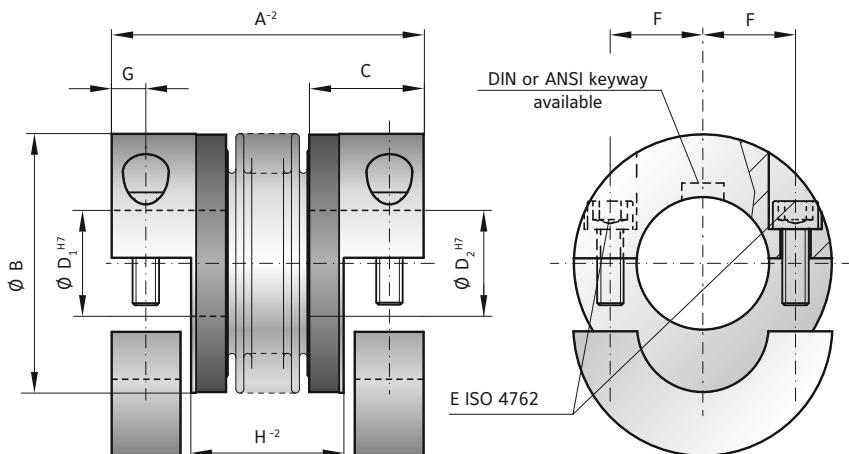

MODEL BKH

SIZE	15	30	60	80	150	200	300	500	800	1500	4000
Rated torque (Nm)	T _{KN}	15	30	60	80	150	200	300	500	800	1500
Overall length (mm)	A^-2	59	66	69	77	83	93	94	106	95	107
Outside diameter (mm)	B	49	55	66	81	81	90	110	125	133	146
Fit length (mm)	C	22	27	31	36	36	41	43	51	45	55
Inside diameter possible from Ø to Ø H7 (mm)	D ₁ /D ₂	8-28	10-30	12-35	14-42	19-42	22-45	24-60	35-60	40-75	50-80
Fastening screw ISO 4762	M5	M6	M8	M10	M10	M12	M12	M16	M16	M20	M24
Tightening torque of the fastening screw (Nm)	E	8	15	40	50	70	120	130	200	250	470
Distance between centerlines (mm)	F	17.5	19	23	27	27	31	39	41	48	55
Distance (mm)	G	7	7.5	9.5	12	12	12.5	14	16.5	18	22.5
Distance (mm)	H^-2	29	36	35	43	41	51	47	60	50	109
Moment of inertia (10 ⁻³ kgm ²)	J _{ges}	0.07	0.08	0.14	0.15	0.23	0.26	0.65	0.67	2.5	3.2
Hub material		Al optional steel	Al optional steel	Al optional steel	Al optional steel	steel optional AL	steel optional AL	steel optional AL	steel optional AL	steel	steel
Approximate weight (kg)		0.15	0.3	0.4	0.8	1.7	2.5	4	7.5	7	12
Torsional stiffness (10 ³ Nm/rad)	C _T	20	15	39	28	76	55	129	85	175	110
Axial ± (mm)		1	2	1	2	1.5	2	2	3	2	3
Lateral ± (mm)	Max. values	0.15	0.2	0.2	0.25	0.2	0.25	0.2	0.25	0.3	0.35
Angular ± (degree)		1	1.5	1	1.5	1	1.5	1	1.5	1	1.5
Axial spring stiffness (N/mm)	C _a	25	15	50	30	72	48	48	32	82	52
Lateral spring stiffness (N/mm)	C _r	475	137	900	270	1200	420	920	290	1550	435

ORDERING EXAMPLE	BK2 / BKH	80	94	20	22.23	XX
Model	●					
Size		●				
Overall length mm			●			
Bore D1 H7				●		
Bore D2 H7					●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. BKH / 80 / 94 / 20 / 22.23 / XX; XX=finely balanced for 25,000 rpm)						

Special designation only (e.g. anodized hubs).

BKL

WITH CLAMPING HUB

2 - 500 Nm



PROPERTIES

FEATURES

- easy to mount
- light weight and low moment of inertia


Two clamping hubs concentrically mounted to flexible bellows.

Brief overloads of up to 1.5x the rated torque are acceptable.

MATERIAL

► **Bellows:** high grade stainless steel► **Hubs:** see table

DESIGN

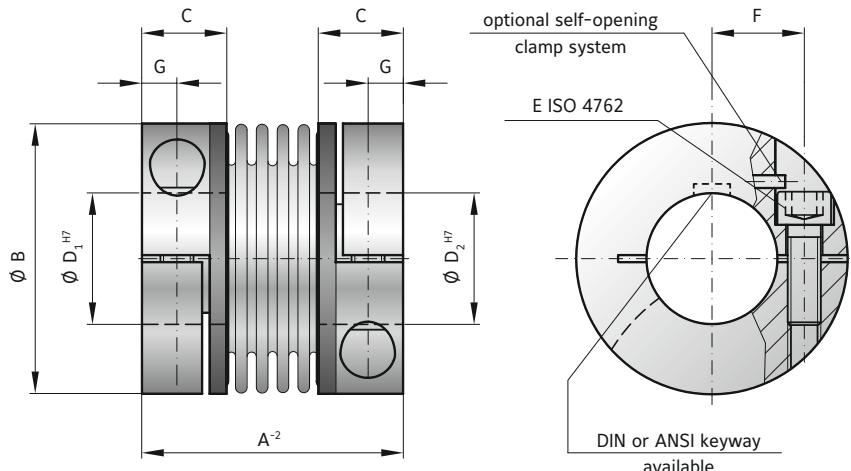**Optional:**

self-opening clamp system to open the bore during installation and removal by backing out the clamping screw.

MODEL BKL

SIZE	2	4.5	10	15	30	60	80	150	300	500
Rated torque (Nm)	T _{KN}	2	4.5	10	15	30	60	80	150	300
Overall length (mm)	A ⁻²	30	40	44	58	68	79	92	92	114
Outside diameter (mm)	B	25	32	40	49	56	66	82	82	123
Fit length (mm)	C	10	13	13	21.5	26	28	32.5	32.5	41
Inside diameter possible from Ø to Ø H7 (mm)	D _{1/2}	4-12.7	6-16	6-24	8-28	10-32	14-35	16-42	19-42	24-60
Fastening screw ISO 4762	E	M3	M4	M4	M5	M6	M8	M10	M10	M12
Tightening torque of the fastening screw (Nm)		2.3	4	4.5	8	15	40	70	85	120
Distance between centerlines (mm)	F	8	11	14	17	20	23	27	27	39
Distance (mm)	G	4	5	5	6.5	7.5	9.5	11	11	17
Moment of inertia (10 ⁻³ kgm ²)	J _{ges.}	0.002	0.007	0.016	0.065	0.12	0.3	0.75	1.8 0.8	7.5 3.1
Hub material		AL optional steel	steel optional AL	steel optional AL	steel optional AL					
Approximate weight (kg)		0.02	0.05	0.06	0.16	0.25	0.4	0.7	1.7 0.75	3.8 1.6
Torsional stiffness (10 ³ Nm/rad)	C _t	1.5	7	9	23	31	72	80	141	157
Axial ± (mm)		0.5	1	1	1	1	1.5	2	2	2.5
Lateral ± (mm)	Max. values	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Angular ± (degree)		1	1	1	1	1	1	1	1	1
Axial spring stiffness (N/mm)	C _a	8	35	30	30	50	67	44	77	112
Lateral spring stiffness (N/mm)	C _r	50	350	320	315	366	679	590	960	2940

ORDERING EXAMPLE	BKL	80	26	22.23	XX
Model	●				
Size		●			
Bore D1 H7			●		
Bore D2 H7				●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. BKL / 80 / 26 / 22.23 / XX; XX=finely balanced for 25,000 rpm)					

Special designation only
(e.g. anodized hubs).

PROPERTIES



FEATURES

- for space restricted installations
- light weight and low moment of inertia
- easy to mount

DESIGN


Two clamping hubs concentrically mounted to flexible bellows.
Brief overloads of up to 1.5x the rated torque are acceptable.

MATERIAL

- **Bellows:** high grade stainless steel
- **Hubs:** see table

Optional:

self-opening clamp system to open the bore during installation and removal by backing out the clamping screw.

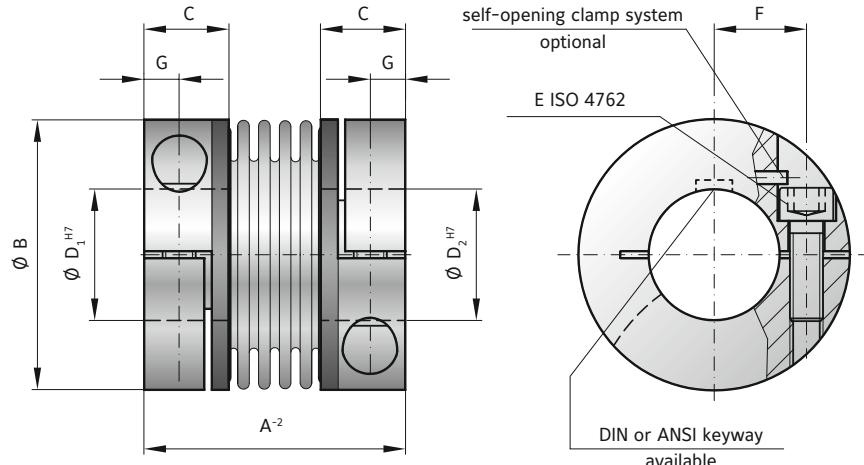

MODEL BKC

SIZE	15	30	60	150	300	500
Rated torque (Nm) T_{KN}	15	30	60	150	300	500
Overall length (mm)	A-2	48	58	67	78	94
Outside diameter (mm)	B	49	56	66	82	110
Fit length (mm)	C	16.5	21	23	27.5	34
Inside diameter possible from \emptyset to \emptyset H7 (mm)	D ₁ /D ₂	8-28	12-32	14-35	19-42	24-60
Fastening screw ISO 4762	E	M5	M6	M8	M10	M12
Tightening torque of the fastening screw (Nm)	E	8	15	40	75	120
Distance between centerlines (mm)	F	17.5	20	23	27	39
Distance (mm)	G	6.5	7.5	9.5	11	13
Moment of inertia (10^{-3} kgm^2) $J_{ges.}$		0.05	0.1	0.26	0.65	6.3
Hub material		AL	AL	AL	AL	steel
Approximate weight (kg)		0.13	0.21	0.37	0.72	3.26
Torsional stiffness (10^3 Nm/rad) C_T		23	31	72	141	157
Axial \pm (mm)	Max. values	1	1	1.5	2	2.5
Lateral \pm (mm)		0.2	0.2	0.2	0.2	0.2
Angular \pm (degree)		1	1	1	1	1
Axial spring stiffness (N/mm) C_a		30	50	67	77	112
Lateral spring stiffness (N/mm) C_r		315	366	679	960	2940
Speed max. with balancing (min ⁻¹)		80,000	70,000	60,000	50,000	40,000
						30,000

ORDERING EXAMPLE	BKC	60	26	22.23	XX
Model	●				
Size		●			
Bore D1 H7			●		
Bore D2 H7				●	
Special designation only (e.g. special bore tolerance).					
For custom features place an XX at the end of the part number and describe the special requirements (e.g. BKC / 60 / 26 / 22.23 / XX; XX=finely balanced for 25,000 rpm)					

BKM

TORSIONAL STIFF WITH CLAMPING HUB

20 - 1,000 NM



PROPERTIES

FEATURES

- extremely compact
- high torque density
- high torsional stiffness

MATERIAL



- **Bellows:** high grade stainless steel
- **Hubs:** see table

DESIGN

Two clamping hubs concentrically mounted to flexible bellows.
Brief overloads of up to 1.5x the rated torque are acceptable.

Key application:

For mounting on a torque transducer.

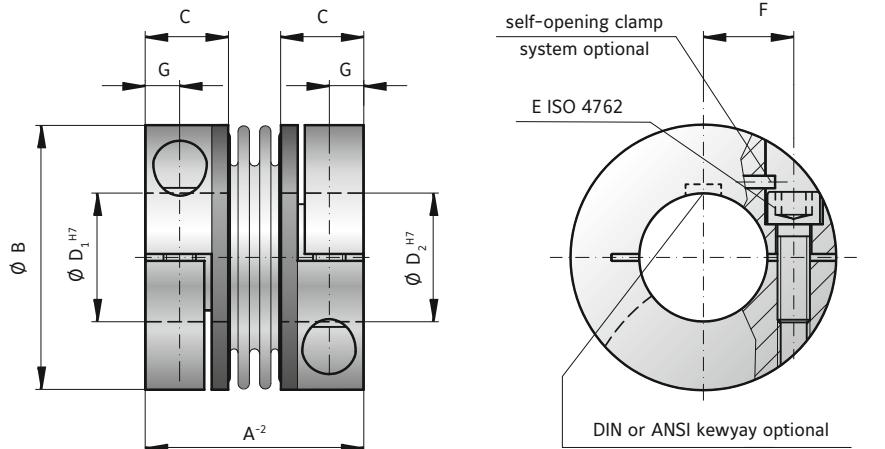

MODEL BKM

SIZE	20	200	400	1000
Rated torque (Nm)	T _{KN}	20	200	400
Overall length (mm)	A ²	40	59	75
Outside diameter (mm)	B	49	66	82
Fit length (mm)	C	16.5	23	27.5
Inside diameter possible from Ø to Ø H7 (mm)	D _{1/2}	15-28	24-35	32-42
Fastening screw ISO 4762	E	M5	M8	M10
Tightening torque of the fastening screw (Nm)		8	40	60
Distance between centerlines (mm)	F	17	23	27
Distance (mm)	G	6	9.5	11
Moment of inertia (10 ⁻³ kgm ²)	J _{ges.}	0.05	0.18	0.62
Hub material		AL	AL	AL
Approximate weight (kg)		0.13	0.4	0.7
Torsional stiffness (10 ³ Nm/rad)	C _T	41.9	138	170
Axial ± (mm)		1	1.5	1
Lateral ± (mm)	Max. values	0.06	0.08	0.1
Angular ± (degree)		0.5	0.5	0.5
Axial spring stiffness (N/mm)	C _a	55.8	153	114
Lateral spring stiffness (N/mm)	C _r	3,710	11,000	6,058
Speed max. with balancing (min ⁻¹)		80,000	60,000	50,000
				40,000

ORDERING EXAMPLE	BKM	20	20	19.05	XX
Model	●				
Size		●			
Bore D1 H7			●		
Bore D2 H7				●	
Special designation only (e.g. special bore tolerance).					
For custom features place an XX at the end of the part number and describe the special requirements (e.g. BKM / 20 / 20 / 19.05 / XX; XX=finely balanced for 25,000 rpm)					

BKS

WELDED WITH CLAMPING HUB

15 - 500 Nm

PROPERTIES

**Optional:**

self-opening clamp system to open the bore during installation and removal by backing out the clamping screw.

FEATURES

- for high temperatures and aggressive media
- compact design
- welded version


MATERIAL

- **Bellows:** high grade stainless steel
- **Hubs:** high grade stainless steel

- **Screws:** Grade 12.9 Geomet coated (alternate materials on request)

DESIGN

Two clamping hubs concentrically mounted to flexible bellows. Brief overloads of up to 1.5x the rated torque are acceptable. From -40° to +300°C operating temperature.

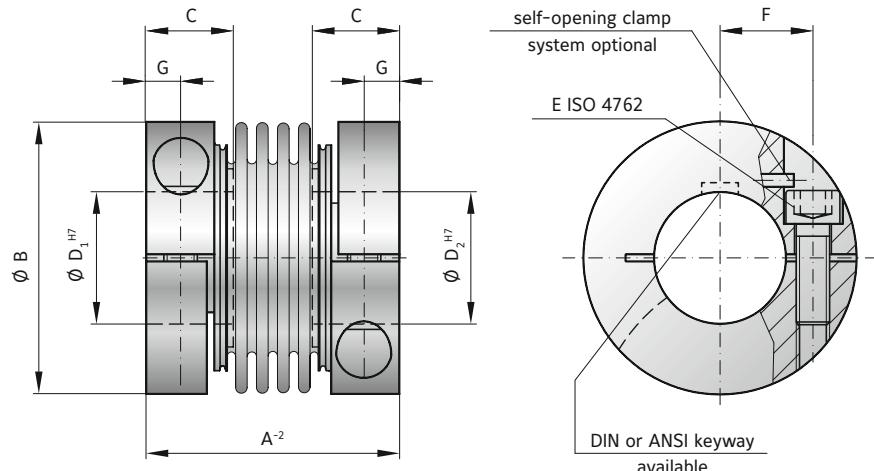

MODEL BKS

SIZE	15	30	60	150	300	500
Rated torque (Nm)	T _{KN}	15	30	60	150	300
Overall length (mm)	A ⁻²	45	52	66	76	89
Outside diameter (mm)	B	49	56	66	82	110
Fit length (mm)	C	17	20	24	30	34
Inside diameter* possible from Ø to Ø H7 (mm)	D ₁ /D ₂	12-28	14-32	16-35	19-42	24-60
Fastening screw ISO 4762	E	M5	M6	M8	M10	M12
Tightening torque of the fastening screw (Nm)		8	15	40	75	120
Distance between centerlines (mm)	F	17.5	20	23	27	39
Distance (mm)	G	6	7.5	9.5	11	13
Moment of inertia (10 ⁻³ kgm ²)	J _{ges.}	0.1	0.2	0.53	1.5	5.5
Approximate weight (kg)		0.27	0.42	0.78	1.5	2.9
Torsional stiffness (10 ³ Nm/rad)	C _T	23	31	72	141	157
Axial ± (mm)	Max. values	1	1	1.5	2	2.5
Lateral ± (mm)		0.2	0.2	0.2	0.2	0.2
Angular ± (degree)		1	1	1	1	1
Axial spring stiffness (N/mm)	C _a	30	50	67	77	112
Lateral spring stiffness (N/mm)	C _r	315	366	679	960	2940
Speed max. with balancing (min ⁻¹)		60,000	50,500	50,000	40,500	40,000

* Smaller bore diameter available at reduced torque capacity

ORDERING EXAMPLE	BKS	15	20	19.05	XX
Model	●				
Size		●			
Bore D1 H7			●		
Bore D2 H7				●	
Special designation only (e.g. special bore tolerance).					
For custom features place an XX at the end of the part number and describe the special requirements (e.g. BKS / 15 / 20 / 19.05 / XX; XX=finely balanced for 25,000 rpm)					

BK3

WITH CONICAL CLAMPING SYSTEM

15 - 10,000 Nm

PROPERTIES



FEATURES


- high clamping pressure
- high torque version
- compact design

DESIGN

Two conical clamping hubs concentrically mounted to flexible bellows. Brief overloads of up to 1.5x the rated torque are acceptable.

MATERIAL

- **Bellows:** high grade stainless steel
- **Hubs:** steel

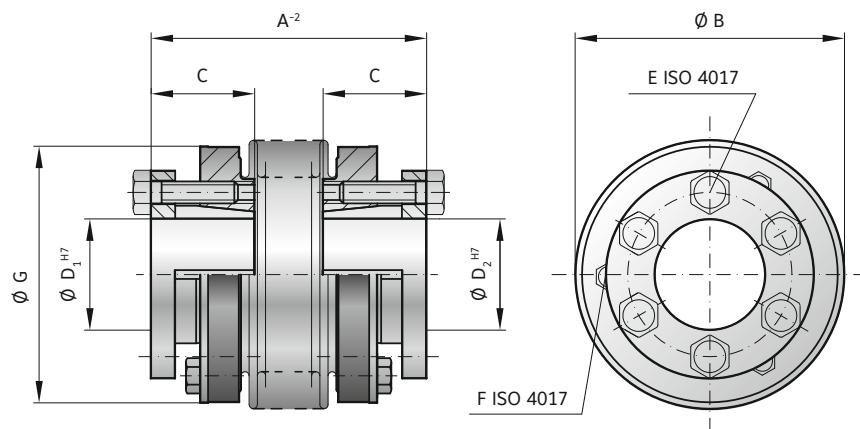

MODEL BK3

SIZE	15	30	60	150	200	300	500	800	1500	4000	6000	10000	
Rated torque (Nm)	T _{KN}	15	30	60	150	200	300	500	800	1500	4000	6000	10000
Overall length (mm)	A-2	48	55	57	65	66	76	75	87	78	90	89	103
Outside diameter (mm)	B	49	55	66	81	90	110	124	133	157	200	253	303
Fit length (mm)	C	19	22	27	32	32	41	41	50	61	80	85	92
Inside diameter possible from Ø to Ø H7 (mm)	D _{1/2}	10-22	12-23	12-29	15-38	15-44	24-56	24-60	30-60	35-70	50-100	60-140	70-180
Fastening screw ISO 4017	E	6 x M4	6 x M5	6 x M5	6 x M6	6 x M6	6 x M8	6 x M8	6 x M10	6 x M12	6 x M16	6 x M16	8 x M16
Tightening torque of the fastening screw (Nm)	E	4	6	8	12	14	18	25	40	70	120	150	160
Jack screw ISO 4017	F	3 x M4	3 x M4	3 x M5	3 x M5	3 x M6	3 x M6	3 x M6	3 x M8	6 x M8	6 x M10	6 x M10	4 x M10
Outside diameter of hub (mm)	G	49	55	66	81	90	110	122	116	135	180	246	295
Moment of inertia (10 ⁻³ kgm ²)	J _{ges}	0.07	0.08	0.15	0.16	0.39	0.41	1.2	1.6	1.7	2.5	5.1	9.9
Approximate weight (kg)		0.25	0.4	0.8	1.2	1.8	3	4.2	5.6	8.2	23	32.6	45.5
Torsional stiffness (10 ³ Nm/rad)	C _T	20	15	39	28	76	55	175	110	191	140	450	350
Axial ± (mm)		1	2	1	2	1.5	2	2	3	2	3	2.5	3.5
Lateral ± (mm)	Max. values	0.15	0.2	0.2	0.25	0.2	0.25	0.25	0.3	0.25	0.3	0.35	0.35
Angular ± (degree)		1	1.5	1	1.5	1	1.5	1	1.5	1	1.5	1.5	1.5
Axial spring stiffness (N/mm)	C _a	25	15	50	30	72	48	82	52	90	60	105	71
Lateral spring stiffness (N/mm)	C _r	475	137	900	270	1200	420	1500	435	2040	610	3750	1050

ORDERING EXAMPLE	BK3	60	76	20	22.23	XX
Model	●					
Size		●				
Overall length mm			●			
Bore D1 H7				●		
Bore D2 H7					●	
Special designation only (e.g. non-standard bore tolerance)						
For custom features place an XX at the end of the part number and describe the special requirements (e.g. BK3 / 60 / 76 / 20 / 22.23 / XX; XX=K6 bore tolerance on D1)						

SP3

WITH EXTERNAL CLAMPING RING

60 - 500 Nm

NEW**High speed**

PROPERTIES

FEATURES

- very high balancing quality due to symmetrical design
- high operating speeds
- extremely smooth running

MATERIAL


- **Bellows:** high grade stainless steel
- **Hubs and clamping ring:** steel

DESIGN

Two precision machined clamping ring hubs mounted concentrically to a flexible bellows. Brief overloads of up to 1.5x the rated torque are acceptable.

FIT CLEARANCE

Overall shaft / hub tolerance
0.01 - 0.025 mm

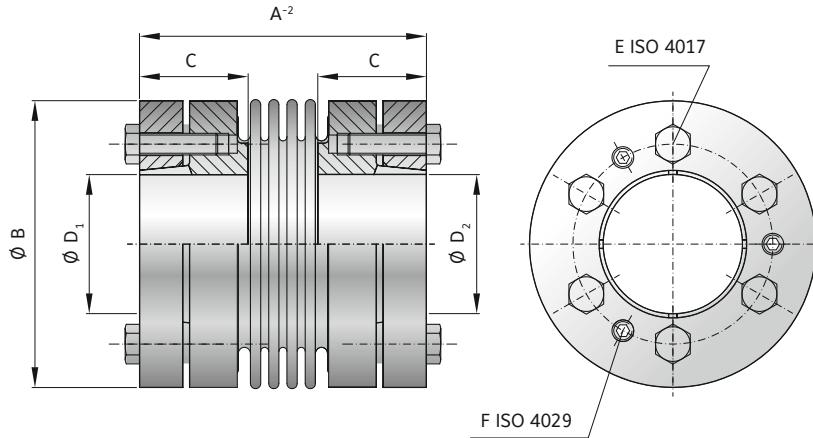

MODEL SP3

SIZE	60	150	200	300	500						
Rated torque (Nm)	T _{KN}	60	150	200	300	500					
Overall length (mm)	A ⁻²	66	76	75	87	76	88	89	103	97	111
Outside diameter (mm)	B	66	81	90	110	124					
Fit length (mm)	C	25	30	32	36	40					
Inside diameter possible from Ø to Ø H7 (mm)	D ₁ /D ₂	14-32	18-35	20-42	22-55	25-60					
Fastening screw ISO 4017	E	6 x M5	6 x M6	6 x M6	6 x M8	6 x M8					
Tightening torque of the fastening screw (Nm)		8.5	14	14	30	35					
Jack screw ISO 4017	F	3 x M5	3 x M6	3 x M6	3 x M8	3 x M8					
Outside diameter of hub (mm)	G	66	81	90	110	122					
Moment of inertia (10 ⁻³ kgm ²)	J _{ges}	0.58	0.60	1.6	1.62	2.42	2.52	6.38	6.56	10.35	10.67
Approximate weight (kg)		0.9	0.92	1.7	1.8	2.1	2.2	3.52	3.6	4.73	4.83
Torsional stiffness (10 ³ Nm/rad)	C _T	76	55	175	110	191	140	450	350	510	500
Axial ± (mm)		1.5	2	2	3	2	3	2.5	3.5	2.5	3.5
Lateral ± (mm)	max. values	0.2	0.25	0.2	0.25	0.25	0.3	0.25	0.3	0.3	0.35
Angular ± (degree)		1	1.5	1	1.5	1	1.5	1	1.5	1	1.5
Axial spring stiffness (N/mm)	C _a	72	48	82	52	90	60	105	71	70	48
Lateral spring stiffness (N/mm)	C _l	1200	420	1500	435	2040	610	3750	1050	2500	840
Speed standard (min ⁻¹)	n	22500	16500	16500	13500	12500					

* Recommended fit pairing H7 / k6; H6 / j5 (short spindle); starting at Ø55 G7 / m6

ORDERING EXAMPLE	SP3	150	87	20	32	XX
Model	●					Special designation only (e.g. non-standard bore tolerance)
Size		●				
Overall length mm			●			
Bore D1 H7				●		
Bore D2 H7					●	

For custom features place an XX at the end of the part number and describe the special requirements (e.g. SP3 / 150 / 87 / 20 / 32 / XX)

BK4

FOR TAPERED SHAFTS

15 - 150 Nm

PROPERTIES



FEATURES


- ▶ for tapered shafts
- ▶ easy to mount and dismount
- ▶ high installed concentricity

MATERIAL

- ▶ **Bellows:** high grade stainless steel
- ▶ **Hubs:** steel

DESIGN

Conical clamping system opposite 1:10 tapered bore with feather keyway.
Brief overloads of up to 1.5x the rated torque acceptable.

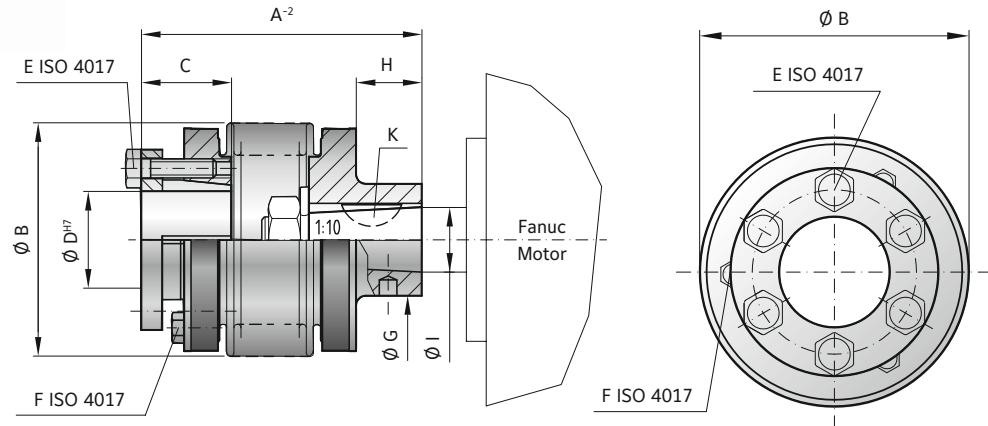

MODEL BK4

SIZE	15	30	60	150
Rated torque (Nm) T_{KN}	15	30	60	150
Overall length (mm) A^{-2}	47	54	68	76
Outside diameter (mm) B	49	55	66	81
Fit length (mm) C	19	22	27	32
Inside diameter possible from \emptyset to $\emptyset H7$ (mm) D	10-22	12-23	12-29	15-37
Fastening screw ISO 4017	6 x M4	6 x M5	6 x M5	6 x M6
Tightening torque of the fastening screw (Nm) E	4	6	8	12
Jack screw ISO 4017 F	3 x M4	3 x M4	3 x M5	3 x M5
Outside diameter of hub (mm) G	20	27	30	30
Hub length (mm) H	8.5	22	18	20
Moment of inertia (10^{-3} kgm^2) J_{ges}	0.10	0.12	0.22	0.27
Approximate weight (kg)	0.25	0.4	0.8	1.35
Torsional stiffness (10^3 Nm/rad) C_T	20	15	39	28
Axial \pm (mm) Max. values	1	2	1	2
Lateral \pm (mm) Max. values	0.15	0.2	0.2	0.25
Angular \pm (degree) Max. values	1	1.5	1	1.5
Axial spring stiffness (N/mm) C_a	25	15	50	30
Lateral spring stiffness (N/mm) C_r	475	137	900	270
Cone \emptyset (Fanuc-Motor) (mm) I	11	16	16	16
Key width (mm) K	4	5	5	5

ORDERING EXAMPLE	BK4	150	82	20	XX
Model	●				
Size		●			
Overall length mm			●		
Bore D1 H7				●	
Special designation only (e.g. non-standard bore tolerance)					

For custom features place an XX at the end of the part number and describe the special requirements (e.g. BK4 / 150 / 82 / 20 / XX; XX=finely balanced for 25,000 rpm)

BK5

BLIND MATE WITH CLAMPING HUB

15 - 1,500 Nm

PROPERTIES



FEATURES

- easy installation and removal
- electrically and thermally isolating
- absolutely backlash free assembly



MATERIAL

- **Bellows:** high grade stainless steel
- **Hubs:** up through size 80 Aluminum, size 150 and up steel

- **Tapered male segment:** high strength plastic

DESIGN

Two clamping hubs, one of which has a tapered male projection for bind mate connection. Brief overloads of up to 1.5x the rated torque are acceptable.

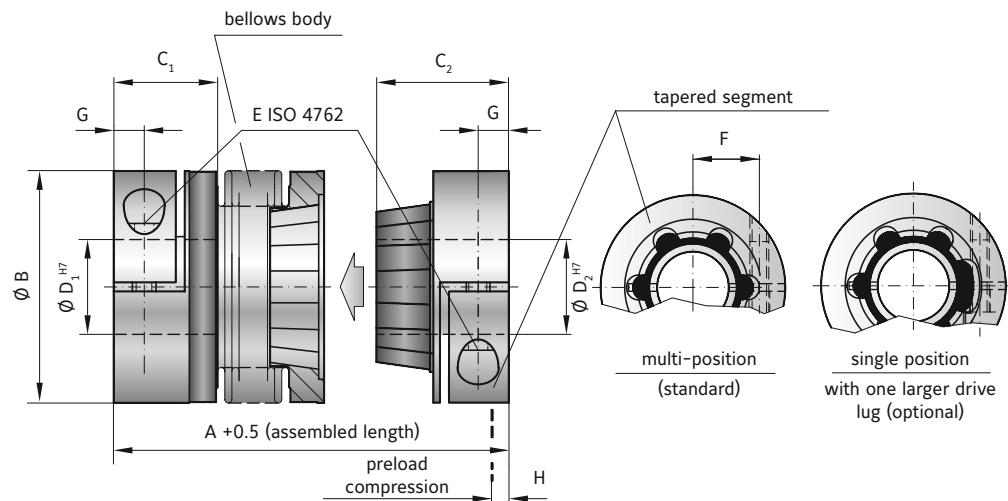

MODEL BK5

SIZE		15	30	60	80	150	300	500	800	1500
		T _{KN}	A ^{+0.5}	G	C ₁	C ₂	G	F	H	
Rated torque (Nm)										
Overall length (inserted) (mm)	B	60	67	71	79	85	95	94	106	95
Outside diameter (mm)	B	49		55		66		81		81
Fit length (mm)	C ₁	22		27		31		36		36
Fit length (mm)	C ₂	28		33		39		43		43
Inside diameter possible from Ø to Ø H7 (mm)	D ₁	8-28		10-30		12-35		14-42		14-42
Inside diameter possible from Ø to Ø H7 (mm)	D ₂	8-22		10-25		12-32		14-38		14-38
Fastening screw ISO 4762	E	M5		M6		M8		M10		M10
Tightening torque of the fastening screw (Nm)	E	8		15		40		50		70
Distance between centerlines (mm)	F	17		19		23		27		39
Distance (mm)	G	6.5		7.5		9.5		11		11
Preload compression (mm)	H	0.2 - 1.0		0.5 - 1.0		0.5 - 1.5		0.5 - 1.5		0.5 - 1.5
Axial recovery force at maximum pretensioning (N)	H	20	12	50	30	70	45	48	32	82
Moment of inertia (10 ⁻³ kgm ²) J _{ges}		0.07	0.08	0.14	0.15	0.23	0.26	0.65	0.67	2.2
Approximate weight (kg)		0.1	0.1	0.3	0.3	0.4	0.4	0.9	0.9	1.8
Torsional stiffness (10 ³ Nm/rad) C _T		10	8	20	14	38	28	65	43	88
Axial* ± (mm)		0.5	1	0.5	1	0.5	1	1	2	1
Lateral ± (mm)	Max. values	0.15	0.2	0.2	0.25	0.2	0.25	0.2	0.25	0.25
Angular ± (degree)		1	1.5	1	1.5	1	1.5	1	1.5	1
Lateral spring stiffness (N/mm) C _r		475	137	900	270	1200	420	920	290	1550

*in addition to maximum allowable pretension **180° opposed in each clamping hub.

ORDERING EXAMPLE	BK5	30	71	18	19	XX
Model	●					
Size		●				
Overall length mm			●			
Bore D1 H7				●		
Bore D2 H7					●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. BK5 / 30 / 71 / 18 / 19 / XX; XX=finely balanced for 25,000 rpm)						
Special designation only (e.g. special bore tolerance).						

BK6

BLIND MATE WITH CONICAL CLAMPING RING

15 - 1,500 Nm



PROPERTIES

FEATURES

- axial mounting possible
- easy installation and removal
- naturally very well balanced due to self centering clamping ring system
- absolutely backlash free assembly


MATERIAL

- **Bellows:** high grade stainless steel
- **Hubs:** steel

- **Tapered male segment:** high strength plastic

DESIGN

Two conical clamping ring hubs, one of which has a tapered male projection for bind mate connection. Brief overloads of up to 1.5x the rated torque are acceptable.

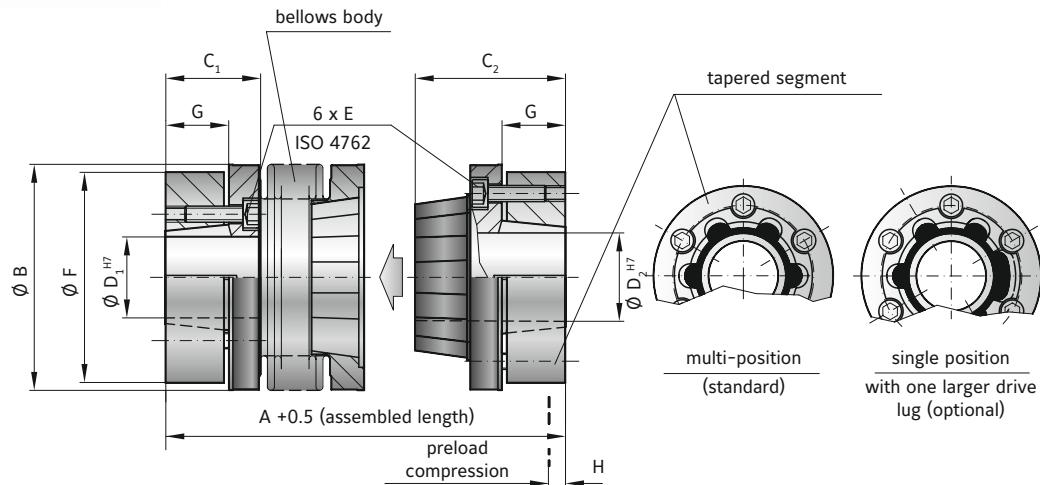

MODEL BK6

SIZE	15	30	60	150	300	500	800	1500							
Rated torque (Nm)	T_{KN}	15	30	60	150	300	500	800	1500						
Overall length (gesteckt) (mm)	$A^{+0.5}$	58	65	68	76	79	89	97	109	113	127	132	145	140	158
Outside diameter (mm)	B	49	55	66	81	110	124	133	157						
Fit length (mm)	C_1	13.5	21.5	18	23.5	27	32	42	53						
Fit length (mm)	C_2	29	34	39	49.5	59	68	74	90.5						
Inside diameter possible from \emptyset to $\emptyset H7$ (mm)	D_1	10-22	12-24	12-32	15-40	24-56	30-60	40-62	50-75						
Inside diameter possible from \emptyset to $\emptyset H7$ (mm)	D_2	10-22	12-24	12-32	15-40	24-56	30-60	40-62	50-75						
Fastening screw ISO 4762	E	M4	M5	M5	M6	M8	M8	M10	M12						
Tightening torque of the fastening screw (Nm)		3.5	6.5	8	12	30	32	55	110						
Diameter of clamping ring (mm)	F	46.5	51	60	74	102	114	126	146						
Clamping ring length (mm)	G	9.5	10.5	11.5	17.5	20	23	27	32						
Preload compression (mm)	H	0.2 - 1.0	0.5 - 1.0	0.5 - 1.5	0.5 - 1.5	0.5 - 1.5	1.0 - 2.0	1.0 - 2.0	0.5 - 1.5						
Axial recovery force at maximum pretensioning (N)		20	12	50	30	70	45	82	52	157	106	140	96	400	650
Moment of inertia (10^{-3} kgm^2)	J_{ges}	0.1	0.12	0.2	0.25	0.4	0.45	2.0	2.5	5.4	6.1	8.4	9.1	17.5	44
Approximate weight (kg)		0.3	0.32	0.5	0.52	0.82	0.84	1.6	1.7	4.1	4.2	6.0	6.3	8.1	16.2
Torsional stiffness (10^3 Nm/rad)	C_T	10	8	20	14	38	28	88	55	225	175	255	245	400	660
Axial* \pm (mm)		0.5	1	0.5	1	0.5	1	1	2	1.5	2	2.5	3.5	3	2
Lateral \pm (mm)	Max. values	0.15	0.2	0.2	0.25	0.2	0.25	0.2	0.25	0.25	0.3	0.3	0.35	0.35	0.35
Angular \pm (degree)		1	1.5	1	1.5	1	1.5	1	1.5	1	1.5	1	1.5	1.5	1.5
Lateral spring stiffness (N/mm)	C_r	475	137	900	270	1200	420	1550	435	3750	1050	2500	840	2000	3600

* in addition to maximum allowable pretension

Higher torques upon request

ORDERING EXAMPLE	BK6	30	76	18	19	XX
Model	●					
Size		●				
Overall length mm			●			
Bore D1 H7				●		
Bore D2 H7					●	
Special designation only (e.g. special bore tolerance).						

For custom features place an XX at the end of the part number and describe the special requirements (e.g. BK6 / 30 / 76 / 18 / 19 / XX; XX=finely balanced for 25,000 rpm)

BK7

WITH EXPANDING SHAFT

15 - 300 Nm



PROPERTIES

FEATURES


- for hollow shaft mounting
- short design saves installation space
- solution for mismatched shaft / bore

MATERIAL

- **Bellows:** high grade stainless steel
- **Hubs:** see table
- **Expanding mandrel system:** steel

DESIGN

One clamping hub on one end with an expanding shaft on the other end. Brief overloads of up to 1.5x the rated torque are acceptable.

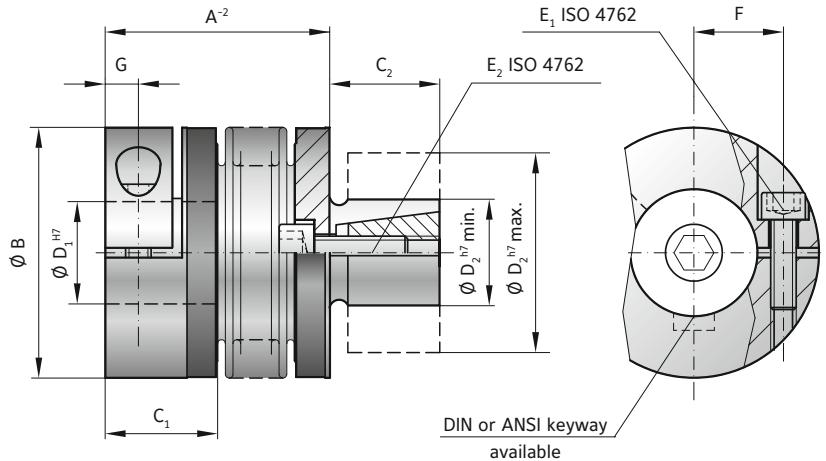

MODEL BK7

SIZE	15	30	60	150	300
Rated torque (Nm) T_{KN}	15	30	60	150	300
Overall length (mm)	A-2	45 52	53 61	62 72	71 83
Outside diameter (mm)	B	49	55	66	81
Fit length (mm)	C ₁	22	27	31	36
Fit length (mm)	C ₂	20	25	27	32
Inside diameter possible from Ø to Ø h7 (mm)	D ₁	8-28	10-30	12-35	19-42
Shaft diameter from Ø to Ø h7 (mm)	D ₂	13-25	14-30	23-38	26-42
Fastening screw ISO 4762	E _{1/2}	M5	M6	M8	M10
Tightening torque of the fastening screw (Nm)	E _{1/2}	8	14	38	65
Distance between centerlines (mm)	F	17	19	23	27
Distance (mm)	G	6.5	7.5	9.5	11
Moment of inertia (10^{-3} kgm^2)	J _{ges}	0.07 0.08	0.14 0.15	0.23 0.26	2.2 2.4
Hub material		Al	Al	Al	steel
Approximate weight (kg)		0.15	0.3	0.4	1.7
Torsional stiffness (10^3 Nm/rad)	C _T	20 15	39 28	76 55	175 110
Axial \pm (mm)	1 2	1 2	1.5 2	2 2	3 2.5
Lateral \pm (mm)	0.15 0.2	0.2 0.25	0.2 0.25	0.2 0.25	0.25 0.25
Angular \pm (degree)	1 1.5	1 1.5	1 1.5	1 1.5	1 1.5
Axial spring stiffness (N/mm)	C _a	20 12	50 30	72 48	82 52
Lateral spring stiffness (N/mm)	C _r	315 108	730 230	1200 380	1550 435

ORDERING EXAMPLE	BK7	150	71	32	22.23	XX
Model	●					
Size		●				
Overall length mm			●			
Bore D1 H7				●		
Shaft D2 f7					●	
Special designation only (e.g. special bore tolerance).						

For custom features place an XX at the end of the part number and describe the special requirements (e.g. BK7 / 150 / 71 / 32 / 22.23 / XX; XX=finely balanced for 25,000 rpm)

BK8

WITH ISO FLANGE CONNECTION

50 - 2,600 Nm

PROPERTIES



FEATURES

- for ISO flange output gearboxes
- allows for continuous hollow through axis with some right angle gearbox designs
- compact design

MATERIAL


- **Bellows:** high grade stainless steel

- **Hubs:** up through size 300 aluminum, size 1500 and up steel

- **Adapter flange:** steel

DESIGN

One clamping hub on one end with an integral flange and adapter flange on the other end. Maximum transmittable torque depends on the bore diameter.

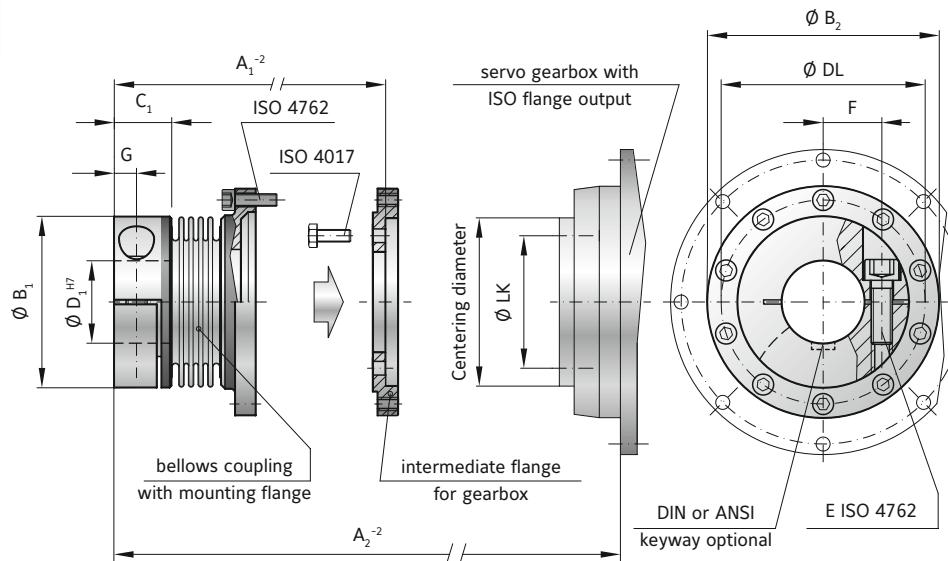


MODEL BK8

SIZE	15	60	150	300	1500
Flange centering diameter (mm)	40 h7	63 h7	80 h7	100 h7	160 h7
Flange bolt circle / thread Ø (mm)	31.5 / 8 x M5	50 / 8 x M6	63 / 12 x M6	80 / 12 x M8	125 / 12 x M10
Maximum torque* (Nm)	50	210	380	750	2600
Length -2 (mm)	A ₁ 48.5	A ₂ 68	72	90	140
Length -2 (mm)	A ₂ 68	A ₁ 48.5	101	128	190
Outside diameter of hub (mm)	B ₁ 49	B ₁ 49	82	110	157
Flange diameter (mm)	B ₂ 63.5	B ₂ 63.5	108	132	188
Fit length (mm)	C ₁ 16.5	C ₁ 16.5	27.5	34	55
Inside diameter possible from Ø to Ø H7 (mm)	D ₁ 12-28	D ₁ 14-35	19-42	24-60	50-80
Hub bolt circle (mm)	DL 56.5	DL 76	97	120	170
Fastening threads (mm)	DL 10 x M4	DL 10 x M5	10 x M6	12 x M6	16 x M8
Fastening screws ISO 4762	E ₁ 1 x M5	E ₁ 1 x M8	1 x M10	1 x M12	2 x M20
Tightening torque of the fastening screw (Nm)	E ₁ 8	E ₁ 45	80	120	470
Distance between centerlines (mm)	F 1 x 17.5	F 1 x 23	1 x 27	1 x 39	2 x 55
Distance (mm)	G 6.5	G 9.5	11	13	22.5
Approximate weight (kg)	0.3	0.7	1	2.8	10
Moment of inertia (10^{-3} kgm ²)	J _{ges} 0.15	J _{ges} 0.65	1.3	5.5	45
Lateral ± (mm)	Max. values 0.25	Max. values 0.25	0.25	0.25	0.25
Angular ± (degree)	Max. values 1	Max. values 1	1	1	1
Axial ± (mm)	Max. values 1	Max. values 1.5	2	2.5	3

* maximum torque transmittable only for brief periods and requires maximum bore for clamping strength

ORDERING EXAMPLE	BK8	60	22.23	67	XX
Model	●				
Size		●			
Bore D1 H7			●		
Overall length mm				●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. BK8 / 60 / 22.23 / 67 / XX; XX=anodized hubs)					

Special designation only
(e.g. special bore tolerance).

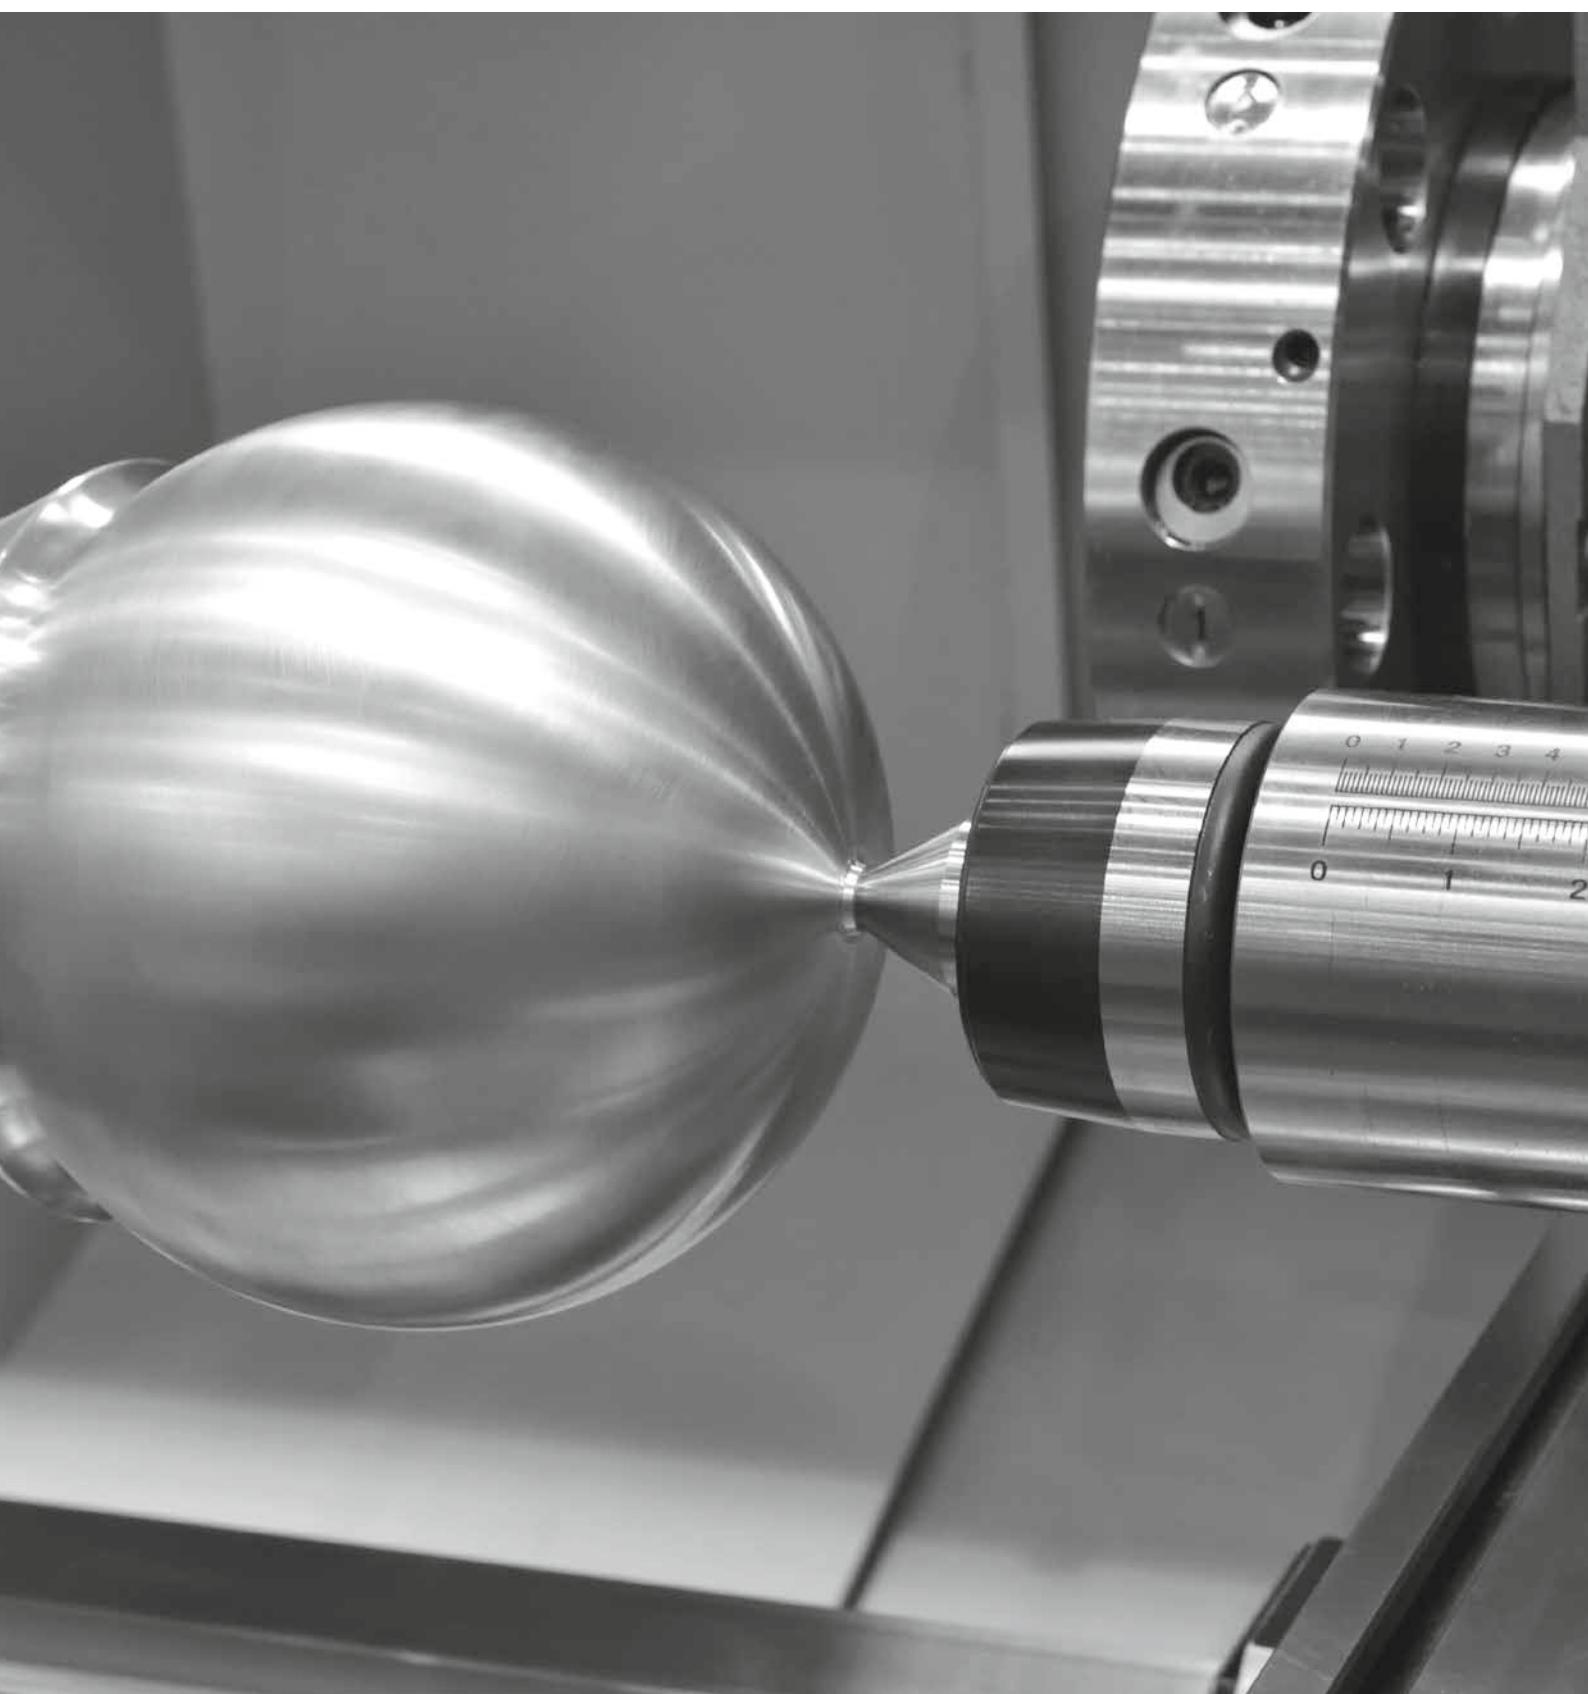

BACKLASH FREE MINIATURE METAL BELLows COUPLINGS

0.05- 10 Nm



GENERAL INFORMATION R+W MINIATURE BELLows COUPLINGS:

SERVICE LIFE

R+W bellows couplings are fatigue resistant and wear free for an infinite service life, as long as the technical limits are not exceeded.

FIT CLEARANCE

Overall shaft / hub clearance of 0.01 - 0.05 mm

ROTATIONAL SPEED

Standard up to 10,000 rpm.
Over 10,000 rpm in finely balanced version; up to grade ISO G=2.5 is available.

TEMPERATURE RANGE

-30 to +100° C

SPECIAL SOLUTIONS

Various materials, tolerances, dimensions and performance ratings available for custom applications on request.

ATEX (Optional)

For use in hazardous zones 1/21 and 2/22, the metal bellows has been authorized under directive 94/9/EG and is available with certification.



BACKLASH FREE, TORSIONALLY STIFF MINIATURE COUPLINGS

0.05 - 10 Nm

MODEL	FEATURES	
MK1	 with radial set screws from 0.05 - 10 Nm <ul style="list-style-type: none">▶ large bores available in small size▶ integral dismounting groove eliminates the need for flats on shafts▶ economy design	Page 52
MK2	 with clamping hub from 0.5 - 10 Nm <ul style="list-style-type: none">▶ easy mounting▶ for highly dynamic applications▶ finely balanced versions up to 90,000 rpm	Page 53
MKH	 with split clamping hub from 0.5 - 10 Nm <ul style="list-style-type: none">▶ lateral mounting possible▶ easy installation and removal▶ allows for pre-alignment of shafts	Page 54
MK3	 with expanding shaft from 0.5 - 10 Nm <ul style="list-style-type: none">▶ easy installation▶ solution for mismatched shaft / bore diameters▶ saves space and cost	Page 55
MK4	 with radial set screw and blind mate connection from 0.5 - 10 Nm <ul style="list-style-type: none">▶ axial installation possible▶ electrically and thermally isolating▶ includes integral dismounting groove	Page 56

MODEL	FEATURES	
MK5	 <p>with clamping hub and blind mate connection from 0.5 - 10 Nm</p> <ul style="list-style-type: none"> ▶ axial installation possible ▶ electrically and thermally isolating ▶ easy mounting and dismounting 	Page 57
MK6	 <p>with expanding shaft and blind mate connection from 0.5 - 10 Nm</p> <ul style="list-style-type: none"> ▶ full axial installation possible ▶ well suited to restricted installation space ▶ solution to mismatched bore / shaft diameters 	Page 58
MKS	 <p>with conical clamping ring from 4.5 - 10 Nm</p> <ul style="list-style-type: none"> ▶ speeds up to 120,000 rpm ▶ naturally very well balanced due in part to self centering clamping system ▶ for high speed high precision applications 	Page 59
BKL	 <p>with clamping hub up to 3 Nm</p> <ul style="list-style-type: none"> ▶ low priced ▶ light weight and low moment of inertia ▶ temperatures up to 200° C 	Page 60
FK1	 <p>with radial set screw up to 1 Ncm</p> <ul style="list-style-type: none"> ▶ well balanced ▶ sterilizable 	Page 61

MK1

WITH RADIAL SET SCREWS

0.05 - 10 Nm



PROPERTIES

FEATURES

- integral dismounting groove eliminates the need for flats on shafts
- economical design
- larger bore diameters in a small size possible

MATERIAL

- **Bellows:** size 0.5 tombac; sizes 1 and up high grade stainless steel



► Hubs: aluminium

DESIGN

Two hubs with radial set screws concentrically mounted to flexible bellows. Speeds up to 20,000 rpm; over 20,000 with finely balanced version.

Advantage:

Bore diameters above 4mm have an integral dismounting groove, which provides clearance over any burr which may be kicked up by the set screw, eliminating the need for flats on shafts.

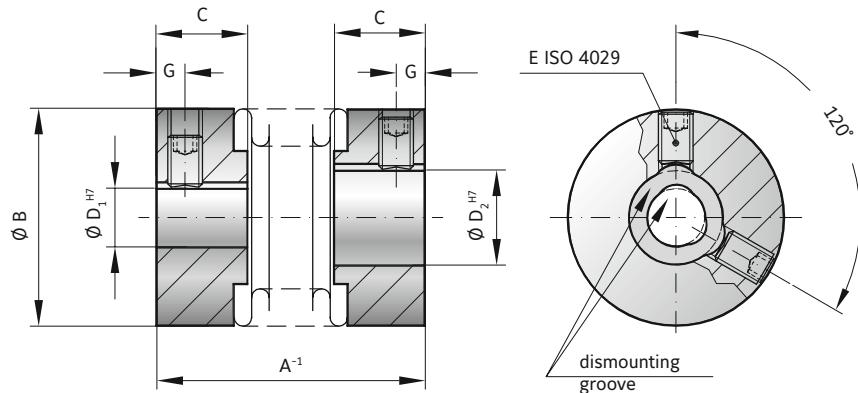

MODEL MK1

SIZE	0.5	1	5	10	15	20	45	100	
Rated torque (Nm)	T _{KN}	0.05	0.1	0.5	1.0	1.5	2.0	4.5	10
Overall length (mm)	A ⁻¹	14	20	20 23 26	22 25 28	24 29	26 31 35	37 45	43 53
Outside diameter (mm)	B	6.5	10	15	15	19	25	32	40
Fit length (mm)	C	4	5	6.5	6.5	7.5	11	13	15
Inside diameter possible from Ø to Ø H7 (mm)	D _{1/2}	1-3	1-5	3-9	3-9	3-12	3-16	6-22	6-28
Clamping screw ISO 4029	E	1xM2	1xM2.5	1xM3	1xM3	2xM3	2xM4	2xM5	2xM6
Tightening torque of the fastening screw (Nm)		0.35	0.75	1.3	1.3	1.3	2.5	4	6
Distance (mm)	G	1.5	1.8	2	2	2	2.5	3.5	4
Moment of inertia (gcm ²)	J _{ges.}	0.1	0.4	1.1 1.2 1.3 1.3 1.8 2	4.7 5.5 15 18 20 65 70 180 220				
Approximate weight (g)		1	5	6 6 6 6 7 8 12 14 22 24 26 54 58 106 114					
Torsional stiffness (Nm/rad)	C _T	50	70	280 210 170 510 380 320 750 700 1200 1300 1200 7000 5000 9050 8800					
Axial (mm)		0.4	0.4	0.4 0.5 0.6 0.4 0.5 0.6 0.5 0.7 0.5 0.6 0.7 0.7 1 1 1.2					
Lateral (mm)	Max. values	0.1	0.15	0.15 0.2 0.25 0.15 0.2 0.25 0.15 0.2 0.15 0.2 0.25 0.2 0.25 0.2 0.3					
Angular (degree)		1	1	1.5 2 1 1.5 2 1.5 1.5 1.5 1.5 1.5 2 1.5 2 1.5 2					

ORDERING EXAMPLE	MK1	5	26	4.76	5	XX
Model	●					
Size		●				
Overall length mm			●			
Bore D1 H7				●		
Bore D2 H7					●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. MK1 / 5 / 26 / 4.76 / 5 / XX; XX=finely balanced for 25,000 rpm)						
Special designation only (e.g. high speed balancing).						

MK2

WITH CLAMPING HUB

0.5 - 10 Nm



PROPERTIES

FEATURES


- for highly dynamic applications
- easy installation
- light weight and low moment of inertia

DESIGN

Two clamping hubs concentrically mounted to flexible bellows.

MATERIAL

- **Bellows:** high grade stainless steel
- **Hubs:** aluminium

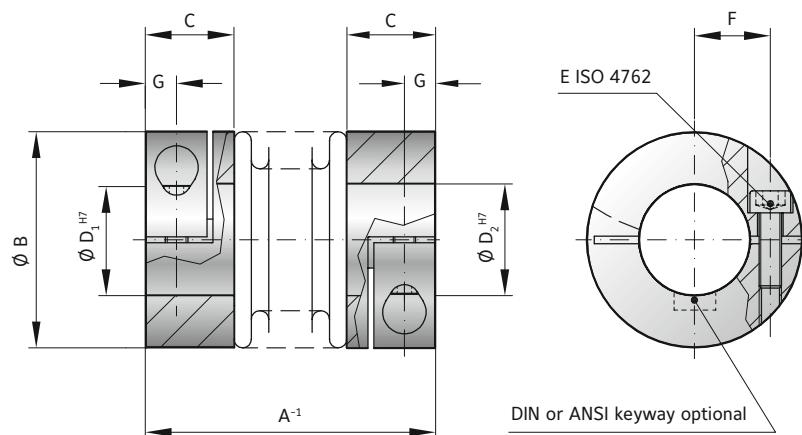

MODEL MK2

SIZE	5	10	15	20	45	100
Rated torque (Nm)	T _{KN}	0.5	1.0	1.5	2.0	4.5
Overall length (mm)	A ⁻¹	25 28 31	27 30 33	30 35	35 40 44	46 54 50 60
Outside diameter (mm)	B	15	15	19	25	32
Fit length (mm)	C	9	9	11	13	16
Inside diameter possible from Ø to Ø H7 (mm)	D _{1/2}	3-7	3-7	3-8	3-12.7	5-16
Fastening screw ISO 4762	M2	M2	M2.5	M3	M4	M4
Tightening torque of the fastening screw (Nm)	E	0.43	0.43	0.85	2.3	4
Distance between centerlines (mm)	F	4.5	4.5	6	8	10
Distance (mm)	G	3	3	3.5	4	5
Moment of inertia (gcm ²)	J _{ges}	2.6 2.8 3 3 3.4 3.6	8.5 9.5 25 27 29	100 108 160 205		
Approximate weight (g)		9 9 9 9 10 11	22 24 36 38 40	74 78 120 130		
Torsional stiffness (Nm/rad)	C _T	280 210 170 510 380 320	750 700 1200 1300	1200 7000 5000 9050	8800	
Axial (mm)		0.4 0.5 0.6 0.4 0.5 0.6	0.5 0.7 0.5 0.6	0.7 0.7 1 1	1.2	
Lateral (mm)	Max. values	0.15 0.2 0.25 0.15 0.2 0.25	0.15 0.2 0.15 0.2	0.25 0.2 0.25 0.2	0.25 0.2 0.25 0.2	0.3
Angular (degree)		1 1.5 2 1 1.5 2	1.5 1.5 1.5 1.5	2 1.5 2 1.5		2 1.5 2

ORDERING EXAMPLE	MK2	5	25	4.76	5	XX
Model	●					
Size		●				
Overall length mm			●			
Bore D1 H7				●		
Bore D2 H7					●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. MK2 / 5 / 25 / 4.76 / 5 / XX; XX=finely balanced for 25,000 rpm)						

Special designation only
(e.g. special bore tolerance).

MKH

WITH SPLIT CLAMPING HUB

0.5 – 10 Nm

PROPERTIES



FEATURES


- mounts laterally
- allows for pre-alignment of shafts
- light weight and low moment of inertia

MATERIAL

- **Belows:** high grade stainless steel
- **Hubs:** aluminium

DESIGN

Two fully split clamping hubs, with two screws in each, concentrically mounted to flexible bellows.

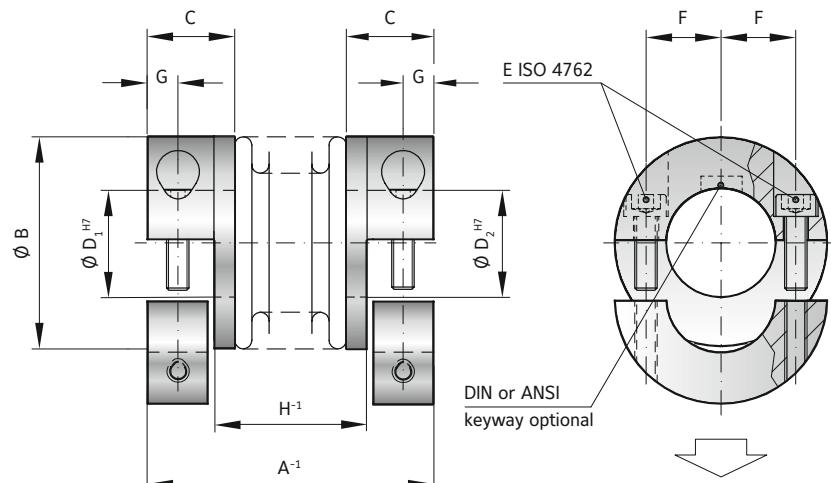

MODEL MKH

SIZE	5	10	15	20	45	100
Rated torque (Nm)	T _{KN}	0.5	1.0	1.5	2.0	4.5
Overall length (mm)	A ⁻¹	25 28 31	27 30 33	30 35	35 40 44	46 54
Outside diameter (mm)	B	15	15	19	25	32
Fit length (mm)	C	9	9	11	13	16
Inside diameter possible from Ø to Ø H7 (mm)	D _{1/2}	3-7	3-7	3-8	3-12.7	5-16
Fastening screw ISO 4762	E	M2	M2	M2.5	M3	M4
Tightening torque of the fastening screw (Nm)		0.43	0.43	0.85	2.3	4
Distance between centerlines (mm)	F	4.5	4.5	6	8	10
Distance (mm)	G	3	3	3.5	4	5
Distance (H) (mm)	H ⁻¹	12 15 18 14 17 20	14.5 19.5	17 22 26	23.5 31.5	27.5 37.5
Moment of inertia (gcm ²)	J _{ges}	2.6 2.8 3 3 3.4 3.6	8.5 9.5	25 27 29	100 108	160 205
Approximate weight (g)		9 9 9 9 10 11	22 24	36 38 40	74 78	120 130
Torsional stiffness (Nm/rad)	C _T	280 210 170 510 380 320	750	700 1200 1300 1200	7000 5000	9050 8800
Axial (mm)		0.4 0.5 0.6 0.4 0.5 0.6	0.5 0.7	0.5 0.6 0.7	0.7 1	1 1.2
Lateral (mm)	Max. values	0.15 0.2 0.25 0.15 0.2 0.25	0.15	0.2 0.15	0.2 0.25	0.2 0.25
Angular (degree)		1 1.5 2 1 1.5 2	1.5	1.5 1.5	2 1.5	2 1.5

ORDERING EXAMPLE	MKH	20	35	8	9.53	XX
Model	●					
Size		●				
Overall length mm			●			
Bore D1 H7				●		
Bore D2 H7					●	
Special designation only (e.g. special bore tolerance).						

For custom features place an XX at the end of the part number and describe the special requirements (e.g. MKH / 20 / 35 / 8 / 9.53 / XX; XX=finely balanced for 25,000 rpm)

MK3

WITH EXPANDING SHAFT

0.5 - 10 Nm

PROPERTIES



FEATURES

- for hollow shaft mounting
- easy to install
- light weight and low moment of inertia


MATERIAL

- **Bellows:** high grade stainless steel
- **Clamping hub:** aluminium

► Expanding shaft: steel

DESIGN

One clamping hub with one clamping screw, one expanding shaft system, both concentrically mounted to flexible bellows.

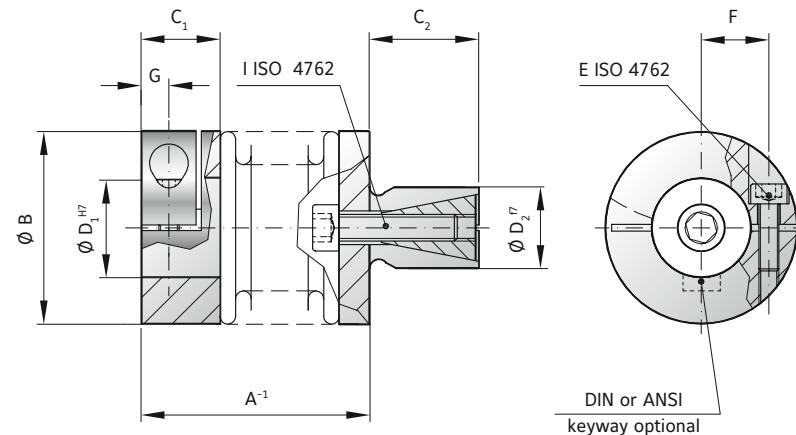

MINIATURE COUPLINGS MK

MODEL MK3

SIZE	5	10	15	20	45	100
Rated torque (Nm)	T _{KN}	0.5	1	1.5	2	4.5
Overall length (mm)	A ⁻¹	20 23 26	22 25 28	24 30	27 33 36	36 44 41 51
Outside diameter (mm)	B	15	15	19	25	32 40
Fit length (mm)	C ₁	9	9	11	13	16 16
Shaft length (mm)	C ₂	10	10	12	12	15 20
Inside diameter possible from Ø to Ø H7 (mm)	D ₁	3-7	3-7	4-8	4-12.7	5-16 6-24
Standard shaft possible from Ø to Ø f7 (mm)	D ₂	8-10	8-10	10-14	10-16	14-20 16-24
Fastening screw ISO 4762	E	M2	M2	M2.5	M3	M4 M4
Tightening torque of the fastening screw (Nm)		0.43	0.43	0.85	2.3	4
Distance between centerlines (mm)	F	4.5	4.5	6	8	10 15
Distance (mm)	G	3	3	3.5	4	5 5
Fastening screw ISO 4762	I	M3	M3	M4	M4	M5 M6
Tightening torque of the fastening screw (Nm)		1.5	1.5	3	4	6.5
Moment of inertia (gcm ²)	J _{ges.}	2.6 2.8 3.0 3.0	3.4 3.6	8.5 9.5	25 27 29	100 108 160 205
Torsional stiffness (Nm/rad)	C _T	280 210 170 510	380 320	750 700	1200 1300 1200	7000 5000 9050 8800
Axial (mm)	Max. values	0.4 0.5 0.6 0.4	0.5 0.6	0.5 0.7	0.5 0.6 0.7	0.7 1 1 1.2
Lateral (mm)		0.15 0.2 0.25 0.15	0.2 0.25	0.15 0.2	0.15 0.2 0.25	0.2 0.25 0.2 0.3
Angular (degree)		1 1.5 2 1	1.5 2	1.5 1.5	2 1.5	2 1.5 2

ORDERING EXAMPLE	MK3	20	36	6.35	12	XX
Model	●					
Size		●				
Overall length mm			●			
Bore D1 H7				●		
Shaft D2 f7					●	
Special designation only (e.g. special bore / shaft tolerance).						

For custom features place an XX at the end of the part number and describe the special requirements (e.g. MK3 / 20 / 36 / 6.35 / 12 / XX; XX=finely balanced for 25,000 rpm)

MK4

BLIND MATE WITH RADIAL SET SCREWS

0.5 – 10 Nm



PROPERTIES

FEATURES


- easy installation and removal
- electrically and thermally isolating
- absolutely backlash free assembly

MATERIAL

- **Bellows:** high grade stainless steel
- **Hubs:** aluminium
- **Tapered male segment:** high strength plastic

DESIGN

Two hubs with radial set screws, one of which has a tapered male projection for bind mate connection. Speeds up to 20,000 rpm; over 20,000 with finely balanced version.

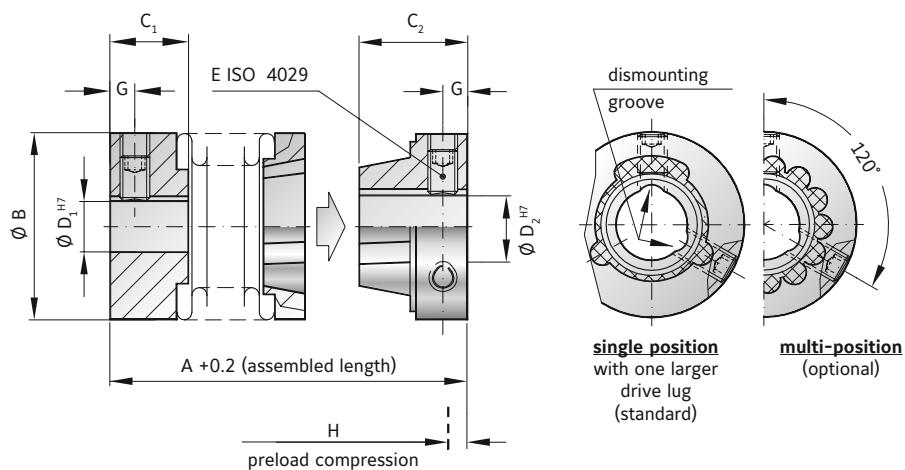

MODEL MK4

SIZE	5	15	20	45	100
Rated torque (Nm)	T_{KN}	0.5	1.5	2	4.5
Overall length (inserted) (mm)	$A^{+0.2}$	22 25 28	26 31	28 33 37	39 47
Outside diameter (mm)	B	15	19	25	32
Fit length (mm)	C_1	6.5	7.5	11	13
Fit length (mm)	C_2	9	10	11	14
Inside diameter possible from \emptyset to \emptyset H7 (mm)	D_1	3-9	3-12	3-16	6-22
Inside diameter possible from \emptyset to \emptyset H7 (mm)	D_2	3-6.35	3-9	3-12.7	6-16
Clamping screw ISO 4029	E	1xM3	2xM3	2xM4	2xM5
Tightening torque of the fastening screw (Nm)		1.3	1.3	2.5	4
Distance (mm)	G	2	2	2.5	3.5
Preload compression (mm)	H	0.4	0.5	0.5	0.7
Axial recovery force at max. preload compression (N)		5 3 2	4 3	3 4 3	15 10 25 30
Moment of inertia (gcm^2)	J_{ges}	2.0 2.2 2.5	5.5 6.0	21 23 25	80 85 200 210
Torsional stiffness (Nm/rad)	C_T	280 210 170	750 700	1200 1300 1200	7000 5000 9050 8800
Axial* (mm)		0.4	0.5 0.6	0.5 0.6	0.7 1 1.2
Lateral (mm)	Max. values	0.15 0.2 0.25	0.15 0.2	0.15 0.2 0.25	0.2 0.25 0.3
Angular (degree)		1 1.5 2	1.5 1.5	1.5 2 1.5	2 1.5 2

* in addition to maximum pretensioning

ORDERING EXAMPLE	MK4	20	37	8	9.53	XX
Model	●					
Size		●				
Overall length mm			●			
Bore D1 H7				●		
Bore D2 H7					●	
Special designation only (e.g. special bore tolerance).						

For custom features place an XX at the end of the part number and describe the special requirements (e.g. MK4 / 20 / 37 / 8 / 9.53 / XX; XX=finely balanced for 25,000 rpm)

MK5

BLIND MATE WITH CLAMPING HUB

0.5 - 10 Nm



PROPERTIES

FEATURES


- easy installation and removal
- electrically and thermally isolating
- absolutely backlash free assembly

MATERIAL

- **Bellows:** high grade stainless steel
- **Hubs:** aluminium
- **Tapered male segment:** high strength plastic

DESIGN

Two clamping hubs, one of which has a tapered male projection for bind mate connection.

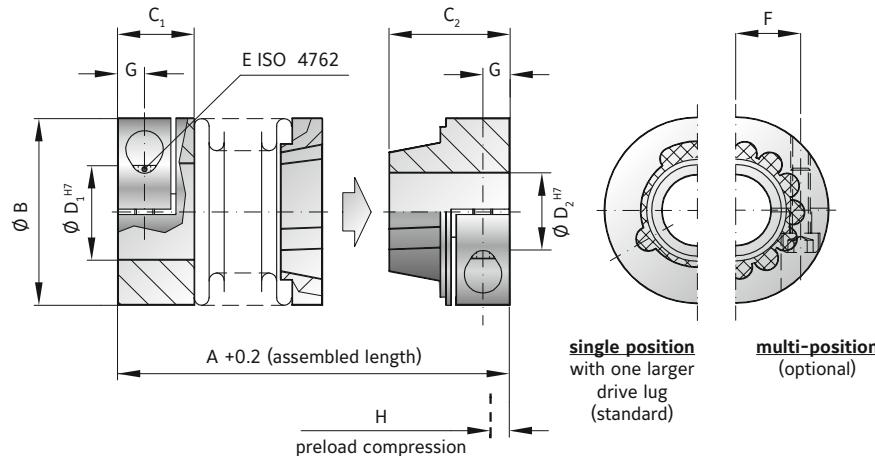

MODEL MK5

SIZE	5	15	20	45	100
Rated torque (Nm)	T_{KN}	0.5	1.5	2	4.5
Overall length (inserted) (mm)	$A^{+0.2}$	27 30 33	34 39	37 43 46	49 57
Outside diameter (mm)	B	15	19	25	32
Fit length (mm)	C_1	9	11	13	16
Fit length (mm)	C_2	12	14	16	20
Inside diameter possible from Ø to Ø H7 (mm)	$D_{1/2}$	3-6.35	3-8	3-12.7	5-16
Fastening screw ISO 4762	E	M2	M2.5	M3	M4
Tightening torque of the fastening screw (Nm)		0.43	0.85	2.3	4
Distance between centerlines (mm)	F	4.5	6	8	10
Distance (mm)	G	3	3.5	4	5
Preload compression (mm)	H	0.4	0.5	0.5	0.7
Axial recovery force at max. preload compression (N)		5 3 2	4 3	3 4 3	15 10 25 30
Moment of inertia (gcm^2)	J_{ges}	3.0 3.2 3.5	9.0 10	28 30 33	110 120 220 230
Torsional stiffness (Nm/rad)	C_T	280 210 170	750 700	1200 1300 1200	7000 5000 9050 8800
Axial* (mm)		0.4 0.5 0.6	0.5 0.7	0.5 0.6 0.7	0.7 1 1 1.2
Lateral (mm)	Max. values	0.15 0.2 0.25	0.15 0.2	0.15 0.2 0.25	0.2 0.25 0.2 0.3
Angular (degree)		1 1.5 2	1.5 1.5	1.5 2 1.5	2 1.5 2

* in addition to maximum pretensioning

ORDERING EXAMPLE	MK5	20	37	6	9.53	XX
Model	●					
Size		●				
Overall length mm			●			
Bore D1 H7				●		
Bore D2 H7					●	
Special designation only (e.g. special bore tolerance).						

For custom features place an XX at the end of the part number and describe the special requirements (e.g. MK5 / 20 / 37 / 6 / 9.53 / XX; XX=finely balanced for 25,000 rpm)

MK6

BLIND MATE WITH EXPANDING SHAFT

0.5 – 10 Nm



PROPERTIES

FEATURES

- ▶ easy installation and removal
- ▶ solution for mismatched bore / shaft diameters
- ▶ absolutely backlash free assembly


MATERIAL

- ▶ **Bellows:** high grade stainless steel

- ▶ **Tapered male segment:** high strength plastic
- ▶ **Clamping hub:** aluminium
- ▶ **Expanding shaft:** steel

DESIGN

One clamping hub with a tapered male projection for bind mate connection and one expanding shaft system.

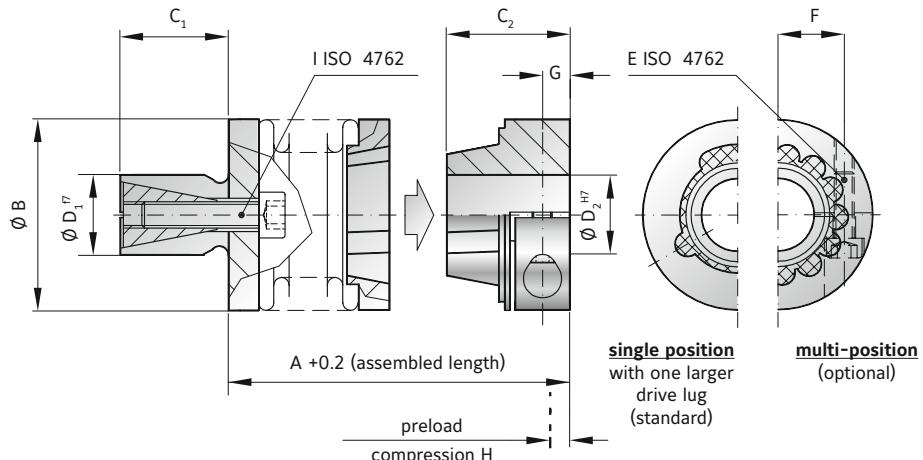

MODEL MK6

SIZE	5	15	20	45	100
Rated torque (Nm)	0.5	1.5	2	4.5	10
Overall length (inserted) (mm)	A ^{+0.2}	21 24 27	27 32	28 34 38	38 46
Outside diameter (mm)	B	15	19	25	32
Shaft length (mm)	C ₁	10	12	12	15
Fit length (mm)	C ₂	12	14	16	20
Standard shaft Ø f7 (mm)	D ₁	8-10	10-14	10-16	14-20
Inside diameter possible from Ø to Ø H7 (mm)	D ₂	3-6.35	3-8	3-12.7	5-16
Fastening screw ISO 4762	E	M2	M2.5	M3	M4
Tightening torque of the fastening screw (Nm)	E	0.43	0.85	2.3	4
Distance between centerlines (mm)	F	4.5	6	8	10
Distance (mm)	G	3	3.5	4	5
Preload compression (mm)	H	0.4	0.5	0.5	0.7
Axial recovery force at max. preload compression (N)		5 3 2	4 3	3 4 3	15 10 25 30
Fastening screw ISO 4762	I	M3	M4	M4	M5
Tightening torque of the fastening screw (Nm)	I	1.5	3	4	6.5
Moment of inertia (gcm ²)	J _{ges}	3.0 3.2 3.5	9.0 10	28 30 33	110 120 220 230
Torsional stiffness (Nm/rad)	C _T	280 210 170	750 700	1200 1300 1200	7000 5000 9050 8800
Lateral (mm)	Max. values	0.15 0.2 0.25	0.15 0.2	0.15 0.2 0.25	0.2 0.25 0.2 0.3
Angular (degree)		1 1.5 2	1.5	1.5 1.5 2	1.5 2

ORDERING EXAMPLE	MK6	20	28	12	9.53	XX
Model	●					
Size		●				
Overall length mm			●			
Shaft D1 f7				●		
Bore D2 H7					●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. MK6 / 20 / 28 / 12 / 9.53 / XX; XX=finely balanced for 25,000 rpm)						

Special designation only
(e.g. special bore / shaft tolerance).

MKS

WITH CONICAL CLAMPING RING

4.5 - 10 Nm

**High speed**

PROPERTIES

FEATURES


- for high speeds
- self centering conical clamping ring design
- high balancing grade

MATERIAL

- **Bellows:** high grade stainless steel
- **Hubs and clamping rings:** aluminium

DESIGN

Two hubs with conical clamping ring and three or four screws. Maximum speed up to 120,000 rpm.

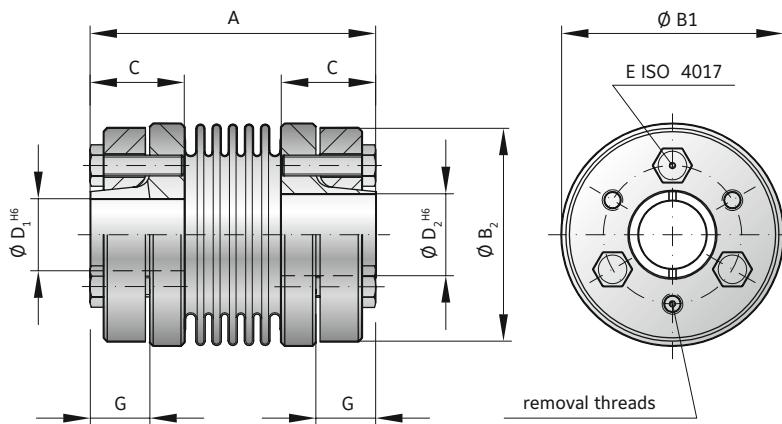

MODELL MKS

SIZE	45	100	150		
Rated torque (Nm)	T _{KN}	4.5	10	15	
Overall length (mm)	A	42	48	53	
Outside diameter (mm)	B ₁	32	40	49	
Outside diameter of hub (mm)	B ₂	30	38	46	
Fit length (mm)	C	14	16	20	
Inside diameter possible from Ø to Ø H6 (mm)	D _{1/2}	6-10	8-14	10-19	
Fastening screw ISO 4017 (mm)	E	3x M3	4x M3	8x M3	
Tightening torque of the fastening screw (Nm)		1.3	1.3	1.3	
Distance (mm)	G	8.5	9.5	13	
Moment of inertia (gcm ²)	J _{ges.}	65	226	561	
Masse (g)		51	103	171	
Torsional stiffness (Nm/rad)	C _T	7000	9050	23000	
Axial (mm)		0.5	0.75	0.75	
Lateral (mm)	Max. values	0.1	0.05*	0.1	0.05*
Angular (degree)		0.5	0.5	0.5	

For speeds beyond 50,000 rpm use reduced misalignment values marked with *

ORDERING EXAMPLE	MKS	45	8	9.53	XX
Model	.				
Size		.			
Bore D1 H6			.		
Bore D2 H6				.	
Special designation only (e.g. special bore tolerance).					

For custom features place an XX at the end of the part number and describe the special requirements (e.g. MKS / 45 / 8 / 9.53 / XX; XX=anodized aluminum hubs)

BKL/003

ECOFLEX® WITH CLAMPING HUB

3 Nm



PROPERTIES

FEATURES


- economically priced
- backlash free and torsionally stiff
- wear free and robust

MATERIAL

- **Bellows:** high grade stainless steel
- **Hubs:** aluminium

DESIGN

Two clamping hubs, each with a clamping screw.
Operational from -40 to +200° C

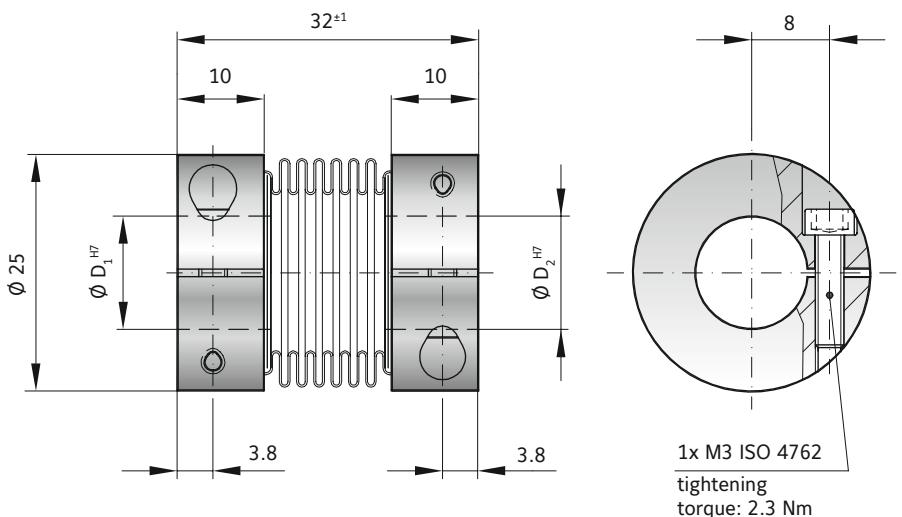

MODEL BKL/003

SIZE	3	
Rated torque (Nm)	T_{KN}	3
Standard bore diameters H7 (mm)	D_1/D_2	3 to 12.7
Moment of inertia (gcm ²)	$J_{ges.}$	20
Approximate weight (g)		23
Tightening torque of the fastening screws (Nm)		2.3
Torsional stiffness (Nm/rad)	C_T	994
Axial (mm)		1
Lateral (mm)	Max. values	0.2
Angular (degree)		2

ECOFLEX®:

The low cost alternative for encoders, potentiometers, stepper motors, and small servo drives.

ORDERING EXAMPLE	BKL	003	3	6.35	XX
Model	.				
Size		.			
Bore D1 H7			.		
Bore D2 H7				.	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. BKL / 003 / 3 / 6.35 / XX; XX=stainless steel hubs)					

Special designation only
(e.g. special bore tolerance).

FK1

MICROFLEX WITH RADIAL SET SCREWS

1 Ncm

PROPERTIES



FEATURES

- very small dimensions
- backlash free
- vibration damping

MATERIAL


- **Flex element:** high strength Polyamide
- **Hubs:** stainless steel

DESIGN

Two hubs with set screws mounted to a flex beam segment. Operational from -35° to +80° C. Speeds up to 20,000 rpm *

SPECIAL SOLUTION


Effective outside diameter can be reduced to 4.5mm through the use of M2x1.5mm screws.

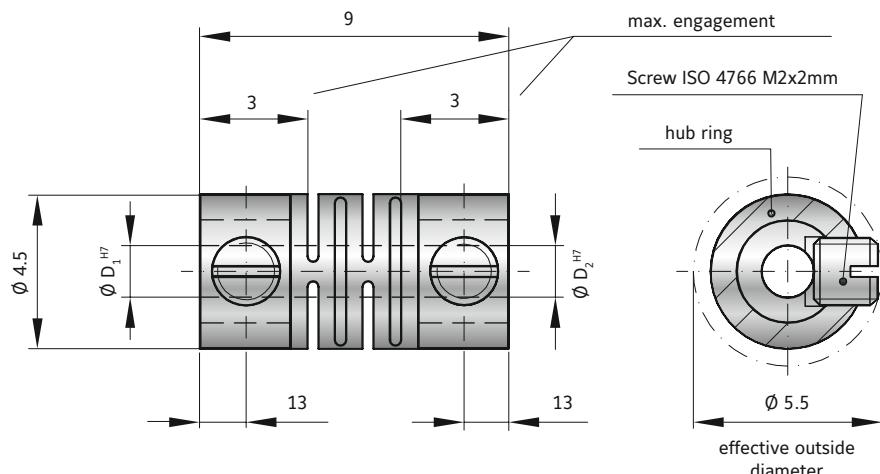

MODEL FK1/001/9

SIZE			
Rated torque	(Ncm)	T_{KN}	1
Standard bore H7	(mm)	D_1, D_2	1.5 / 1.5 or 2 / 1.5 additional bore diameters available upon request
Moment of inertia	(gcm ²)	$J_{ges.}$	5.39
Approximate weight	(g)		0.47
Torsional stiffness	(Ncm/rad)	C_T	23 (measured at +20° C)
Axial	(mm)	Max. values	0.2
Lateral	(mm)		0.1
Angular	(degree)		1.5

COUPLING ASSEMBLY AND MOUNTING

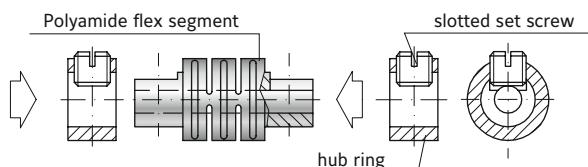

The screw threads through the clamping ring, through a slot in the flexible segment, and down onto the shaft, securing the entire assembly. Including a flat on the shaft can improve torque transmission.


Caution: Always use a precisely calibrated torque wrench during installation.

ORDERING EXAMPLE	FK1	001	9	1.5	1.5	XX
Model	●					
Size		●				
Overall length mm			●			
Bore D1 H7				●		
Bore D2 H7					●	

For custom features place an XX at the end of the part number and describe the special requirements (e.g. FK1 / 001 / 9 / 1.5 / 1.5 / XX; XX=M2x1.5mm screws)

DISMOUNTING

For dismounting, simply loosen the set screws and remove the coupling from the shafts.





BACKLASH FREE SERVO DISC PACK COUPLINGS **25 - 100 Nm**

GENERAL INFORMATION R+W SERVO DISC PACK COUPLINGS:

SERVICE LIFE

R+W bellows couplings are fatigue resistant and wear free for an infinite service life, as long as the technical limits are not exceeded.

FIT CLEARANCE

Overall shaft / hub clearance of 0.01 - 0.05 mm

ROTATIONAL SPEED

Standard up to 10,000 rpm.

TEMPERATURE RANGE

-30 bis +130° C

SPECIAL SOLUTIONS

On request.

ATEX (Optional)

On request.



BACKLASH FREE SERVO DISC PACK COUPLINGS

25 – 100 Nm

MODEL	FEATURES	
SCL2 S	with clamping hub single flex coupling ► very high torsional stiffness ► compact design ► low moment of inertia	Page 66
SCL2 D	with clamping hub double flex coupling ► high torsional stiffness ► low moment of inertia ► lateral misalignment compensation	Page 66
SCL3 S	with conical clamping system single flex coupling ► very high concentricity ► high clamping pressure ► low moment of inertia	Page 67
SCL3 D	with conical clamping system double flex coupling ► high concentricity ► high clamping pressure ► high torsional stiffness	Page 67

SIZING AND SELECTION

SCL

SERVO DISC PACK COUPLINGS

SYMBOLS

T_{KN}	= Rated torque of the coupling (Nm)
T_{AS}	= Peak torque of the drive system e.g. max. acceleration torque of drive (Nm) or max. braking torque of load (Nm)
J_L	= Total load inertia (e.g. spindle + slide + workpiece + 1/2 of coupling) (kgm^2)
J_A	= Total driving inertia (motor [including gear ratio] + 1/2 of coupling) (kgm^2)
C_T	= Torsional stiffness of the coupling (Nm/rad)
f_e	= Natural frequency of the two mass system (Hz)

ACCORDING TO TORQUE

Couplings are normally sized for the highest torque to be regularly transmitted. The peak torque of the application should not exceed the rated torque of the coupling. The following calculation provides an approximation of the minimum required coupling size, and allows for the maximum rated speed and misalignment to exist in the application:

$$T_{KN} \geq 1.5 \cdot T_{AS} \text{ (Nm)}$$

ACCORDING TO ACCELERATION TORQUE

A more detailed calculation takes acceleration and the driving and driven moments of inertia into account. A strong inertia ratio diminishes the effect of the load factor in the sizing calculation.

$$T_{KN} \geq T_{AS} \cdot \frac{J_L}{J_A + J_L} \text{ (Nm)}$$


ACCORDING TO RESONANT FREQUENCY

The torsional natural frequency of the coupling must be significantly higher or lower than that of the equipment. For the mechanical substitution model the two mass system applies.

In practice the following applies: $f_e \geq 2 \cdot f_{er}$

$$f_e = \frac{1}{2 \cdot \pi} \sqrt{C_T \cdot \frac{J_A + J_L}{J_A \cdot J_L}} \text{ (Hz)}$$

Two Mass System

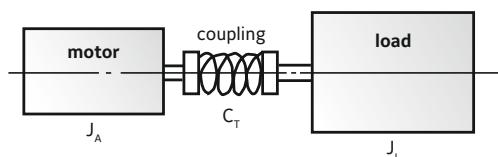


SCL2

WITH CLAMPING HUB



25 - 100 Nm

**NEW**

S = Single flex coupling

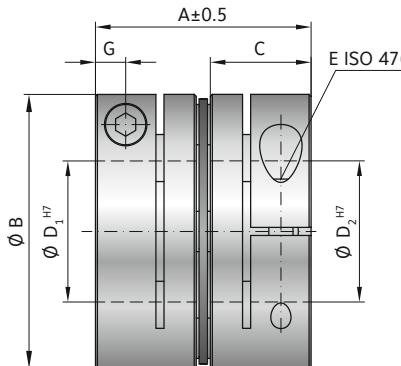

D = Double flex coupling

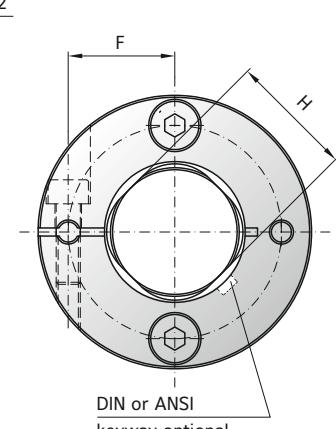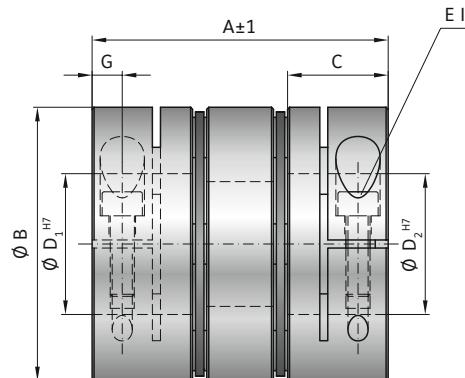

MODEL SCL2

SIZE	25	40	60	100
System	S	D	S	D
Rated torque (Nm)	T _{KN}	25	40	60
Coupling length (mm)	A	43.6	60.2	50.9
Outside diameter (mm)	B	56	63	68
Fit length (mm)	C	20.2	24	25
Bore diameter H7 (mm)	D ₁ / D ₂	15-30	16-30	25-35
Fastening screw	E	M5	M6	M6
Tightening torque (Nm)		8	15	15
Distance (mm)	F	22	23	26.5
Distance (mm)	G	6	7.5	7.5
Shaft diameter limitation (mm)	H	26	-	31
Moment of inertia (10 ⁻³ kgm ²)	J _{ges}	0.095	0.138	0.182
Weight (kg)		0.192	0.284	0.304
Torsional stiffness (Nm/rad)	C _T	46000	23000	58000
Axial displacement ± (mm)	max. values	0.4	0.81	0.42
Lateral displacement ± (mm)		-	0.29	-
Angular displacement ± (degree)		1	2	1
Max. speed (1/min)				10000

ORDERING EXAMPLE	SCL2	60	D	28	33	XX
Model	●					
Size		●				
System			●			
Bore Ø D1 H7				●		
Bore Ø D2 H7					●	
Special designation only (e.g. balanced G2.5)						

For custom features place an XX at the end of the part number and describe the special requirements (SCL2 / 60 / D / 28 / 33 / XX)

SCL3

WITH EXTERNAL CLAMPING RING

25 - 100 Nm

**NEW**

PROPERTIES

FEATURES

- high torsional stiffness
- low inertia
- backlash free
- low imbalance


MATERIAL

- **Disc packs:** highly elastic spring steel
- **Hubs and spacer:** aluminium



DESIGN

Two precision machined coupling hubs and precision spacer mounted to the disc packs by means of high strength screws and spacers for frictional clamping of the assembly.

S = Single flex coupling

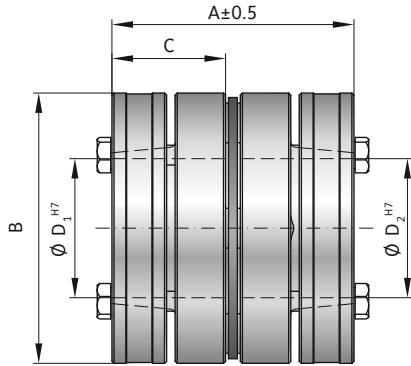

D = Double flex coupling

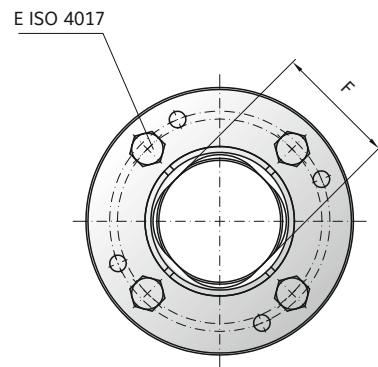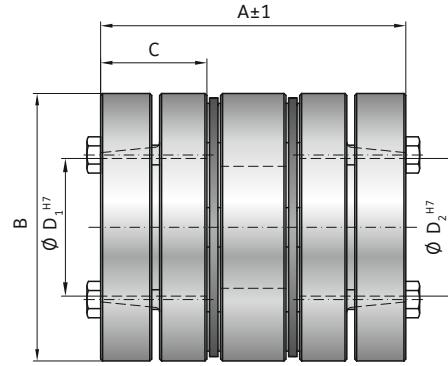

MODEL SCL3

SIZE	25	40	60	100
System	S	D	S	D
Rated torque (Nm)	T _{KN}	25	40	60
Coupling length (mm)	A	56.6	73.2	56.9
Outside diameter (mm)	B	56	63	68
Fit length (mm)	C	27	27	27
Bore diameter H7 (mm)	D ₁ / D ₂	18-28	20-30	27-35
Fastening screw	E	M5	M5	M5
Tightening torque (Nm)		5.5	6	6
Shaft diameter limitation (mm)	F	26	-	31
Moment of inertia (10 ⁻³ kgm ²)	J _{ges}	0.144	0.187	0.230
Weight (kg)		0.299	0.390	0.384
Torsional stiffness (Nm/rad)	C _T	46000	23000	58000
Axial displacement ± (mm)	max. values	0.4	0.81	0.42
Lateral displacement ± (mm)		-	0.29	-
Angular displacement ± (degree)		1	2	1
Max. speed (1/min)			10000	

ORDERING EXAMPLE	SCL3	60	D	28	33	XX
Model	.					
Size		.				
System			.			
Bore Ø D1 H7				.		
Bore Ø D2 H7					.	
For custom features place an XX at the end of the part number and describe the special requirements (SCL3 / 60 / D / 28 / 33 / XX)						

Special designation only
(e.g. balanced G2.5)





BACKLASH FREE ELASTOMER COUPLINGS

SERVOMAX® / ECOLIGHT®

0.5 - 25,000 Nm



GENERAL INFORMATION ABOUT R+W ELASTOMER COUPLINGS:

SERVICE LIFE

When properly selected, handled, and installed, these couplings are maintenance free with infinite service life.

ATEX (Optional)

For use in hazardous zones 1/21 and 2/22, the elastomer coupling has been authorized under directive 94/9/EG and is available with certification.

SPECIAL SOLUTIONS

Various materials, tolerances, dimensions and performance ratings available for custom applications on request.

FIT CLEARANCE

Overall shaft / hub clearance of 0.01 - 0.05 mm

FEATURES

Elastomer is press fit for zero backlash; standard versions are electrically isolating.





BACKLASH FREE ELASTOMER COUPLINGS SERVOMAX® AND ECOLIGHT®

0.5 - 25,000 Nm

MODEL	FEATURES	
EK1	<p>with keyway connection from 0.5 - 25,000 Nm</p> <ul style="list-style-type: none">▶ press fit design▶ readily modified for custom dimensions	Page 74-75
EK2	<p>with clamping hub from 6 - 2,150 Nm</p> <ul style="list-style-type: none">▶ high concentricity▶ backlash free▶ easy mounting	Page 76
EKL	<p>with clamping hub from 0.5 - 2,150 Nm</p> <ul style="list-style-type: none">▶ compact design▶ low moment of inertia▶ easy mounting	Page 77
EKH	<p>with split clamping hub from 4 - 25,000 Nm</p> <ul style="list-style-type: none">▶ for lateral installation▶ allows for pre-aligned shafts▶ easy mounting	Page 78-79
EK6	<p>with conical clamping ring from 4 - 25,000 Nm</p> <ul style="list-style-type: none">▶ high concentricity▶ high clamping pressure▶ self centering hub design▶ allows for axial installation	Page 80-81

MODEL

FEATURES

SP6



**for high speed spindle applications
from 60 - 1,350 Nm**

Page 82

- ▶ very high precision
- ▶ very high concentricity
- ▶ high clamping force
- ▶ symmetrically machined hubs

EK7



**with expanding shaft
from 2 - 2,150 Nm**

Page 83

- ▶ for hollow shaft mounting
- ▶ expanding shaft through axial tightening
- ▶ short body length after installation

EKZ



**intermediate spacer
from 2 - 2,150 Nm**

Page 84

- ▶ high lateral misalignment
- ▶ easy to mount
- ▶ vibration damping

EK4



**for tapered shafts
from 6 - 400 Nm**

Page 85

- ▶ for tapered shafts such as Fanuc motors
- ▶ easy mounting
- ▶ axial installation onto tapered shaft

TX1



**with keyway connection
from 0.5 - 810 Nm**

Page 86-87

- ▶ corrosion proof
- ▶ low cost
- ▶ light weight

GENERAL INFORMATION

R+W ELASTOMER COUPLINGS


AXES OF MISALIGNMENT



Lateral



Angular




Axial

FUNCTION


The equalizing element of the EK coupling is the elastomer insert. It transmits torque without backlash or vibration. The elastomer insert defines the characteristics of the entire drive system.

Backlash is eliminated by the press fit of the elastomer into the hubs. Through variation of the Shore hardness of the elastomer insert, the coupling system can be optimized for the ideal torsional characteristics.

SIZES 2 - 800



Shore hardness 98 A



Shore hardness 64 Sh D



Shore hardness 80 Sh A




Shore hardness 65 Sh D




Shore hardness 64 Sh D

SIZES 2500 - 9500


THE COUPLING INCLUDES 5X ELASTOMER SEGMENTS

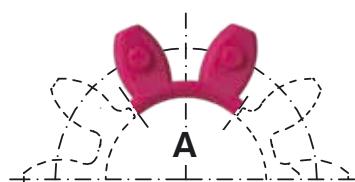

Shore hardness 98 A

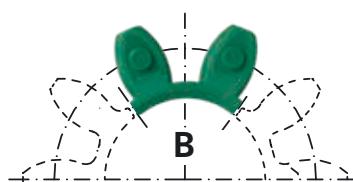

Shore hardness 64 Sh D

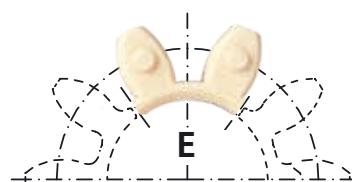

Shore hardness 64 Sh D

DESCRIPTION OF THE ELASTOMER INSERTS

Type	Shore hardness	Color	Material	Relative damping (Ψ)	Temperature range	Features
A	98 Sh A	red	TPU	0.4 - 0.5	-30°C to +100°C	high damping
B	64 Sh D	green	TPU	0.3 - 0.45	-30°C to +120°C	high torsional stiffness
C	80 Sh A	yellow	TPU	0.3 - 0.4	-30°C to +100°C	very high damping
D*	65 Sh D	black	TPU	0.3 - 0.45	-10°C to + 70°C	electrically conductive
E	64 Sh D	beige	Hytrel	0.3 - 0.45	-50°C to +150°C	temperature resistant

* The electrical conductivity of the elastomer material is to prevent the electrostatic charging of the elastomer coupling system, to reduce the risk of sparking in operation. ATEX technical data is available upon request.

The values of the relative damping were determined at 10 Hz and +20° C.

SIZES EK

SIZE	2			5			10			20			60			150			
Type (Elastomer insert)		A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
Static torsional stiffness (Nm/rad)	C_T	50	115	17	150	350	53	260	600	90	1140	2500	520	3290	9750	1400	4970	10600	2000
Dynamic torsional stiffness (Nm/rad)	$C_{T_{dyn}}$	100	230	35	300	700	106	541	1650	224	2540	4440	876	7940	11900	2072	13400	29300	3590
Lateral (mm)		0.08	0.06	0.2	0.08	0.06	0.2	0.1	0.08	0.22	0.1	0.08	0.25	0.12	0.1	0.25	0.15	0.12	0.3
Angular (Degree)	Max. values	1	0.8	1.2	1	0.8	1.2	1	0.8	1.2	1	0.8	1.2	1	0.8	1.2	1	0.8	1.2
Axial (mm)		± 1			± 1			± 1			± 2			± 2			± 2		

SIZE	300			450			800			2500			4500			9500		
Type (Elastomer insert)		A	B	C	A	B	C	A	B	C	A	B	A	B	A	B	A	B
Static torsional stiffness (Nm/rad)	C_T	12400	18000	3000	15100	27000	4120	41300	66080	10320	87600	109000	167000	372000	590000	670000		
Dynamic torsional stiffness (Nm/rad)	$C_{T_{dyn}}$	23700	40400	6090	55400	81200	11600	82600	180150	28600	175000	216000	337000	743000	1180000	1340000		
Lateral (mm)		0.18	0.14	0.35	0.2	0.18	0.35	0.25	0.2	0.4	0.5	0.3	0.5	0.3	0.6	0.4		
Angular (Degree)	Max. values	1	0.8	1.2	1	0.8	1.2	1	0.8	1.2	1.5	1	1.5	1	1.5	1		
Axial (mm)		± 2			± 2			± 2			± 3			± 4			± 5	

Static torsional stiffness at 50% T_{KN}

Dynamic torsional stiffness at T_{KN}

EK1

WITH KEYWAY CONNECTION

0.5 - 2,150 Nm



PROPERTIES

FEATURES

- ▶ press fit design
 - ▶ readily modified for custom dimensions
 - ▶ low backlash (keyway)

DESIGN


Two concentrically machined hubs with curved jaws, keyways, and set screws.

MATERIAL

- ▶ **Hubs:** up to size 450 high strength aluminum; size 800 steel
 - ▶ **Elastomer:** wear resistant thermally stable TPU

Optional:

Conical bores for Fanuc
motors and other tapered
shafts available.

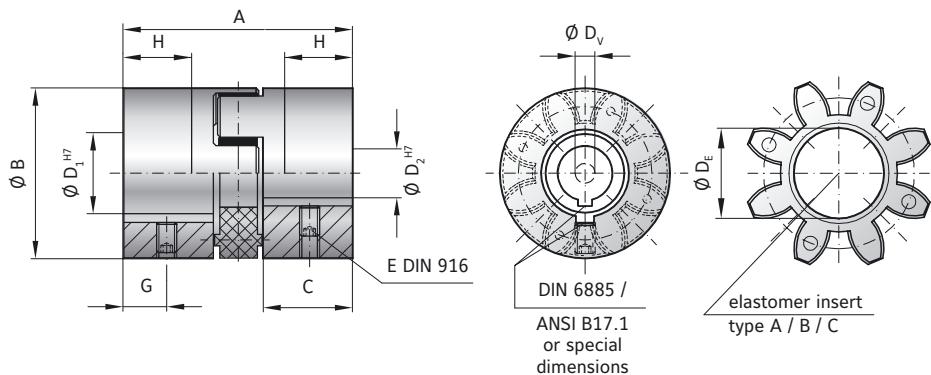

MODEL EK1

For information on shaft misalignment, torsional stiffness, and other details about the elastomer inserts see pages 72 + 73.

** set screw size							
D ₁ /D ₂	- Ø 10	Ø 10.1 - 12	Ø 12.1 - 30	Ø 30.1 - 60	Ø 60.1 - 95	Ø 95.1 - 130	Ø 130.1 - 170
E	M3	M4	M5	M8	M10	M12	M16

EK1

WITH KEYWAY CONNECTION

1,950 - 25,000 Nm



PROPERTIES

FEATURES



- ▶ press fit design
- ▶ readily modified for custom dimensions
- ▶ low backlash (keyway)

MATERIAL

- ▶ **Hubs:** GGG40
- ▶ **Elastomer:** wear resistant thermally stable TPU

DESIGN

Two concentrically machined hubs with curved jaws, keyways, and set screws. Elastomer insert consist of 5 segments.

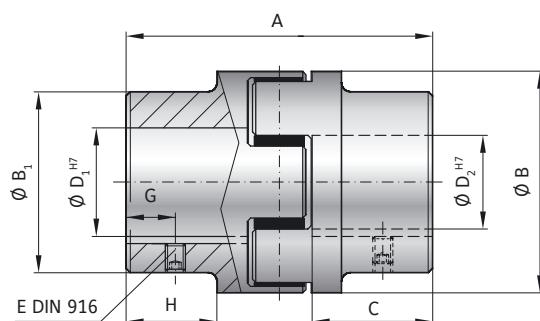

elastomer insert type A / B

MODEL EK1

SIZE	2500		4500		9500	
Type (Elastomer insert)	A	B	A	B	A	B
Rated torque (Nm)	T_{KN}	1950	2450	5000	6200	10000
Max. torque (Nm)	T_{Kmax}	3900	4900	10000	12400	20000
Overall length (mm)	A	213		272		341
Outside diameter (mm)	B/B ₁	160 / 154		225 / 190		290 / 240
Mounting length (mm)	C	88		113		142
Inside diameter (pilot bored) (mm)	D _v	30		40		50
Inside diameter range H7 (mm)	D _{1/2}	30 - 95		40 - 130		50 - 170
Inside diameter of elastomer(mm)	D _E	80		111		145
Set screws (DIN 916)	E	see table (depending on bore Ø)**				
Distance (mm)	G	25		30		40
Possible shortening length (mm)	H	69		89		110
Moment of inertia per hub (10^{-3} kgm^2)	J ₁ /J ₂	40		147		480
Approx. weight (kg)		12.5		25		53
Speed standard (min^{-1})		3,500		3,000		2,000
Speed balanced (10^3 min^{-1})		10	10	8	8	6.5
For information on shaft misalignment, torsional stiffness, and other details about the elastomer inserts see pages 72 + 73.						

ORDERING EXAMPLE	EK1	2500	A	50.8	80	XX
Model	●					
Size		●				
Elastomer insert type			●			
Bore D1 H7				●		
Bore D2 H7					●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. EK1 / 2500 / A / 50.8 / 80 / XX; XX=stainless steel)	Special designation only (e.g. special bore tolerance).					

EK2

WITH CLAMPING HUB

6 - 2,150 Nm

PROPERTIES



FEATURES

- easy mounting
- highly concentric assembly
- vibration damping

MATERIAL


- **Hubs:** up to size 450 high strength aluminum; size 800 steel
- **Elastomer:** wear resistant thermally stable TPU

DESIGN

Two concentrically machined hubs with curved jaws and clamping screws.

ORDERING EXAMPLE

see page 73

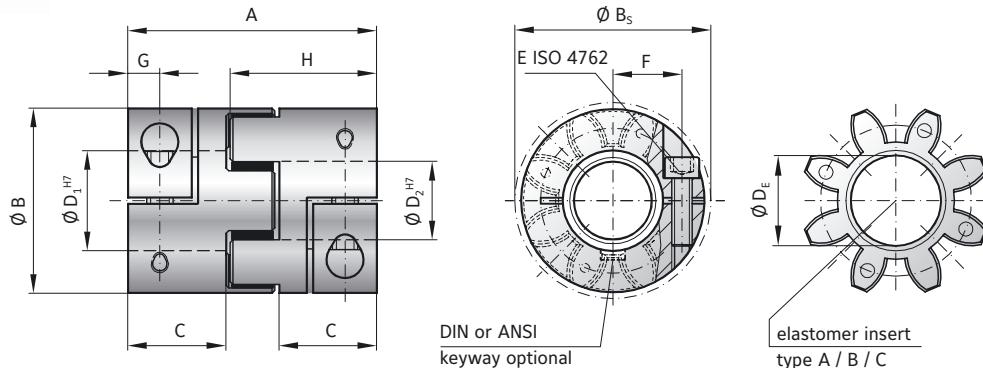

MODEL EK2

SIZE	20			60			150			300			450			800			
Type (Elastomer insert)	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	
Rated torque (Nm) T_{KN}	17	21	6	60	75	20	160	200	42	325	405	84	530	660	95	950	1100	240	
Max. torque* (Nm) T_{Kmax}	34	42	12	120	150	35	320	400	85	650	810	170	1060	1350	190	1900	2150	400	
Overall length (mm)	A	66		78		90		114		126		162							
Outside diameter (mm)	B	42		56		66.5		82		102		136.5							
Outside diameter with screw head (mm)	B_s	44.5		57		68		85		105		139							
Mounting length (mm)	C	25		30		35		45		50		65							
Inside diameter range H7 (mm) $D_{1/2}$	8 - 25		12 - 32		19 - 36		20 - 45		28 - 60		35 - 80								
Inside diameter of elastomer (mm) D_E	19.2		26.2		29.2		36.2		46.2		60.5								
Clamping screw (ISO 4762)	E	M5		M6		M8		M10		M12		M16							
Tightening torque of the clamping screw (Nm)		8		15		35		70		120		290							
Distance between centers (mm)	F	15.5		21		24		29		38		50.5							
Distance (mm)	G	8.5		10		12		15		17.5		23							
Hub length (mm)	H	39		46		52.5		66		73		93.5							
Moment of inertia per hub (10^{-3} kgm^2) J_1/J_2	0.016		0.05		0.13		0.4		0.9		9.5								
Approx. weight (kg)	0.15		0.35		0.6		1.1		1.7		10								
Speed standard (min^{-1})	12,500		11,000		10,000		9,000		8,000		4,000								
Speed balanced (10^3 min^{-1})	45	60	35	31	31	25	22	26	18	22	26	16	16	17	12	13	13	8	

For information on shaft misalignment, torsional stiffness, and other details about the elastomer inserts see pages 72 + 73.

* Maximum transmittable torque of the clamping hub depends on the bore diameter

Size	$\varnothing 8$	$\varnothing 16$	$\varnothing 19$	$\varnothing 25$	$\varnothing 30$	$\varnothing 32$	$\varnothing 35$	$\varnothing 45$	$\varnothing 50$	$\varnothing 55$	$\varnothing 60$	$\varnothing 65$	$\varnothing 70$	$\varnothing 75$	$\varnothing 80$
20	20	35	45	60											
60		50	80	100	110	120									
150			120	160	180	200	220								
300			200	230	300	350	380	420							
450					420	480	510	600	660	750	850				
800							700	750	800	835	865	900	925	950	1,000

Higher torque possible with keyways

EKL

COMPACT VERSION WITH CLAMPING HUB

0.5 - 2,150 Nm

PROPERTIES



FEATURES

- short overall length
- easy mounting
- vibration damping

MATERIAL


- **Hubs:** up to size 450 high strength aluminum; size 800 steel
- **Elastomer:** wear resistant thermally stable TPU

DESIGN

Two concentrically machined hubs with curved jaws and clamping screws.

ORDERING EXAMPLE

see page 73

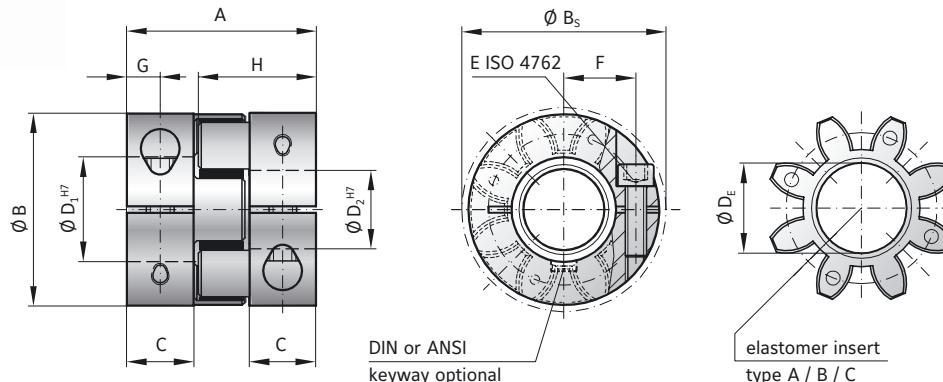

MODEL EKL

SIZE	2			5			10			20			60			150			300			450			800			
Type (Elastomer insert)	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	
Rated torque (Nm) T_{KN}	2	2.4	0.5	9	12	2	12.5	16	4	17	21	6	60	75	20	160	200	42	325	405	84	530	660	95	950	1100	240	
Max. torque* (Nm) T_{Kmax}	4	4.8	1	18	24	4	25	32	6	34	42	12	120	150	35	320	400	85	650	810	170	1060	1350	190	1900	2150	400	
Overall length (mm)	A	20			26			32			50			58			62			86			94			123		
Outside diameter (mm)	B	16			25			32			42			56			66.5			82			102			136.5		
Outside diameter with screw head (mm)	B _s	17			25			32			44.5			57			68			85			105			139		
Mounting length (mm)	C	6			8			10.3			17			20			21			31			34			46		
Inside diameter range H7 (mm) $D_{1/2}$		3 - 8			4 - 12.7			4 - 16			8 - 25			12 - 32			19 - 36			20 - 45			28 - 60			35 - 80		
Inside diameter of elastomer (mm)	D_E	6.2			10.2			14.2			19.2			26.2			29.2			36.2			46.2			60.5		
Clamping screw (ISO 4762)	E	M2			M3			M4			M5			M6			M8			M10			M12			M16		
Tightening torque of the clamping screw (Nm)		0.6			2			4			8			15			35			70			120			290		
Distance between centers (mm)	F	5.5			8			10.5			15.5			21			24			29			38			50.5		
Distance (mm)	G	3			4			5			8.5			10			11			15			17.5			23		
Hub length (mm)	H	12			16.7			20.7			31			36			39			52			57			74		
Moment of inertia per hub (10^{-3} kgm^2)	J_1/J_2	0.0003			0.002			0.003			0.01			0.04			0.08			0.3			0.66			8		
Approx. weight (kg)		0.008			0.02			0.05			0.12			0.3			0.5			0.9			1.5			8.5		
Speed standard (min^{-1})		15,000			15,000			13,000			12,500			11,000			10,000			9,000			8,000			4,000		
Speed balanced (10^3 min^{-1})		60	67	45	57	65	43	53	63	40	45	60	35	31	31	25	22	26	18	22	26	16	16	17	12	13	13	8

For information on shaft misalignment, torsional stiffness, and other details about the elastomer inserts see pages 72 + 73.

* Maximum transmittable torque of the clamping hub depends on the bore diameter

Size	$\varnothing 3$	$\varnothing 4$	$\varnothing 5$	$\varnothing 8$	$\varnothing 16$	$\varnothing 19$	$\varnothing 25$	$\varnothing 30$	$\varnothing 32$	$\varnothing 35$	$\varnothing 45$	$\varnothing 50$	$\varnothing 55$	$\varnothing 60$	$\varnothing 65$	$\varnothing 70$	$\varnothing 75$	$\varnothing 80$
2	0.2	0.8	1.5	2.5														
5		1.5	2	8														
10			4	12	32													
20				20	35	45	60											
60					50	80	100	110	120									
150						120	160	180	200	220								
300						200	230	300	350	380	420							
450								420	480	510	600	660	750	850				
800										700	750	800	835	865	900	925	950	1,000

Higher torque possible with keyways.

EKH

WITH SPLIT CLAMPING HUB

4 - 2,150 Nm



PROPERTIES

FEATURES


- lateral mounting
- easy installation and removal
- allows for pre-alignment of shafts

MATERIAL

- **Hubs:** up to size 450 high strength aluminum; size 800 steel
- **Elastomer:** wear resistant thermally stable TPU

DESIGN

Two concentrically machined, fully split hubs with curved jaws and clamping screws.

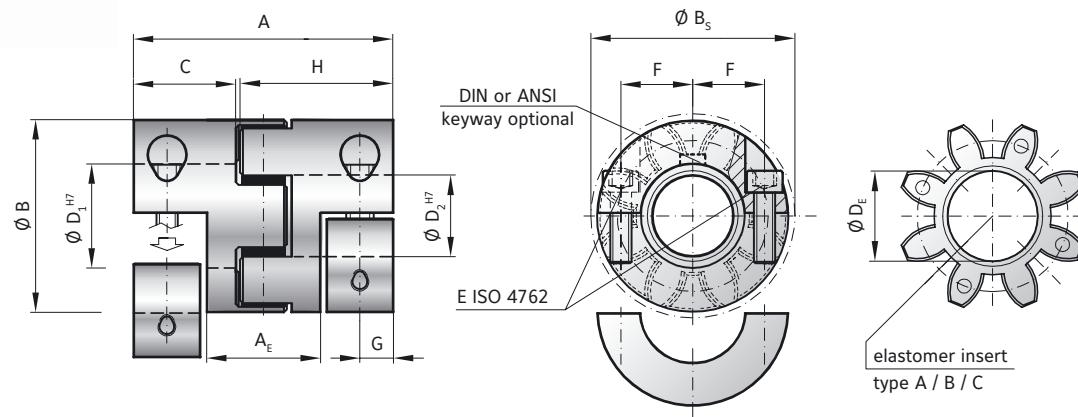

MODEL EKH

SIZE	10			20			60			150			300			450			800			
Type (Elastomer insert)	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	
Rated torque (Nm)	T_{KN}	12.6	16	4	17	21	6	60	75	20	160	200	42	325	405	84	530	660	95	950	1100	240
Max. torque*	T_{Kmax}	25	32	6	34	42	12	120	150	35	320	400	85	650	810	170	1060	1350	190	1900	2150	400
Overall length (mm)	A	53		66		78		90		114		126		162								
Length of center section (mm)	A_E	20		28.8		34		38		50		52		65								
Outside diameter (mm)	B	32		42		56		66.5		82		102		136.5								
Outside diameter with screw head (mm)	B_S	32		44.5		57		68		85		105		139								
Mounting length (mm)	C	20		25		30		35		45		50		65								
Inside diameter range H7 (mm)	$D_{1/2}$	6 - 16		8 - 25		12 - 32		19 - 36		20 - 45		28 - 60		35 - 80								
Inside diameter of elastomer (mm)	D_E	14.2		19.2		26.2		29.2		36.2		46.2		60.5								
Clamping screw (ISO 4762)	E	4 x M4		4 x M5		4 x M6		4 x M8		4 x M10		4 x M12		4 x M16								
Tightening torque of the clamping screw (Nm)		4		8		15		35		70		120		290								
Distance between centers (mm)	F	10.5		15.5		21		24		29		38		50.5								
Distance (mm)	G/G_1	7.5		8.5		10		12		15		17.5		23								
Hub length (mm)	H/H_1	31		39		46		52.5		66		73		93.5								
Moment of inertia per hub (10^{-3} kgm^2)	J_1/J_2	0.005		0.02		0.06		0.1		0.4		1		9.5								
Approx. weight (kg)		0.08		0.15		0.35		0.6		1.1		1.7		10								
Speed standard (min^{-1})		13,000		12,500		11,000		10,000		9,000		8,000		4,000								
Speed balanced (10^3 min^{-1})		53	63	40	45	60	35	31	31	25	22	26	18	22	26	16	16	17	12	13	13	

For information on shaft misalignment, torsional stiffness, and other details about the elastomer inserts see pages 72 + 73.

* Maximum transmittable torque of the clamping hub depends on the bore diameter

Size	$\varnothing 6$	$\varnothing 8$	$\varnothing 16$	$\varnothing 19$	$\varnothing 25$	$\varnothing 30$	$\varnothing 32$	$\varnothing 35$	$\varnothing 45$	$\varnothing 50$	$\varnothing 55$	$\varnothing 60$	$\varnothing 65$	$\varnothing 70$	$\varnothing 75$	$\varnothing 80$	$\varnothing 90$	$\varnothing 120$	$\varnothing 140$		
10	6	12	32																		
20		30	40	50	65																
60			65	120	150	180	200														
150				180	240	270	300	330													
300					300	340	450	520	570	630											
450							630	720	770	900	1120	1180	1350								
800									1050	1125	1200	1300	1400	1450	1500	1550	1600				
2500										1400	1800	2000	2250	2500	2700	2900	3100	3300	3700		
4500											2400	2600	2900	3100	3400	3600	3900	4100	4700	6200	
9500												5000	5500	6000	6500	7000	7500	8000	9000	12000	14000

Higher torque possible with keyways

EKH

WITH SPLIT CLAMPING HUB

1,950 - 25,000 Nm



PROPERTIES

FEATURES



- lateral mounting
- easy installation and removal
- allows for pre-alignment of shafts

DESIGN

Two concentrically machined, fully split hubs with curved jaws and clamping screws. Elastomer insert consists of 5 segments.

MATERIAL

- **Hubs:** GGG 40
- **Elastomer:** wear resistant thermally stable TPU

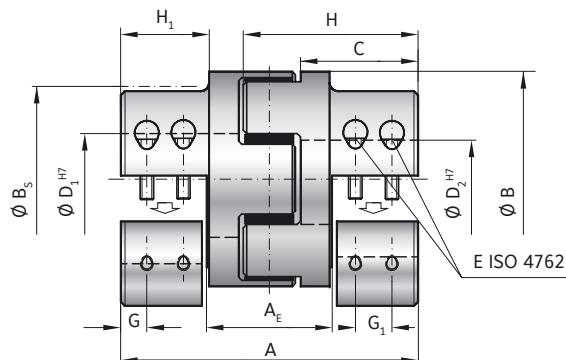

elastomer insert type A / B

MODEL EKH

SIZE	2500		4500		9500	
Type (Elastomer insert)	A	B	A	B	A	B
Rated torque (Nm)	T_{KN}	1950	2450	5000	6200	10000
Max. torque* (Nm)	T_{Kmax}	3900	4900	10000	12400	20000
Overall length (mm)	A	213		272		341
Length of center section (mm)	A_E	78		104		131
Outside diameter (mm)	B	160		225		290
Outside diameter with screw head (mm)	B_s	156		199		243
Mounting length (mm)	C	85		113		140
Inside diameter range H7 (mm)	$D_{1/2}$	35 - 90		40 - 120		50 - 140
Inside diameter of elastomer (mm)	D_E	80		111		145
Clamping screw (ISO 4762)	E	8 x M16		8 x M20		8 x M24
Tightening torque of the clamping screw (Nm)		300		600		1100
Distance between centers (mm)	F	57		75		90
Distance (mm)	G/G_1	18 / 30		24 / 41		30 / 48
Hub length (mm)	H/H_1	120 / 69		154 / 89		193 / 110
Moment of inertia per hub (10^{-3} kgm^2)	J_1/J_2	40		147		480
Approx. weight (kg)		12.5		25		53
Speed standard (min^{-1})		3,000		3,500		2,000
Speed balanced (10^3 min^{-1})		10	10	8	8	6.5

For information on shaft misalignment, torsional stiffness, and other details about the elastomer inserts see pages 72 + 73.

* Maximum transmittable torque of the clamping hub depends on the bore diameter see page 70.

ORDERING EXAMPLE	EKL EK2 EKH	60	A	12.7	24	XX
Model	●					
Size		●				
Elastomer insert type			●			
Bore D1 H7				●		
Bore D2 H7					●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. EKH / 60 / A / 12.7 / 24 / XX; XX=anodized aluminum)						

Special designation
only (e.g. special bore
tolerance).

EK6

WITH CONICAL CLAMPING RING

4 - 2,150 Nm



PROPERTIES

FEATURES


- high clamping pressure
- self centering on shaft
- very high concentricity

DESIGN

Two concentrically machined hubs with curved jaws and conical clamping rings.

MATERIAL

- **Hubs:** up to size 450 high strength aluminum; size 800 steel
- **Elastomer:** wear resistant thermally stable TPU

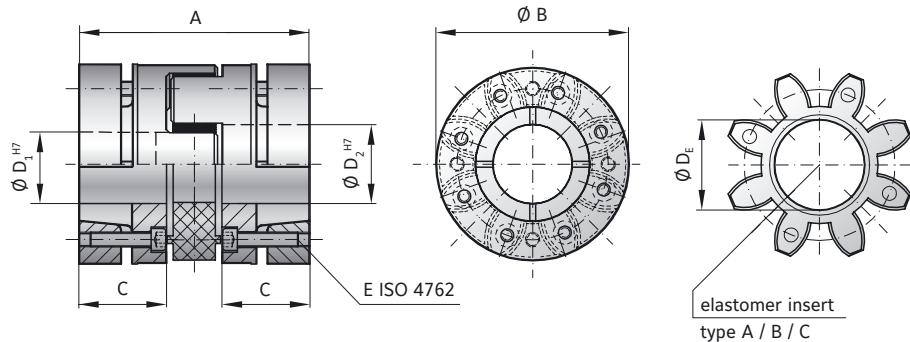

MODEL EK6

SIZE	10			20			60			150			300			450			800			
Type (Elastomer insert)	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	
Rated torque (Nm)	T_{KN}	12.5	16	4	17	21	6	60	75	20	160	200	42	325	405	84	530	660	95	950	1100	240
Max. torque (Nm)	T_{Kmax}	25	32	6	34	42	12	120	150	35	320	400	85	650	810	170	1060	1350	190	1900	2150	400
Overall length (mm)	A	42		56		64		76		96		110		138								
Outside diameter (mm)	B/B_1	32		43		56		66.5		82		102		136.5								
Mounting length (mm)	C	15		20		23		28		36		42		53								
Inside diameter range H7 (mm)	$D_{1/2}$	6 - 16		8 - 24		12 - 32		19 - 35		20 - 45		28 - 55		32 - 80								
Inside diameter of elastomer (mm)	D_E	14.2		19.2		26.2		29.2		36.2		46.2		60.5								
Clamping screw (ISO 4762)	E	3x M3		6x M4		4x M5		8x M5		8x M6		8x M8		8x M10								
Tightening torque of the clamping screw (Nm)		2		3		6		7		12		35		55								
Distance (mm)	F																					
Moment of inertia per hub (10^{-3} kgm^2)	J_1/J_2	0.004		0.015		0.05		0.1		0.3		0.85		9.2								
Approx. weight (kg)		0.08		0.12		0.3		0.5		0.9		1.5		9.6								
Speed standard (min^{-1})		20,000		19,000		14,000		13,000		10,000		9,000		4,000								
Speed balanced (10^3 min^{-1})		53	63	40	45	60	35	31	31	25	22	26	18	22	26	16	16	17	12	13	13	8

For information on shaft misalignment, torsional stiffness, and other details about the elastomer inserts see pages 72 + 73.

ORDERING EXAMPLE	EK6	60	A	19	22.23	XX
Model	●					
Size		●				
Elastomer insert type			●			
Bore D1 H7				●		
Bore D2 H7					●	
Special designation only (e.g. special bore tolerance).						

For custom features place an XX at the end of the part number and describe the special requirements (e.g. EK6 / 60 / A / 19 / 22.23 / XX; XX=finely balanced ISO G2.5 / 30,000 rpm)

EK6

WITH CONICAL CLAMPING RING

1,950 - 25,000 Nm

PROPERTIES



FEATURES


- high clamping pressure
- self centering on shaft
- very high concentricity

MATERIAL

- **Hubs:** GGG40
- **Elastomer:** wear resistant thermally stable TPU

DESIGN

Two concentrically machined hubs with curved jaws and conical clamping rings. Elastomer insert consist of 5 segments.

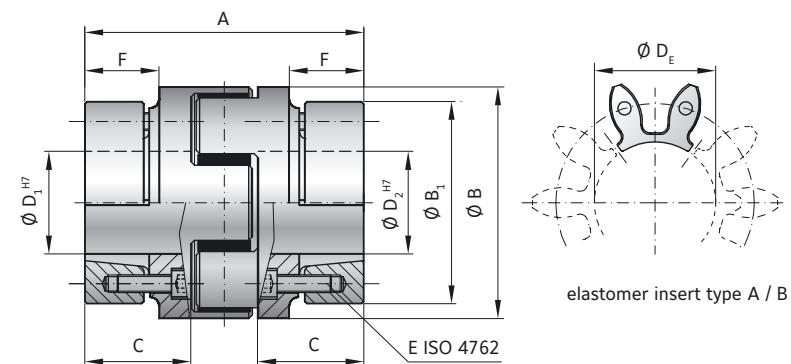

MODEL EK6

SIZE	2500		4500		9500	
Type (Elastomer insert)	A	B	A	B	A	B
Rated torque (Nm)	T_{KN}	1950	2450	5000	6200	10000
Max. torque (Nm)	T_{Kmax}	3900	4900	10000	12400	20000
Overall length (mm)	A	177		227		282
Outside diameter (mm)	B/B_1	160 / 159		225 / 208		290 / 285
Mounting length (mm)	C	70		90		112
Inside diameter range H7 (mm)	$D_{1/2}$	40 - 95		50 - 130		60 - 170
Inside diameter of elastomer (mm)	D_E	80		111		145
Clamping screw (ISO 4762)	E	10x M10		10x M12		10x M16
Tightening torque of the clamping screw (Nm)		60		100		160
Distance (mm)	F	51		66		80
Moment of inertia per hub (10^{-3} kgm^2)	J_1/J_2	31.7		135.7		469.2
Approx. weight (kg)		15		35		73
Speed standard (min^{-1})		3,500		3,000		2,000
Speed balanced (10^3 min^{-1})		10	10	8	8	6.5
						6.5

For information on shaft misalignment, torsional stiffness, and other details about the elastomer inserts see pages 72 + 73.

ORDERING EXAMPLE	EK6	2500	A	50.8	80	XX
Model	●					
Size		●				
Elastomer insert type			●			
Bore D1 H7				●		
Bore D2 H7					●	
Special designation only (e.g. special bore tolerance).						
For custom features place an XX at the end of the part number and describe the special requirements (e.g. EK6 / 2500 / A / 50.8 / 80 / XX; XX=stainless steel)						

SP6

HIGH SPEED WITH CONICAL CLAMPING RING

60 - 1,350 Nm

NEW**High speed**

PROPERTIES

FEATURES

- very high precision
- very high concentricity
- high clamping force
- symmetrically machined hubs

MATERIAL

- **Hubs:** high strength aluminium; optional steel
- **Clamping ring:** high strength aluminium; optional steel


- **Elastomer:** wear resistant thermally stable TPU

DESIGN

Two precision machined hubs with curved jaws and conical clamping rings.

FIT CLEARANCE

Overall shaft / hub tolerance
0.01 - 0.025 mm

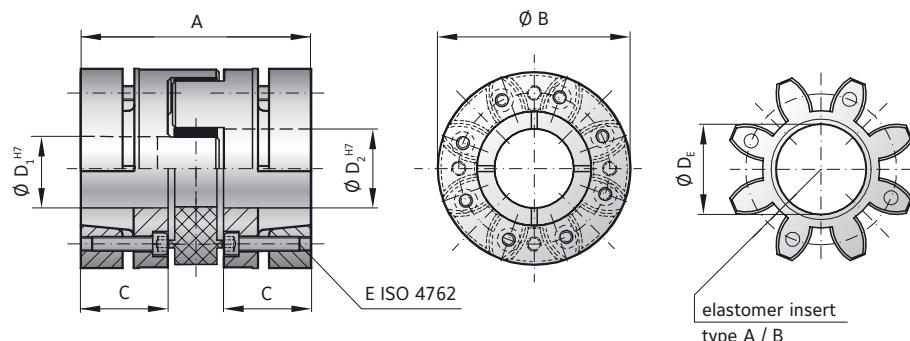

MODEL SP6

SIZE	60	150	300	450						
Type (Elastomer insert)	A	B	A	B						
Rated torque (Nm)	T _{KN}	60	75	160	200	325	405	530	660	
Max. torque (Nm)	T _{Kmax}	120	150	320	400	650	810	1060	1350	
Overall length (mm)	A	64	78	80	90	100	114	110	126	140
Outside diameter (mm)	B	55		65		80		102		
Mounting length (mm)	C	23	30	30	35	40	45	42	50	57
Inside diameter range H7 (mm)	D _{1/2} *	14 - 32		19 - 38		20 - 48**		28 - 55		
Inside diameter of elastomer (mm)	D _E	26.2		29.2		36.2		46.2		
Hub material		AL / optional steel		AL / optional steel		AL / optional steel		AL / optional steel		
Clamping screw (ISO 4762)	E	4x M5		8x M5		8x M6		8x M8		
Tightening torque of the clamping screw - AL / steel (Nm)		6 / 6	7 / 7	7 / 8.5	7.5 / 8.5	8.5 / 8.5	14 / 14	25 / 30		
Moment of inertia per hub AL / steel (10 ⁻³ kgm ²)	J _{1/J₂}	0.06 / 0.15	0.08 / 0.20	0.16 / 0.38	0.18 / 0.44	0.20 / 0.50	0.52 / 1.29	1.33 / 3.31	1.55 / 3.88	1.74 / 4.38
Approx. weight total - AL / steel (kg)		0.25 / 0.62	0.32 / 0.78	0.46 / 1.10	0.53 / 1.30	0.60 / 1.43	1.00 / 2.41	1.70 / 4.00	1.90 / 4.70	2.20 / 5.20
Speed standard (min ⁻¹)		28,000		26,000		26,000		18,000		

For information on shaft misalignment, torsional stiffness, and other details about the elastomer inserts see pages 72 + 73.

* Recommended fit pairing H7/k6; H6/j5 (short spindle); starting at Ø55 G7/m6

** from Ø46 to 48 with custom hub

ORDERING EXAMPLE	SP6	150	90	A	32	25.4	XX
Model	●						
Size		●					
Overall length			●				
Elastomer insert type				●			
Bore D1 H7					●		
Bore D2 H7						●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. SP6 / 150 / 90 / A / 32 / 25.4 / XX; XX = hub material steel).							

Special designation only
(e.g. hub material steel).

EK7

WITH EXPANDING SHAFT

2 - 2,150 Nm



PROPERTIES

FEATURES

- for hollow shaft mounting
- short overall length
- solution for mismatched bore / shaft diameters


MATERIAL

- **Hubs:** up to size 450 high strength aluminum; size 800 steel
- **Expanding shaft hub:** steel

- **Elastomer:** wear resistant thermally stable TPU

DESIGN

One concentrically machined hub with clamping screw and curved jaws. One concentrically machined hub with expanding shaft system and curved jaws.

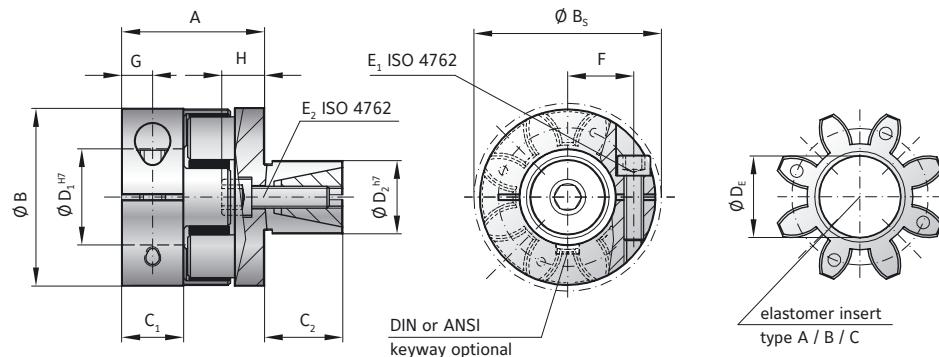

MODEL EK7

SIZE	5			10			20			60			150			300			450			800			
Type (Elastomer insert)	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	
Rated torque (Nm) T_{KN}	9	12	2	12.5	16	4	17	21	6	60	75	20	160	200	42	325	405	84	530	660	95	950	1100	240	
Max. torque* (Nm) T_{Kmax}	18	24	4	25	32	6	34	42	12	120	150	35	320	400	85	650	810	170	1060	1350	190	1900	2150	400	
Overall length (mm)	A	22			28			40			46			51			68			76			94		
Outside diameter (mm)	B	25			32			42			56			66.5			82			102			136.5		
Outside diameter with screw head (mm)	B_s	25			32			44.5			57			68			85			105			139		
Mounting length (mm)	C_1	8			10.3			17			20			21			31			34			46		
Mounting length (mm)	C_2	12			20			25			27			32			45			55			60		
Inside diameter range H7 (mm)	D_1	4 - 12.7			5 - 16			8 - 25			12 - 32			19 - 36			20 - 45			28 - 60			35 - 80		
Outside diameter range h7 (mm)	D_2	10 - 16			13 - 25			14 - 30			23 - 38			26 - 42			38 - 60			42 - 70			42 - 80		
Inside diameter of elastomer (mm)	D_E	10.2			14.2			19.2			26.2			29.2			36.2			46.2			60.5		
Clamping screw (ISO 4762)	E_1	M3			M4			M5			M6			M8			M10			M12			M16		
Tightening torque (Nm)	E_1	2			4			8			15			35			70			120			290		
Clamping screw (ISO 4762)	E_2	M4			M5			M6			M8			M10			M12			M16			M16		
Tightening torque (Nm)	E_2	4			9			12			32			60			110			240			300		
Distance between centers (mm)	F	8			10.5			15.5			21			24			29			38			50.5		
Distance (mm)	G	4			5			8.5			10			11			15			17.5			23		
Length (mm)	H	7			7			10			11			16			20			27			27		
Moment of inertia D_1 (10^{-3} kgm 2) J_1		0.002			0.003			0.01			0.04			0.08			0.3			0.66			8		
Moment of inertia D_2 (10^{-3} kgm 2) J_2		0.002			0.01			0.04			0.1			0.2			1			2.6			9		
Approx. weight (kg)		0.04			0.05			0.12			0.3			0.5			0.9			1.5			7.6		
Speed standard (min $^{-1}$)		15,000			13,000			12,500			11,000			10,000			9,000			8,000			4,000		
Speed balanced (10 3 min $^{-1}$)		57	65	43	53	63	40	45	60	35	31	31	25	22	26	18	22	26	16	16	17	12	13	13	8

For information on shaft misalignment, torsional stiffness, and other details about the elastomer inserts see pages 72 + 73.

* Maximum transmittable torque of the clamping hub depends on the bore diameter (see EKL on page 68).

ORDERING EXAMPLE	EK7	20	A	24	19.05	XX
Model	●					
Size		●				
Elastomer insert type			●			
Bore D1 H7				●		
Expanding shaft D2 h7					●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. EK7 / 20 / A / 24 / 19.05 / XX; XX=stainless steel)						

INTERMEDIATE SPACER

0.5 - 2,150 Nm



PROPERTIES

FEATURES


- high lateral misalignment
- easy to mount
- combine with any two hub designs

MATERIAL

- **Hubs:** high strength aluminum
- **Elastomer:** wear resistant thermally stable TPU

DESIGN

A concentrically machined spacer with curved jaws. 2x elastomer segment press fit for zero backlash; standard versions are electrically isolating.

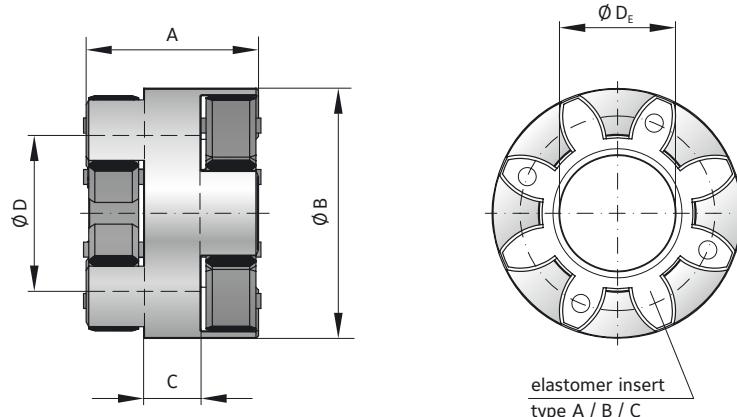

MODEL EKZ


SIZE	2	5	10	20	60	150	300	450	800
Type (Elastomer insert)	A B C	A B C	A B C	A B C	A B C	A B C	A B C	A B C	A B C
Rated torque (Nm)	T _{KN} 2 2.4 0.5	9 12 2	12.5 16 4	17 21 6	60 75 20	160 200 42	325 405 84	530 660 95	950 1100 240
Max. torque (Nm)	T _{Kmax} 4 4.8 1	18 24 4	25 32 6	34 42 12	120 150 35	320 400 85	650 810 170	1060 1350 190	1900 2150 400
Overall length (mm)	A 20	26	30	39	48	53	62	86	81
Outside diameter (mm)	B 16	25	32	42	56	66.5	82	102	136.5
Hub length (mm)	C 9	9	9	10	16	18	20	40	25
Inside diameter (mm)	D 9	15	18	25	32	38	45	60	80
Inside diameter of elastomer (mm)	D _E 6.2	10.2	14.2	19.2	26.2	29.2	36.2	46.2	60.5
Moment of inertia (10 ⁻³ kgm ²)	J ₁ /J ₂ 0.0001	0.0005	0.002	0.008	0.03	0.05	0.1	0.6	1.1
Approx. weight (kg)		0.007	0.02	0.04	0.09	0.21	0.33	0.58	1.38
Speed standard (min ⁻¹)		15,000	15,000	13,000	12,500	11,000	10,000	9,000	8,000

For information on shaft misalignment, torsional stiffness, and other details about the elastomer inserts see pages 72 + 73.


ORDERING EXAMPLE	EKZ	60	A	XX
Model	●			
Size		●		
Elastomer insert type			●	Special designation only (e.g. non-standard length).

For custom features place an XX at the end of the part number and describe the special requirements (e.g. EKZ / 60 / A / XX; XX=anodized aluminum)


WORKS WITH FULL PRODUCT RANGE




EK1



EK2



EK6



EK7

EK4

FOR CONICAL SHAFT ENDS

20 - 150 Nm

PROPERTIES



FEATURES

- for tapered shafts
- short compact design
- easy assembly
- concentrically machined hubs
- backlash free
- electrically isolating


MATERIAL

- **Clamping hub D₁:** high strength aluminum

- **Conical hub D₂:** steel
- **Elastomer:** wear resistant thermally stable TPU

DESIGN

Two coupling hubs are concentrically machined with curved jaws. One side with clamping hub and screw per ISO 4762. One side with tapered bore and keyway per customer specifications.

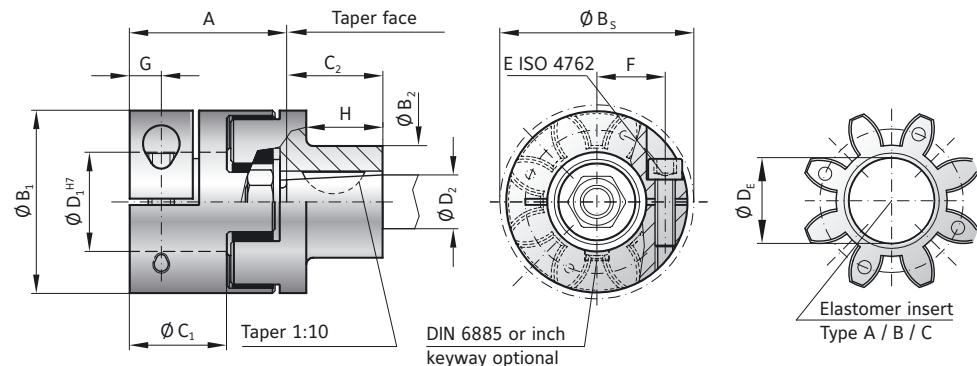

MODEL EK4

SIZE	20	60	150	
Type (Elastomer insert)	A	B	C	
Rated torque (Nm)	T _{KN}	17	21	6
Max. torque*	T _{Kmax}	34	42	12
Overall length (mm)	A	42	50	57
Outside diameter of clamping hub (mm)	B ₁	42	56	66.5
Outside diameter of tapered bore hub (mm)	B ₂	20	28	30
Outside diameter with screw head (mm)	B _s	44.5	57	68
Mounting length (mm)	C ₁	25	30	35
Mounting length (mm)	C ₂	15	27	28
Inside diameter range H7 (mm)	D ₁	8-25	12-32	19-36
Possible tapered bore diameter (mm)	D ₂	11	16	16
Inside diameter of elastomer (mm)	D _E	19.2	26.2	29.2
Clamping screw (ISO 4762)	E	M5	M6	M8
Tightening torque of the clamping screw (Nm)	F	8	15	35
Distance between centers (mm)	G	15.5	21	24
Distance (mm)	H	8.5	10	12
Length (mm)		9.5	21	19
Speed standard (min ⁻¹)		12500	11000	10000
Speed balanced (10 ³ min ⁻¹)	45	60	35	31
	31	31	25	22
			25	26
				18

* in Maximum transmittable torque depends on the bore diameter (overall clearance between shaft and hub 0.01 to 0.05 mm; shaft oiled) Higher torques upon request.

For information on shaft misalignment, torsional stiffness, and other details about the elastomer inserts see pages 72 + 73.

ELASTOMER COUPLINGS EK / TX

ORDERING EXAMPLE	EK4	20	A	24	XX
Model	●				
Size		●			
Type Elastomer insert			●		
Bore Ø D1 H7				●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. EK4 / 20 / A / 24 / XX)					

TX1

ECOLIGHT® WITH KEYWAY CONNECTION

0.5 - 810 Nm

PROPERTIES



FEATURES


- very low mass and moment of inertia
- corrosion proof
- economically priced

DESIGN


Two highly concentric, precision molded hubs with curved jaws, keyways, and set screws, suitable for use in temperatures ranging from -20 to +100°C.

MATERIAL

- **Hubs:** extremely rigid, glass fiber reinforced thermoplastic
- **Elastomer:** wear resistant thermally stable TPU



convex elastomer insert
for higher misalignment

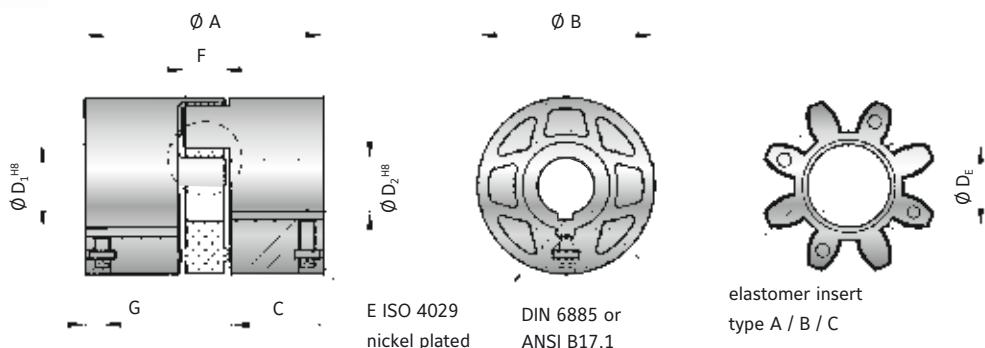

MODEL TX1

SIZE		2			10			20			60			150			300			
Elastomer insert		A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	
Rated torque	(Nm)	T_{KN}	2	2.4	0.5	12.5	16	4	17	21	6	60	75	20	160	200	42	325	405	84
Max. torque	(Nm)	T_{Kmax}	4	4.8	1	25	32	6	34	42	12	120	150	35	320	400	85	650	810	170
Overall length	(mm)	A	20		35		66		78		90		114							
Outside diameter	(mm)	B	17		32		42		56		66.5		82							
Mounting length	(mm)	C	6.5		12		25		30		35		45							
Inside diameter possible from - to H8	(mm)	$D_{1/2}$	5 - 8		6 - 16		10 - 24		16 - 30		19 - 38		20 - 45							
Inside diameter of elastomer	(mm)	D_E	6.2		14.2		19.2		27.2		30.2		38.2							
Set screw (ISO 4029)	(Nm)	E	M3		M3		M4		M5		M6		M6							
Tightening torque of the clamping screw max.	(Nm)		0.8		0.8		1.5		3		6		6							
Width elastomer insert	(mm)	F	5		9.5		12		14		15		18							
Distance	(mm)	G	3		3.5		4		6		7		7							
Moment of inertia per Hub	(kgm²)	J_1/J_2	1.9		1.4		10		30		70		180							
Approx. weight	(g)		5.9		30		80		180		270		510							
Speed (min⁻¹)			12,000		10,000		9,000		8,000		7,000		6,000							
Static torsional stiffness(Nm/rad)		C_T	50	115	1.7	260	600	90	1140	2500	520	3290	9750	1400	4970	10600	1130	12400	18000	1280
Dynamic torsional stiffness (Nm/rad)		C_{Tdyn}	100	230	35	541	1650	224	2540	4440	876	7940	11900	1350	13400	29300	3590	23700	40400	6090
Lateral (mm)		Max. values	0.08	0.06	0.2	0.2	0.17	0.2	0.2	0.2	0.22	0.22	0.25	0.25	0.25	0.28	0.28	0.28	0.3	
Angular (Degree)					1			1.5			1.5		1.5			1.5		1.5		
Axial (mm)					±1			±1			±1.5		±1.5			±2		±2		

Static torsional stiffness at 50% T_{KN} Dynamic torsional stiffness at T_{KN}

DESCRIPTION OF THE ELASTOMER INSERTS OF THE ECOLIGHT® SERIES

Type	Shore hardness	Color	Material	Relative damping (ψ)	Temperature range	Features
A	98 Sh A	red	TPU	0.4 - 0.5	-30°C to +100°C	high damping
B	64 Sh D	green	TPU	0.3 - 0.45	-30°C to +100°C	high torsional stiffness
C	80 Sh A	yellow	TPU	0.3 - 0.4	-30°C to +100°C	very high damping

FUNCTION

The equalizing element of the TX coupling is the elastomer insert. It absorbs vibration while transmitting torque. The elastomer defines the characteristics of the entire drive system.

Due to a special convex tooth geometry of the elastomer insert, greater shaft misalignment can be compensated for. Changing the Shore hardness of the elastomer allows the ECOLIGHT coupling to be optimized for ideal torsional characteristics.

BORE DIAMETER DEPENDS ON HUB STRUCTURE

Size	2	10	20	60	150	300
 Structure I from - to	solid hub no special structure	6 - 12.9	10 - 14.9	16 - 20.9	19 - 26.9	20 - 28.9
 Structure II from - to	solid hub no special structure	13 - 16	15 - 19.9	21 - 25.9	27 - 33.9	29 - 38.9
 Structure III from - to	solid hub no special structure		20 - 24	26 - 30	34 - 38	39 - 45

ORDERING EXAMPLE	TX1	60	A	20	24	XX
Model	●					
Size		●				
Elastomer insert type			●			
Bore D1 H8				●		
Bore D2 H8					●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. TX1 / 60 / A / 20 / 24 / XX; XX="D" holes per drawing)						





BACKLASH FREE TORQUE LIMITERS

0.1 - 2,800 Nm



GENERAL INFORMATION ABOUT R+W SAFETY COUPLINGS:

SERVICE LIFE

As long as the technical limits are not exceeded these couplings are wear and maintenance free.

FIT CLEARANCE

Overall shaft / hub clearance of 0.01 - 0.05 mm

SPECIAL SOLUTIONS

Various materials, tolerances, dimensions and performance ratings available for custom applications on request.

ATEX (Optional)

For use in hazardous zones 1/21 and 2/22, these safety couplings have been authorized under directive 94/9/EG and are available with certification.





BACKLASH FREE TORQUE LIMITERS

0.1 - 2,800 Nm

MODEL	FEATURES	
SK1	 with conical clamping bushing (or clamping hub in smaller sizes) for indirect drives from 0.1 - 2,800 Nm ► integral bearing to support sprockets, gears, and other drive elements ► compact simple design ► adjustable torque settings	Pages 98-99
SKP	 with keyway connection for indirect drives from 0.1 - 2,800 Nm ► integral bearing to support sprockets, gears, and other drive elements ► compact simple design ► adjustable torque settings	Pages 100-101
SKN	 with clamping hub for indirect drives from 5 - 1,800 Nm ► integral bearing to support sprockets, gears, and other drive elements ► compact simple design ► adjustable torque settings	Pages 102-103
SK2	 with clamping hubs and bellows coupling for direct drives from 0.1 - 1,800 Nm ► easy to mount ► compensation for shaft misalignment ► adjustable torque settings	Page 104

MODEL	FEATURES	
SK3	<p>with conical clamping bushings and bellows coupling for direct drives from 5 - 2,800 Nm</p> <ul style="list-style-type: none"> ▶ high clamping pressure ▶ compensation for shaft misalignment ▶ adjustable torque settings 	Page 105
SK5	<p>with clamping hubs, bellows coupling, and blind mate system for direct drives from 0.1 - 850 Nm</p> <ul style="list-style-type: none"> ▶ very easy to mount and dismount ▶ electrically and thermally isolating ▶ adjustable torque settings 	Page 106
ES2	<p>with clamping hubs and elastomer coupling for direct drives from 1 - 1,800 Nm</p> <ul style="list-style-type: none"> ▶ easy to mount ▶ vibration damping ▶ compensation for shaft misalignment ▶ adjustable torque settings 	Page 107




BACKLASH FREE TORQUE LIMITERS TORQLIGHT® 1 - 700 Nm

MODEL	FEATURES	
SLN	<p>with clamping hub for indirect drives from 10 - 700 Nm</p> <ul style="list-style-type: none"> ▶ integral bearing to support sprockets, gears, and other drive elements ▶ adjustable torque settings ▶ ultra compact, low inertia version 	Page 109
SLP	<p>with keyway connection for indirect drives from 10 - 700 Nm</p> <ul style="list-style-type: none"> ▶ integral bearing to support sprockets, gears, and other drive elements ▶ adjustable torque settings ▶ ultra compact, low inertia version 	Page 110
SL2	<p>with clamping hubs and bellows coupling for direct drives from 10 - 400 Nm</p> <ul style="list-style-type: none"> ▶ easy to mount ▶ compensation for shaft misalignment ▶ adjustable torque settings ▶ ultra compact, low inertia version 	Page 111
SLE	<p>with clamping hubs and elastomer coupling for direct drives from 10 - 700 Nm</p> <ul style="list-style-type: none"> ▶ easy to mount ▶ vibration damping ▶ compensation for shaft misalignment ▶ adjustable torque settings ▶ ultra compact, low inertia version 	Page 112
ESL	<p>with keyway mounting and elastomer coupling for direct drives from 1 - 150 Nm</p> <ul style="list-style-type: none"> ▶ low cost design ▶ vibration damping ▶ wear resistant ratcheting ball design 	Page 113
ACCESSORIES	<p>Accessories for safety couplings</p>	Page 115-119

GENERAL INFORMATION TORQUE LIMITERS


AVAILABLE FUNCTION SYSTEMS TORQUE LIMITERS



SINGLE POSITION


Standard Version

- ▶ after the overload condition has been removed the clutch will automatically re-engage precisely at its original orientation
- ▶ maintains synchronous shaft positioning
- ▶ switch plate moves at disengagement to signal overload
- ▶ patented preload for zero backlash; suitable for high precision drives



MULTI-POSITION 60°


- ▶ after the overload condition has been removed the clutch will automatically re-engage at one of multiple angular intervals
- ▶ immediate availability of the machine after overload disengagement
- ▶ switch plate moves at disengagement to signal overload
- ▶ optional re-engagement intervals of 30, 45, 90, 120 degrees
- ▶ patented preload for zero backlash; suitable for high precision drives

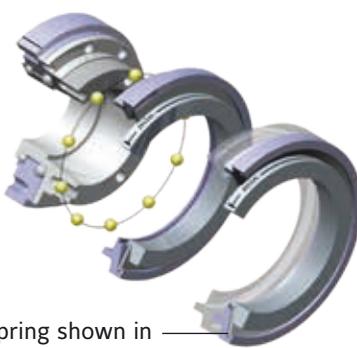

FULL DISENGAGEMENT

- ▶ spring snaps over center, eliminating residual force on the ball-detent system
- ▶ complete separation at overload, allowing shafts to spin freely until they are stopped
- ▶ switch plate moves at disengagement to signal overload
- ▶ coupling requires manual re-engagement at multiple available intervals (60 degrees standard; alternate engagement intervals on request)
- ▶ well suited to higher speed applications

Note: Coupling can be disengaged manually. Contact R+W for details.



LOAD HOLDING / LOAD BLOCKING

- ▶ overload detection device
- ▶ only limited free rotation after overload disengagement, beyond which the clutch is fully blocked
- ▶ re-engages automatically when reversed back into original disengagement position
- ▶ switch plate moves at disengagement to signal overload
- ▶ useful in lift systems and other applications where the load must be supported after a brief torque release

GENERAL INFORMATION

TORQUE LIMITERS

SINGLE POSITION
MULTI-POSITION
LOAD HOLDING

Note: Automatic
re-engagement only
occurs at low speed.

GENERAL INFORMATION

R+W safety couplings operate as spring loaded ball-detent clutches. They protect drive components (e.g. motors, transmissions, and spindles) from damage caused by machine crashes and other forms of overload.

- ▶ The torque is transmitted by hardened balls (4) loaded into conical detents (5).
- ▶ The balls are loaded into the detents by the spring disc system (2) across the switch plate (3).

- ▶ The disengagement torque is continuously adjustable via the torque adjustment nut (1).
- ▶ At overload the balls exit their detents, moving the switch plate (3) and disc spring system (2) back away from the detents, separating the input from the output of the safety coupling.
- ▶ The movement of the switch plate (3) can be detected by a proximity switch (6) to signal the drive to shut down.

FUNCTION OF THE BALL-DETENT SYSTEM




SINGLE POSITION / MULTI-POSITION

In these designs the disc spring system continues to apply a light residual pressure when in its disengaged state. This pressure is sufficient to cause automatic re-engagement after the torque has been reduced to a level below the torque setting of the safety coupling.



LOAD HOLDING / LOAD BLOCKING

The input and output of the safety coupling are only allowed limited free rotation after disengagement. This free rotation is sufficient to allow the switch plate to move and the overload condition to be signaled (see page 87).

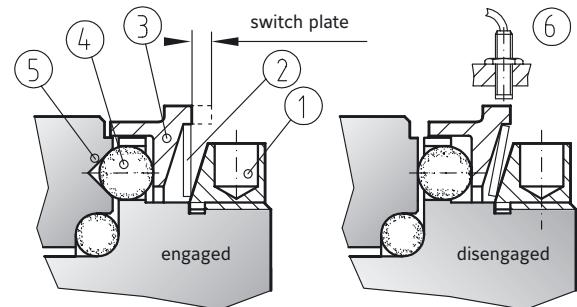

① Torque adjustment nut ③ Switch plate ⑤ Conical detent
② Disc spring system ④ Drive ball ⑥ Proximity switch

GENERAL INFORMATION TORQUE LIMITERS

FULL DISENGAGEMENT

Only attempt
re-engagement when
the machine is stopped.


FUNCTION OF THE BALL-DETENT SYSTEM

SK ES2

FULL DISENGAGEMENT

In the full disengagement version the spring system (7) snaps over center, eliminating residual force on the ball-detent system. This causes a complete separation at overload, allowing shafts to spin freely until they are stopped.


- Re-engagement must be performed manually (see figure at right).

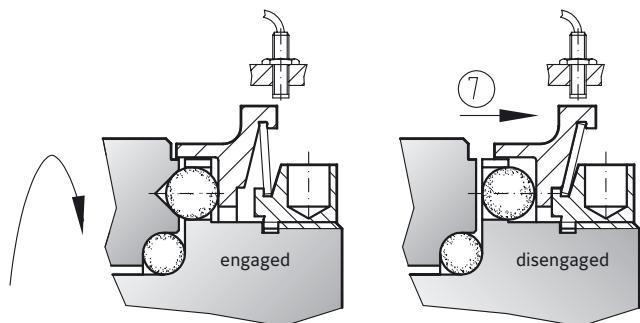

BALL-DETENT CLUTCHES ARE THE SAME DESIGN IN THE SK AND ES2 SIZES

The R+W full disengagement safety coupling can be re-engaged at any of 6 intervals by pressing the spring system back into its locked position. The re-engagement intervals are indicated by reference markings (8) on the coupling.

From size 60 and up a recess is included in the torque adjustment nut, allowing for 2 levers to be used in a self contained fashion, as shown in the figure on the right.

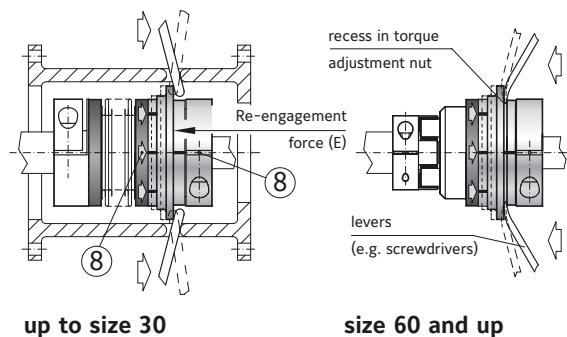

GENERAL INFORMATION TORQUE LIMITERS

BEHAVIOR AND CHARACTERISTICS

SPRING SYSTEM

R+W safety couplings work exclusively with a disc spring system with a special characteristic. Prior to the torque adjustment nut coming into contact with the disc springs and applying pressure (1) no torque transmission is possible. Once the spring is loaded, the active range of the spring system had been reached, with the spring rate declining as further compression takes place, both prior to, and during disengagement (2). Once completely depressed, the spring system is rigid (3).

As the safety coupling is in the process of disengaging, the spring force continues to decline. This advantage guarantees the shortest possible disengagement times (1-2 msec), very low wear while running disengaged, and very low residual friction in general (2-5%).

IMPORTANT!

The minimum and maximum torque values of the R+W safety couplings are at the limits of the active range of the disc spring system. Therefore it is critical not to exit the manufacturer specified torque adjustment range.

ROTATIONAL SPEED

The rotational speed at disengagement significantly influences the service life of the coupling. At lower speeds the coupling can handle many thousands of disengagements with no degradation to performance. Please contact R+W for details if applying the safety coupling to a high speed shaft.

WEAR

In its engaged state the safety coupling is completely wear free. Service life can be extended significantly by taking measures to stop shaft rotation quickly after disengagement.

MAINTENANCE

The R+W safety couplings are maintenance free and lubricated for life.


SAFETY COUPLING WITH SEAL (OPTIONAL)

Benefits of sealing:



- ▶ Protection from harmful contaminants
- ▶ No leakage of grease
- ▶ Recommended for harsh environments or clean room / sanitary application requirements

SPRING CHARACTERISTIC

special design

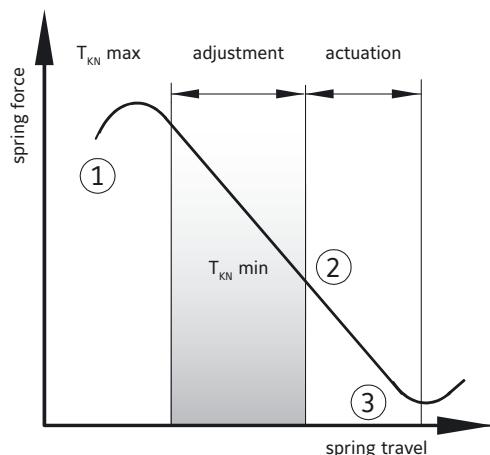

DISENGAGEMENT

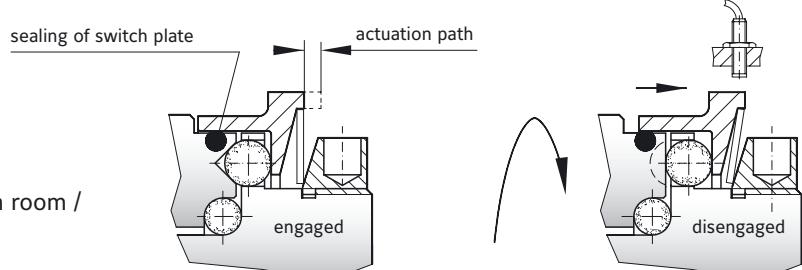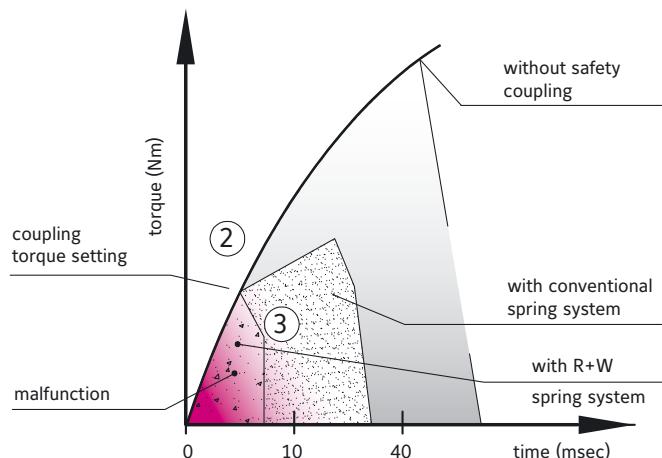

GENERAL INFORMATION TORQUE LIMITERS


RADIAL LOADS SAFETY COUPLINGS

SK1 **SKN** **SKP** **SLN** **SLP**

The models shown above have an integral bearing (1) to support the drive attachment (e.g. timing belt or chain sprocket, gear, or hand wheel). The maximum radial load (2) is listed in the table below.

If the center of the overhung load is located within dimension range (S) no additional bearing support is necessary. For offset mounting additional bearings can be used to support the load. This is useful in cases where the attached component is too small to fit over the coupling output flange or has a large width.

Depending on the installation space, ball, roller or needle bearings can all be used.

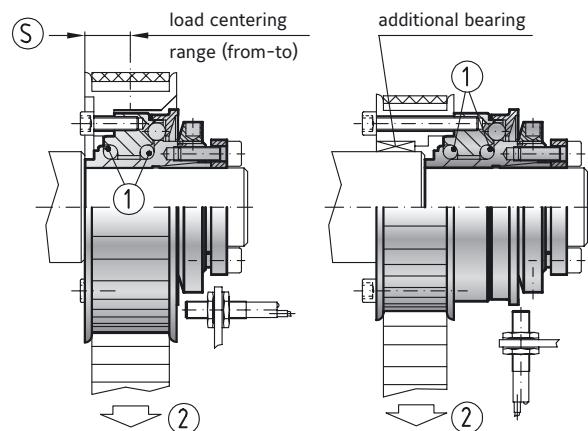

SIZE SK1/SKN/SKP	1.5	2	4.5	10	15	30	60	150	200	300	500	800	1500	2500
Max. radial load (N)	50	100	200	500	1400	1800	2300	3000	3500	4500	5600	8000	12000	20000
(S) from-to (mm)	3-6	5-8	5-11	6-14	7-17	10-24	10-24	12-24	12-26	12-28	16-38	16-42	20-50	28-60

SIZE SLN/SLP	30	60	150	300
Max. radial load (N)	800	1000	1200	1600
(S) from-to (mm)	4-14	5-18	6-20	6-23

SK1

WITH CONICAL CLAMP

0.1 - 2,800 Nm



PROPERTIES

MATERIAL

- **Clutch system:** hardened steel
- **Clamping ring size 1.5 - 10:** aluminum
- **Conical clamping bushing size 15 - 2500:** steel

DESIGN

Size 1.5 - 10 with clamping ring and a single clamping screw.

Size 15 - 2500 with conical clamping bushing and six screws.

Clutch system: spring loaded ball-detent principle. Operable temperature range from -30 to +120° C.



AVAILABLE FUNCTION SYSTEMS

- W = Single position / automatic re-engagement (standard)
- D = Multi-position / automatic re-engagement
- G = Load holding / load blocking
- F = Full disengagement / manual re-engagement





MINIATURE DESIGN | SIZE 1.5 - 10

Standard with clamping collar

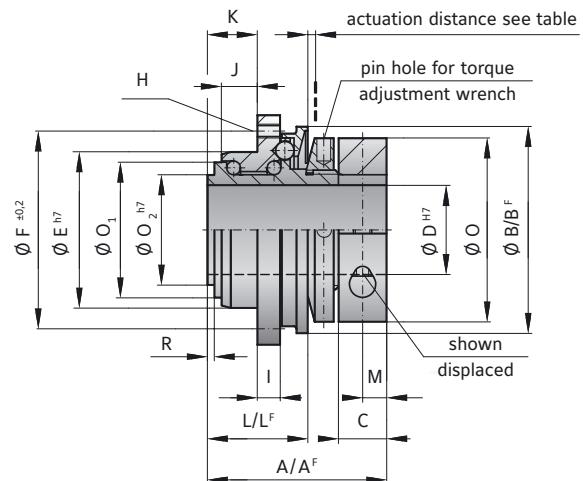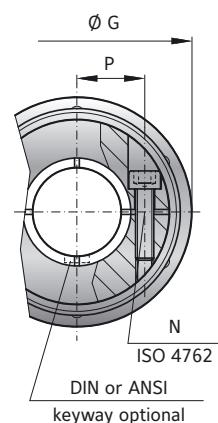

STANDARD DESIGN | SIZE 15 - 2,500

Standard with conical clamping bushing

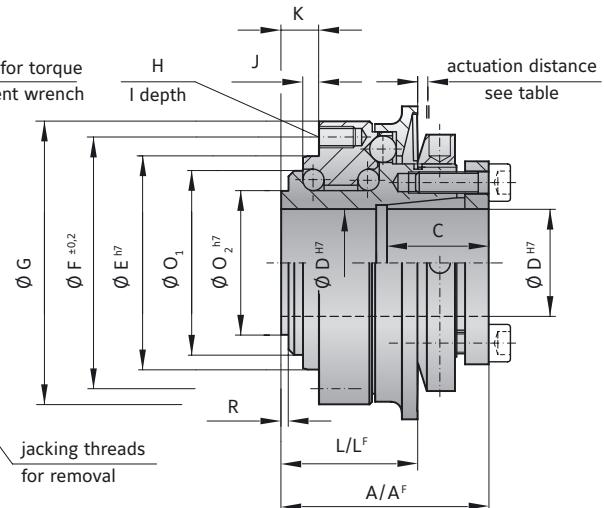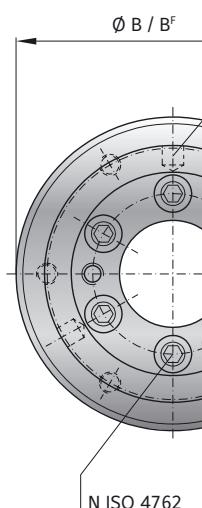

MODEL SK1

			MINIATURE DESIGN													
SIZE			1.5	2	4.5	10	15	30	60	150	200	300	500	800	1500	2500
Adjustment range available from - to (approx. values) (Nm)	T _{KN}		0.1-0.6 0.4-1 0.8-2	0.2-1.5 0.5-2.2 1.5-3.5	1-3 2-4.5 3-7	2-6 4-12 7-18	5-15 12-25 20-40 35-70	5-20 10-30 20-60 50-100	10-30 25-80 50-115	20-70 45-150 80-225	30-90 60-160 140-280 250-400	100-200 150-240 220-440	80-200 200-350 320-650	400-650 500-800 650-950	600-800 700-1200 1000-1800	1500-2000 2000-2500 2300-2800
Adjustment range available from - to (approx. values) ("F" Version) (Nm)	T _{KN}		0.3-0.8 or 0.6-1.3	0.2-1 or 0.7-2	2.5-4.5	2-5 4-10 8-15	7-15	8-20 or 16-30	10-30 20-40 30-60	20-60 40-80 80-150	80-140 or 130-200	120-180 160-300 300-450	50-150 100-300 250-500	200-400 or 450-850	1000-1250 or 1250-1500	1400-2200 or 1800-2700
Overall length (mm)	A		23	28	32	39	40	50	54	58	63	70	84	95	109	146
Overall length ("F" Version) (mm)	A ^F		23	28	32	39	40	50	54	58	66	73	88	95	117	152
Actuation ring Ø (mm)	B		23	29	35	45	55	65	73	92	99	120	135	152	174	242
Actuation ring Ø, ("F" Version) (mm)	B ^F		24	32	42	51.5	62	70	83	98	117	132	155	177	187	258
Clamping fit length (mm)	C		7	8	11	11	19	22	27.5	32	32	41	41	49	61	80
Inner diameter from Ø to Ø H7 (mm)	D		4-8	4-12	5-14	6-20	8-22	12-22	12-29	15-37	20-44	25-56	25-56	30-60	35-70	50-100
Pilot diameter h7 (mm)	E		14	22	25	34	40	47	55	68	75	82	90	100	125	168
Bolt-hole circle diameter ± 0.2 (mm)	F		22	28	35	43	47	54	63	78	85	98	110	120	148	202
Flange outside diameter -0.2 (mm)	G		26	32	40	50	53	63	72	87	98	112	128	140	165	240
Thread	H		4xM2	4xM2.5	6xM2.5	6xM3	6xM4	6xM5	6xM5	6xM6	6xM6	6xM8	6xM8	6xM10	6xM12	6xM16
Thread depth (mm)	I		3	4	4	5	6	8	9	10	10	10	12	15	16	24
Centering length -0.2 (mm)	J		2.5	3.5	5	8	3	5	5	5	5	6	9	10	13.5	20
Distance (mm)	K		5	6	8	11	8	11	11	12	12	15	21	19	25	34
Distance (mm)	L		11	15	17	22	27	35	37	39	44	47	59	67	82	112
Distance, ("F" Version) (mm)	L ^F		11.5	16	18	24	27	37	39	41.5	47	51.5	68	75	94	120
Distance	M		3.5	4	5	5										
Screw ISO 4762	N		1xM2.5	1xM3	1xM4	1xM4	6xM4	6xM5	6xM5	6xM6	6xM6	6xM8	6xM8	6xM10	6xM12	6xM16
Tightening torque (Nm)	O		1	2	4	4.5	4	6	8	12	14	18	25	40	70	120
Outside diameter clamp ring Ø (mm)	O ₁		20	25	32	40										
Diameter (mm)	O ₂		13	18	21	30	35	42	49	62	67	75	84	91	112	154
Diameter h7 (mm)	O ₂		11	14	17	24	27	32	39	50	55	65	72	75	92	128
Distance between centers (mm)	P		6.5	8	10	15										
Distance (mm)	R		1	1.3	1.5	1.5	2.5	2.5	2.5	2.5	3	3	4	4	4.5	6
Moment of inertia (10 ⁻³ kgm ²)	J _{ges}		0.01	0.02	0.05	0.07	0.15	0.25	0.50	1.60	2.70	5.20	8.6	20	31.5	210
Approx. weight (kg)			0.03	0.065	0.12	0.22	0.4	0.7	1.0	1.3	2.0	3.0	4.0	5.5	10	28
Actuation distance (mm)			0.7	0.8	0.8	1.2	1.5	1.7	1.7	1.9	2.2	2.2	2.2	2.2	3.0	3.0

A^F, B^F, L^F = Full disengagement / manual re-engagement version (F)

ORDERING EXAMPLE	SK1	10	W	12.7	4	2-6	XX
Model	●						Special designation only (e.g. special bore / keyway dimensions).
Size		●					
Function system			●				
Bore D1 H7				●			
Disengagement torque Nm					●		
Torque adjustment range Nm						●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. SK1 / 10 / W / 12.7 / 4 / 2-6 / XX; XX=stainless steel)							

WITH KEYWAY CONNECTION

0.1 - 2,800 Nm

PROPERTIES



MATERIAL

► **Clutch system:** hardened steel

DESIGN


With DIN 6885 or ANSI B17.1 keyway.
Clutch system: spring loaded ball-detent principle. Operable temperature range from -30 to +120° C.

AVAILABLE FUNCTION SYSTEMS

- W = Single position / automatic re-engagement (standard)
- D = Multi-position / automatic re-engagement
- G = Load holding / load blocking
- F = Full disengagement / manual re-engagement


MINIATURE DESIGN | SIZE 1.5 - 10

Standard with keyway mounting

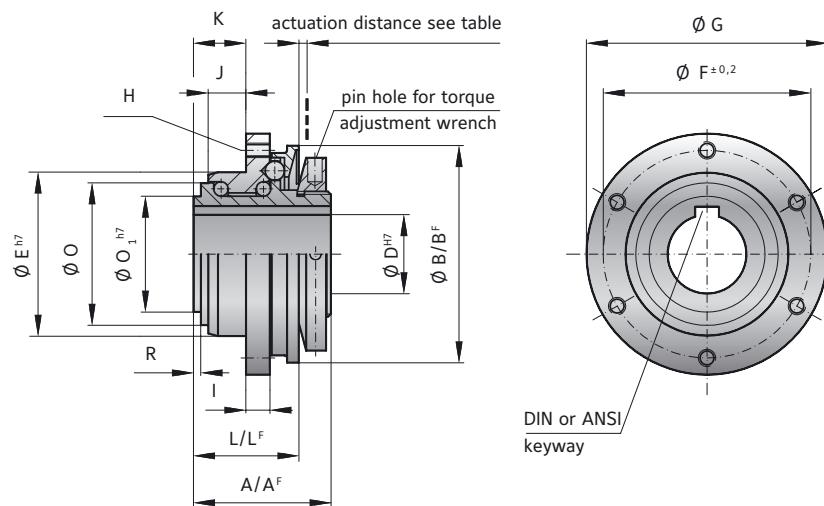

STANDARD DESIGN | SIZE 15 - 2,500

Standard with keyway mounting

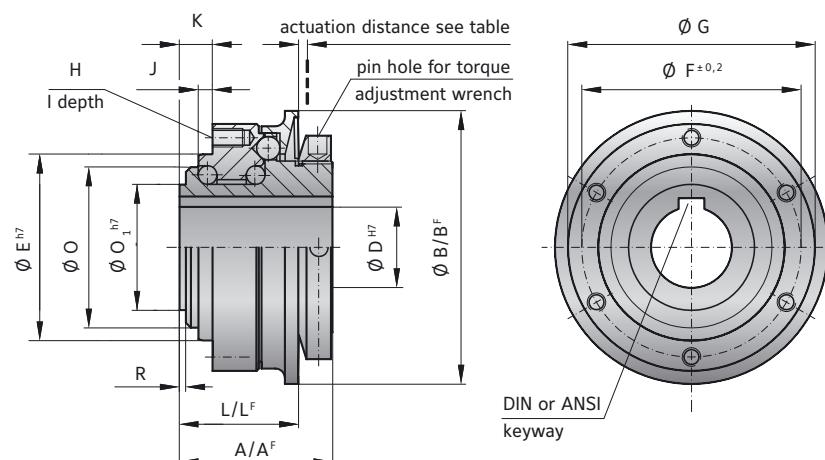

MODEL SKP

			MINIATURE DESIGN													
SIZE			1.5	2	4.5	10	15	30	60	150	200	300	500	800	1500	2500
Adjustment range available from - to (approx. values)	(Nm)	T _{KN}	0.1-0.6 0.4-1 0.8-2	0.2-1.5 0.5-2.2 1.5-3.5	1-3 2-4.5 3-7	2-6 4-12 7-18	5-15 12-25 20-40 35-70	5-20 10-30 20-60 50-100	10-30 25-80 50-115	20-70 45-150 80-225	30-90 60-160 140-280 250-400	100-200 150-240 220-440	80-200 200-350 320-650	400-650 500-800 650-950	600-800 700-1200 1000-1800	1500-2000 2000-2500 2300-2800
Adjustment range available from - to (approx. values) ("F" Version)	(Nm)	T _{KN}	0.3-0.8 or 0.6-1.3	0.2-1 or 0.7-2	2.5-4.5	2-5 4-10 8-15	7-15	8-20 or 16-30	10-30 20-40 30-60	20-60 40-80 80-150	80-140 or 130-200	120-180 160-300 300-450	50-150 100-300 250-400	200-400 or 450-850	1000-1250 or 1250-1500	1400-2200 or 1800-2700
Overall length A	(mm)	A	15.5	20	22	28	34	43	46	48.5	54	57	71.5	80	99	135
Overall length ("F" Version)	(mm)	A ^F	15.5	20	22	28	34	43	46	48.5	57	60	75	91	110	141
Actuation ring Ø	(mm)	B	23	29	35	45	55	65	73	92	99	120	135	152	174	242
Actuation ring Ø, ("F" Version)	(mm)	B ^F	24	32	42	51.5	62	70	83	98	117	132	155	177	187	258
Inner diameter from Ø to Ø H7	(mm)	D	4-8*	4-10*	4-12*	4-16*	8-18	12-25.4	12-28	15-38	20-42	25-50	25-58	30-60	35-73	50-98
Inner diameter with keyway DIN 6885-3 (flat)	(mm)	D	-	-	-	16-18	18-20	25.4-27	28-30	38-40	42-44	50-52	58-60	60-63	73-75	98-100
Pilot diameter h7	(mm)	E	14	22	25	34	40	47	55	68	75	82	90	100	125	168
Bolt-hole circle diameter ± 0.2	(mm)	F	22	28	35	43	47	54	63	78	85	98	110	120	148	202
Flange outside diameter -0.2	(mm)	G	26	32	40	50	53	63	72	87	98	112	128	140	165	240
Thread	H	4xM2	4xM2.5	6xM2.5	6xM3	6xM4	6xM5	6xM5	6xM6	6xM6	6xM8	6xM8	6xM10	6xM12	6xM16	
Thread depth	I	3	4	4	5	6	8	11	11	10	10	10	12	15	16	24
Centering length -0.2	J	2.5	3.5	5	8	3	5	5	5	5	6	9	10	13.5	20	
Distance	K	5	6	8	11	8	11	11	12	12	15	21	19	25	34	
Distance	L	11	15	17	22	27	35	37	39	44	47	59	67	82	112	
Distance, ("F" Version)	L ^F	11.5	16	18	24	27	37	39	41.5	47	51.5	68	75	94	120	
Diameter	O	13	18	21	30	35	42	49	62	67	75	84	91	112	154	
Diameter h7	O ₁	11	14	17	24	27	32	39	50	55	65	72	75	92	128	
Distance	R	1	1.3	1.5	1.5	2.5	2.5	2.5	2.5	3	3	4	4	4.5	6	
Moment of inertia (10 ⁻³ kgm ²)	J _{ges}	0.01	0.02	0.05	0.07	0.15	0.25	0.50	1.60	2.70	5.20	8.6	20	31.5	210	
Approx. weight (kg)		0.03	0.065	0.12	0.22	0.4	0.7	1.0	1.3	2.0	3.0	4.0	5.5	10	28	
Actuation distance (mm)		0.7	0.8	0.8	1.2	1.5	1.5	1.7	1.9	2.2	2.2	2.2	2.2	3.0	3.0	


A^F, B^F, L^F = Full disengagement / manual re-engagement version (F)

* bore diameter < 6 mm delivered without keyway

KEYWAY ACCORDING TO DIN 6885 (R+W STANDARD)

D ₁ from to	6	8	10	12	17	22	30	38	44	44	50	58	65	75	85	95	110
b ^{S9}	2	3	4	5	6	8	10	12	14	16	18	20	22	25	28		
h	2	3	4	5	6	7	8	8	9	10	11	12	14	14	16		
t ₁	1.2	1.8	2.5	3	3.5	4	5	5	5.5	6	7	7.5	9	9	10		
t ₂ +0.1/-0.2	1	1.4	1.8	2.3	2.8	3.3	3.3	3.3	3.8	4.3	4.4	4.9	5.4	5.4	6.4		

Bore diameters specified as common inch sizes receive standard keyways according to ANSI B17.1. Special keyway dimensions are also available upon request.

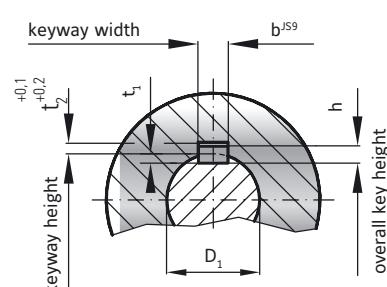

ORDERING EXAMPLE	SKP	10	W	15.88	4	2-6	XX
Model	●						
Size		●					
Function system			●				
Bore D1 H7				●			
Disengagement torque Nm					●		
Torque adjustment range Nm						●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. SKP / 10 / W / 15.88 / 4 / 2-6 / XX; XX=stainless steel)							

Special designation only (e.g. special bore / keyway dimensions).

SKN

WITH CLAMPING HUB

5 - 1,800 Nm

PROPERTIES



MATERIAL

- **Clutch system:** hardened steel
- **Clamping collar:** up to size 500 aluminum, size 800 and up steel


DESIGN

With clamping ring and one clamping screw. Clutch system: spring loaded ball-detent principle. Operable temperature range from -30 to +120° C.

AVAILABLE FUNCTION SYSTEMS

- W = Single position / automatic re-engagement (standard)
- D = Multi-position / automatic re-engagement
- G = Load holding / load blocking
- F = Full disengagement / manual re-engagement

STANDARD DESIGN | SIZE 15 - 1,500

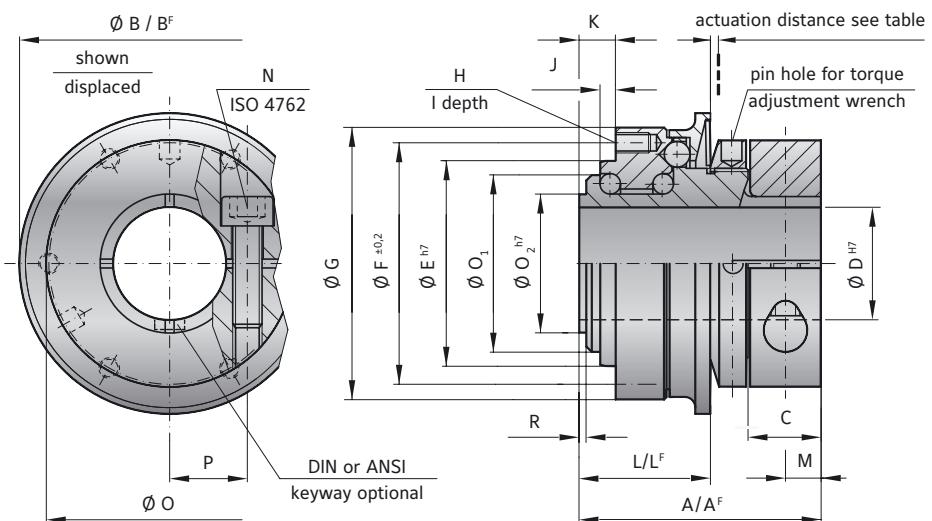

MODEL SKN

SIZE		15	30	60	150	200	300	500	800	1500
Adjustment range available from - to (approx. values)	(Nm) T _{KN}	5-10 or 8-20	10-25 or 20-40	10-30 or 25-80	20-70 45-150 80-180	30-90 60-160 120-240	100-200 150-240 200-320	80-200 200-350 300-500	400-650 500-800 600-850	600-800 700-1200 1000-1800
Adjustment range available from - to (approx. values) ("F" Version)	(Nm) T _{KN}	7-15	8-20 or 16-30	10-30 20-40 30-60	20-60 40-80 80-150	80-140 or 130-200	120-180 or 160-300	50-150 100-300 250-500	200-400 or 450-800	1000-1250 or 1250-1500
Overall length	(mm) A	47	59	65	71	80	84	101	115	145
Overall length, ("F" Version)	(mm) A ^F	47	59	65	73	83	87	107	126	160
Actuation ring Ø	(mm) B	55	65	73	92	99	120	135	152	174
Actuation ring Ø, ("F" Version)	(mm) B ^F	62	70	83	98	117	132	155	177	187
Clamping fit length	(mm) C	13.5	16	20	23	26	26	30	35	46
Inside diameter from Ø to Ø H7	(mm) D	12-22*	14-25.4*	16-32	19-40*	24-44	30-56*	35-60*	40-62*	50-72*
Pilot diameter h7	(mm) E	40	47	55	68	75	82	90	100	125
Bolt-hole circle diameter ± 0.2	(mm) F	47	54	63	78	85	98	110	120	148
Flange outside diameter -0.2	(mm) G	53	63	72	87	98	112	128	140	165
Thread	H	6xM4	6xM5	6xM5	6xM6	6xM6	6xM8	6xM8	6xM10	6xM12
Thread depth	(mm) I	6	8	9	10	10	10	12	15	16
Centering length -0.2	(mm) J	3	5	5	5	5	6	9	10	13.5
Distance	(mm) K	8	11	11	12	12	15	21	19	25
Distance	(mm) L	27	35	37	39	44	47	59	67	82
Distance, ("F" Version)	(mm) L ^F	27	37	39	41.5	47	51.5	68	75	94
Distance	M	6.5	7.5	9.5	11	13	13	14.5	18	22.5
Screw ISO 4762	N	M5	M6	M8	M10	M12	M12	M14	M16	M20
Tightening torque		8	15	40	70	120	130	210	270	500
Clamp ring Ø	O	49	55	67	85	94	110	121	134	157
Diameter	O ₁	35	42	49	62	67	75	84	91	112
Diameter h7	O ₂	27	36	39	50	55	65	72	75	92
Distance between centers	(mm) P	17.5	19	23.5	30	32.5	39	43.5	45	52
Distance	(mm) R	2.5	2.5	2.5	2.5	3	3	4	4	4.5
Moment of inertia (10 ⁻³ kgm ²)	J _{ges}	0.15	0.25	0.50	1.60	2.70	5.20	8.60	20	31.5
Approx. weight (kg)		0.4	0.7	1.0	1.3	2.0	3.0	4.0	5.5	10
Actuation distance (mm)		1.5	1.5	1.7	1.9	2.2	2.2	2.2	2.2	3.0

A^F, B^F, L^F = Full disengagement / manual re-engagement version (F)

* keyway with max. bore only in clamping hub possible.

ORDERING EXAMPLE	SKN	60	W	19.05	60	25-80	XX
Model	●						
Size		●					
Function system			●				
Bore D1 H7				●			
Disengagement torque Nm					●		
Torque adjustment range Nm						●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. SKN / 60 / W / 19.05 / 60 / 25-80 / XX; XX=stainless steel)							

Special designation only
(e.g. special bore / keyway dimensions).

SK2

WITH CLAMPING HUBS

0.1 - 1,800 Nm



PROPERTIES

MATERIAL

- **Bellows:** high grade stainless steel
- **Clutch system:** hardened steel
- **Clamping hubs:** up to size 80 aluminum, size 150 and up steel


DESIGN

Two clamping hubs with one clamping screw in each. Clutch system: spring loaded ball-detent principle. Operable

temperature range from -30 to +100° C.

AVAILABLE FUNCTION SYSTEMS

- W = Single position / automatic re-engagement (standard)
- D = Multi-position / automatic re-engagement
- G = Load holding / load blocking
- F = Full disengagement / manual re-engagement

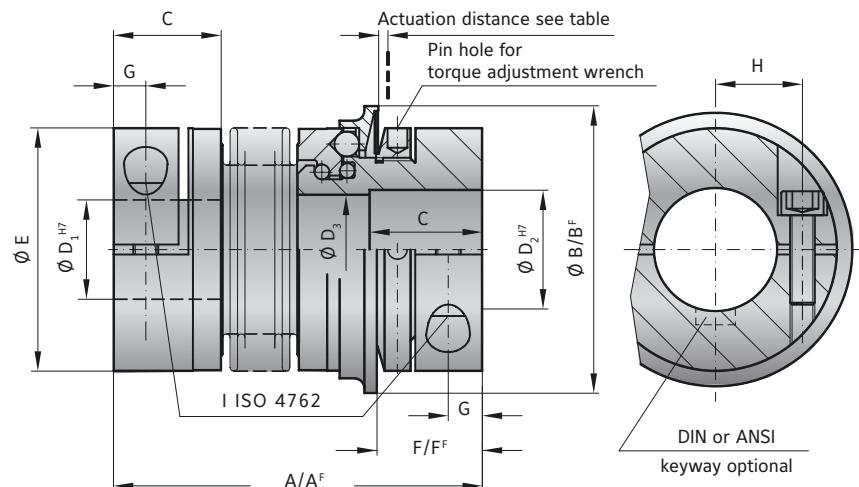

MODEL SK2

SIZE		1.5	2	4.5	10	15	30	60	80	150	200	300	500	800	1500											
Adjustment range available from ~ to (approx. values) (Nm)	T _{KN}	0.1-0.6 0.4-1 0.8-1.5	0.2-1.5 or 0.5-2	1-3 or 3-6	2-6 or 4-12	5-10 or 8-20	10-25 or 20-40	10-30 or 25-80	10-70 or 30-90	20-70 or 45-150 80-180	20-70 or 60-160 120-240	30-90 or 150-240 200-320	80-200 or 200-350 300-500	400-650 500-800 650-850	650-800 700-1200 1000-1800											
Adjustment range available from ~ to (approx. values) ("F" Version) (Nm)	T _{KN}	0.3-0.8 or 0.6-1.3	0.2-1 or 0.7-2	2.5-4.5	2-5 or 5-10	7-15	8-20 or 16-30	20-40 or 30-60	20-60 or 40-80 80-150	20-60 or 40-80 80-150	80-140 or 130-200	120-180 or 160-300	60-150 100-300 250-500	200-400 or 450-800	1000-1250 or 1250-1500											
Overall length (mm)	A	42	46	51	57	65	65	74	75	82	87	95	102	112	127											
Overall length, ("F" Version) (mm)	A ^F	42	46	51	57	65	65	74	75	82	87	95	102	112	117											
Actuation ring Ø (mm)	B	23	29	35	45	55	65	73	92	92	99	120	135	152	174											
Actuation ring Ø, ("F" Version) (mm)	B ^F	24	32	42	51.5	62	70	83	98	98	117	132	155	177	187											
Clamping fit length (mm)	C	11	13	16	16	22	27	31	35	35	40	42	51	48	67											
Inside diameter from Ø to Ø H7 (mm)	D ₁ /D ₂	3-8*	4-12*	5-14*	6-16*	10-26	12-30	15-32	19-42	19-42	24-45	30-60	35-60	40-75	50-80											
Diameter (mm)	D ₃	9.1	12.1	14.1	20.1	21.1	24.1	32.1	36.1	36.1	42.1	58.1	60.1	60.1	68.1											
Outside diameter of coupling (mm)	E	19	25	32	40	49	55	66	81	81	90	110	123	134	157											
Distance (mm)	F	12	13	15	17	19	24	28	31	31	35	35	45	50	63											
Distance, ("F" Version) (mm)	F ^F	11.5	12	14	16	19	22	29	31	30	33	35	43	54	61											
Distance (mm)	G	3.5	4	5	5	6.5	7.5	9.5	11	11	12.5	13	17	18	22.5											
Distance between centers (mm)	H	6	8	10	15	17	19	23	27	27	31	39	41	2x48	2x55											
Screw ISO 4762	I	M2.5	M3	M4	M4	M5	M6	M8	M10	M10	M12	M12	M16	2xM16	2xM20											
Tightening torque (Nm)		1	2	4	4.5	8	15	40	50	70	120	130	200	250	470											
Approx. weight (kg)		0.047	0.07	0.2	0.3	0.4	0.6	1.0	2.0	2.4	4.0	5.9	9.6	14	21											
Moment of inertia (10 ⁻³ kgm ²)	J _{ges}	0.01	0.01	0.01	0.02	0.02	0.06	0.07	0.10	0.15	0.27	0.32	0.75	0.80	1.80	1.90	2.50	2.80	5.10	5.30	11.5	11.8	22.8	23.0	42.0	83.0
Torsional stiffness (10 ³ Nm/rad)	C _T	0.7	1.2	1.3	7	5	9	8	20	15	39	28	76	55	129	85	175	110	191	140	420	350	510	500	780	1304
Lateral ± (mm) values		0.15	0.15	0.20	0.20	0.25	0.20	0.30	0.15	0.20	0.20	0.25	0.20	0.25	0.20	0.25	0.25	0.30	0.25	0.30	0.30	0.35	0.35	0.35	0.35	0.35
Angular ± (Degree) values		1	1	1.5	1.5	2	1.5	2	1	1.5	1	1.5	1	1.5	1	1.5	1.5	2	1.5	2	2	2.5	2.5	2.5	2.5	2.5
Lateral spring stiffness (N/mm)		70	40	30	290	45	280	145	475	137	900	270	1200	420	920	255	1550	435	2040	610	3750	1050	2500	840	2000	3600
Actuation distance (mm)		0.7	0.8	0.8	1.2	1.5	1.5	1.5	1.7	1.9	1.9	1.9	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	3

A^F, B^F, L^F = Full disengagement / manual re-engagement version (F)
Larger versions available upon request.
* keyway with max. bore only in clamping hub possible.

SK3

WITH CONICAL CLAMPING SYSTEM

5 - 2,800 Nm



PROPERTIES

MATERIAL

- **Bellows:** high grade stainless steel
- **Clutch system:** hardened steel
- **Clamping hubs / bushings:** steel


DESIGN

Two conical clamping assemblies with six tightening screws each, plus jack screws for removal. Clutch system: spring loaded ball-detent principle.

Operable temperature range from -30 to +100° C.

AVAILABLE FUNCTION SYSTEMS

- W = Single position / automatic re-engagement (standard)
- D = Multi-position / automatic re-engagement
- G = Load holding / load blocking
- F = Full disengagement / manual re-engagement

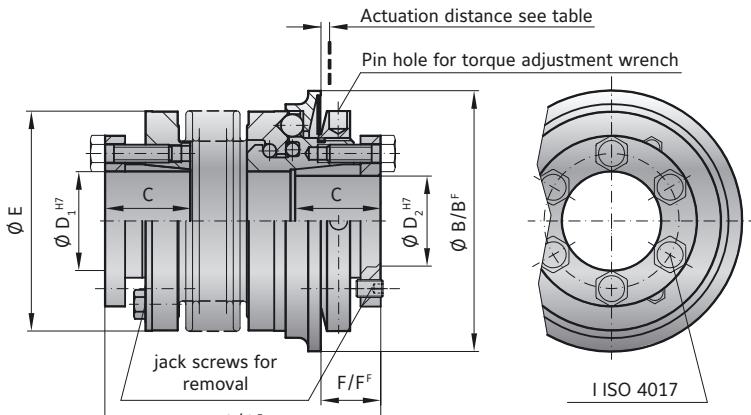

MODEL SK3

SIZE		15	30	60	150	200	300	500	800	1500	2500
Adjustment range available from (approx. values) (Nm)	T _{KN}	5-10 or 8-20	10-25 or 20-40	10-30 or 25-80	20-70 or 45-150 80-200	30-90 or 60-160 140-280	100-200 or 150-240 220-400	80-200 or 200-350 300-500	400-650 or 500-800 600-900	650-850 or 700-1200 1000-1800	1500-2000 or 2000-2500 2300-2800
Adjustment range available from (approx. values) ("F" Version) (Nm)	T _{KN}	7-15	8-20 or 16-30	20-40 or 30-60	20-60 or 40-80 80-150	80-140 or 130-200	120-180 or 160-300	60-150 or 100-300 250-500	200-400 or 450-800	1000-1250 or 1250-1500	1400-2200 or 1800-2700
Overall length ±2 (mm)	A	62 69	72 80	84 94	93 105	99 111	114 128	123 136	151	175	246
Overall length. ("F" Version) ±2 (mm)	A ^F	62 69	72 80	84 94	93 105	102 114	117 131	127 140	151	184	252
Actuation ring Ø (mm)	B	55	65	73	92	99	120	135	152	174	243
Actuation ring Ø. ("F" Version) (mm)	B ^F	62	70	83	98	117	132	155	177	187	258
Clamping fit length (mm)	C	19	22	27	32	32	41	41	49	61	80
Inside diameter from Ø to Ø H7 (mm)	D ₁ /D ₂	10-22	12-23	12-29	15-37	20-44	25-56	25-60	30-60	35-70	50-100
Outside diameter of coupling (mm)	E	49	55	66	81	90	110	123	133	157	200
Distance (mm)	F	13	16	18	19	19	23	25	31	30	34
Distance. ("F" Version) (mm)	F ^F	13	14	17	18	17	20	22	20	26	31
6x Screw ISO 4017	I	M4	M5	M5	M6	M6	M8	M8	M10	M12	M16
Tightening torque (Nm)		4	6	8	12	14	18	25	40	70	120
Approx. weight (kg)		0.3	0.4	1.2	2.3	3.0	5.0	6.5	9.0	16.3	35
Moment of inertia (10^{-3} kgm ²)	J _{ges}	0.10 0.15	0.28 0.30	0.75 0.80	1.90 2.00	2.80 3.00	5.50 6.00	11.0 12.8	20	42	257
Torsional stiffness (10^3 Nm/rad)	C _T	20 15	39 28	76 55	175 110	191 140	420 350	510 500	780	1304	3400
Lateral max. values		0.15 0.20	0.20 0.25	0.20 0.25	0.20 0.25	0.25 0.30	0.25 0.30	0.30 0.35	0.35	0.35	0.35
Angular		1 1.5	1 1.5	1 1.5	1 1.5	1.5 2	1.5 2	2 2.5	2.5	2.5	2.5
Lateral spring stiffness		475 137	900 270	1200 380	1550 435	2040 610	3750 1050	2500 840	2000	3600	6070
Actuation distance		1.5	1.5	1.7	1.9	2.2	2.2	2.2	2.2	3	3

A^F, B^F, L^F = Full disengagement / manual re-engagement version (F)

Larger versions available upon request.

ORDERING EXAMPLE	SK3 SK5	60	84	D	16	19.05	25	10-30	XX
Model	●								
Size		●							
Overall length mm			●						
Function system				●					
Bore D1 H7					●				
Bore D2 H7						●			
Disengagement torque Nm							●		
Torque adjustment range Nm								●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. SK3 / 60 / 84 / D / 16 / 19.05 / 25 / 10-30 / XX; XX=special 30 deg re-engagement angle)									

Special designation only
(e.g. special bore / keyway dimensions).

SK5

BLIND MATE WITH CLAMPING HUBS

0.1 - 850 Nm

PROPERTIES



MATERIAL

- **Bellows:** high grade stainless steel
- **Clutch system:** hardened steel
- **Clamping hubs:** up to size 80 aluminum, size 150 and up steel
- **Tapered male segment:** high strength plastic


DESIGN

Two clamping hubs with one clamping screw each, and one of the clamping hubs with tapered male segment

for plug-in installation. Clutch system: spring loaded ball-detent principle. Operable temperature range from -30 to +100° C.

AVAILABLE FUNCTION SYSTEMS

- W = Single position / automatic re-engagement (standard)
- D = Multi-position / automatic re-engagement
- G = Load holding / load blocking
- F = Full disengagement / manual re-engagement

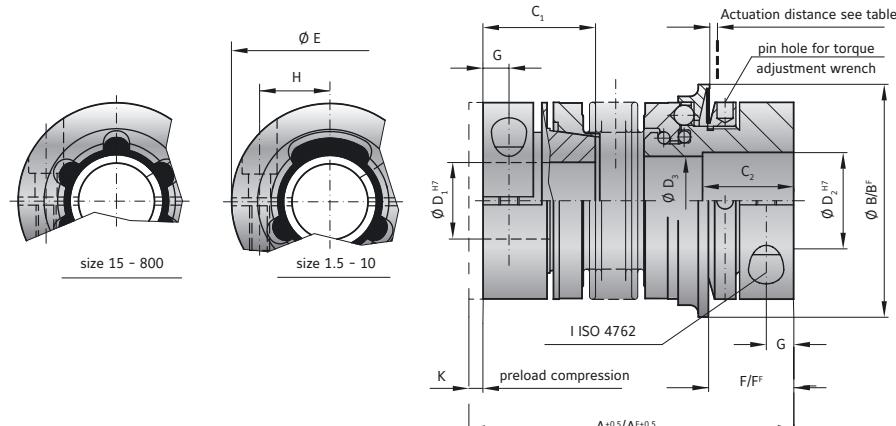

MODEL SK5

Size	1.5	2	4.5	10	15	30	60	80	150	300	500	800
Adjustment range available from - to (approx. values) (Nm)	T_{KN} 0.1-0.6 0.4-1 0.8-1.5	0.2-1.5 or 0.5-2	1-3 or 3-6	2-6 or 4-12	5-10 or 8-20	10-25 or 20-40	10-30 or 25-80	20-70 or 30-90	20-70 or 45-150	100-200 150-240 200-320	80-200 200-350 300-500	400-650 500-800 650-850
Adjustment range available from - to (approx. values) ("F" Version) (Nm)	T_{KN} 0.3-0.8 or 0.6-1.3	0.2-1 or 0.7-2	2.5-4.5	2-5 or 5-10	7-15	8-20 or 16-30	20-40 or 30-60	20-60 or 40-80	80-150	120-200 or 160-300	100-150 100-300 250-500	200-400 or 450-800
Overall length +0.5 (mm)	A	44	48	54	60	68	70	79	76	83	89	97
Overall length +0.5 ("F" Version) (mm)	A^F	44	48	54	60	68	70	79	76	83	89	97
Actuation ring Ø (mm)	B	23	29	35	45	55	65	73	92	92	120	135
Actuation ring Ø ("F" Version) (mm)	B^F	24	32	42	51.5	62	70	83	98	98	132	155
Clamping fit length C_1/C_2 (mm)	C_1/C_2	14 11	16 13	19 16	21 16	28 22	33 27	39 31	43 35	43 35	52 42	61 52
Bore Diameter from Ø to Ø H7 (mm)	D_1	3-8*	4-12*	5-16*	5-20*	8-22*	10-25*	12-32	14-38*	14-38*	30-56	35-60
Bore Diameter from Ø to Ø H7 (mm)	D_2	3-8*	4-12*	5-14*	5-20*	8-26	10-30	12-32	14-42	14-42	30-60	35-60
Diameter (mm)	D_3	9.1	12.1	14.1	20.1	21.1	24.1	32.1	36.1	36.1	58.1	60.1
Outside diameter (mm)	E	19	25	32	40	49	55	66	81	81	110	123
Distance (mm)	F	12	13	15	17	19	24	28	31	31	35	50
Distance ("F" Version) (mm)	F^F	11.5	12	14	16	19	22	29	31	30	36	43
Distance (mm)	G	3.5	4	5	5	6.5	7.5	9.5	11	11	13	17
Distance between centers (mm)	H	6	8	10	15	17	19	23	27	27	39	41
Screw ISO 4762	I	M2.5	M3	M4	M4	M5	M6	M8	M10	M10	M12	M16
Tightening torque (Nm)	I	1	2	4	4.5	8	15	40	50	70	130	200
Pretensioning, approx (mm)	K	0.1-0.5	0.2 - 0.7	0.2 - 0.7	0.2 - 1.0	0.2 - 1.0	0.3 - 1.5	0.5 - 1.5	0.5 - 1.0	0.5 - 1.0	0.5 - 1.5	0.5 - 2.0
Axial recovery of coupling max. (N)		4	8	5	15	10	25	30	20	12	50	32
Approx. weight (kg)		0.038	0.07	0.2	0.3	0.4	0.6	1.4	2	2.4	5.9	9.6
Moment of inertia (10^{-3} kgm ²)	J_{ges}	0.01	0.01	0.01	0.02	0.02	0.06	0.07	0.10	0.27	0.32	0.75
Torsional stiffness (10^3 Nm/rad)	C_T	0.7	1.2	1.3	7	5	8	7	12	10	18	40
Lateral \pm (mm) max. values		0.15	0.15	0.20	0.20	0.25	0.20	0.30	0.15	0.20	0.25	0.20
Angular \pm (Degree)		1	1	1.5	1.5	2	1.5	1	1.5	1	1.5	2
Lateral spring stiffness (N/mm)		70	40	30	290	45	280	145	475	137	900	1200
Actuation distance (mm)		0.7	0.8	0.8	1.2	1.5	1.5	1.7	1.7	1.9	1.9	2.2

A^F, B^F, L^F = Full disengagement / manual re-engagement version (F)

* keyway with max. bore only conditionally possible.

ES2

PRESS FIT ELASTOMER WITH CLAMPING HUB

1 - 1,800 Nm



PROPERTIES

MATERIAL

- **Clutch system:** hardened steel
- **Hub D1:** up to size 450 high strength aluminum, size 800 and up steel
- **Hub D2:** up to size 60 high strength aluminum, size 150 and up steel
- **Elastomer insert:** wear resistant thermally stable TPU

DETAILS FOR ELASTOMER INSERTS
see page 66/67


DESIGN

Two clamping hubs with one clamping


screw in each and concave driving jaws. Backlash free, vibration damping, electrically isolating elastomer insert press fit into the jaw sets. Clutch system: spring loaded ball-detent principle.

AVAILABLE FUNCTION SYSTEMS


- W = Single position / automatic re-engagement (standard)
- D = Multi-position / automatic re-engagement
- G = Load holding / load blocking
- F = Full disengagement / manual re-engagement



Size 5-800
elastomer insert
type A / B



Size 1500
includes 5x elastomer
segments type A / B

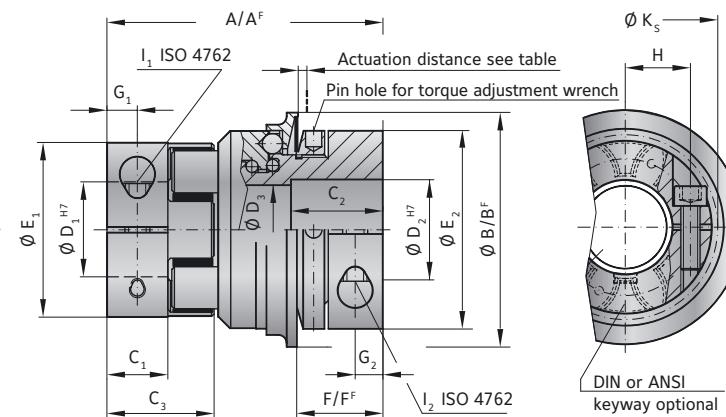

MODEL ES2

Size	5	10	20	60	150	300	450	800	1500
Type (Elastomer insert)	A	B	A	B	A	B	A	B	A
Rated torque (Nm)	T _{KN}	9	12	12.5	16	17	21	60	75
Max. torque* (Nm)	T _{Kmax}	18	24	25	32	34	42	120	150
Adjustment range possible from -to (Nm)	T _{KN}	1-3 or 3-6	2 - 6 or 4 - 12	10 - 25 or 20 - 40	10 - 30 or 25 - 80	20 - 70 or 45 - 150	20 - 100 or 80 - 180	200 - 200 or 200 - 320	200 - 200 or 300 - 500
Adjustment range ("F" Version) possible from -to (Nm)	T _{KN} ^F	2.5 - 4.5	2 - 5 or 5 - 10	8 - 20 or 16 - 30	20 - 40 or 30 - 60	20 - 60 or 40 - 80	120 - 180 or 180 - 300	60 - 150 or 100 - 300	200 - 400 or 250 - 500
Overall length (mm)	A	50	60	86	96	106	140	164	179
Overall length ("F" Version) (mm)	A _F	50	60	86	96	108	143	168	190
Actuation ring Ø (mm)	B	35	45	65	73	92	120	135	152
Outside diameter of actuation ring ("F" Version) (mm)	B _F	42	51.5	70	83	98	132	155	177
Clamping fit length (mm)	C ₁	8	10.3	17	20	21	31	34	46
Fit length (mm)	C ₂	14	16	27	31	35	42	51	45
Length of hub (mm)	C ₃	16.7	20.7	31	36	39	52	57	74
Inside diameter from Ø to Ø H7 (mm)	D ₁	4 - 12.7**	5 - 16**	8 - 25	12 - 32	19 - 36	20 - 45	28 - 60	35 - 80
Inside diameter from Ø to Ø H7 (mm)	D ₂	6 - 14**	6 - 20**	12 - 30	15 - 32	19 - 42	30 - 60	35 - 60	40 - 75
Diameter Ø (mm)	D ₃	14.1	20.1	24.1	32.1	36.1	58.1	60.1	68.1
Inside diameter (Elastomer insert) (mm)	D _E	10.2	14.2	19.2	26.2	29.2	36.2	46.2	60.5
Diameter of the hub (mm)	E ₁	25	32	42	56	66.5	82	102	136.5
Diameter of the hub (mm)	E ₂	19	40	55	66	81	110	123	132
Distance (mm)	F	15	17	24	28	31	35	45	50
Distance ("F" Version) (mm)	F _F	14	16	22	29	30	35	43	54
Distance (mm)	G ₁	4	5	8.5	10	11	15	17.5	23
Distance (mm)	G ₂	5	5	7.5	9.5	11	13	17	18
Distance between centers (mm)	H ₁	8	10.5	15	21	24	29	38	50.5
Screws (ISO 4762)	I ₁	M3	M4	M5	M6	M8	M10	M12	M16
Tightening torque (Nm)	I ₁	2	4.5	8	15	35	70	120	290
Distance between centers D2 side (mm)	H ₂	10	15	19	23	27	39	41	48
Screws (ISO 4762)	I ₂	M4	M4	M6	M8	M10	M12	M16	2x M16
Tightening torque (Nm)	I ₂	4	4.5	15	40	70	130	200	250
Diameter with screwhead (mm)	K _S	25	32	44.5	57	68	85	105	139
Approx. weight (kg)	J _{ges}	0.02	0.06	0.25	0.7	2.3	11	22	33.5
Actuation distance (mm)		0.8	1.2	1.5	1.7	1.9	2.2	2.2	3.0

For information on shaft misalignment, torsional stiffness, and other details about the elastomer inserts see page 105. A^F, B^F, L^F = Full disengagement / manual re-engagement version (F)

* Maximum transmittable torque of the clamping hub depends on the bore diameter see table on page 70.

** keyway with max. bore only in clamping hub possible.

*** fully split clamping hub with two rows of screws.

SL

BACKLASH FREE TORQUE LIMITERS

TORQLIGHT®

1 - 700 Nm

LIGHTWEIGHT DESIGN



GENERAL INFORMATION ABOUT R+W SAFETY COUPLINGS:



SERVICE LIFE

As long as the technical limits are not exceeded these couplings are wear and maintenance free.

FIT CLEARANCE

Overall shaft / hub clearance of 0.01 - 0.05 mm

DESIGN

Ball-detent clutch with special light weight materials and low profile dimensions

SPECIAL SOLUTIONS

Various materials, tolerances, dimensions and performance ratings available for custom applications on request.

ATEX (Optional)

For use in hazardous zones 1/21 and 2/22, these safety couplings have been authorized under directive 94/9/EG and are available with certification.

SLN

WITH CLAMPING COLLAR

10 - 700 Nm




PROPERTIES

DESIGN

With clamping collar and a single clamping screw.
Clutch system: spring loaded ball-detent principle. Operable temperature range from -30 to +120° C.

AVAILABLE FUNCTION SYSTEMS

- W = Single position / automatic re-engagement (standard)
- D = Multi-position / automatic re-engagement

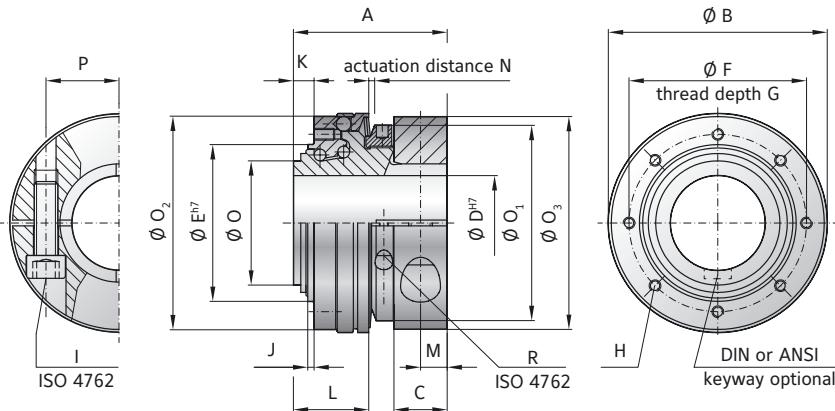

MODEL SLN

SIZE	30	60	150	300
Adjustment range* from - to (Nm)	10-35 30-80 40-135	30-80 60-120 100-200	40-100 100-200 150-300	200-350 300-450 400-550 550-700
Overall length (mm)	A 45	53	63	72
Actuation ring Ø (mm)	B 63	74	92	118
Clamping fit length (mm)	C 15	18	22	24
Bore diameter from Ø to Ø H7 (mm)	D 12-30	16-35	19-42	22-60
Pilot diameter h7 (mm)	E 43	53	68	85
Bolt-hole circle diameter ± 0.2 (mm)	F 48	60	75	95
Thread depth +1 (mm)	G 5	6	7	9
Fastening threads	H 8x M4	8x M4	8x M5	8x M6
Screw ISO 4762	I M6	M8	M10	M12
Tightening torque (Nm)	J 15	40	75	130
Centering length -0.2 (mm)	K 2	2	3	3
Distance (mm)	L 6	7	9	9
Distance to actuation ring edge (mm)	M 23	26	32	36
Distance (mm)	N 7.5	9	11	12
Actuation distance (mm)	O 1.3	1.5	1.8	2
Ø Base element (mm)	P 35	42	54	70
Ø Adjustment nut (mm)	Q 55	66	82	100
Ø Flange -0.2 (mm)	R 58	72	87	110
Ø Clamp ring (mm)	S 59	72	90	114
Distance between centers (mm)	T 21.5	25	33	41
Adjustment nut's clamp screw ISO 4762	U M3	M3	M3	M4
Tightening torque (Nm)	V 2	2	2	4.5
Approx. weight (kg)	W 0.3	0.5	0.8	1.5
Approx. moment of inertia at D max (10^{-3} Kgm ²)	X J_{ges} 0.15	0.3	1	3

*Maximum transmittable torque of the clamping hub depends on the bore diameter / see table below

MAXIMUM TRANSMITTABLE TORQUE IN RELATION TO BORE DIAMETER

SIZE	Ø 12	Ø 15	Ø 20	Ø 25	Ø 30	Ø 35	Ø 40	Ø 45	Ø 50	Ø 55	Ø 60
30	30	55	80	110	130						
60		80	120	160	200	220					
150			200	250	300	350	400	450			
300				350	430	510	590	670	750	830	910

Higher torque possible with keyway.

SLP

WITH KEYWAY CONNECTION

10 - 700 Nm




PROPERTIES

DESIGN

With DIN 6885 or ANSI B17.1 keyway.
Clutch system: spring loaded ball-detent principle. Operable temperature range from -30 to +120° C.

AVAILABLE FUNCTION SYSTEMS

- W = Single position / automatic re-engagement (standard)
- D = Multi-position / automatic re-engagement

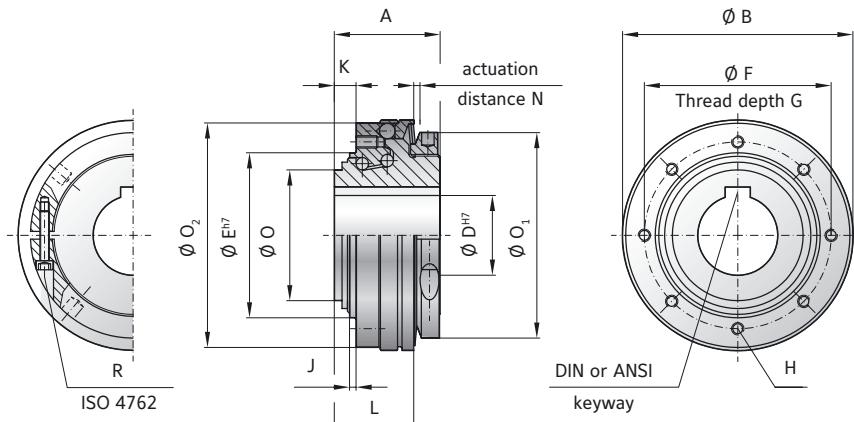

MODEL SLP

SIZE	30	60	150	300	
Adjustment range* from - to (Nm)	T _{KN}	10-35 30-80 40-135	30-80 60-120 100-200	40-100 100-200 150-300	200-350 300-450 400-550 550-700
Overall length (mm)	A	30	35	41	48
Actuation ring diameter (mm)	B	63	74	92	118
Bore diameter from Ø to Ø H7 (mm)	D	12-25.4 (28)*	16-30 (32)*	19-44 (46)*	22-54 (58)*
Pilot diameter h7 (mm)	E	43	53	68	85
Bolt-hole circle diameter ± 0.2 (mm)	F	48	60	75	95
Thread depth +1 (mm)	G	5	6	7	9
Fastening threads	H	8x M4	8x M4	8x M5	8x M6
Centering length -0.2 (mm)	J	2	2	3	3
Distance (mm)	K	6	7	9	9
Distance to actuation ring edge (mm)	L	23	26	32	36
Actuation distance (mm)	N	1.3	1.5	1.8	2
Ø Base element (mm)	O	35	42	54	70
Ø Adjustment nut (mm)	O ₁	55	66	82	100
Ø Flange -0.2 (mm)	O ₂	58	72	87	110
Adjustment nut's clamp screw ISO 4762	R	M3	M3	M3	M4
Tightening torque (Nm)		2	2	2	4.5
Approx. weight (kg)		0.2	0.35	0.7	1.1
Approx. moment of inertia at D max. (10 ⁻³ kgm ²)	J _{ges}	0.1	0.4	1.1	2.3

* maximum bore diameters shown are only available with shallow keyway according to DIN 6885/3 or special heights for inch bores

ORDERING EXAMPLE	SLN SLP	60	W	25.4	80	60-120	XX
Model	●						
Size		●					
Function system			●				
Bore D H7				●			
Disengagement torque Nm					●		
Torque adjustment range Nm						●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. SLN / 60 / W / 25.4 / 80 / 60-120; XX=special dual keyway)							

Special designation only
(e.g. special bore / keyway dimensions).

SL2

WITH CLAMPING HUBS

10 - 400 Nm




PROPERTIES

DESIGN

Clamping collar / clamping hub with one clamping screw each. Clutch system: spring loaded ball-detent principle. Special compact, high stiffness version. Operable temperature range from -30 to +100° C.

AVAILABLE FUNCTION SYSTEMS

- W = Single position / automatic re-engagement (standard)
- D = Multi-position / automatic re-engagement

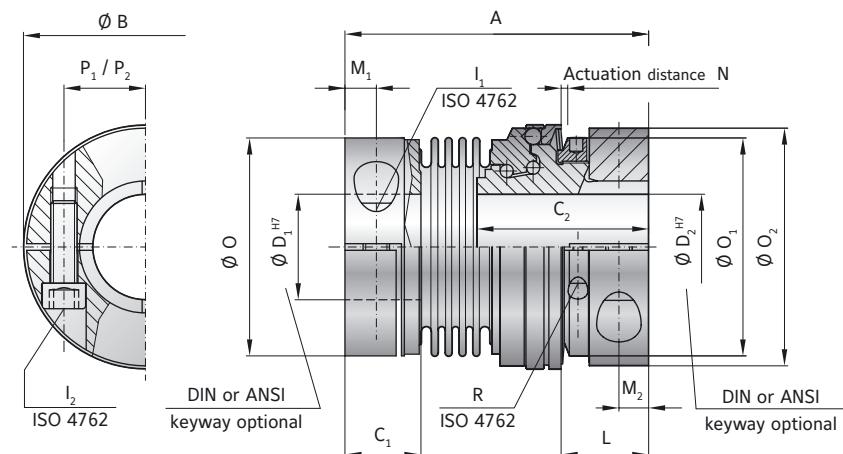

MODEL SL2

SIZE	30	60	150	300
Adjustment range* from - to (Nm)	T _{KN}	10-35 30-80	20-50 40-100	40-100 100-200
Overall length (mm)	A	80	93	112
Actuation ring diameter (mm)	B	63	74	92
Hub length (mm)	C ₁ /C ₂	21/45	23/53	28 / 63
Bore diameter from Ø to Ø H7 (mm)	D ₁ /D ₂	12-32/12-30	16-35 / 16-35	19-42 / 19-42
Screw ISO 4762 (mm)	I ₁ /I ₂	M6	M8	M10
Tightening torque (Nm)		15	40	75
Distance to actuation ring edge (mm)	L	22	26	32
Distance (mm)	M ₁ /M ₂	7.5/7.5	9.5/9	11/11
Actuation distance (mm)	N	1.3	1.5	1.8
Ø Clamping hub Ø ₁ (coupling end) (mm)	O	55.5	66	82
Ø Adjustment nut (mm)	O ₁	55	66	82
Clamping ring Ø ₂ (torque limiter end) (mm)	O ₂	59	72	90
Distance between centers, bellows side/safety element (mm)	P ₁ /P ₂	20/21.5	23 / 25	27/33
Adjustment nut's clamp screw ISO 4762	R	M3	M3	M3
Tightening torque (Nm)		2	2	2
Approx. weight (kg)		0.4	0.7	1.2
Approx. moment of inertia at D max.(10 ⁻³ Kgm ²)	J _{ges}	0.2	0.8	1.4
Torsional stiffness (10 ³ Nm/rad)		31	72	141
Lateral ± max. (mm)		0.2	0.2	0.25

*Maximum transmittable torque of the clamping hub depends on the bore diameter / see table on page 103

ORDERING EXAMPLE	SL2 SK2	60	W	30	20	80	40-100	XX
Model	●							
Size		●						
Function system			●					
Bore D1 H7				●				
Bore D2 H7					●			
Disengagement torque Nm						●		
Torque adjustment range Nm							●	

Special designation
only (e.g. special bore /
keyway dimensions).

For custom features place an XX at the end of the part number and describe the special requirements (e.g. SL2 / 60 / W / 30 / 20 / 80 / 40-100; XX=special dual keyway)

SLE

PRESS FIT ELASTOMER WITH CLAMPING HUB

10 - 700 Nm




PROPERTIES

DESIGN

Clamping collar with clamping screw. Clamping hub with concave driving jaws and clamping screw. Backlash free, vibration damping, electrically isolating elastomer insert press fit into the jaw sets. Clutch system: spring loaded ball-detent principle, in a special compact, low inertia design.

AVAILABLE FUNCTION SYSTEMS

- W = Single position / automatic re-engagement (standard)
- D = Multi-position / automatic re-engagement

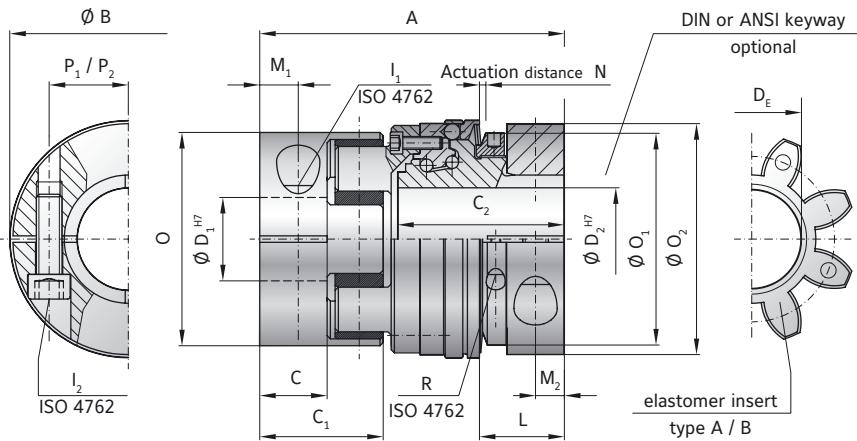

MODEL SLE

SIZE	30	60	150	300
Type (elastomer insert)	A	B	A	B
Rated torque	T _{KN}	60	75	160
Max. torque	T _{KN max}	120	150	325
Adjustment range* possible from -to (Nm)	T _{KN}	10-35 30-80 40-135	30-80 60-120 100-200	40-100 100-200 150-300
Overall length (mm)	A	85	93	122
Actuation ring diameter (mm)	B	63	74	92
Hub length (coupling hub end) (mm)	C/C ₁	20 / 36	21 / 39	31 / 52
Length of hub (torque limiting portion)	C ₂	45	53	63
Bore diameter from Ø to Ø H7 (mm)	D ₁ /D ₂	12-32 / 12-30	16-36 / 16-35	19-45 / 19-42
Inner diameter (elastomer insert)	D _E	26.2	29.2	36.2
ISO 4762 screw, coupling side / torque limiter side	I ₁ /I ₂	M6	M8	M10
Tightening torque (Nm)		15	40	75
Distance to actuation ring edge (mm)	L	22	26	32
Distance (mm)	M ₁ /M ₂	10 / 7.5	12 / 9	15 / 11
Actuation distance (mm)	N	1.3	1.5	1.8
Clamping hub Ø, elastomer coupling	O	56	66.5	82
Ø Adjustment nut	O ₁	55	66	82
Clamping hub Ø, safety coupling	O ₂	59	72	90
Distance to clamping screw, coupling side / torque limiter side	P ₁ /P ₂	21 / 21.5	24 / 25	29 / 33
Adjustment nut's clamp screw ISO 4762	R	M3	M3	M3
Tightening torque (Nm)		2	2	2
Approx. weight (kg)		0.4	0.8	1.5
Approx. moment of inertia at D max.(10 ⁻³ Kgm ²)	J _{ges}	0.3	1	1.8
Static torsional rigidity (Nm/rad)		3290	9750	4970
Dynamic torsional rigidity (Nm/rad)		7940	11900	10600
Lateral ± approx. (mm)		0.12	0.1	0.15
		0.12	0.12	0.18
		0.15	0.15	0.18
		0.18	0.18	0.14
		0.14	0.14	0.2
		0.18	0.18	0.18

ESL

WITH KEYWAY CONNECTION

1 - 150 Nm

PROPERTIES



MATERIAL

- **Clutch system:** high strength steel, drive balls made from hardened steel
- **Hubs:** high strength aluminum
- **Elastomer insert:** wear resistant, thermally stable TPU


DETAILS FOR ELASTOMER INSERT
see page 66/67

DESIGN

Two hubs, each with keyway, set screw, and concave driving jaws. The clutch system is integrated into one of the hubs.

DISENGAGEMENT

Negligible wear at up to 200 rpm.
Contact R+W for higher speed applications.

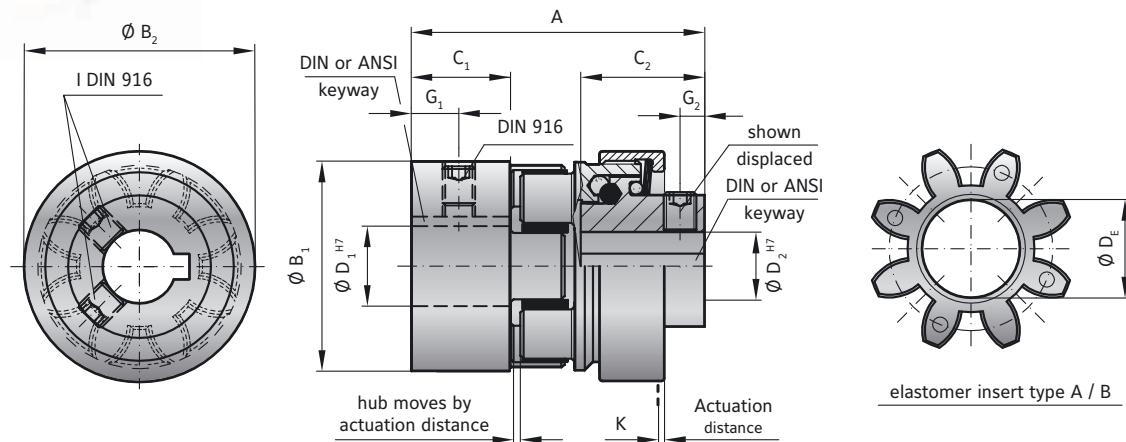

MODEL ESL

Size	5	10	20	60	150
Type (Elastomer insert)	A	B	A	B	A
Rated torque (Nm)	T _{Kn}	9	12	12.5	16
Torque setting possible* from - to (Nm)	T _{Kn}	1-6		1-12	
Overall length (mm)	A	34		45	
Diameter of the hub (mm)	B ₁	25		32	
Diameter of the hub (mm)	B ₂	29		32	
Clamping fit length (mm)	C ₁	12.5		12	
Clamping fit length (mm)	C ₂	11.5		20	
Inside diameter from Ø to Ø H7 (mm)	D ₁	6-15		6-18	
Inside diameter from Ø to Ø H7 (mm)	D ₂	6-10		6-12	
Inside diameter max. (elastomer) (mm)	D _E	10.5		14.2	
Distance (mm)	G ₁	5		6	
Distance (mm)	G ₂	2.5		3.5	
Screws DIN 916**	I				
depending on bore diameter see below table					
Approx. weight (kg)		0.05		0.15	
Moment of inertia (10 ⁻³ kgm ²)	J ₁ / J ₂	0.01		0.02	
Actuation distance (mm)	K	0.6		0.6	
Screws DIN 916**					
depending on bore diameter see below table					
Approx. weight (kg)		0.05		0.15	
Moment of inertia (10 ⁻³ kgm ²)	J ₁ / J ₂	0.01		0.02	
Actuation distance (mm)	K	0.6		0.6	

* Disengagement torque is permanently set at the factory. For information on shaft misalignment, torsional stiffness, and other details about the elastomer inserts see page 70.

ORDERING EXAMPLE	ESL	10	A	14	12	10	XX
Model	●						
Size		●					
Elastomer insert type			●				
Bore D1 H7 includes standard keyway				●			
Bore D2 H7 includes standard keyway					●		
Disengagement torque Nm (not adjustable)						●	

For custom features place an XX at the end of the part number and describe the special requirements (e.g. ESL / 10 / A / 14 / 12 / 10 / XX; XX=stainless steel)

FIXED DISENGAGEMENT TORQUE

The ESL coupling is unlike other R+W safety couplings in that the disengagement torque is permanently set and tamper proof.

** SET SCREWS

D1/D2	-	Ø 10	Ø 11-12	Ø 13-30	Ø 31-58	Ø 59-80
I		M3	M4	M5	M8	M10

Bores <6mm made without keyway.



STOP STOP STOP



TORQUE LIMITERS ACCESSORIES

ACCESSORIES FOR SK / ES2 / SL TORQUE LIMITERS

**It is important that switches
are 100% tested for proper
functioning after mounting.**


PROXIMITY SWITCH (E-STOP FUNCTION)

SK

ES2

ORDER NUMBER 650.2703.001


TECHNICAL DATA	SK, ES2
Voltage	10 to 30 V DC
Max. output current	200 mA
Max. switch frequency	800 Hz
Temperature range	-25° to +70° C
Protective system	IP 67
Switch type	normally open
Max. detection gap	max. 2 mm
SWITCH DIAGRAM SK, ES2	
<pre> graph LR P[+] --- SW(()) SW --- Load[load] R1[br] --- Gnd[-] </pre>	

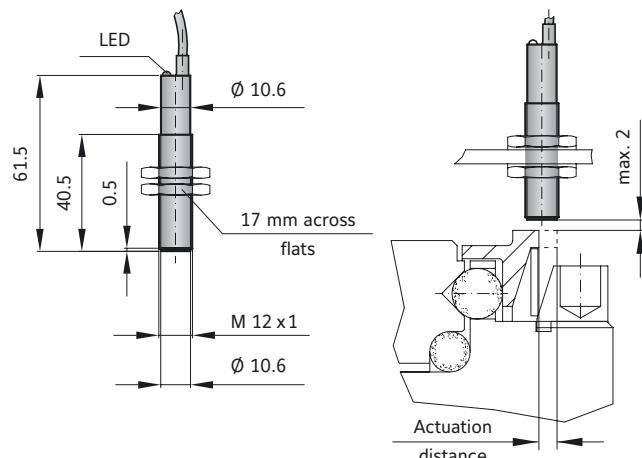

SL

ORDER NUMBER 619.4711.650

TECHNICAL DATA	SL
Voltage	10 to 30 V DC
Max. output current	200 mA
Max. switch frequency	≤ 3 KHz
Temperature range	-25° to +70° C
Protective system	IP 67
Switch type	PNP, NO
Max. detection gap	max. 2 mm
SWITCH DIAGRAM SL	
<pre> graph LR P[+] --- SW(()) SW --- Load[load] R1[BN] --- Gnd[-] </pre>	

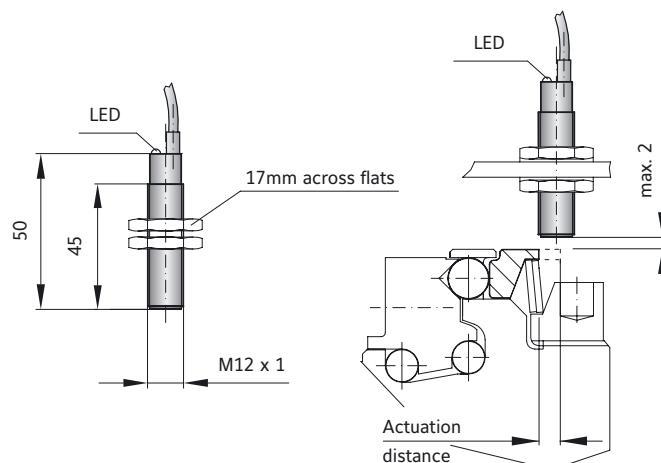

It is important that switches are 100% tested for proper functioning after mounting.


MECHANICAL LIMIT SWITCH (E-STOP FUNCTION)



ORDER NUMBER 618.6740.644

TECHNICAL DATA	SK, ES2, SL
Max. voltage	250 V AC
MAX. CONSTANT CURRENT:	10 A
Protective system	IP 65
Contact system	Opener (forced separating)
Temperature range	-30° to +80° C
Actuation	Plunger (metal)
SWITCH DIAGRAM SK, ES2, SL	

The mechanical limit switch is suitable for size 30 and up. For smaller safety couplings the proximity sensor is recommended.

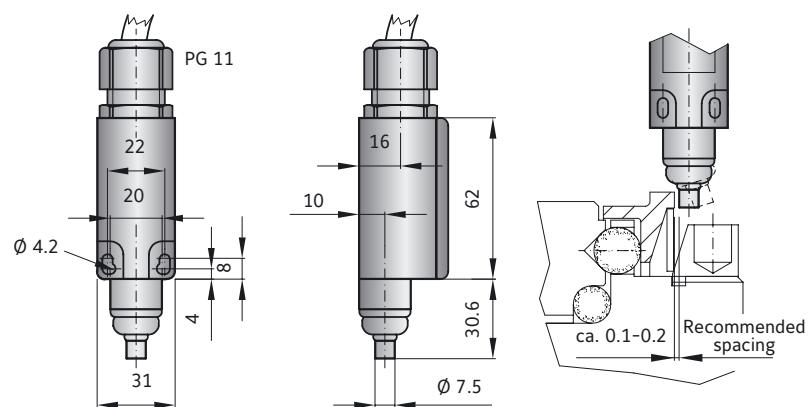

The switch plunger (pictured above and right) should be located as close to the actuation ring / limit switch plate as possible (approximately 0.1-0.2mm).



ACCESSORIES FOR ATEX TORQUE LIMITERS

It is important that switches are 100% tested for proper functioning after mounting.



ATEX PROXIMITY SWITCH (E-STOP FUNCTION)



ORDER NUMBER EEX. 1624.004

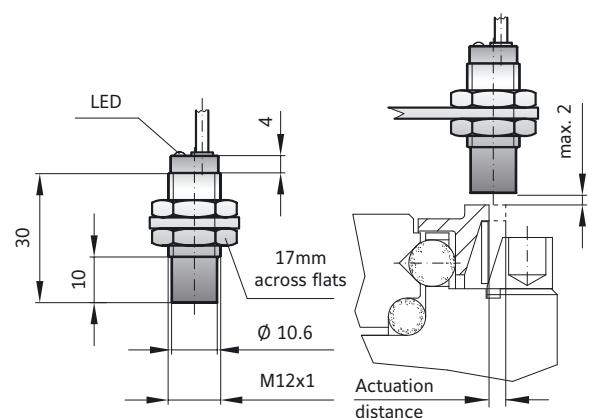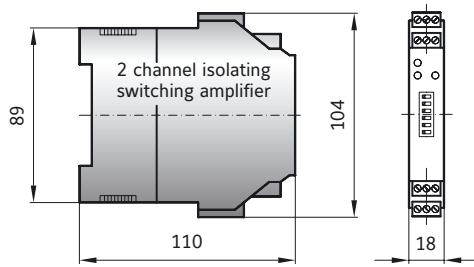

SWITCH DIAGRAM

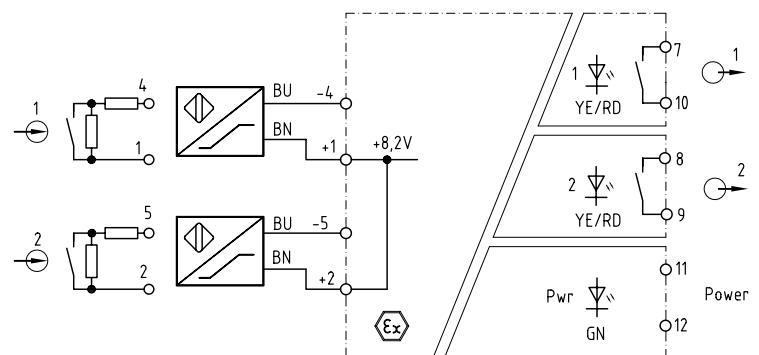


ACCESSORIES FOR SK/ES2/SL TORQUE LIMITERS

R+W SPANNER WRENCH FOR TORQUE ADJUSTMENT




For smaller couplings the spanner wrench is not necessary. In sizes 1.5/2/4.5/10 the torque adjustment nut is easily turned with a screw or pin.

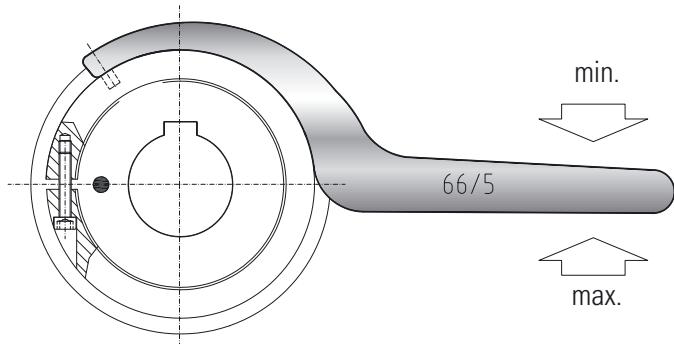

ORDER NUMBERS

COUPLING SIZE	SK Single position Multi-position Load holding	SK Full disengagement	ES2 Single position Multi-position Load holding	ES2 Full disengagement	SL Single position Multi-position
15	49/4	49/4	-	-	-
20	-	-	55/4	55/4	-
30	55/4	55/4	-	-	55/4
60	66/5	66/5	66/5	66/5	66/5
80	82/5	82/5	-	-	-
150	82/5	82/5	82/5	82/5	82/5
200	90/6	98/5	-	-	-
300	114/6	114/6	114/6	114/6	100/6
450	-	-	126/8	126/8	-
500	126/8	126/8	-	-	-
800	134/8	144/8	134/8	144/8	-
1500	163/8	163/8	163/8	163/8	-
2500	210/10	226/10	-	-	-

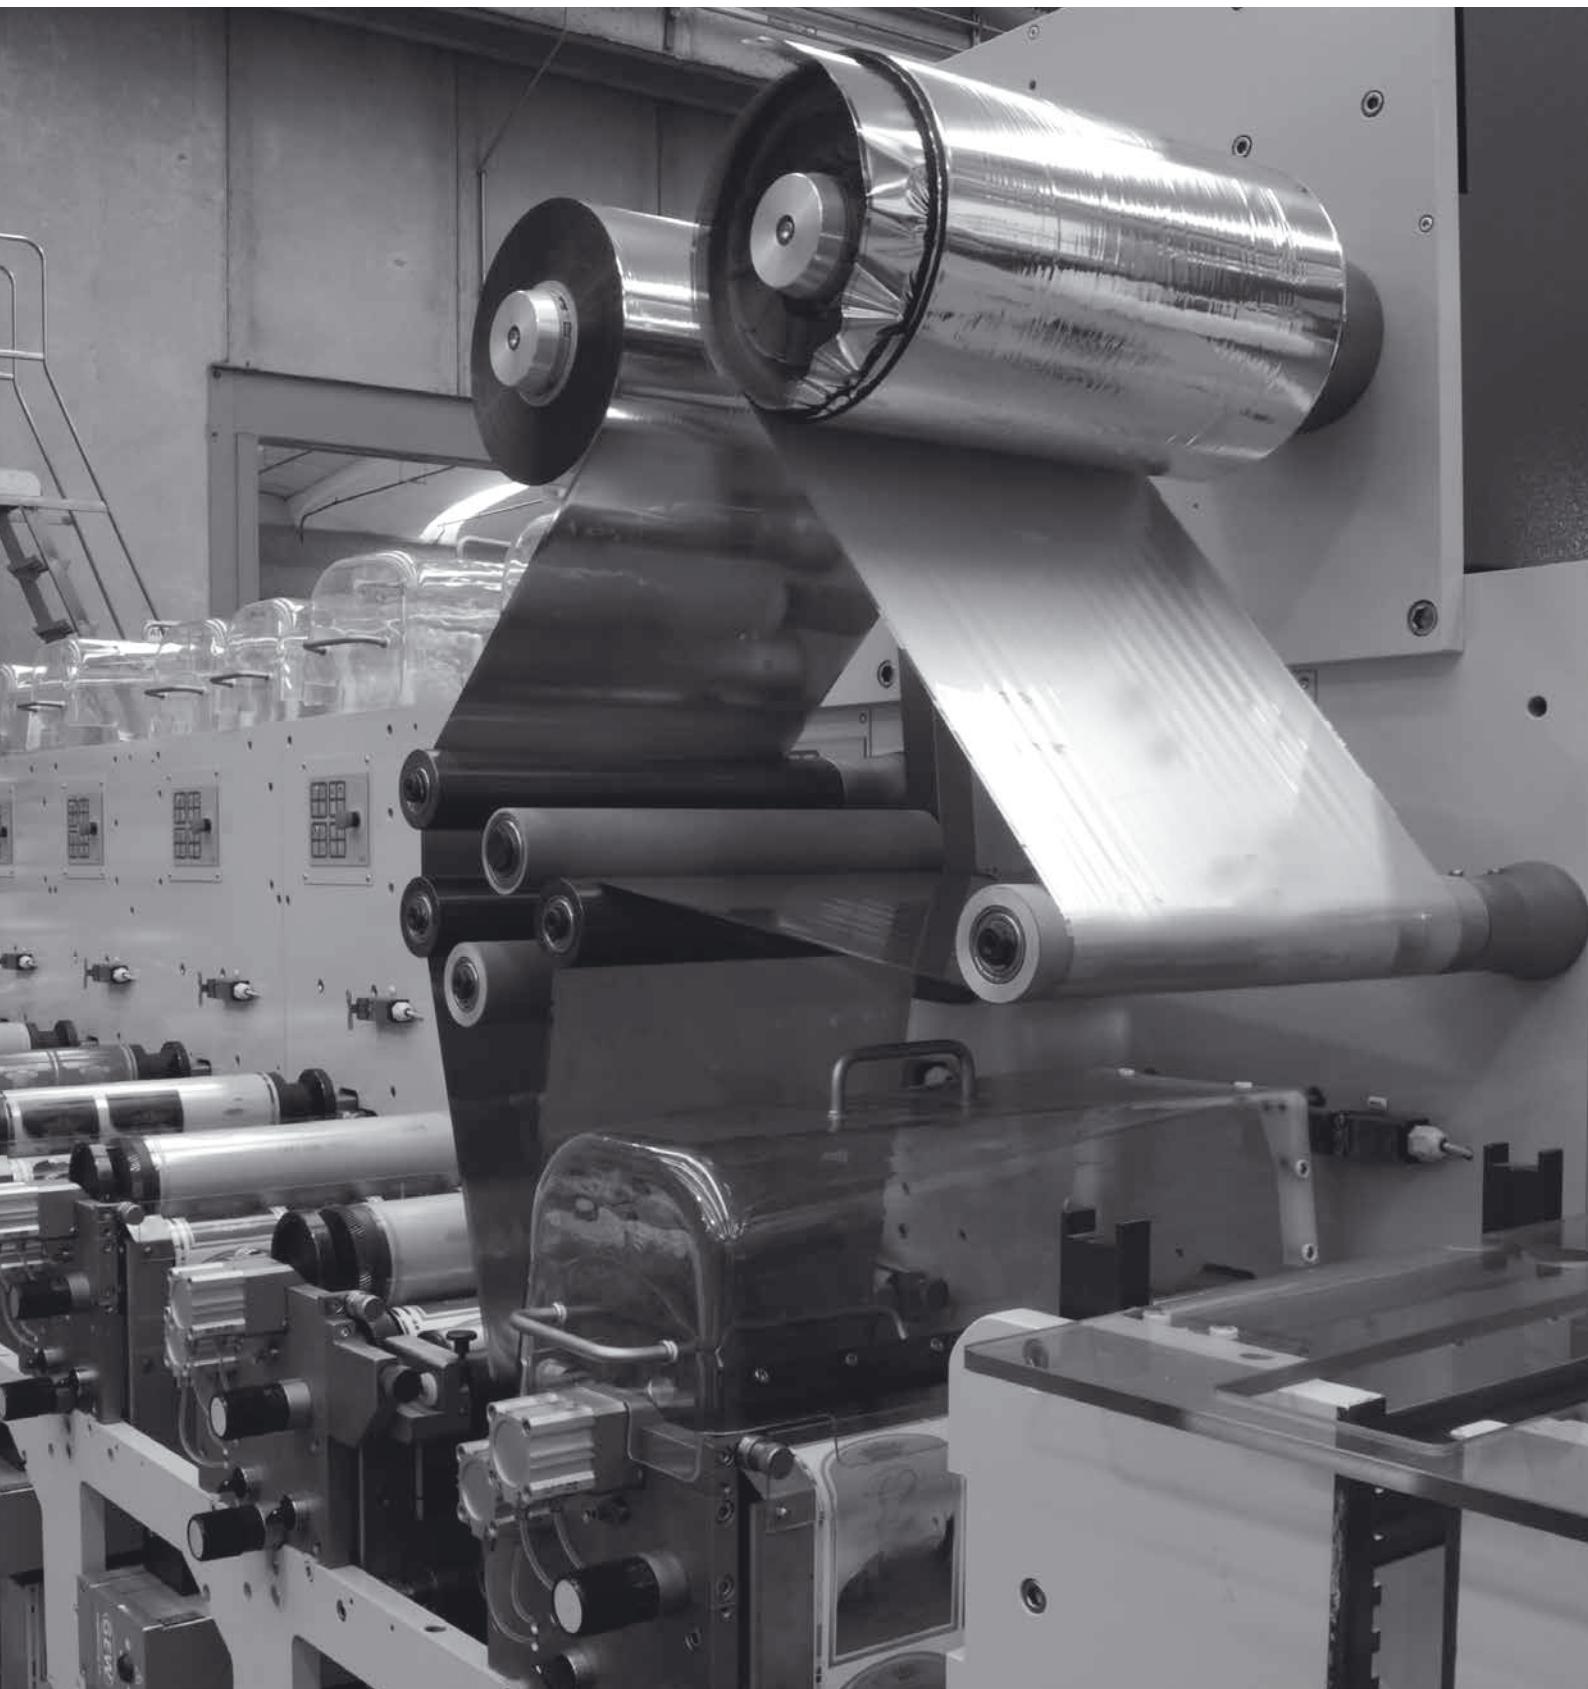

ZA**EZ**

LINE SHAFTS

5 - 25,000 Nm



GENERAL INFORMATION R+W LINE SHAFTS:

SERVICE LIFE

R+W line shafts are wear and maintenance free for an infinite service life, as long as the technical limits are not exceeded.

FIT CLEARANCE

Overall shaft / hub clearance of 0.01 – 0.05 mm

ROTATIONAL SPEED

After selecting overall length A, contact R+W for maximum speed.

SPECIAL SOLUTIONS

Various materials, tolerances, dimensions and performance ratings available for custom applications on request.

ATEX (Optional)

For use in hazardous zones 1/21 and 2/22, R+W line shafts have been authorized under directive 94/9/EG and is available with certification.



ZA

BACKLASH FREE, TORSIONALLY STIFF LINE SHAFTS

10 - 4,000 Nm

MODEL	FEATURES	
ZA	 with clamping hub from 10 - 800 Nm <ul style="list-style-type: none">▶ installation and removal possible without disturbing other machine components▶ standard lengths up to 6 meters▶ no intermediate support bearings required	Page 124
ZA	 with conical clamping system from 1,500 - 4,000 Nm <ul style="list-style-type: none">▶ installation and removal possible without disturbing other machine components▶ standard lengths up to 6 meters▶ no intermediate support bearings required	Page 125
ZAE	 with split clamping hub from 10 - 800 Nm <ul style="list-style-type: none">▶ complete coupling system mounts laterally for very easy installation and removal▶ standard lengths up to 6 meters▶ no intermediate support bearings required	Page 126
ZAL	 with split clamping hub from 10 - 800 Nm <ul style="list-style-type: none">▶ complete coupling system mounts laterally for very easy installation and removal▶ standard lengths up to 6 meters, with CFK tube▶ no intermediate support bearings required	Page 127

BACKLASH FREE LINE SHAFTS

5 - 25,000 Nm

MODEL

FEATURES

EZ2



**with split clamping hub
from 9 - 25,000 Nm**

Pages 128-129

- ▶ standard lengths up to 4 meters
- ▶ no intermediate support bearings required
- ▶ complete coupling system mounts laterally for very easy installation and removal

EZV



**with split clamping hub,
adjustable length
from 12.5 - 1,200 Nm**

Pages 130-131

- ▶ adjustable length ranges up to 4 meters
- ▶ no intermediate support bearings required
- ▶ complete coupling system mounts laterally for very easy installation and removal

ZA

WITH CLAMPING HUB

10 - 800 Nm



PROPERTIES

FEATURES

- for spanning larger distances between shaft ends
- standard lengths up to 6 meters
- no intermediate support bearings required
- extremely straight and laterally stiff intermediate tube

MATERIAL


- **Bellows:** high grade stainless steel

► **Intermediate tube:** up to size 150 aluminum, size 300 and up steel, optional CFK

► **Hubs:** up to size 60 aluminum, size 150 and up steel

DESIGN

Two clamping hubs with a single clamping screw in each. A special support system carries the weight of the tube on the hubs. Operable temperature range from -30 to +100 °C.

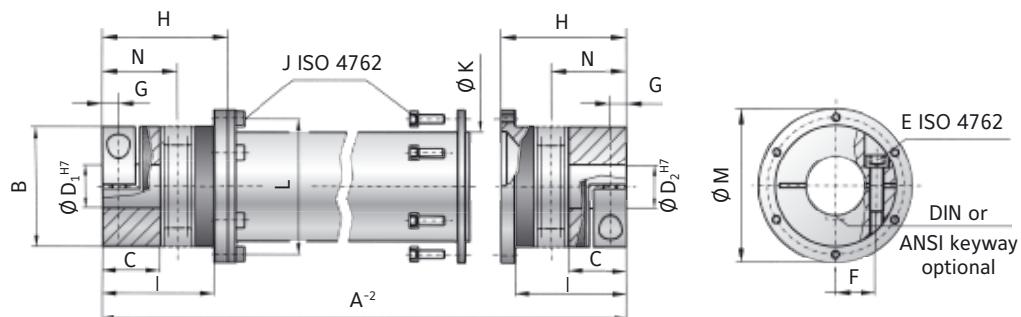

MODEL ZA

SIZE	10	30	60	150	200	300	500	800
Rated torque (Nm)	T _{KN}	10	30	60	150	200	300	500
Overall length min. to max. (mm)	A ⁻²	110 - 6000	140 - 6000	170 - 6000	215 - 6000	215 - 6000	250 - 6000	260 - 6000
Outside diameter clamping hub (mm)	B	40	55	66	81	90	110	123
Fit length (mm)	C	16	27	31	35.5	40.5	43	50
Inside diameter from Ø to Ø H7 (mm)	D _{1/2}	5 - 20	10 - 28	12 - 32	19 - 42	22 - 45	30 - 60	35 - 60
With keyway max. Ø H7 (mm)	D _{1/2}	17	23	29	36	45	60	66
ISO 4762 clamping screw	E	M4	M6	M8	M10	M12	M12	2x M16
Tightening torque (Nm)	F	5	15	40	70	110	130	200
Distance between centers (mm)	F	15	19	23	27	31	39	41
Distance (mm)	G	5	7.5	9.5	11	12.5	13	17
Length bellow body (mm)	H	44.5	57.5	71	78	86	94	110
Distance (mm)	I	38.5	51	61	69	75.5	81	96
ISO 4762 clamping screw	J	4x M4	6x M4	6x M5	8x M6	8x M6	8x M8	8x M8
Tightening torque (Nm)	J	3	4	7	10	12	30	40
Outside diameter tube section (mm)	K	35	50	60	76	90	100	110
Bolt hole circle Ø (mm)	L	45	62.5	71.5	88	100	120	132
Outside diameter flange (mm)	M	52	70	80	98	110	135	148
Shaft average value (mm)	N	25	34	41	47	52	56	64

For maximum misalignment values see page 16.

ORDERING EXAMPLE	ZA	10	1551	18	19.05	XX
Model	●					
Size		●				
Overall length mm			●			
Bore D1 H7				●		
Bore D2 H7					●	
Special designation only (e.g. special bore tolerance).						
For custom features place an XX at the end of the part number and describe the special requirements (e.g. ZA / 10 / 1551 / 18 / 19.05 / XX; XX=anodized aluminum)						

ZA

WITH CONICAL CLAMPING SYSTEM

1,500 - 4,000 Nm



PROPERTIES

FEATURES

- for spanning larger distances between shaft ends
- standard lengths up to 6 meters
- no intermediate support bearings required
- extremely straight and laterally stiff intermediate tube


MATERIAL

- **Bellows:** high grade stainless steel

- **Intermediate tube:** steel, optional CFK
- **Hubs:** steel

DESIGN

Two conical clamping bushings with separate screws for mounting and dismantling. A special support system carries the weight of the tube on the hubs. Operable temperature range from -30 to +100 °C.

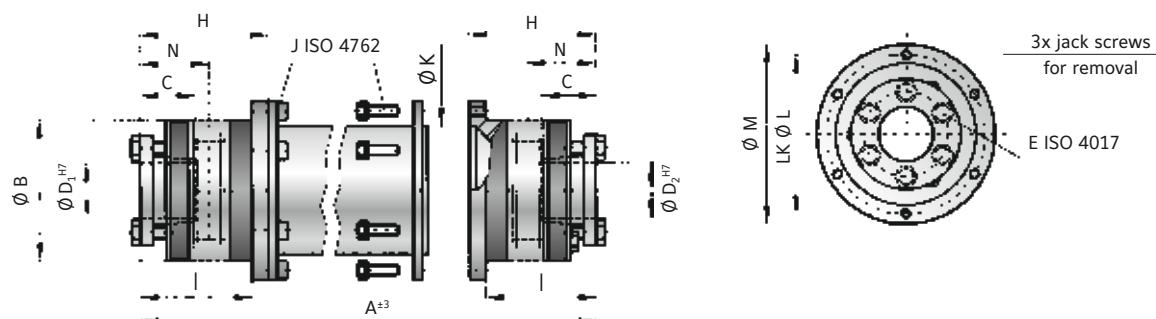

MODEL ZA

SIZE		1500	4000
Rated torque (Nm)	T _{KN}	1500	4000
Overall length min. to max. (mm)	A ^{±3}	280 - 6000	280 - 6000
Outside diameter (mm)	B	157	200
Fit length (mm)	C	61	80.5
Inside diameter from Ø to Ø H7 (mm)	D _{1/2}	35 - 70	40 - 100
ISO 4017 clamping screws	E	6 x M12	6 x M16
Tightening torque (Nm)	H	70	120
Length bellows body (mm)	H	98	103.5
Distance (mm)	I	82	84
ISO 4762 clamping screws	J	10x M10	12x M12
Tightening torque (Nm)	J	70	120
Outside diameter tube section (mm)	K	150	160
Bolt hole circle Ø (mm)	L	168	193
Outside diameter flange (mm)	M	184	213
Shaft average value (mm)	N	56	61

For maximum misalignment values see page 16.

ORDERING EXAMPLE	ZA	1500	2551	50.8	70	XX
Model	●					
Size		●				
Overall length mm			●			
Bore D1 H7				●		
Bore D2 H7					●	
For custom features place an XX at the end of the part number and describe the special requirements (e.g. ZA / 1500 / 2551 / 50.8 / 70 / XX; XX=stainless steel)						Special designation only (e.g. special bore tolerance).

ZAE

WITH SPLIT CLAMPING HUB

10 - 800 Nm



PROPERTIES

FEATURES

- for spanning larger distances between shaft ends
- standard lengths up to 6 meters
- no intermediate support bearings required
- extremely straight and laterally stiff intermediate tube


MATERIAL

- **Bellows:** high grade stainless steel

- **Intermediate tube:** up to size 150 aluminum, size 300 and up steel
- **Hubs:** up to size 60 aluminum, size 150 and up steel

DESIGN

Two clamping hubs with two clamping screws in each. A special support system carries the weight of the tube on the hubs. Operable temperature range from -30 to +100 °C.

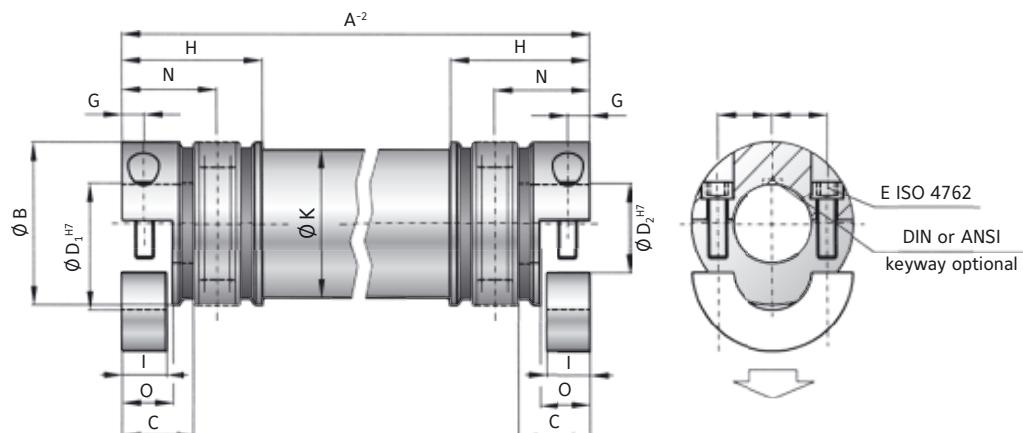

MODEL ZAE

SIZE	10	30	60	150	300	500	800	
Rated torque (Nm)	T _{KN}	10	30	60	150	300	500	800
Overall length min. to max. (mm)	A ⁻²	100 - 6000	130 - 6000	160 - 6000	180 - 6000	240 - 6000	250 - 6000	250 - 6000
Outside diameter clamping hub (mm)	B	40	55	66	81	110	123	133
Fit length (mm)	C	16	27	31	34.5	42	50	47
Inside diameter from Ø to Ø H7 (mm)	D _{1/2}	5 - 20	10 - 28	12 - 32	19 - 42	30 - 60	35 - 60	40 - 72
Max. inside diameter clamping hub (mm)	D _{max}	24	30	32	42	60	60	75
With keyway - max Ø H7 (mm)	D _{1/2}	17	23	29	36	60	60	66
ISO 4762 clamping screws	E	M4	M6	M8	M10	M12	M16	M16
Tightening torque (Nm)	E	5	15	40	70	130	200	250
Distance between centers (mm)	F	15	19	23	27	39	41	48
Distance (mm)	G	5	7.5	9.5	12	14	17	19
Length bellows body (mm)	H	39.5	52	64	72	83	96	95
Clamping length (mm)	I	10	15	19	22	28	33.5	37.5
Outside diameter tube section (mm)	K	35	50	60	76	100	110	120
Length (mm)	O	11.5	17	21	24	30	35.5	40
Shaft average value (mm)	N	25	34	41	47	56	66	65

For maximum misalignment values see page 16.

ORDERING EXAMPLE	ZAE	10	1551	18	19.05	XX
Model	●					
Size		●				
Overall length mm			●			
Bore D1 H7				●		
Bore D2 H7					●	
Special designation only (e.g. special bore tolerance).						
For custom features place an XX at the end of the part number and describe the special requirements (e.g. ZAE / 10 / 1551 / 18 / 19.05 / XX; XX=anodized aluminum)						

ZAL

WITH CFK INTERMEDIATE TUBE AND SPLIT CLAMPING HUB 10 - 800 Nm

PROPERTIES



FEATURES

- low moment of inertia
- for spanning larger distances between shaft ends
- standard lengths up to 6 meters
- no intermediate support bearings required
- good for higher speeds

MATERIAL


- **Bellows:** high grade stainless steel

► Intermediate tube: CFK

- **Hubs:** up to size 60 aluminum, size 150 and up steel

DESIGN

Two clamping hubs with two clamping screws in each. A special support system carries the weight of the tube on the hubs. Operable temperature range from -30 to +100 °C.

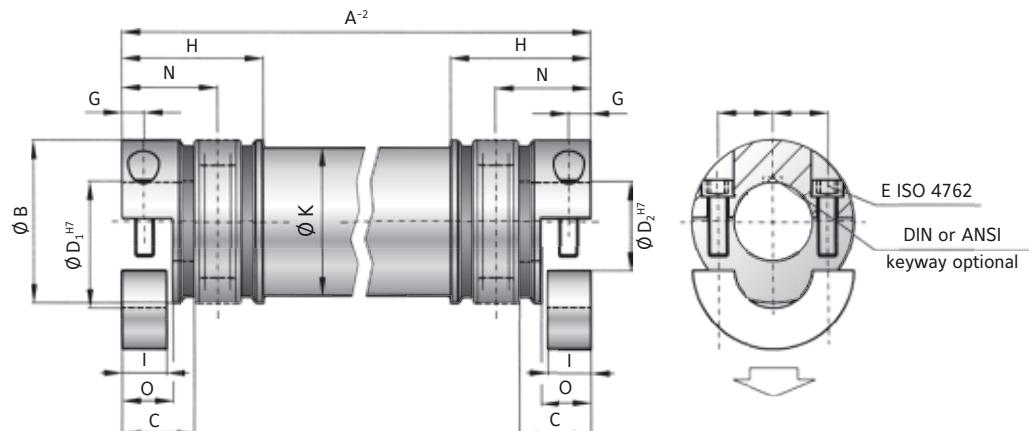

MODEL ZAL

SIZE	10	30	60	150	300	500	800	
Rated torque (Nm)	T _{KN}	10	30	60	150	300	500	800
Overall length min. to max. (mm)	A-2	100 - 6000	130 - 6000	160 - 6000	180 - 6000	240 - 6000	250 - 6000	250 - 6000
Outside diameter clamping hub (mm)	B	40	55	66	81	110	123	133
Fit length (mm)	C	16	27	31	34.5	42	50	47
Inside diameter from Ø to Ø H7 (mm)	D _{1/2}	5 - 20	10 - 28	12 - 32	19 - 42	30 - 60	35 - 60	40 - 72
Max. inside diameter clamping hub (mm)	D _{max}	24	30	32	42	60	60	75
With keyway - max Ø H7 (mm)	D _{1/2}	17	23	29	36	60	60	66
ISO 4762 clamping screws	E	M4	M6	M8	M10	M12	M16	M16
Tightening torque (Nm)	E	5	15	40	70	130	200	250
Distance between centers (mm)	F	15	19	23	27	39	41	48
Distance (mm)	G	5	7.5	9.5	12	14	17	19
Length bellows body (mm)	H	39.5	52	64	72	83	96	95
Clamping length (mm)	I	10	15	19	22	28	33.5	37.5
Outside diameter tube section (mm)	K	35	50	60	76	100	110	120
Length (mm)	O	11.5	17	21	24	30	35	40
Shaft average value (mm)	N	25	34	41	47	56	66	65

For maximum misalignment values see page 16.

ORDERING EXAMPLE	ZAL	10	1551	18	19.05	XX
Model	●					
Size		●				
Overall length mm			●			
Bore D1 H7				●		
Bore D2 H7					●	
Special designation only (e.g. special bore tolerance).						

For custom features place an XX at the end of the part number and describe the special requirements (e.g. ZAL / 10 / 1551 / 18 / 19.05 / XX; XX=anodized aluminum hubs)

EZ2

WITH SPLIT CLAMPING HUB

9 - 25,000 Nm



PROPERTIES

FEATURES

- ▶ easy installation and removal
- ▶ standard lengths up to 4 meters
- ▶ no intermediate support bearings required

MATERIAL



- ▶ **Hubs:** up to size 450 high strength aluminum, size 800 steel, size 2500 and up GGG40
- ▶ **Intermediate tube:** up to size 450 high strength aluminum, size 800 and up steel, optional CFK tube on request

- ▶ **Elastomer insert:** wear resistant, thermally stable TPU



DESIGN

Two split clamping hubs, with two clamping screws in each, and concave driving jaws. Backlash free, vibration damping, electrically isolating elastomer inserts press fit into the hubs. Precision intermediate tube with a high level of straightness and lateral stiffness.

DESIGN | SIZE 10 - 800

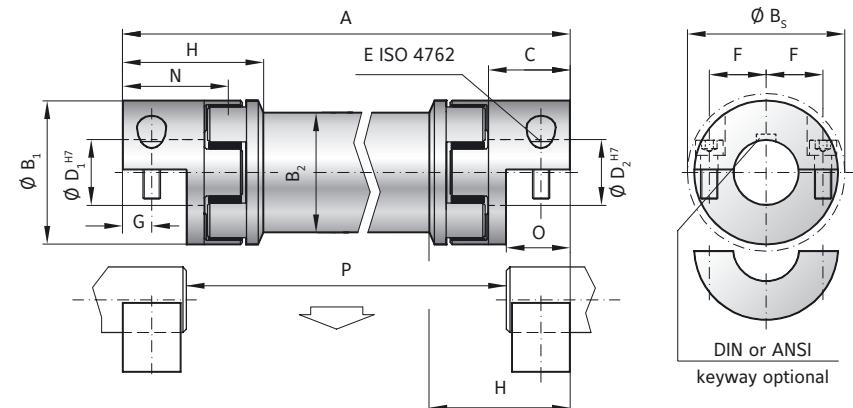

DESIGN | SIZE 2,500 - 9,500

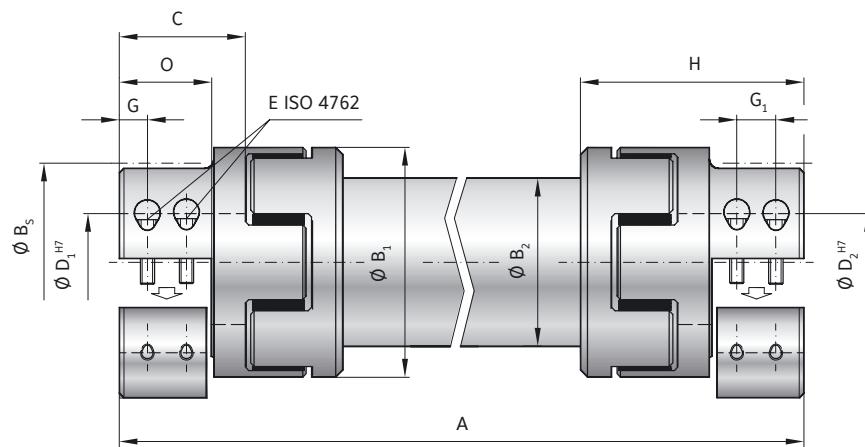

For details on the elastomer inserts see pages 66-67.


MODEL EZ2

SIZE		5	10	20	60	150	300	450	800	2500	4500	9500	
Type (Elastomer insert)		A	B	A	B	A	B	A	B	A	B	A	B
Rated torque (Nm)	T _{KN}	9	12	12.5	16	17	21	60	75	160	200	325	405
Max. torque* (Nm)	T _{Kmax}	18	24	25	32	34	42	120	150	320	400	650	810
Overall length (mm)	A	75 - 3,000	95 - 4,000	130 - 4,000	175 - 4,000	200 - 4,000	245 - 4,000	280 - 4,000	320 - 4,000	460 - 4,000	580 - 4,000	710 - 4,000	
Outside diameter hub (mm)	B ₁	25		32		42		56		66.5		82	
Outside diameter tube (mm)	B ₂	25		28		35		50		60		76	
Outside diameter with screwhead(mm)	B _s	25		32		44.5		57		68		85	
Fit length (mm)	C	13		20		25		40		47		55	
Inside diameter range from Ø to Ø H7 (mm)	D _{1/2}	5 - 12.7		5 - 16		8 - 25		14 - 32		19 - 36		19 - 45	
Max. inside diameter (Elastomer insert) (mm)	D _E	10.2		14.2		19.2		26.2		29.2		36.2	
Mounting screw ISO 4762	E	4 x M3		4 x M4		4 x M5		4 x M6		4 x M8		4 x M10	
Tightening torque (Nm)		2		4		8		15		35		70	
Distance between centers (mm)	F	8		10.5		15.5		21		24		29	
Distance (mm)	G/G ₁	5		7.5		8.5		15		17.5		20	
Coupling length(mm)	H	25		34		46		63		73		84	
Moment of inertia per hub (10^{-3} kgm ²)	J ₁ /J ₂	0.004		0.01		0.02		0.15		0.21		1.02	
Inertia of tube per meter (10^{-3} kgm ²)	J ₃	0.049		0.075		0.183		0.66		1.18		2.48	
Combined dynamic torsional stiffness of the inserts (Nm/rad)	C _{Tdyn} ^E	150	350	270	825	1,270	2,220	3,970	5,950	6,700	14,650	11,850	20,200
Torsional stiffness of tube per meter (Nm/rad)	C _T ^{ZWR}	503		321		1,530		6,632		11,810		20,230	
Shaft average value (mm)	N	18		26		33		49		57		67	
Length (mm)	O	11		16.6		18.6		32		37		42	

* Maximum transmittable torque of the clamping hub depends on the bore diameter (see pages 78).

INSTALLATION

The overall length A is best determined as the distance between shaft ends P plus 2x dimension O.

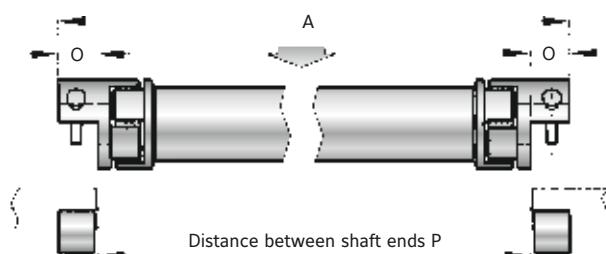

ORDERING EXAMPLE	EZ2	20	1200	A	24	19.05	XX
Model	●						
Size		●					
Overall length mm			●				
Elastomer insert type				●			
Bore D1 H7					●		
Bore D2 H7						●	

Special designation only
(e.g. special bore tolerance).

For custom features place an XX at the end of the part number and describe the special requirements (e.g. EZ2 / 20 / 1200 / A / 24 / 19.05 / XX; XX=anodized aluminum)

ADJUSTABLE LENGTH WITH SPLIT CLAMPING HUB 12.5 - 1,200 Nm



PROPERTIES

FEATURES


- ▶ telescoping for adjustable length and rotational orientation
- ▶ very easy to install and remove
- ▶ no intermediate support bearings required
- ▶ length ranges up to 4 meters

MATERIAL

- ▶ **Hubs:** high strength aluminum
- ▶ **Intermediate tube:** highly straight and concentric aluminum tubing
- ▶ **Elastomer insert:** wear resistant, thermally stable TPU

DESIGN

Two split clamping hubs, with two clamping screws in each, and concave driving jaws. Backlash free, vibration damping, electrically isolating elastomer inserts press fit into the hubs. Precision intermediate tube with a high level of straightness and lateral stiffness. Outer tube clamps over inner tube to fix the overall length.

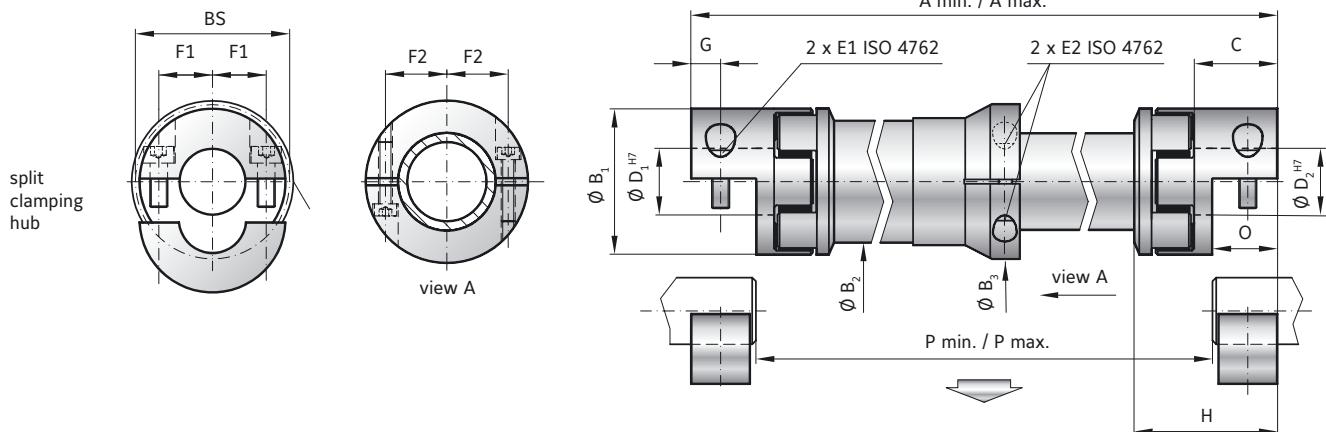


For details on the elastomer inserts see pages 66-67.

FUNCTIONAL DESCRIPTION

The maximum extended length relates to the minimum collapsed length. The formulas to the right can be used to determine the corresponding values.

Information on sizing, torsional stiffness, misalignment ratings, etc. can be found on pages 16-18.

$$\text{Maximum extended length} = (\text{collapsed length} \times 2) - \text{measurement } (X_1 + X_2)$$

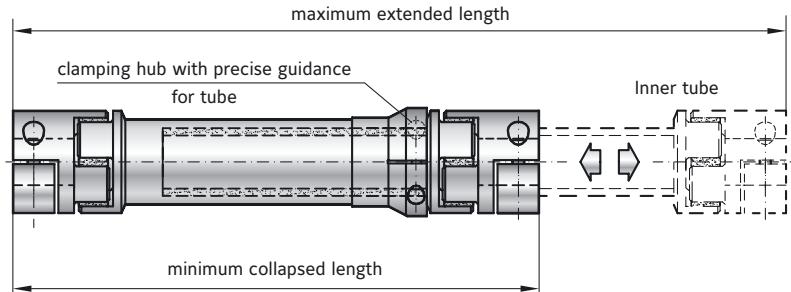

$$\text{Minimum collapsed length} = \frac{\text{maximum extended length} + \text{dimension } (X_1 + X_2)}{2}$$

MODEL EZV

SIZE		10		20		60		150		300		450	
Type (Elastomer insert)		A	B	A	B	A	B	A	B	A	B	A	B
Rated torque (Nm)	T _{KN}	12.5	16	17	21	60	75	160	200	325	405	530	660
Max. torque*	T _{Kmax}	25	32	34	42	120	150	320	400	650	810	1060	1200
Inserted min. length from - to (mm)	A _{min}	150 - 2,055		200 - 2,075		250 - 2,095		300 - 2,115		350 - 2,130		400 - 2,150	
Extended over all length from - to (mm)	A _{max}	190 - 4,000		250 - 4,000		310 - 4,000		370 - 4,000		440 - 4,000		500 - 4,000	
Measurement (mm)	X1+X2	115		156		197		240		280		312	
Outside diameter clamping hub (mm)	B ₁	32		42		56		66.5		82		102	
Outside diameter tube (mm)	B ₂	28		35		50		60		80		90	
Outside diameter center hub (mm)	B ₃	41.5		47		67		77		102		115	
Outside diameter with screwhead (mm)	B _s	32		44.5		57		68		85		105	
Fit length (mm)	C	20		25		40		47		55		65	
Inside diameter from Ø to Ø H7 (mm)	D _{1/2}	5 - 16		8 - 25		14 - 32		19 - 35		19 - 45		24 - 60	
Screw ISO 4762	E ₁	M4		M5		M6		M8		M10		M12	
Tightening torque (Nm)		4		8		15		35		70		120	
Screw ISO 4762	E ₂	M4		M4		M5		M6		M8		M10	
Tightening torque (Nm)		4		4.5		8		18		35		70	
Distance between centers (mm)	F _{10.5}	10.5		15.5		21		24		29		38	
Distance between centers (mm)	F ₂	15		18		26		31		41		45	
Distance (mm)	G	7.5		8.5		15		17.5		20		25	
Coupling length (mm)	H	34		46		63		73		86		99	
Shaft average value (mm)	N	26		33		49		57		67		78	
Length (mm)	O	16.6		18.6		32		37		42		52	
Moment of inertia coupling half (10 ⁻³ kgm ²)	J _{1/J₂}	0.01		0.02		0.15		0.21		1.02		2.3	
Inertia of tube per meter (10 ⁻³ kgm ²)	J ₃	0.075		0.183		0.66		1.18		2.48		10.6	
Combined dynamic torsional stiffness of the inserts (Nm/rad)	C _{Tdyn} ^E	270	825	1,270	2,220	3,970	5,950	6,700	14,650	11,850	20,200	27,700	40,600
Torsional stiffness of tube per meter (Nm/rad)	C _T ^{ZWR}	321		1,530		6,632		11,810		20,230		65,340	

*Maximum transmittable torque of the clamping hub depends on the bore diameter (see pages 78).

ORDERING EXAMPLE	EZV	20	1200	A	24	19.05	XX
Model	●						Special designation only (e.g. special bore tolerance).
Size		●					
Collapsed length			●				
Elastomer insert type				●			
Bore D1 H7					●		
Bore D2 H7						●	

For custom features place an XX at the end of the part number and describe the special requirements (e.g. EZV / 20 / 1200 / A / 24 / 19.05 / XX; XX=anodized aluminum)



ATEX

FOR USE IN HAZARDOUS AREAS

ATEX

FOR USE IN HAZARDOUS AREAS

PRECISION COUPLINGS

MARKING EXAMPLE

Based on the ATEX markings the product can be certified for suitability under certain conditions.

	II	2G	c	IIA T6	X
	II	2D	c	85°C	X
Equipment group	Category	Protection type	Explosion group / temperature class / maximum surface temperature		Additional features

Equipment group	Approval type
I	approved for underground operation
II	approved for all other applications

Category	Approved for zone	Zone description
1G	0	Area in which an explosive atmosphere consisting of a mixture of air and flammable gases, vapors, or mists, is present continuously, frequently, or for long periods of time.
2G	1	Area in which the potential exists for an explosive mixture of air and flammable gases, vapors, or mists to occur.
3G	2	Area in which the potential for an explosive mixture of air and flammable gases, vapors, or mists to occur is unlikely and only for a brief duration.
1D	20	Area with the same conditions as zone 0, with powder or dust.
2D	21	Area with the same conditions as zone 1, with powder or dust.
3D	22	Area with the same conditions as zone 2, with powder or dust.

Protection type	Definition
c	Design safety level: ignition hazard is avoided by the product design.

Example classification by occurring gases, mists and vapors according to temperature class and explosion group

Explosion group / temperature class / maximum surface temperature	IIA	IIB (includes IIA)	IIC (includes IIA + IIB)
T1 / 450°C	acetone, ammonia, methane...	natural gas	hydrogen
T2 / 300°C	ethyl alcohol, butane, cyclohexane...	ethylene, ethylene oxide	ethyne (acetylene)
T3 / 200°C	gasoline, diesel fuel, fuel oil...	ethylene glycol, hydrogen sulfide	
T4 / 135°C	acetaldehyde	ethyl ether	
T5 / 100°C			
T6 / 85°C			carbon disulphide

Additional labeling	Definition
X	Special operating conditions
U	Product is only a component in a machine. Conformity therefore shall only be declared after installation.

ATEX BELLOWS COUPLINGS

CONSTRUCTION

Dimensions and materials of the standard models remain largely intact.

PERFORMANCE RATINGS

All permitted misalignment, speed, and torque ratings of the standard models must be reduced by approximately 30%.

OPERATION

ATEX metal bellows couplings must only be operated inside a sealed housing. Both the input and output shafts must be monitored to guarantee shut down in the case of coupling failure.

With blind mate style bellows couplings it is also necessary to guarantee electrical continuity between both shafts. This is necessary due to the electrically isolating properties of the coupling, and the need to prevent sparking from any electrostatic charges.

SAMPLE IDENTIFICATION



Type: BK2/60/EEx - 2013
II 2G c T4
II 2D c 135°C
Ser.No.: 123456.7
Tech.Ref.No.:2003/003RW



Type: BK5/60/EEx - 2013
II 2G c T4
II 2D c 135°C
Ser.No.: 123456.7
Tech.Ref.No.:2003/006RW

ATEX ELASTOMER COUPLINGS

CONSTRUCTION

Dimensions and materials of the standard models remain largely intact.

For ATEX elastomer couplings the inserts come in version "D" (Sh65D) which is electrically conductive to provide continuity for any potential electrostatic charges.

PERFORMANCE RATINGS

All permitted misalignment, speed, and torque ratings of the standard models must be reduced by approximately 30%.

OPERATION

In the case of model TX thermoplastic hub elastomer couplings it is also necessary to guarantee electrical continuity between both shafts. This is necessary due to the electrically isolating properties of the coupling, and the need to prevent sparking from any electrostatic charges.

SAMPLE IDENTIFICATION



Type: EK2/60/EEx - 2013
II 2G c T4
II 2D c 135°C
Ser.No.: 123456.7
Tech.Ref.No.:2003/001RW



Type: TX1/60/EEx - 2013
II 2G c IIA T6
II 2D c 85°C
Ser.No.: 123456.7
Tech.Ref.No.:2003/001RW

ATEX

FOR USE IN HAZARDOUS AREAS PRECISION COUPLINGS

ATEX TORQUE LIMITERS

CONSTRUCTION

Dimensions and materials of the standard models remain largely intact.

Generally full disengagement style torque limiters are used in ATEX environments in order to avoid high temperatures from excess friction after disengagement.

For ES2 torque limiters the inserts come in version "D" (Sh65D) which is electrically conductive to provide continuity for any potential electrostatic charges.

PERFORMANCE RATINGS

All permitted misalignment and speed ratings of the standard models must be reduced by approximately 30%.

OPERATION

ATEX safety couplings must be used with an ATEX proximity switch. The emergency stop function in conjunction with activation of the switch must be fully tested for proper function prior to commissioning of the machine.

When bellows couplings are incorporated they must only be operated inside a sealed housing. Both the input and output shafts must be monitored to guarantee shut down in the case of bellows failure.

With blind mate style bellows couplings it is also necessary to guarantee electrical continuity between both shafts. This is necessary due to the electrically isolating properties of the coupling, and the need to prevent sparking from any electrostatic charges.

SAMPLE IDENTIFICATION



Type: SK2/60/EEx - 2013
II 2G c T3
II 2D c 200°C
Ser.No.: 123456.7
Tech.Ref.No.:2003/004RW



Type: ES2/60/(F)EEx - 2013
II 2G c T3
II 2D c 200°C
Ser.No.: 123456.7
Tech.Ref.No.:2003/002RW

ATEX LINE SHAFTS

CONSTRUCTION

Dimensions and materials of the standard models remain largely intact.

For EZ type line shafts the inserts come in version "D" (Sh65D) which is electrically conductive to provide continuity for any potential electrostatic charges.

PERFORMANCE RATINGS

All permitted misalignment, speed, and torque ratings of the standard models must be reduced by approximately 30%.

The allowable operating speed depends on the overall length of the line shaft and is available upon request.

OPERATION

When bellows couplings are incorporated they must only be operated inside a sealed housing. Both the input and output shafts must be monitored to guarantee shut down in the case of bellows failure.

SAMPLE IDENTIFICATION



Type: EZ2/60/D/EEx - 2013
II 2G c T4
II 2D c 135°C
Ser.No.: 123456.7
Tech.Ref.No.:2003/005RW



Type: ZA/10/EEx - 2013
II 2G c T4
II 2D c 135°C
Ser.No.: 123456.7
Tech.Ref.No.:2005/007RW


Prior to deviating from any of the previous safety instructions please contact R+W.

The use of devices and components in explosive areas is governed by the European directives 94/9/EC (for manufacturers) and 1992/92/EC (for operators). The presented products are non-electrical equipment of category 2. All necessary documents and certifications are stored in a known location. The conformity of these products with these guidelines is established and may be declared by the manufacturer.


According to Directive 94/9/EC, delivery of an ATEX coupling requires the inclusion of special installation and operating instructions along with the EC declaration of conformity issued by the manufacturer. All necessary values for installation, operation and removal are included.

All statements made about ATEX conforming products are based on our present knowledge and experience. R+W reserves the right to change technical specifications.


NOTES

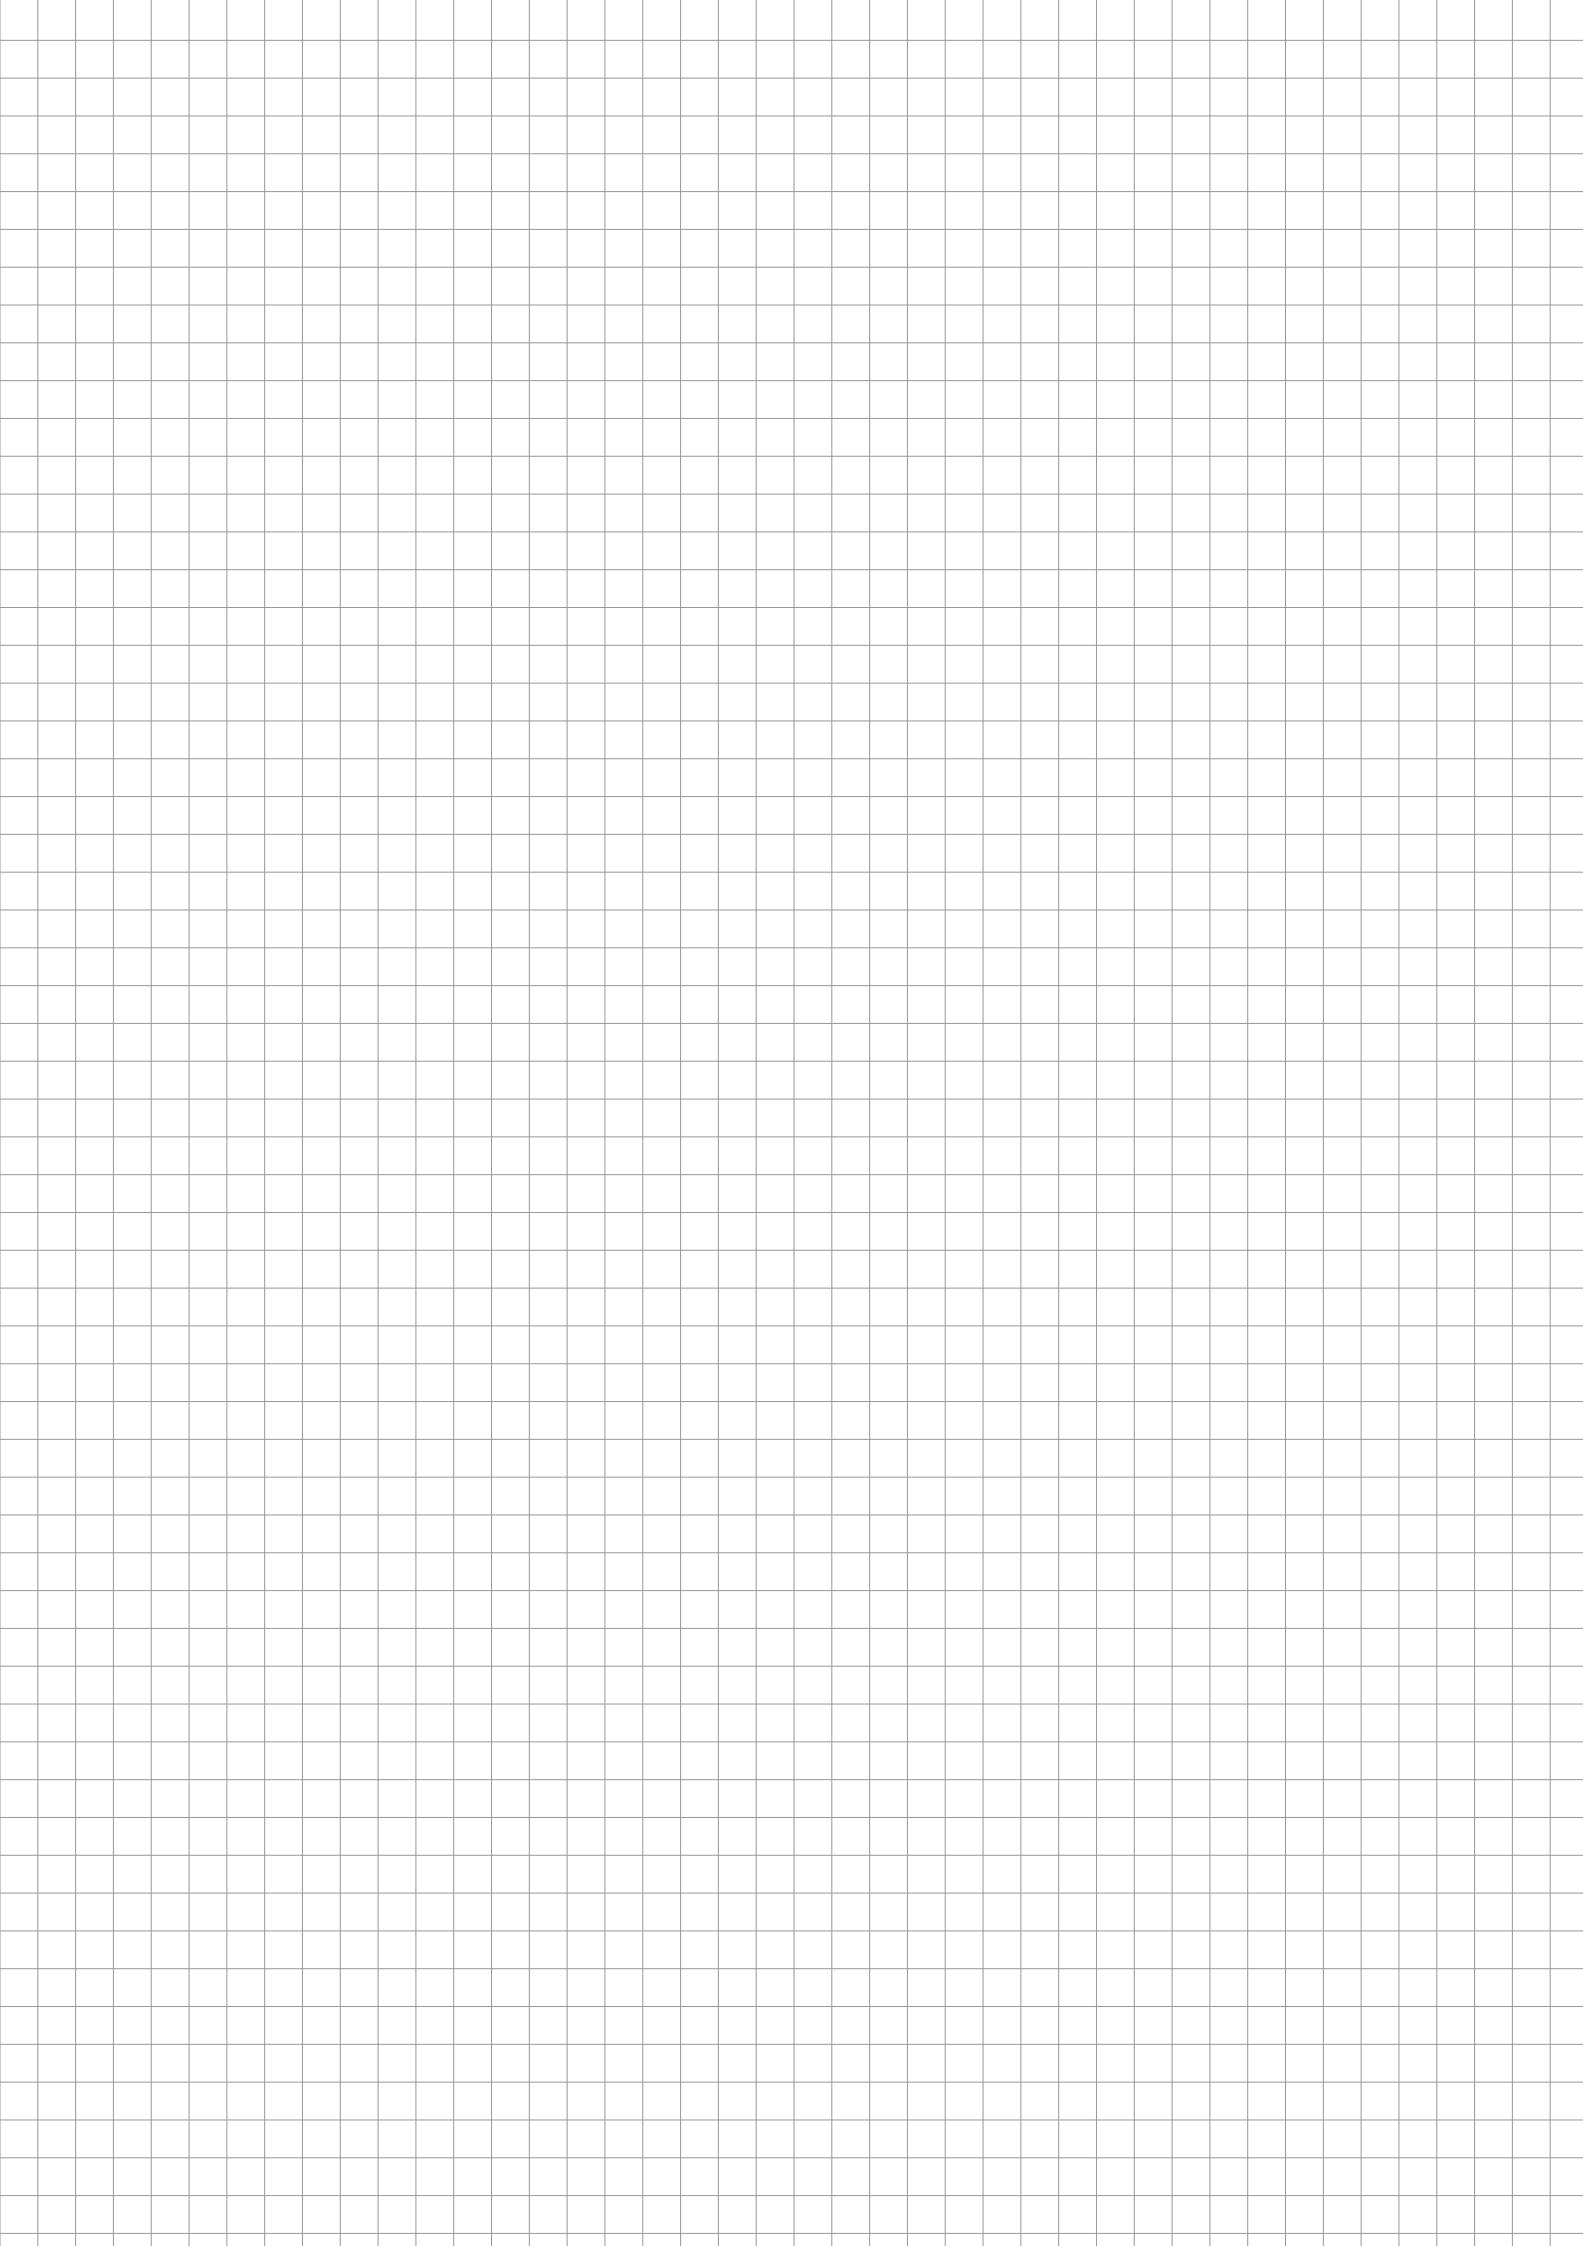


NOTES

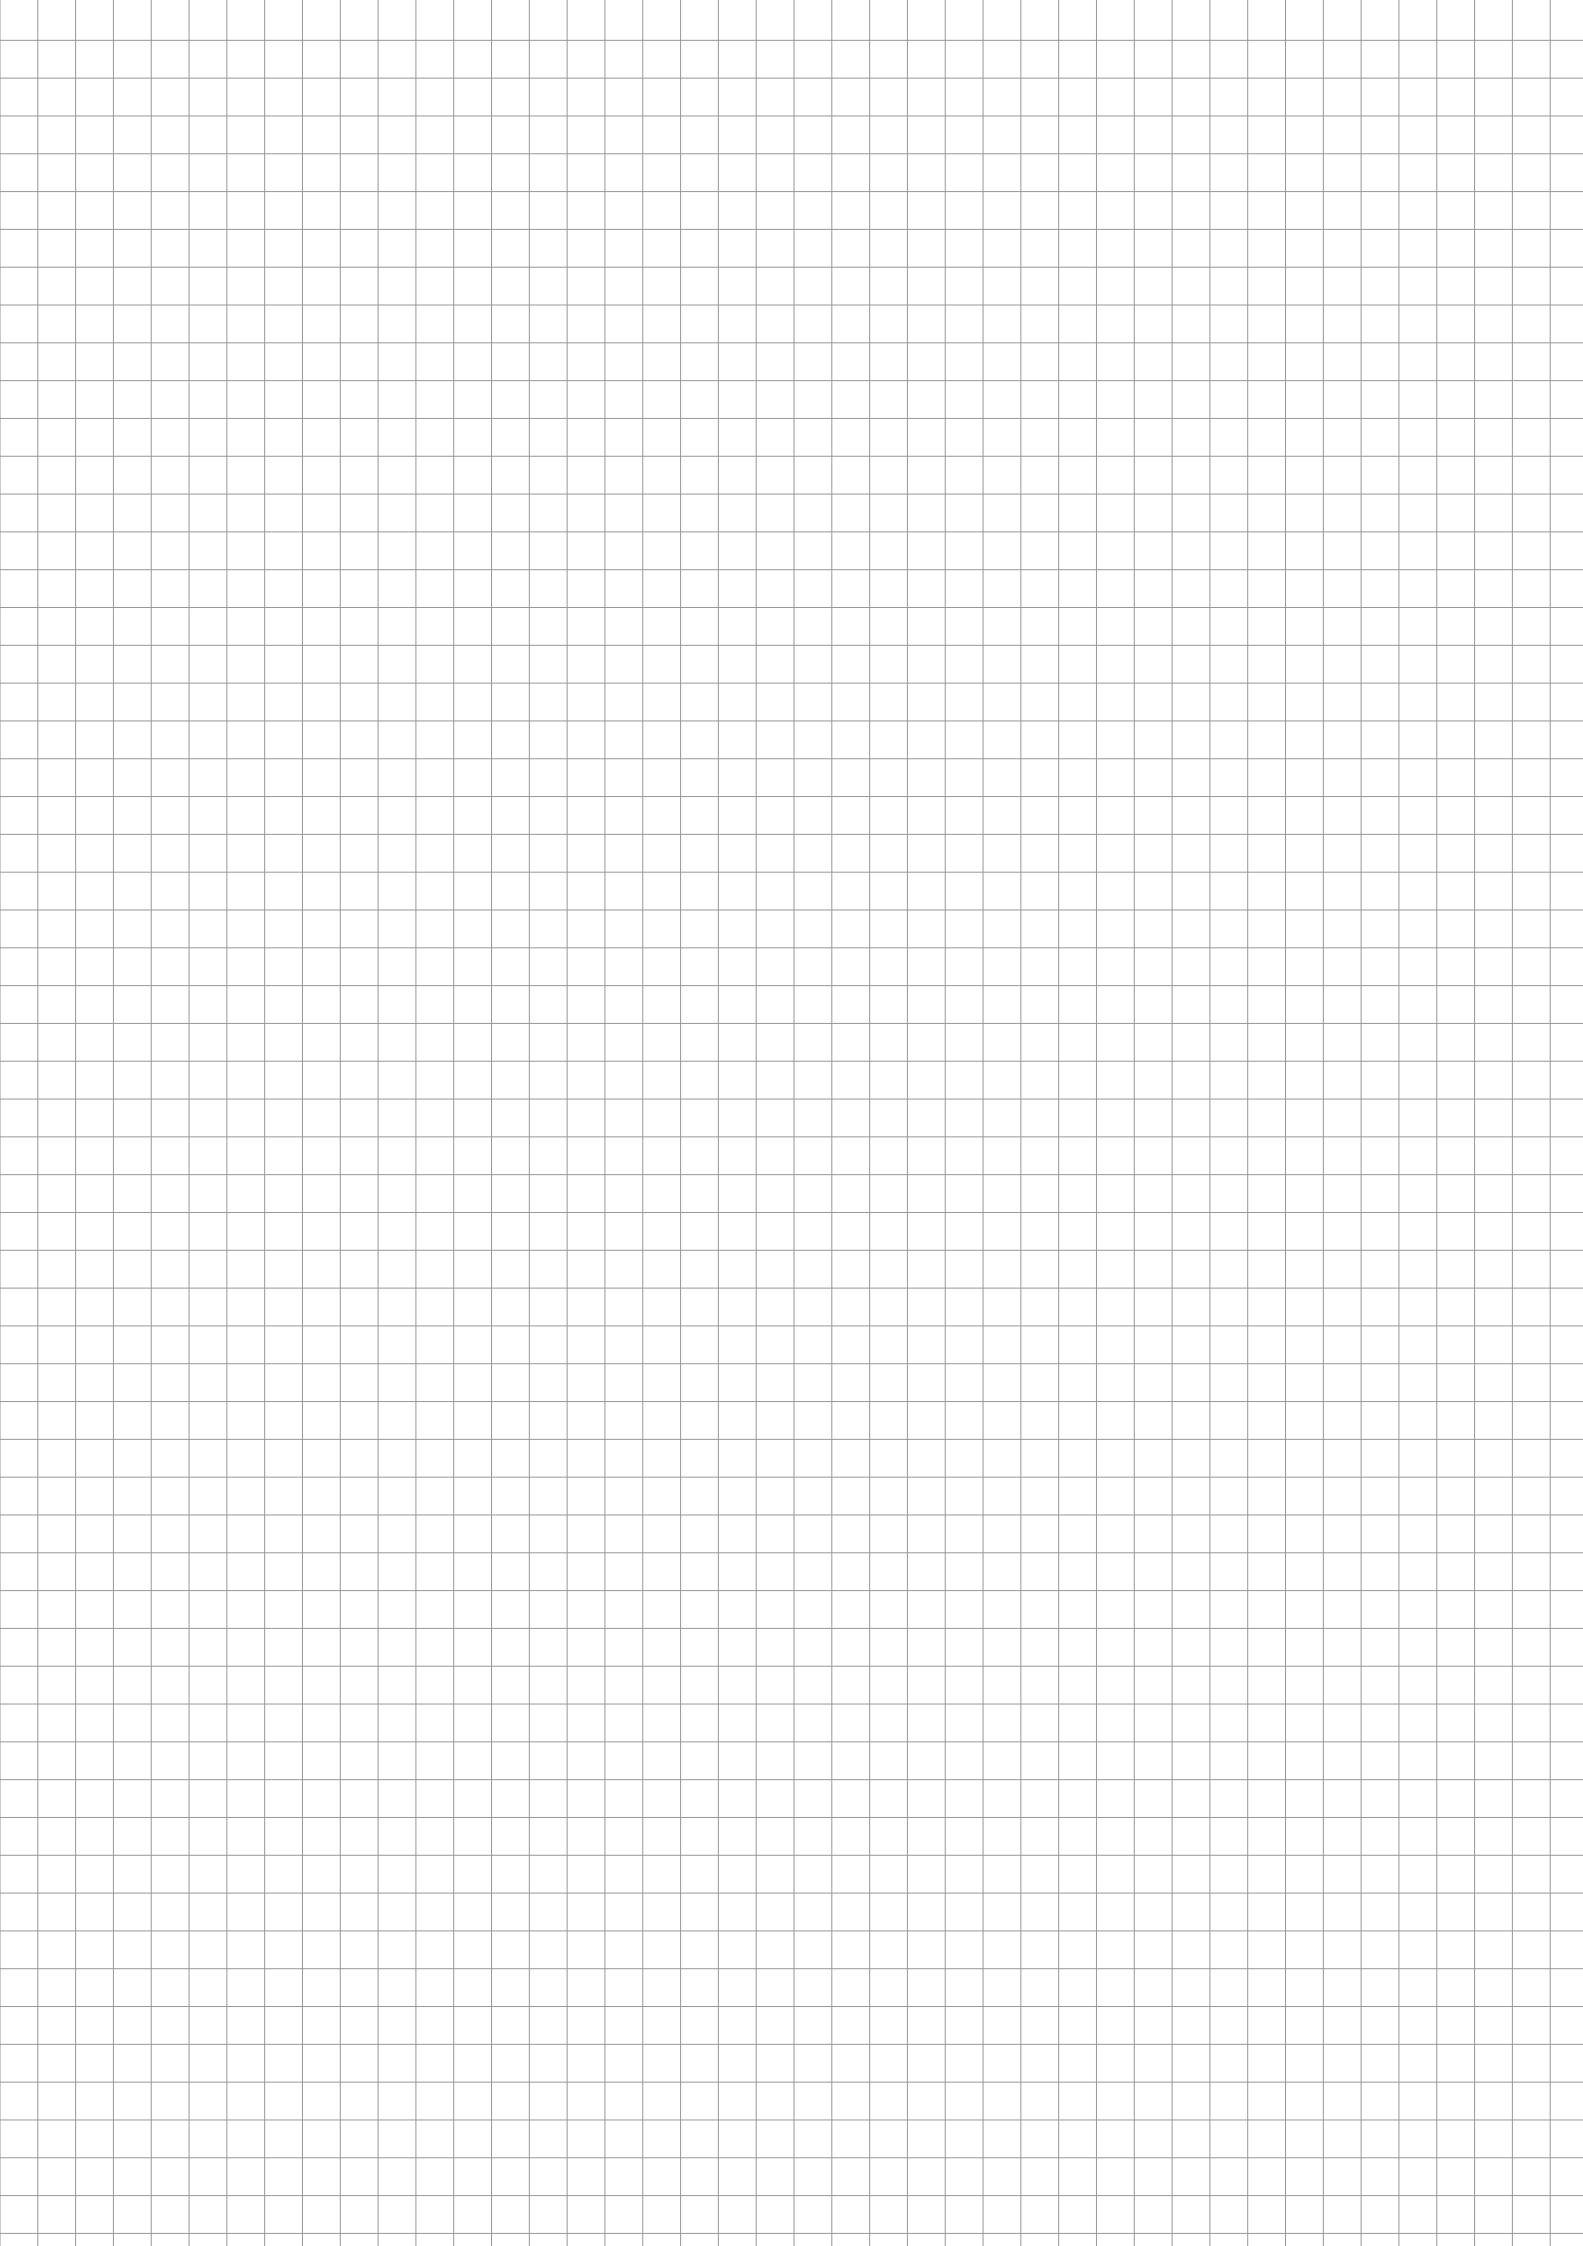

NOTES

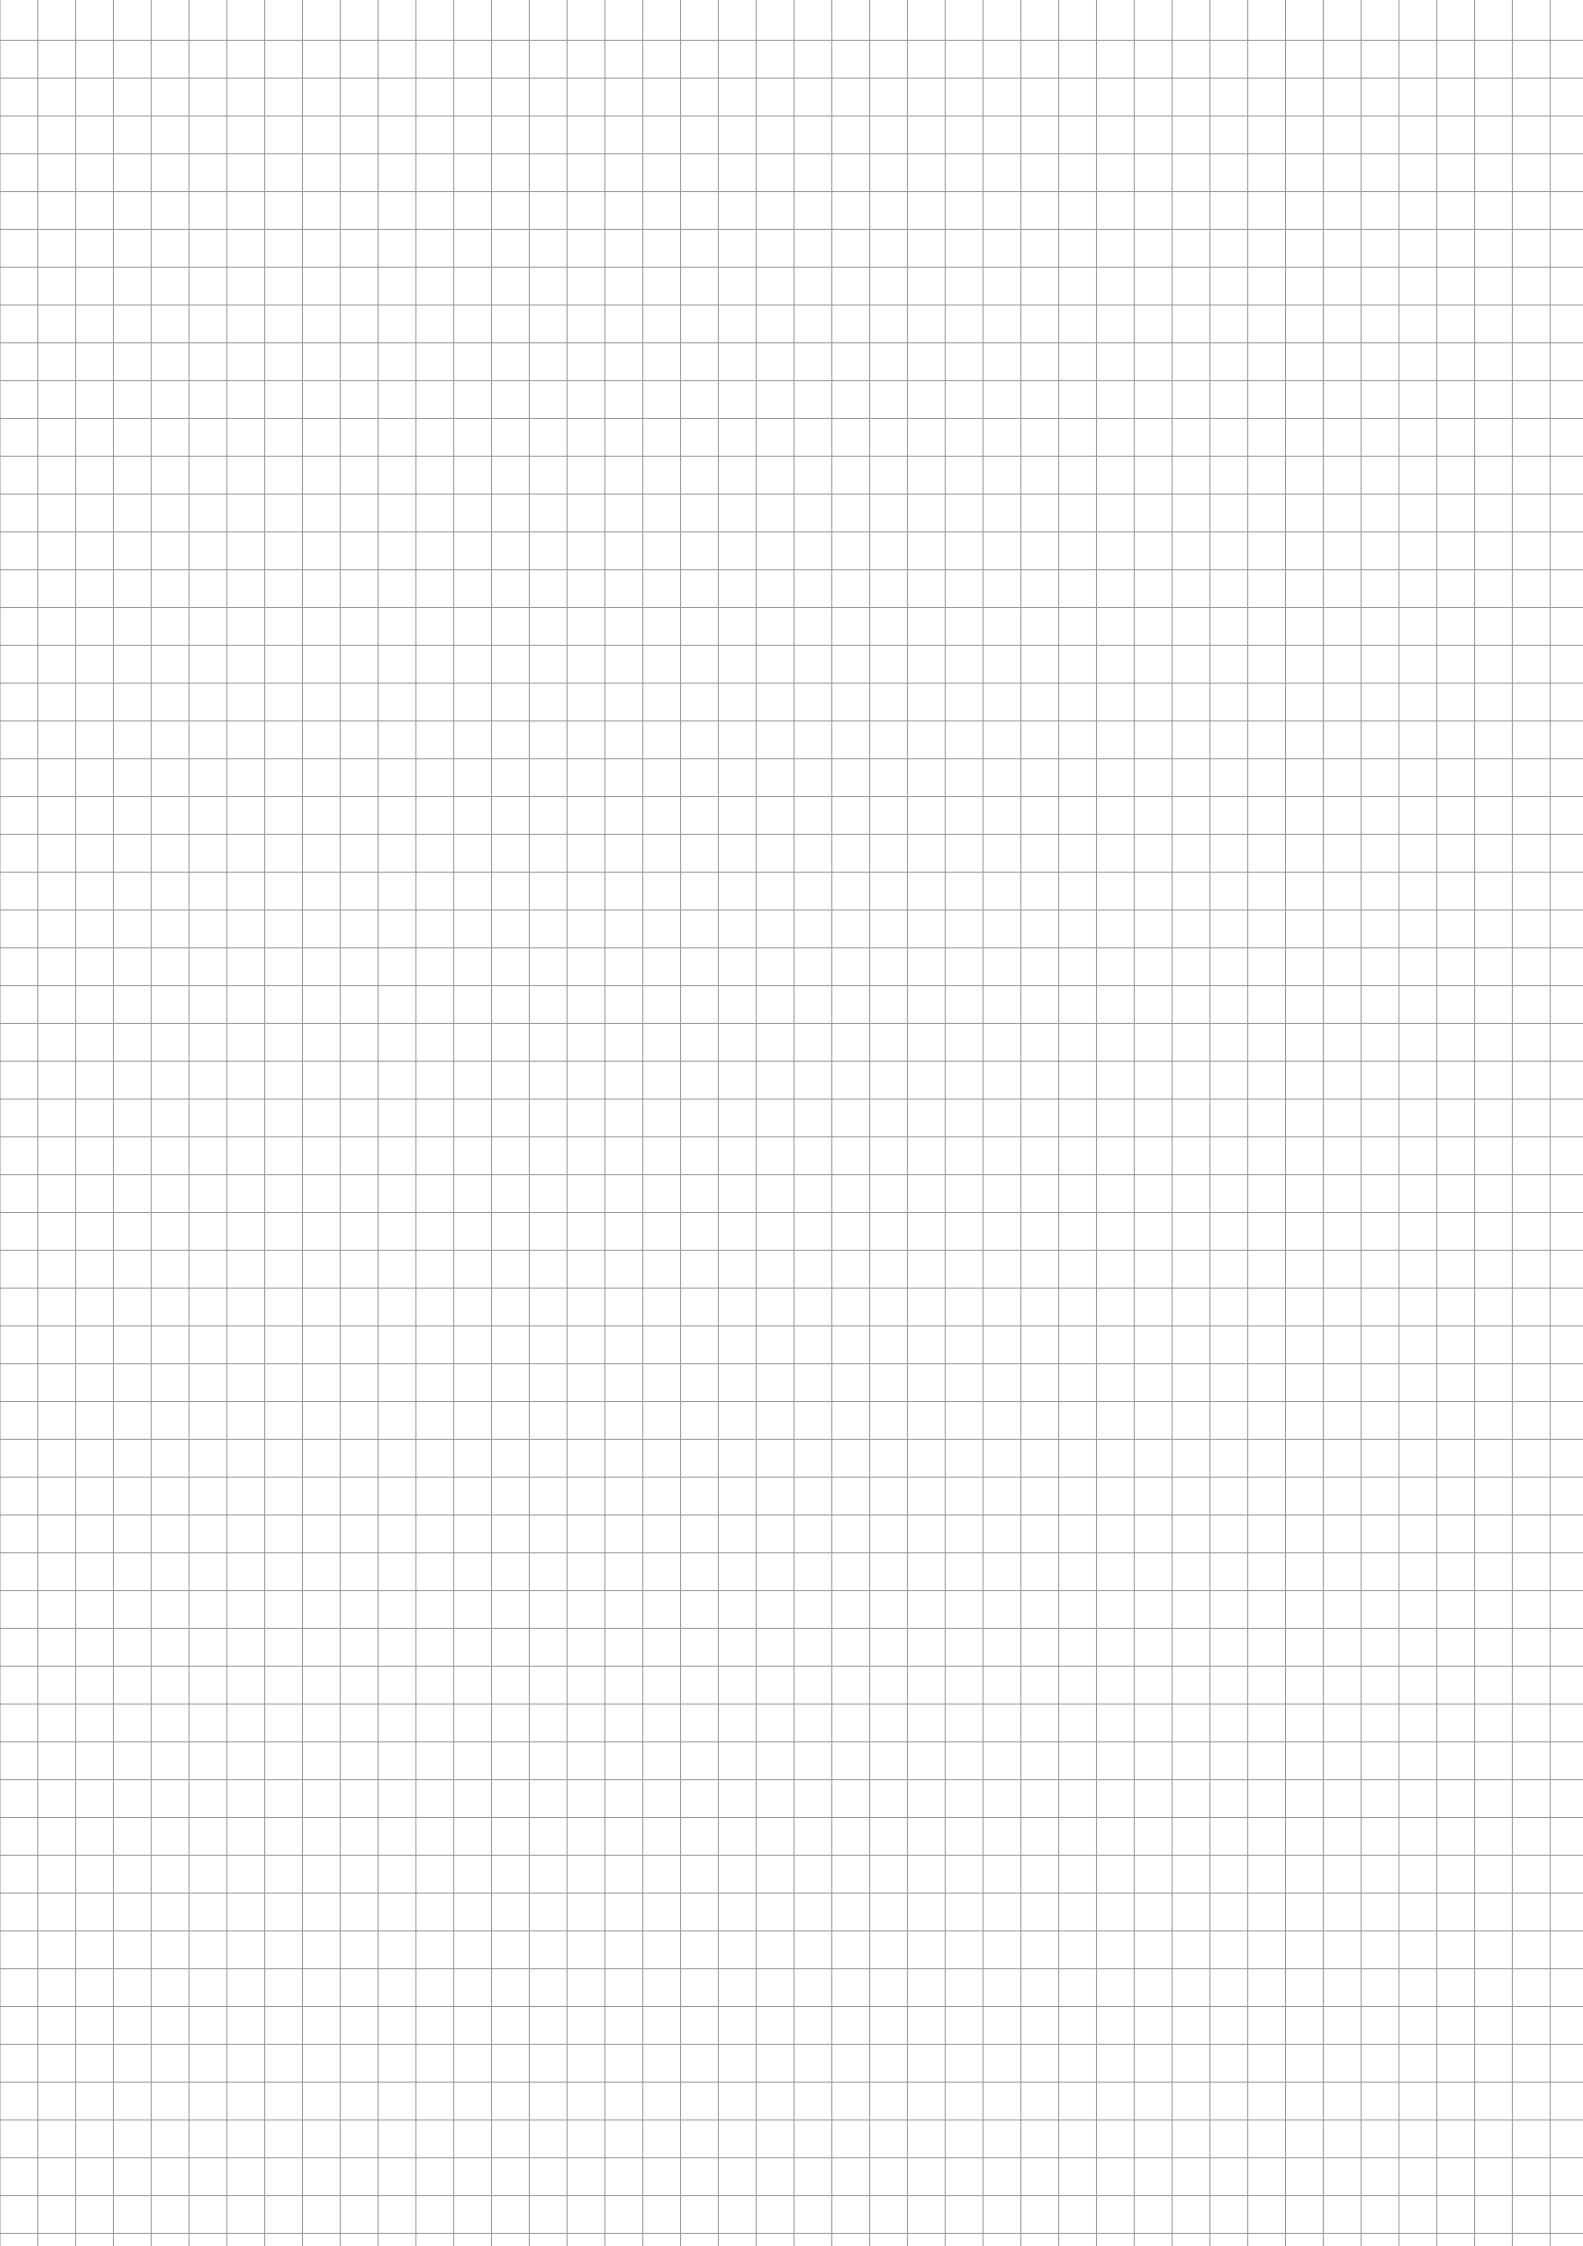

NOTES

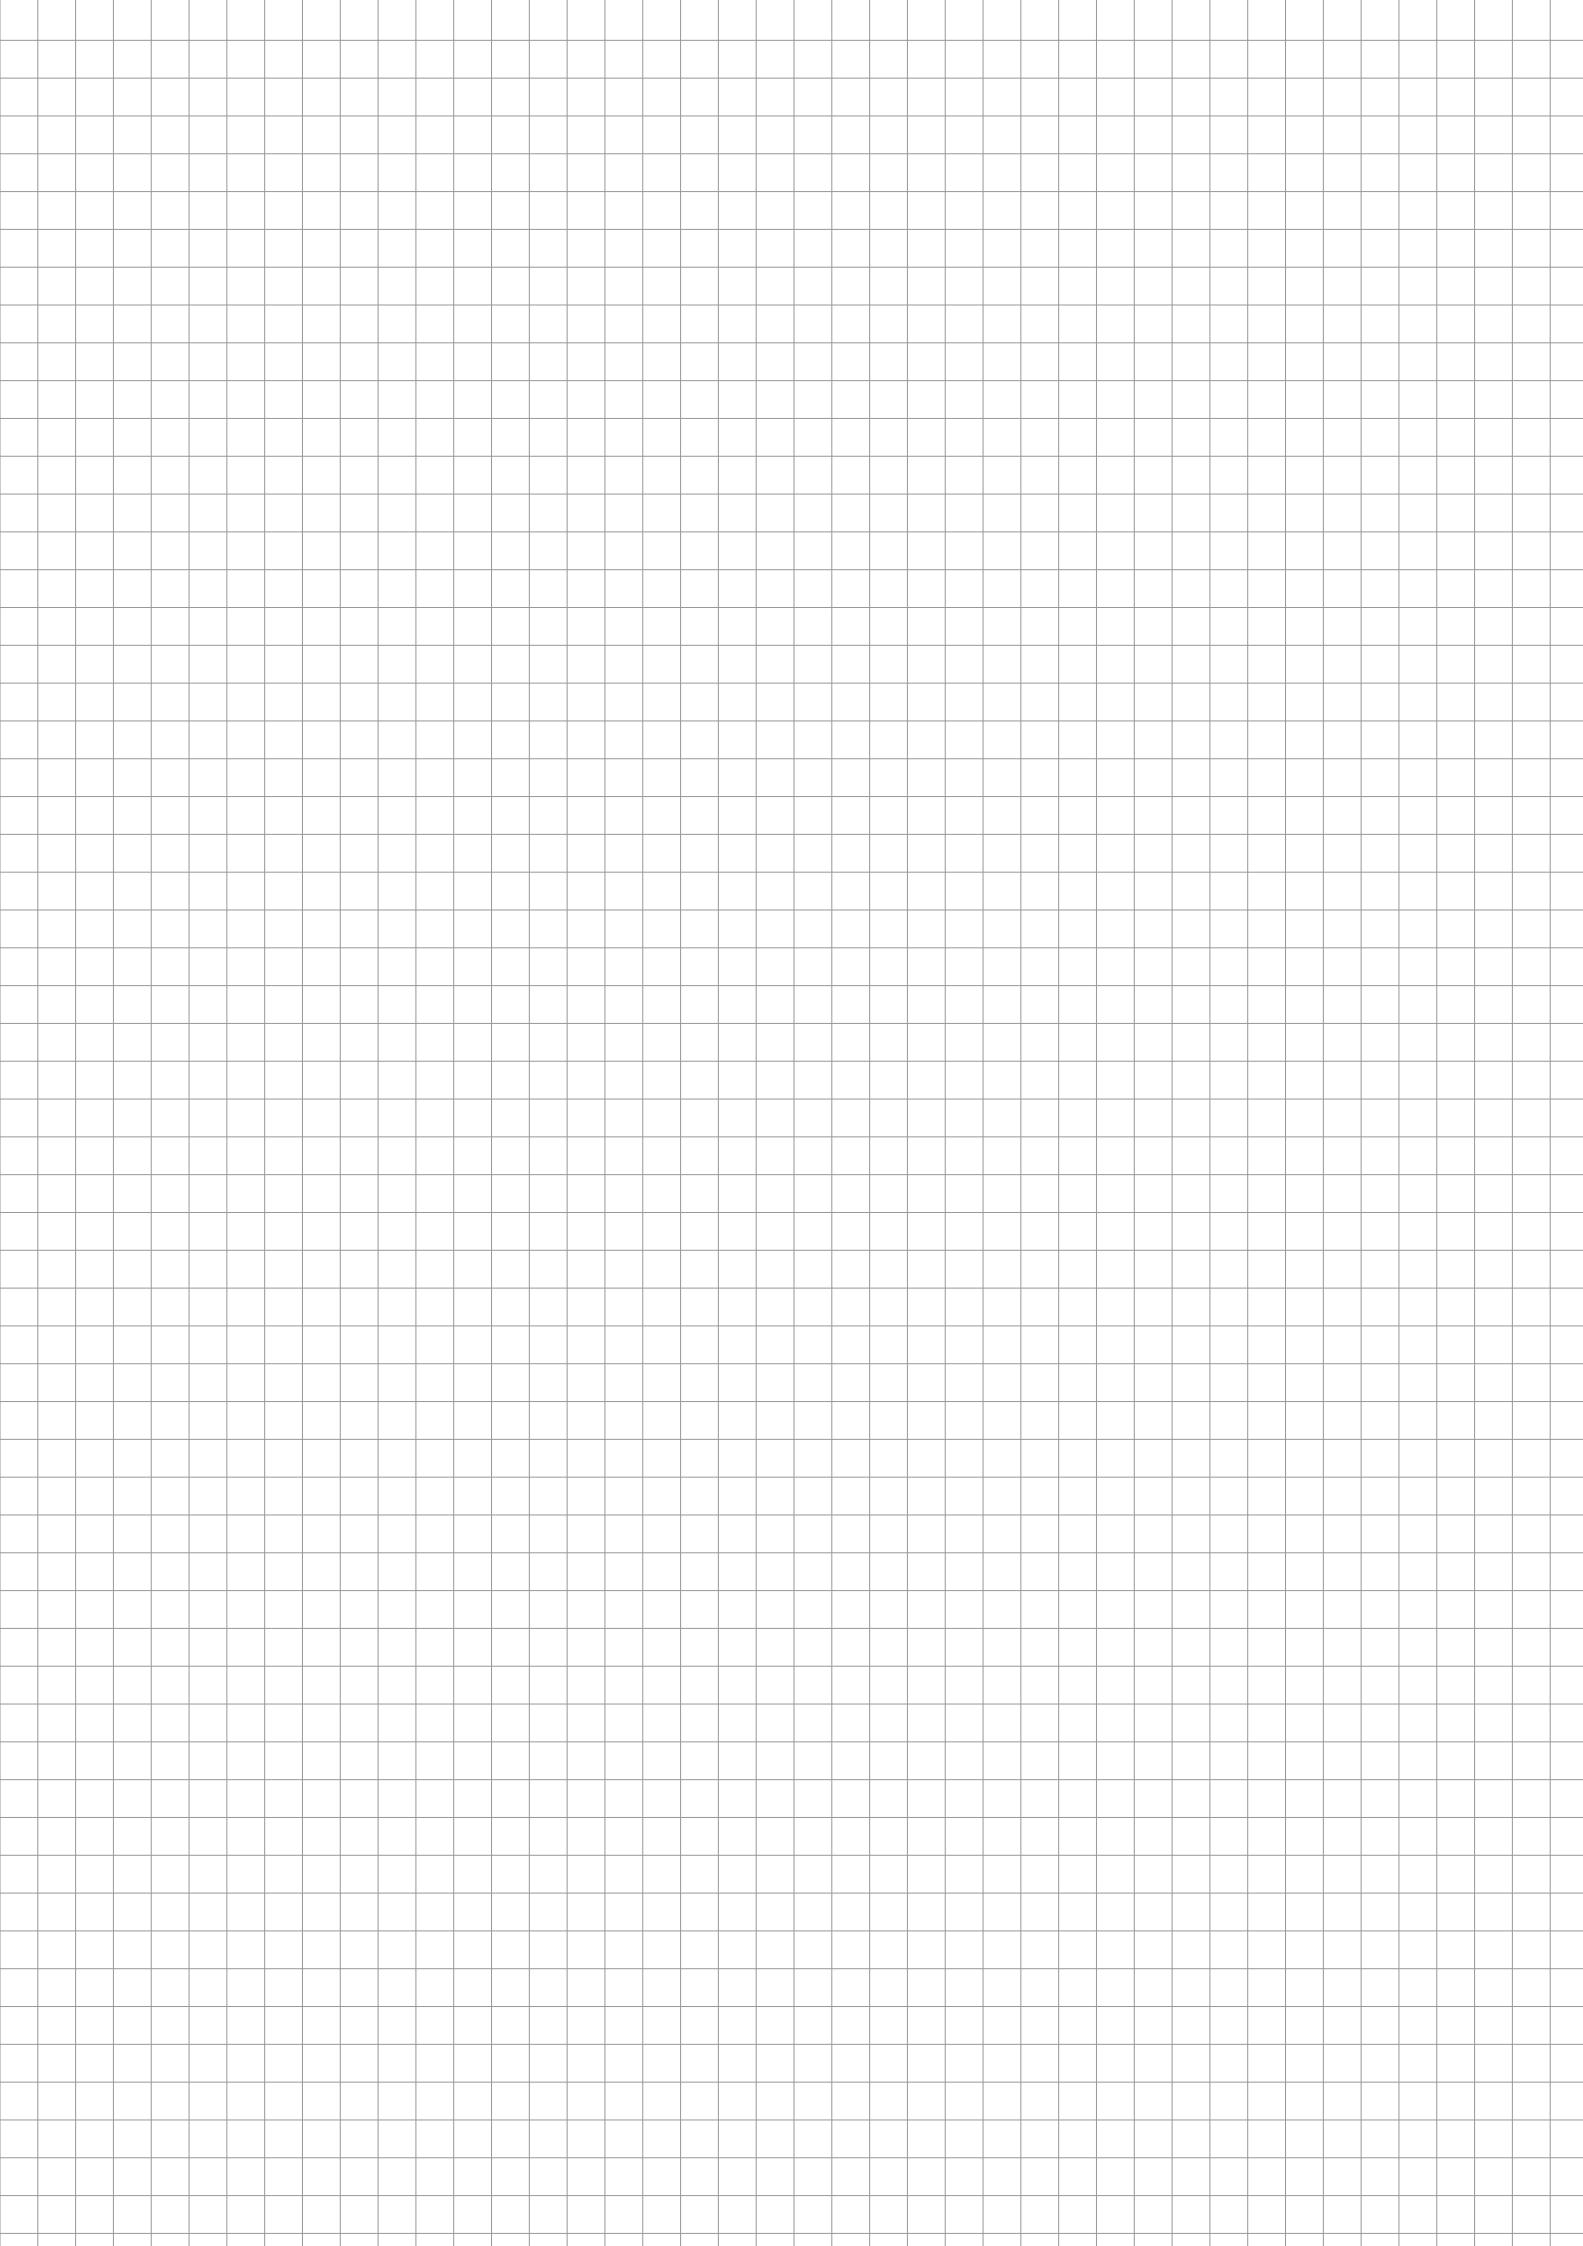

PERFECT CONNECTIONS WORLDWIDE.

QUALITY "MADE IN GERMANY."



ARGENTINA | AUSTRALIA | AUSTRIA | BELGIUM | BOSNIA-HERZEGOVINA | BRAZIL | CANADA | CHILE | CHINA | COLOMBIA | CROATIA | CZECH REPUBLIC | DENMARK | ESTONIA | FINLAND | FRANCE | GREECE | HUNGARY | INDIA | INDONESIA | ISRAEL | ITALY | JAPAN | KOREA | LITHUANIA | MACEDONIA | MALAYSIA | MEXICO | MONTENEGRO | NETHERLANDS | NEW ZEALAND | NORWAY | PERU | PHILIPPINES | POLAND | PORTUGAL | ROMANIA | RUSSIA | SAUDI ARABIA | SERBIA | SINGAPORE | SLOVAKIA | SLOVENIA | SOUTH AFRICA | SPAIN | SWEDEN | SWITZERLAND | TAIWAN | THAILAND | TURKEY | UK | UKRAINE | UNITED ARAB EMIRATES | USA

R + W ANTRIEBSELEMENTE GMBH

Alexander-Wiegand-Strasse 8
D - 63911 Klingenberg/Germany
Phone +49 9372 986 40
Fax +49 9372 986 420
info@rw-kupplungen.de
www.rw-kupplungen.de

R+W AMERICA

254 Tubeway Drive
USA 60188 Carol Stream, IL
Phone +1 630 521 9911
Fax +1 630 521 0366
info@rw-america.com
www.rw-america.com

R+W MACHINERY (SHANGHAI) CO., LTD

Rm 606,999 Zhouhai Rd, Block B,
Sunland International Building,
Pudong Shanghai 200137
China
Phone +86 21 586 829 86
Fax +86 21 586 829 95
info@rw-china.com
www.rw-china.com

R+W ITALIA S.R.I.

Via De Amicis, 67
I - 20092 Cinisello Balsamo (MI)
Phone +39 02 262 641 63
Fax +39 02 243 085 64
info@rw-italia.it
www.rw-italia.it

R+W BÜRO ASIA PACIFIC

No. 34, Jalan Permas 9/2
Bandar Baru Permas Jaya
Johor Bahru 81750
MALAYSIA
Phone +60 177 254177
jasontai@rwcouplings.com
www.rwcouplings.com

R+W BÜRO FRANCE

249 rue Irène Joliot Curie
F - 60610 Lacroix Saint Ouen
Phone +33 967 124232
Fax +33 344 434232
Mobil +33 612 896309
info@rw-france.fr
www.rw-france.fr

QUALITY MANAGEMENT

We are certified

according to ISO 9001:2008

D-ZM-16029-01-01 Registration No. 40503432/3



The information included in this document is based on our present knowledge and experience and does not exclude the manufacturer's own substantial testing of the products. Drawings may differ from the original coupling. All data subject to change without notice. Therefore we do not guarantee protection against third party claims. The sale of our product is in accordance with our general terms and conditions.

RW-COUPINGS.COM

R+W ANTRIEBSELEMENTE GMBH
A POPPE + POTHOFF COMPANY

ALEXANDER-WIEGAND-STRASSE 8
D-63911 KLINGENBERG
WWW.RW-COUPINGS.COM

PHONE: +49 9372 9864-0
FAX: +49 9372 9864-20
INFO@RW-KUPPLUNGEN.DE