

VRS

Vacuum Rotary Connection



The VRS Series Vacuum Rotary Connection, with its robust and lightweight design, provides an in line rotary connection for vacuum supplies. Its continuous rotation system avoids coiling of the hose and eliminates force constraints when used with collaborative robots.

Industry-specific applications



Advantages

- Compact and lightweight
- Excellent mechanical resistance
- Continuous rotation
- Ideal for cobotic


Characteristics

Model	Flow Rate (Nl/min)	Through bore Ø (mm)	Maximum speed (tr/min)	Connection	Weight (g)
VRS34MF	1500	16	40	G3/4"-M/F	135

Specifications

Materials	Aluminum - NBR Nitrile - Steel
Temperature range	From -10 to +50°C

Dimensions

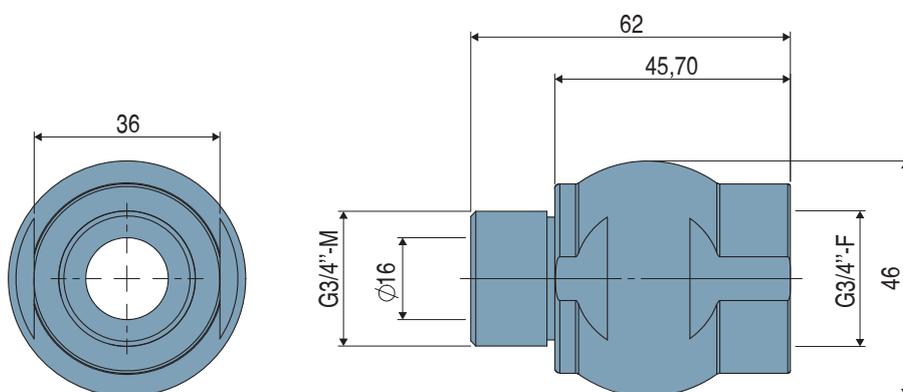

VRS

Note: All dimensions are in mm.
The values represent the average characteristics of our products.



To order please specify: VRS34MF

Accessory

Vacuum Rotary Union part n° VRU34A50

14