

Compensator SAE 1" to 5"




Rubber compensators are elastic connectors with turnable SAE flanges. Compensators are used for damping oscillations, vibrations, noises and movements in axial and transversal direction.

Design

Rubber compensators have a plain surface vulcanized to a fabric body (inside and outside) of the rubber part. The outside is weather resistant and protects the fabric against ageing, wear and corrosion. The interior of the rubber part consists of nitril-butadien-caoutchouc (NBR). The outer layer is made of CR (chloroprene rubber). Because compensators have tightening lips on both sides, further seals are not necessary.

Use

For all mineral oil products, crude oil, lubrication oil, cooling oil (-20°C up to 80°C), grease, cold water, warm water up to 60°C, water/oil emulsions, fuel with 30% aromatic content. For operation in suction and return lines.

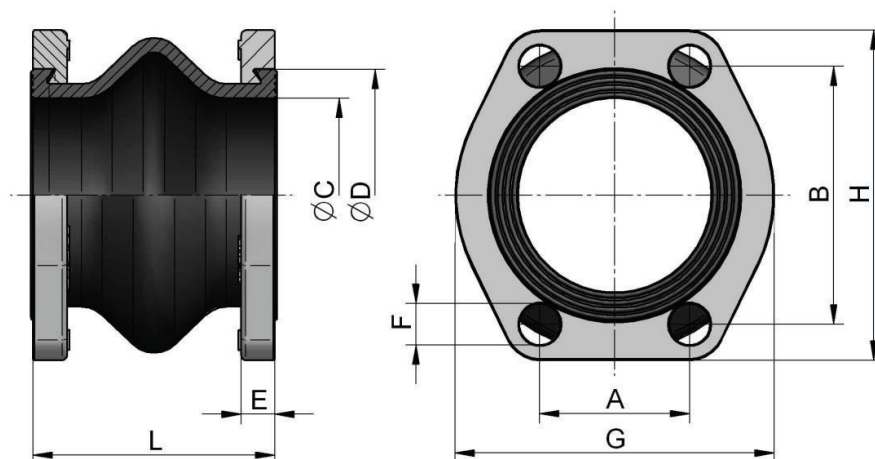

order number	description	size		A	B	D	C	E	F	G	H	L	weight
		SAE	NG*	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[kg]
SDKSS025	K16S-25	1"	25	26,2	52,4	43	25 ^{+1 -3}	11	11	59	70	65	0,4
SDKSS032	K16S-32	1 ¼"	32	30,2	58,7	50	32 ^{+1 -3}	11	13	73	81	65	0,5
SDKSS040	K16S-40	1 ½"	40	35,7	70,0	62	40 ^{+1 -3}	13	13	83	95	100	0,8
SDKSS050	K16S-50	2"	50	42,9	77,8	72	48 ^{+1 -3}	13	13	97	103	100	1,0
SDKSS063	K16S-63	2 ½"	63	50,8	89,0	87	63 ^{+1 -3}	14	13	109	115	100	1,2
SDKSS080	K16S-80	3"	80	62,0	106,4	104	80 ^{+1 -3}	14	17	131	136	100	1,8
SDKSS092	K16S-90	3 ½"	90	70,0	120,7	120	90 ^{+1 -3}	14	17	140	152	100	1,9
SDKSS100	K16S-100	4"	100	77,8	130,2	130	100 ^{+1 -3}	16	17	152	162	100	2,5
SDKSS126	K16S-125	5"	125	92,0	152,4	155	125 ^{+1 -3}	16	17	165	184	130	3,0


*... NG = nominal size

Material

inside	NBR 70 shore ± 5
outside	CR
flange	steel

Working Pressure

maximum working pressure	1,5 bar (absolute)
--------------------------	--------------------



Please read manual before installation and for the maximum movement tolerances of the rubber connection! Note, that the dimension tolerances have to be taken from the corresponding scale drawing.

This data sheet and the corresponding scale drawings are to be used as a general guideline and technical overview of our products. Please contact us if more exact information is needed. As we are constantly improving our products, their characteristics, dimensions and weights may also change, although we do our best to incorporate these changes continually. asa assumes no liability for any information therein, any errors, omissions, misprints, nor any direct or indirect damages, losses or costs resulting therefrom. Any cooling performances and general technical values indicated in this catalogue are measured at a test bench according to asa testing procedures. Because there is no standardized testing procedure, tests used by other manufacturers could have different results. Due to different conditions in testing and application environments the cooling performance may also vary by +/- 15%. Therefore we recommend all products to be checked under the system operating conditions. This is also true of vibrations and mechanical stress as well as for pressure peaks and thermal stress and any other relevant factors. General tolerances according to DIN ISO 2768-mS, General tolerances for casted parts according to EN ISO 8062-3 (DCTG 10). Tolerances for rubber parts are according to ISO 3302-1 (class M4-F+C). The tolerances of welding seams are defined by quality group D according to EN ISO 10042, if it is not specified on the actual scale drawing or data sheet. In addition to that we point out that any data sheet and corresponding scale drawing is no substitution for the manual.

DD-SDKSSxxx-en-rev2

© asa hydraulik, December 2017

page1/1