




BJD Series

BJD-A1▶A7

BJD-A1/BJD-A2/BJD-A3/BJD-A4
BJD-A5/BJD-A6/BJD-A7

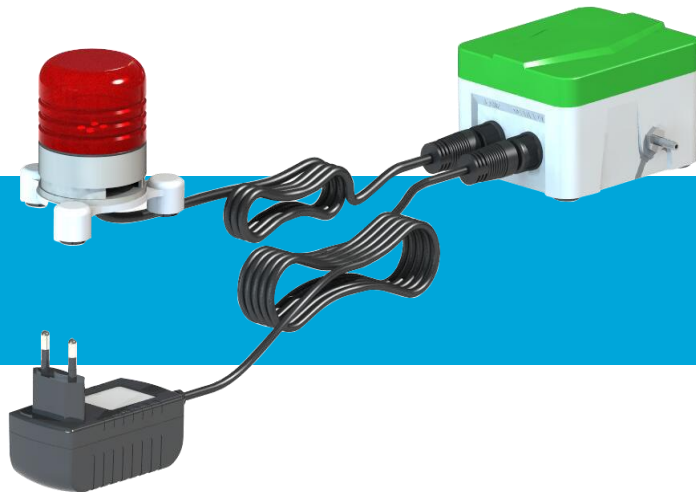

- Widespread use
- Simple structure and easy to install
- Remote alarm
- The IP rate to the alarm light with translucent cover can reach to IP45.

Product Introduction

BJD,with a pressure alarm system.


When the air pressure in the alarm box is higher or lower than certain value, circuit will be connected and alarm light will be on.

Specification Curves

Model	Voltage	Frequency	Alarm High pressure	Alarm Low pressure	Power	Net weight	Sound(1m)
	VAC	Hz	kPa	kPa	W	kg	dB(A)
BJD-A1	100-240	50 / 60		< 7	3.0	0.9	70
BJD-A2	100-240	50 / 60	> 20		3.0	0.9	70
BJD-A3	100-240	50 / 60	> 25		3.0	0.9	70
BJD-A4	100-240	50 / 60	> 30		3.0	0.9	70
BJD-A5	100-240	50 / 60	> 20	< 7	3.0	0.9	70
BJD-A6	100-240	50 / 60	> 25	< 7	3.0	0.9	70
BJD-A7	100-240	50 / 60	> 30	< 7	3.0	0.9	70

All specification values are only for reference, and are not guaranteed values.

Dimensions(mm)

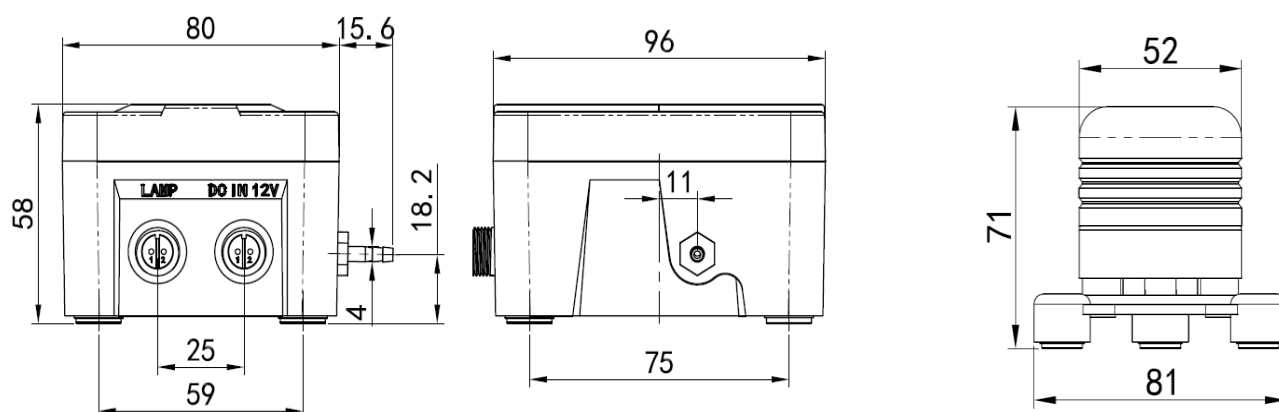

Alarm Box

SECOH SHANGHAI MEC LTD.

Website: www.secoh-sh.com

Professional • Efficient • Energy-Saving