


VALVOLE A FARFALLA CON ATTUATORE BUTTERFLY VALVES WITH ACTUATOR

Ingombri valvola e attuatore con bracket serie 600133-600134 - Dimensions valve and actuator with bracket series 600133-600134

VALVOLA CON ATTUATORE DOPPIO EFFETTO
VALVE WITH DOUBLE ACTING ACTUATOR

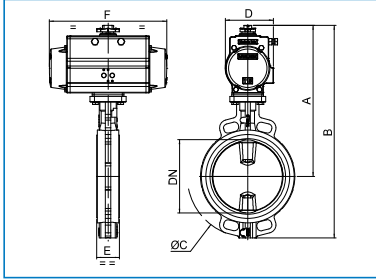


PN	10/16	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150	10	10	10	10	10
DN	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
A	239	250	263	275	304	328	353	429	494	544	624	686	730	955	990
B	307	330	352	370	418	455	494	669	697	786	891	1007	1070	1023	1464
ØC	144	159	180	195	227	257	283	343	404	482	530	588	639	710	824
D	71	71	71	80	94	94	106	137	148	164	185	213	217	248	290
E	36	46	49	49	55	58	58	64	72	81	80	106	116	134	156
F	141	141	141	164	210	210	241	333	372	435	500	493	579	690	672
ACT.	DA52	DA52	DA52	DA63	DA75	DA75	DA85	DA115	DA125	DA140	DA160	DA180	DA200	DA230	DA270
RI	5390	3836	3836	3838	3839	3839	3839	5383	3865	5392	5392	5400	5400	5401	5402

VALVOLA CON ATTUATORE SEMPLICE EFFETTO
VALVE WITH SPRING RETURN ACTUATOR


PN	10/16	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150	10	10	10	10	10
DN	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
A	238	257	288	307	325	395	394	478	563	710	843	948	970	1155	1237
B	306	337	377	402	439	522	535	653	766	952	1110	1272	1310	1523	1711
ØC	144	159	180	195	227	257	283	343	404	482	530	588	639	710	824
D	80	80	94	106	123	148	148	186	213	217	248	290	290	402	402
E	36	46	49	49	55	58	58	64	72	81	80	106	116	134	156
F	164	164	210	241	275	372	372	500	493	579	690	672	672	881	881
ACT.	SR63	SR63	SR75	SR85	SR100	SR115	SR115	SR160	SR180	SR200	SR230	SR270	SR270	SR330	SR330
RI	5363	3838	5384	5384	3839	5047	5047	5394	5395	4453	5403	5404	5404	5405	5406

VALVOLA CON ATTUATORE ELETTRICO SERIE 85
VALVE WITH ELECTRIC ACTUATOR SERIES 85

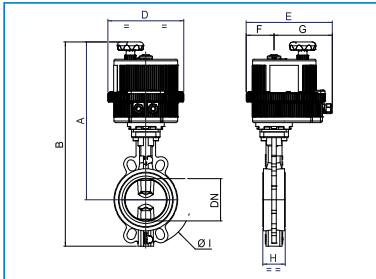

PN	10/16	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150
DN	40	50	65	80	100	125	150	200	250
A	279	336	349	377	388	429	440	470	523
B	347	416	438	472	502	556	581	645	726
D	124	158	158	186	186	209	209	219	219
E	163	188	188	212	212	235	235	245	245
F	43	61	61	68	68	85	85	78	78
G	120	127	127	144	144	150	150	167	167
H	36	46	49	49	55	58	58	64	72
ØI	159	159	180	195	227	257	283	343	404
ACT.	VB15	VB030	VB030	VB060	VB060	VB110	VB110	VB270	VB350
RI	5390	3836	3836	3838	5396	3839	3839	5383	3865


VALVOLA CON ATTUATORE ELETTRICO SERIE 86
VALVE WITH ELECTRIC ACTUATOR SERIES 86

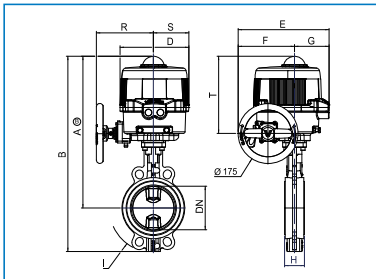

PN	10/16	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150	10/16 ANSI 150
DN	40	50	65	80	100	125	150	200	250
A	314	347	349	382	393	443	454	484	537
B	382	427	438	477	507	570	595	659	740
D	137	161	158	176	176	201	200	212	212
E	155	187	187	197	197	266	266	279	279
F	92	63	63	63	63	165	165	184	184
G	63	124	124	134	134	101	101	95	95
H	36	46	49	49	55	58	58	64	72
ØI	144	159	180	195	227	257	283	343	404
R	-	-	-	-	-	166	166	166	166
S	-	-	-	-	-	103	103	106	106
T	-	-	-	-	-	225	225	226	226
ACT.	VB15M	VB030M	VB030M	VB060M	VB060M	VB110M	VB110M	VB270M	VB350M
RI	5390	3836	3836	3838	5396	3839	3839	5383	3865

Ingombri valvola e attuatore con bracket serie 600243-600244 - Dimensions valve and actuator with bracket series 600243-600244

VALVOLA CON ATTUATORE DOPPIO EFFETTO VALVE WITH DOUBLE ACTING ACTUATOR

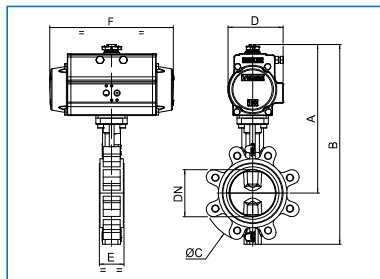


PN	16	16	16	16	16	16	16	16	16	16	10	10	10	10	10
DN	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
A	239	250	263	275	304	328	353	429	494	544	624	683	730	955	990
B	303	330	352	370	418	455	494	669	697	786	891	1007	1070	1023	1464
ØC	139	155	175	190	221	250	277	333	404	484	528	589	637	708	838
D	71	71	71	80	94	94	10	137	148	164	185	213	217	248	290
E	36	46	49	49	55	58	58	64	72	81	80	106	116	134	156
F	141	141	141	164	210	210	241	333	372	435	500	493	579	690	672
ACT.	DA52	DA52	DA	DA63	DA75	DA75	DA85	DA115	DA125	DA140	DA160	DA180	DA200	DA230	DA270
RI	5390	3836	3836	3838	3839	3839	3839	5383	3865	5392	5392	5400	5400	5401	5402

VALVOLA CON ATTUATORE SEMPLICE EFFETTO VALVE WITH SPRING RETURN ACTUATOR


PN	16	16	16	16	16	16	16	16	16	16	10	10	10	10	10
DN	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
A	239	257	288	307	325	395	394	478	563	710	843	948	970	1155	1237
B	307	337	377	402	439	522	535	653	766	952	1110	1272	1310	1523	1711
ØC	139	159	180	195	227	257	283	343	404	482	530	588	639	710	824
D	71	80	94	106	123	148	148	186	213	217	248	290	290	402	402
E	36	46	49	49	55	58	58	64	72	81	80	106	116	134	156
F	141	164	210	241	275	372	372	500	493	579	690	672	672	881	881
ACT.	SR63	SR63	SR75	SR85	SR100	SR115	SR115	SR160	SR180	SR200	SR230	SR270	SR270	SR330	SR330
RI	5393	3838	5384	5384	3839	5047	5047	5394	5395	4453	5403	5404	5404	5405	5406

VALVOLA CON ATTUATORE ELETTRICO SERIE 85 VALVE WITH ELECTRIC ACTUATOR SERIES 85

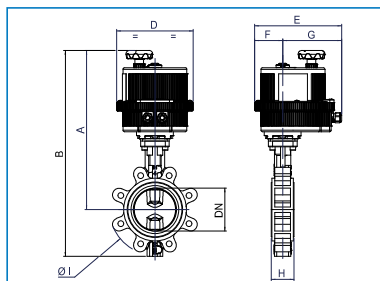

PN	16	16	16	16	16	16	16	16	16
DN	40	50	65	80	100	125	150	200	250
A	279	336	349	377	388	429	440	270	523
B	347	416	438	472	502	556	581	645	726
D	124	158	158	186	186	209	209	219	219
E	163	188	188	212	212	235	235	245	245
F	43	61	61	68	68	85	85	78	78
G	120	127	127	144	144	150	150	167	167
H	36	46	49	49	55	58	58	64	72
ØI	139	159	180	195	227	257	283	343	404
ACT.	VB15	VB030	VB030	VB060	VB060	VB110	VB110	VB270	VB350
RI	5390	3836	3836	3838	5396	3839	3839	5383	3865

VALVOLA CON ATTUATORE ELETTRICO SERIE 86 VALVE WITH ELECTRIC ACTUATOR SERIES 86

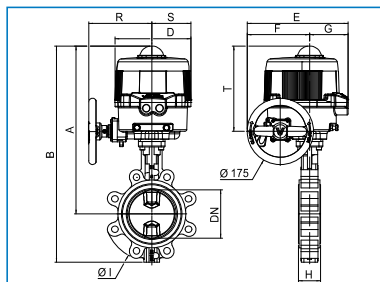

PN	16	16	16	16	16	16	16	16	16
DN	40	50	65	80	100	125	150	200	250
A	314	347	349	382	393	443	454	484	537
B	382	427	438	477	507	570	595	659	740
D	137	161	158	176	176	201	200	212	212
E	155	187	187	197	197	266	266	279	279
F	92	63	63	63	63	165	165	184	184
G	63	124	124	134	134	101	101	95	95
H	36	46	49	49	55	58	58	64	72
ØI	144	159	180	195	227	257	283	343	404
R	-	-	-	-	-	166	166	166	166
S	-	-	-	-	-	103	103	106	106
T	-	-	-	-	-	225	225	226	226
ACT.	VB15M	VB030M	VB030M	VB060M	VB060M	VB110M	VB110M	VB270M	VB350M
RI	5390	3836	3836	3838	5396	3839	3839	5383	3865



 Valvola a farfalla in ottone a passaggio totale [RB art. 600000] filettatura F/F.

 Brass butterfly valve full port, [RB art. 600000], threaded.



Art. 8P021100

Con attuatore pneumatico doppio effetto serie 82.
With double acting pneumatic actuator series 82.

MISURA-SIZE	1/2"	3/4"	1"	1"1/4	1"1/2	2"	2"1/2	3"
PN	16	16	16	16	16	16	16	16
ACT.	DA32	DA32	DA32	DA52	DA52	DA63	DA63	DA75
KIT	RI3752	RI3752	RI3752	RI3825	RI3825	RI3208	RI3835	RI3826

Art. 8P021200

Con attuatore pneumatico semplice effetto serie 82.
With spring return pneumatic actuator series 82.

MISURA-SIZE	1/2"	3/4"	1"	1"1/4	1"1/2	2"	2"1/2	3"
PN	16	16	16	16	16	16	16	16
ACT.	SR52	SR52	SR52	SR63	SR75	SR75	SR85	SR85
KIT	R3827	RI3827	RI3827	RI3828	RI3833	RI3834	RI3826	RI3826



Art. 8E098***

Con attuatore elettrico serie 85.
With electric actuator series 85.

MISURA-SIZE	1/2"	3/4"	1"	1"1/4	1"1/2	2"	2"1/2	3"
PN	16	16	16	16	16	16	16	16
ACT.	VB015	VB015	VB015	VB015	VB015	VB030*	VB030*	VB060*
KIT	R3827	RI3827	RI3827	RI3825	RI3825	RI3208	RI3835	RI3826
12 V								
24 V								
100 - 240 V								

*Versione speciale - Special version.

*** CODICE TENSIONE - VOLTAGE CODE		
12V AC/DC + 001	24V AC/DC + 002	100-240V AC + 004



 Valvola a farfalla tipo Wafer per acquedottistica [art. 600133] PN10-PN16-ANSI 150 (da DN50 a DN300), PN10 (da DN350 a DN600) corpo in ghisa GG25 (da DN50 a DN300), GGG50 (da DN350 a DN600) + vernice epossidica, disco in GGG40 nichelato, guarnizioni in EPDM.

 Butterfly valve Wafer type for waterworks [art. 600133] PN10-PN16-ANSI 150 (from DN50 to DN300), PN10 (from DN350 to DN600) body in cast iron GG25 (from DN50 to DN300), GGG50 (from DN350 to DN600) + epoxy painting, disc GGG40 nickel plated, EPDM seat.

Disponibile a richiesta certificato ATEX, non disponibile certificato PED.
ATEX certificate available on request, PED certificate not available.



Art. 8P112600 Con attuatore pneumatico doppio effetto serie 82.
With double acting pneumatic actuator series 82.

DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600
PN	16	16	16	16	16	16	16	16	16	10	10	10	10	10
ACT.	DA52	DA52	DA63	DA75	DA75	DA85	DA115	DA125	DA140	DA160	DA180	DA200	DA230	DA270
KIT	RI3836	RI3836	RI3838	RI3839	RI3839	RI3839	RI5383	RI3865	RI5392	RI5392	RI5400	RI5400	RI5401	RI5402

Art. 8P112700 Con attuatore pneumatico semplice effetto serie 82.
With spring return pneumatic actuator series 82.

DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600
PN	16	16	16	16	16	16	16	16	16	10	10	10	10	10
ACT.	SR63	SR75	SR85	SR100	SR115	SR115	SR160	SR180	SR200	SR230	SR270	SR270	SR330	SR330
KIT	RI3838	RI5384	RI5384	RI3839	RI5047	RI5047	RI5394	RI5395	RI4453	RI5403	RI5404	RI5404	RI5405	RI5406



Art. 8E267*** Con attuatore elettrico serie 85.
With electric actuator series 85.

DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600
PN	16	16	16	16	16	16	16	16	-	-	-	-	-	-
ACT.	VB030	VB030	VB060	VB060	VB110	VB110	VB270	VB350	-	-	-	-	-	-
KIT	RI3836	RI3836	RI3838	RI5396	RI3839	RI3839	RI5383	RI3865	-	-	-	-	-	-
12 V														
24 V														
100 - 240 V														



Art. 8M267*** Con attuatore elettrico serie 86.
With electric actuator series 86.

DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600
PN	16	16	16	16	16	16	16	16	-	-	-	-	-	-
ACT.	VB030M	VB030M	VB060M	VB060M	VB110M	VB110M	VB270M	VB350M	-	-	-	-	-	-
KIT	RI3836	RI3836	RI3838	RI5396	RI3839	RI3839	RI5383	RI3865	-	-	-	-	-	-
12 V														
24 V														
100 - 240 V														

CODICE TENSIONE - VOLTAGE CODE

12V AC/DC
+ 001

24V AC/DC
+ 002

100-240V AC
+ 004



 Valvola a farfalla tipo Wafer per acquedottistica [art. 600134] PN10-PN16 (solo DN40) PN10-PN16-ANSI 150 (da DN50 a DN300), PN10 (da DN350 a DN600) corpo in ghisa GG25 (da DN40 a DN300), GGG50 (da DN350 a DN600) + vernice epossidica, disco in A351-CF8M, guarnizioni in EPDM.

 Butterfly valve Wafer type for waterwork [art. 600134] PN10-PN16 (only DN40) PN10-PN16-ANSI 150 (from DN50 to DN300), PN10 (from DN350 to DN600) body in cast iron GG25 (from DN40 to DN300), GGG50 (from DN350 to DN600) + epoxy painting, disc A351-CF8M, EPDM seat.

Disponibile a richiesta certificato ATEX, non disponibile certificato PED.
ATEX certificate available on request, PED certificate not available.



Art. 8P112800 Con attuttore pneumatico doppio effetto serie 82.
With double acting pneumatic actuator series 82.

DN	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
PN	16	16	16	16	16	16	16	16	16	16	10	10	10	10	10
ACT.	DA52	DA52	DA52	DA63	DA75	DA75	DA85	DA115	DA125	DA140	DA160	DA180	DA200	DA230	DA270
KIT	RI5390	RI3836	RI3836	RI3838	RI3839	RI3839	RI3839	RI5383	RI3865	RI5392	RI5392	RI5400	RI5400	RI5401	RI5402

Art. 8P112900 Con attuttore pneumatico semplice effetto serie 82.
With spring return pneumatic actuator series 82.

DN	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
PN	16	16	16	16	16	16	16	16	16	16	10	10	10	10	10
ACT.	SR63	SR63	SR75	SR85	SR100	SR115	SR115	SR160	SR180	SR200	SR230	SR270	SR270	SR330	SR330
KIT	RI5393	RI3838	RI5384	RI5384	RI3839	RI5047	RI5047	RI5394	RI5395	RI4453	RI5403	RI5404	RI5404	RI5405	RI5406



Art. 8E268*** Con attuttore elettrico serie 85.
With electric actuator series 85.

DN	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
PN	16	16	16	16	16	16	16	16	16	-	-	-	-	-	-
ACT.	VB015	VB030	VB030	VB060	VB060	VB110	VB110	VB270	VB350	-	-	-	-	-	-
KIT	RI5390	RI3836	RI3836	RI3838	RI5396	RI3839	RI3839	RI5383	RI3865	-	-	-	-	-	-
12 V															
24 V															
100 - 240 V															



Art. 8M268*** Con attuttore elettrico serie 86.
With electric actuator series 86.

DN	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
PN	16	16	16	16	16	16	16	16	16	-	-	-	-	-	-
ACT.	VB015M	VB030M	VB030M	VB060M	VB060M	VB110M	VB110M	VB270M	VB350M	-	-	-	-	-	-
KIT	RI5390	RI3836	RI3836	RI3838	RI5396	RI3839	RI3839	RI5383	RI3865	-	-	-	-	-	-
12 V															
24 V															
100 - 240 V															

CODICE TENSIONE - VOLTAGE CODE

12V AC/DC
+ 001

24V AC/DC
+ 002

100-240V AC
+ 004



 Valvola a farfalla tipo Lug per acquedottistica [art. 600243] PN16 (da DN50 a DN300), PN10 (da DN350 a DN600) corpo in ghisa GGG40 + vernice epossidica, disco in GGG40 nichelato, guarnizioni in EPDM.

 Butterfly valve Lug type for waterwork [art. 600243] PN16 (from DN50 to DN300), PN10 (from DN350 to DN600) body in cast iron GGG40 + epoxy painting, disc GGG40 nickel plated, EPDM seat.

Disponibile a richiesta certificato ATEX, non disponibile certificato PED.
ATEX certificate available on request, PED certificate not available.



Art. 8P114000 Con attuatore pneumatico doppio effetto serie 82.
With double acting pneumatic actuator series 82.

DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600
PN	16	16	16	16	16	16	16	16	16	10	10	10	10	10
ACT.	DA52	DA52	DA63	DA75	DA75	DA85	DA115	DA125	DA140	DA160	DA180	DA200	DA230	DA270
KIT	RI3836	RI3836	RI3838	RI3839	RI3839	RI3839	RI5383	RI3865	RI5392	RI5392	RI5400	RI5400	RI5401	RI5402

Art. 8P114100 Con attuatore pneumatico semplice effetto serie 82.
With spring return pneumatic actuator series 82.

DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600
PN	16	16	16	16	16	16	16	16	16	10	10	10	10	10
ACT.	SR63	SR75	SR85	SR100	SR115	SR115	SR160	SR180	SR200	SR230	SR270	SR270	SR330	SR330
KIT	RI3838	RI5384	RI5384	RI3839	RI5047	RI5047	RI5394	RI5395	RI4453	RI5403	RI5404	RI5404	RI5405	RI5406



Art. 8E274*** Con attuatore elettrico serie 85.
With electric actuator series 85.

DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600
PN	16	16	16	16	16	16	16	16	-	-	-	-	-	-
ACT.	VB030	VB030	VB060	VB060	VB110	VB110	VB270	VB350	-	-	-	-	-	-
KIT	RI3836	RI3836	RI3838	RI5396	RI3839	RI3839	RI5383	RI3865	-	-	-	-	-	-
12 V														
24 V														
100 - 240 V														



Art. 8M274*** Con attuatore elettrico serie 86.
With electric actuator series 86.

DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600
PN	16	16	16	16	16	16	16	16	-	-	-	-	-	-
ACT.	VB030M	VB030M	VB060M	VB060M	VB110M	VB110M	VB270M	VB350M	-	-	-	-	-	-
KIT	RI3836	RI3836	RI3838	RI5396	RI3839	RI3839	RI5383	RI3865	-	-	-	-	-	-
12 V														
24 V														
100 - 240 V														

CODICE TENSIONE - VOLTAGE CODE

12V AC/DC
+ 001

24V AC/DC
+ 002

100-240V AC
+ 004



 Valvola a farfalla tipo Lug per acquedottistica [art. 600244] PN16 (da DN40 a DN300), PN10 (da DN350 a DN600) corpo in ghisa GGG40 + vernice epossidica, disco in A351-CF8M, guarnizioni in EPDM.

 Butterfly valve Lug type for waterwork [art. 600244] PN16 (from DN40 to DN300), PN10 (from DN350 to DN600) body in cast iron GGG40 + epoxy painting, disc A351-CF8M, EPDM seat.

Disponibile a richiesta certificato ATEX, non disponibile certificato PED.
ATEX certificate available on request, PED certificate not available.



Art. 8P114200 Con attuatore pneumatico doppio effetto serie 82.
With double acting pneumatic actuator series 82.

DN	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
PN	16	16	16	16	16	16	16	16	16	16	10	10	10	10	10
ACT.	DA52	DA52	DA52	DA63	DA75	DA75	DA85	DA115	DA125	DA140	DA160	DA180	DA200	DA230	DA270
KIT	RI5390	RI3836	RI3836	RI3838	RI3839	RI3839	RI3839	RI5383	RI3865	RI5392	RI5392	RI5400	RI5400	RI5401	RI5402

Art. 8P114300 Con attuatore pneumatico semplice effetto serie 82.
With spring return pneumatic actuator series 82.

DN	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
PN	16	16	16	16	16	16	16	16	16	16	10	10	10	10	10
ACT.	SR63	SR63	SR75	SR85	SR100	SR115	SR115	SR160	SR180	SR200	SR230	SR270	SR270	SR330	SR330
KIT	RI5393	RI3838	RI5384	RI5384	RI3839	RI5047	RI5047	RI5394	RI5395	RI4453	RI5403	RI5404	RI5404	RI5405	RI5406



Art. 8E275*** Con attuatore elettrico serie 85.
With electric actuator series 85.

DN	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
PN	16	16	16	16	16	16	16	16	16	-	-	-	-	-	-
ACT.	VB015	VB030	VB030	VB060	VB060	VB110	VB110	VB270	VB350	-	-	-	-	-	-
KIT	RI5390	RI3836	RI3836	RI3838	RI5396	RI3839	RI3839	RI5383	RI3865	-	-	-	-	-	-
12 V															
24 V															
100 - 240 V															



Art. 8M275*** Con attuatore elettrico serie 86.
With electric actuator series 86.

DN	40	50	65	80	100	125	150	200	250	300	350	400	450	500	600
PN	16	16	16	16	16	16	16	16	16	-	-	-	-	-	-
ACT.	VB015M	VB030M	VB030M	VB060M	VB060M	VB110M	VB110M	VB270M	VB350M	-	-	-	-	-	-
KIT	RI5390	RI3836	RI3836	RI3838	RI5396	RI3839	RI3839	RI5383	RI3865	-	-	-	-	-	-
12 V															
24 V															
100 - 240 V															

CODICE TENSIONE - VOLTAGE CODE

12V AC/DC
+ 001

24V AC/DC
+ 002

100-240V AC
+ 004



-  Valvola a farfalla per uso alimentare in acciaio inox AISI 304L attacchi DIN 11851 F/F.
-  Stainless steel AISI 304L, butterfly valve for food industry, F/F DIN 11851 connections.



- Art. 8P015700** Con attuatore pneumatico doppio effetto serie 82.
With double acting pneumatic actuator series 82.

DN	25	32	40	50	65	80	100
PN	6	6	6	6	6	6	6
ACT.	DA32	DA52	DA52	DA63	DA75	DA85	DA85
KIT	-	-	-	-	-	-	-

- Art. 8P015800** Con attuatore pneumatico semplice effetto serie 82.
With spring return pneumatic actuator series 82.

DN	25	32	40	50	65	80	100
PN	6	6	6	6	6	6	6
ACT.	SR52	SR52	SR63	SR75	SR85	SR85	SR100
KIT	-	-	-	-	-	-	-



- Art. 8E047***** Con attuatore elettrico serie 85.
With electric actuator series 85.

DN	25	32	40	50	65	80	100
PN	6	6	6	6	6	6	6
ACT.	VB015	VB015	VB030	VB030	VB060	VB110	VB110
KIT	-	-	-	-	-	-	-
12 V							
24 V							
100 - 240 V							

***			CODICE TENSIONE - VOLTAGE CODE		
12V AC/DC + 001		24V AC/DC + 002		100-240V AC + 004	



 Valvola a farfalla attacchi clamp BS4825, in acciaio inox AISI 304.

 Butterfly valve, BS4825 clamp connections, stainless steel AISI 304.



Art. 8P025900

Con attuatore pneumatico doppio effetto serie 82.
 With double acting pneumatic actuator series 82.

PN	6	6	6	6	6	6	6
CLAMP	3/4"	1"	1"1/2	2"	2"1/2	3"	4"
ACT.	DA32	DA32	DA52	DA63	DA75	DA75	DA85
KIT	-	-	-	-	-	-	-

Art. 8P026000

Con attuatore pneumatico semplice effetto serie 82.
 With spring return pneumatic actuator series 82.

PN	6	6	6	6	6	6	6
CLAMP	3/4"	1"	1"1/2	2"	2"1/2	3"	4"
ACT.	SR52	SR52	SR63	SR75	SR75	SR85	SR100
KIT	-	-	-	-	-	-	-



 Valvola a farfalla attacchi a saldare per tubi DIN 11850, in acciaio inox AISI 304.

 Butterfly valve, din weld connections, for tube DIN 11850, stainless steel AISI 304.



Art. 8P026100

Con attuatore pneumatico doppio effetto serie 82.
With double acting pneumatic actuator series 82.

DN	25	32	40	50	65	80	100
PN	6	6	6	6	6	6	6
ACT.	DA32	DA52	DA52	DA63	DA75	DA85	DA85
KIT	-	-	-	-	-	-	-

Art. 8P026200

Con attuatore pneumatico semplice effetto serie 82.
With spring return pneumatic actuator series 82.

DN	25	32	40	50	65	80	100
PN	6	6	6	6	6	6	6
ACT.	SR52	SR52	SR63	SR75	SR85	SR85	SR100
KIT	-	-	-	-	-	-	-



 Valvola a farfalla in PVC.

 PVC butterfly valve.



Art. 8P016500

Con attuttore pneumatico doppio effetto serie 82.
With double acting pneumatic actuator series 82.

DN	40	50	65	80	100	125	150	200
PN	16	16	10	10	10	10	10	10
ACT.	DA52	DA52	DA63	DA63	DA75	DA85	DA100	DA115
KIT	-	-	-	-	-	-	-	-

Art. 8P016600

Con attuttore pneumatico semplice effetto serie 82.
With spring return pneumatic actuator series 82.

DN	40	50	65	80	100	125	150	200
PN	16	16	10	10	10	10	10	10
ACT.	SR75	SR75	SR85	SR85	SR115	SR115	SR125	SR140
KIT	-	-	-	-	-	-	-	-



Art. 8E062***

Con attuttore elettrico serie 85.
With electric actuator series 85.

DN	40	50	65	80	100	125	150	200
PN	16	16	10	10	10	10	10	10
ACT.	VB015	VB015	VB030	VB060	VB060	VB060*	VB110	VB190*
KIT	-	-	-	-	-	-	-	-
12 V								
24 V								
100 - 240 V								

*Versione speciale - Special version.

***			CODICE TENSIONE - VOLTAGE CODE		
12V AC/DC + 001		24V AC/DC + 002		100-240V AC + 004	